



Workpath SDK Device Usage Sample Overview

Product Group: HP Workpath SDK

Version: 1.6.3

Revised: November 11, 2025

HP Inc.
11311 Chinden Blvd.
Boise, ID 83714 USA

HP Confidential

Table of Contents

1 Introduction 3
1.1 Document conventions3

2 Device Usage Sample on a device 4

3 Device Usage Sample Flow 6

4 Add permission in manifest 7

5 Initializing SDK..... 8

6 Checking DeviceUsageService Capability 10

7 Retrieve usage from a device..... 11

8 Legal notice 12

9 Support..... 13

1 Introduction

Device Usage Sample provides use case scenario how to read usage information on a device using DeviceUsageService of the HP Workpath SDK API.

1.1 Document conventions

The following conventions are used throughout this document to define, describe, and discuss the API: function prototypes, data structure definitions, enumerated constants.

- **Name** – Bold signifies item names such as button names and menu items.
- <name> – Angle brackets mark URLs.
- {value} – Curly braces represent values to be replaced.
- Identifiers for defined constants use all UPPERCASE letters.
- *Name* – Italicized type refers to formal function parameters, data structure types and fields, and other defined or enumerated types in the text body (for example, *streamtype*).
- Numbers are in decimal format unless otherwise noted.
- Name - Monospaced type is used for code fragments, function prototypes and data type definitions.
- Function names are usually accompanied by parentheses (for example, `function()`).

2 Device Usage Sample on a device

Device Usage Sample shows the code and the usage of example how to use DeviceUsageService on a device.

7:33 AM

Device Usage Sample

VERSION: 1.6.3 (20251111) / 17, API: 1.6.3 / 9

printer

└ A4EquivalentByJobCategory

└ JobCategory

Print

└ ColorDecimpressions

0

└ MonoDecimpressions

0

└ TotalDecimpressions

0

└ JobCategory

Copy

└ ColorDecimpressions

0

└ MonoDecimpressions

0

└ TotalDecimpressions

0

└ JobCategory

Fax

└ ColorDecimpressions

0

└ MonoDecimpressions

0

└ TotalDecimpressions

0

└ PrintByMediaSize

...

└ CopyByMediaSize

...

└ FaxByMediaSize

...

└ PlexByMediaSize

...

└ byColorMode

```
{
  "mVersion": 9,
  "printer": {
    "a4EquivalentByJobCategory": [
      {
        "colorDecimpressions": 0,
        "jobCategory": "Print",
        "monoDecimpressions": 0,
        "totalDecimpressions": 0
      },
      {
        "colorDecimpressions": 0,
        "jobCategory": "Copy",
        "monoDecimpressions": 0,
        "totalDecimpressions": 0
      },
      {
        "colorDecimpressions": 0,
        "jobCategory": "Fax",
        "monoDecimpressions": 0,
        "totalDecimpressions": 0
      }
    ],
    "byColorMode": [
      {
        "colorMode": "Color",
        "impressions": 0,
        "jobCategory": "Print"
      },
      {
        "colorMode": "Mono",
        "impressions": 0,
        "jobCategory": "Print"
      },
      {
        "colorMode": "Color",
        "impressions": 0,
        "jobCategory": "Print"
      }
    ]
  }
}
```

GET DEVICEUSAGE

A main activity of Device Usage Sample

 **HP Color LaserJet MFP E87740**
HP Color LaserJet MFP E87740 15.26.184.96

Information

General

Copy/Print

Scan/Digital Send

Fax

Supplies

Troubleshooting

Security

HP Web Services

Network

Device Status

Configuration Page

Supplies Status Page

Event Log Page

Usage Page

Device Information

Event Schedule Summary

Control Panel Snapshot

Printable Reports and Pages

Open Source Licenses

Usage Page

Device Information

Product Serial Number:XXXXXXXXX

Product Name:HP Color LaserJet MFP E87740

Nickname:HP Color LaserJet MFP E87740

Impressions

Print

Paper Size	Units	Monochrome	Color	Total
Letter (8.5x11)	1.0	0	0	0
Total		0	0	0

Copy

Paper Size	Units	Monochrome	Color	Total
Letter (8.5x11)	1.0	0	0	0
Total		0	0	0

Equivalent Impressions (Letter/A4)

	Monochrome	Color	Total
Print	0.0	0.0	0.0
Copy	0.0	0.0	0.0
Fax	0.0	0.0	0.0
Grand Total	0.0	0.0	0.0

	Monochrome	Color	Total
Duplex*	0.0	0.0	0.0

* Duplex counts are included in the table Total Equivalent Impressions (Letter/A4)

Scan Counts by Size

Paper Size	Total
Letter (8.5x11)	0
Legal (8.5x14)	0


Device usage in EWS

HP Confidential

Page 5 of 13

Device Usage Sample v1.6.3

3 Device Usage Sample Flow

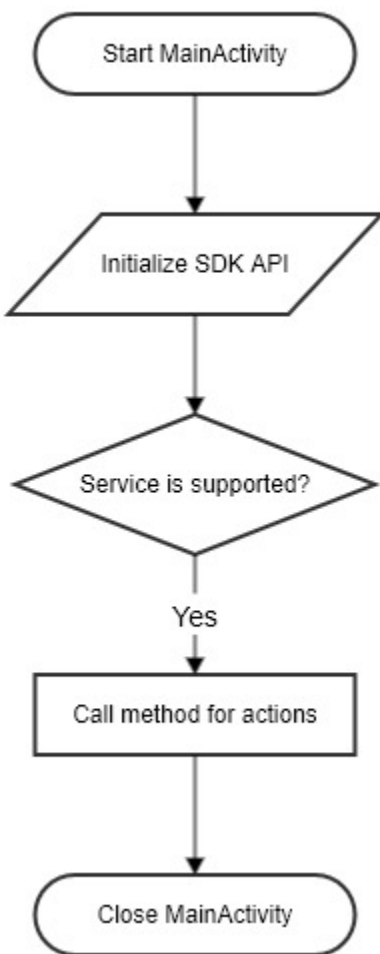

Flow of Device Usage Sample

4 Add permission in manifest

Application must add SDK permission to access new service of the SDK. This shows how to add it for the access of DeviceUsageService.

```
1. <?xml version="1.0" encoding="utf-8"?>
2. <manifest xmlns:android="http://schemas.android.com/apk/res/android"
   package="com.hp.workpath.sample.deviceusagesample">
3. <uses-permission android:name="com.hp.workpath.permission.sdk.ACCESS_DEVICE_USAGE_PERMISSION" />
```

5 Initializing SDK

Application requires initializing the SDK services when starts with an activity for accessing the SDK services. The `com.hp.workpath.api.Workpath` includes `initialize()` method for this.

The sample shows how to initialize SDK.

1. Call `initialize()` method of Workpath SDK on resume event and clear it on pause event. It is for calling initialization when an activity is switched. Refer to `MainActivity.java`.

```
1. @Override
2.     protected void onCreate(Bundle savedInstanceState) {
3.         super.onCreate(savedInstanceState);
4.         setContentView(R.layout.activity_main);
5.         mDeviceUsageFragment = new DeviceUsageFragment();
6.     }
7.     @Override
8.     protected void onResume() {
9.         super.onResume();
10.        replaceFragment(mDeviceUsageFragment);
11.        mInitializationTask = new InitializationTask(this);
12.    }
```

Initialization call in Activity Resume

2. Make a task and call `initialize()` method with catching exceptions. If Workpath SDK is not initialized, sdk exception or security exception will be thrown. Refer to `InitializationTask.java`.

```
1. @Override
2.     protected InitStatus doInBackground(final Void... params) {
3.         InitStatus status = InitStatus.NO_ERROR;
4.         try {
5.             // initialize Workpath SDK
6.             Workpath.getInstance().initialize(mContextRef.get());
7.             // Check if DeviceUsageService is supported
8.             if (!DeviceUsageService.isSupported(mContextRef.get())) {
9.                 // DeviceUsageService is not supported on this device
10.                status = InitStatus.NOT_SUPPORTED;
11.            }
12.        } catch (SdkUnsupportedException sue) {
13.            mThrowable = sue;
14.            status = InitStatus.INIT_EXCEPTION;
15.        } catch (SecurityException se) {
16.            mThrowable = se;
17.            status = InitStatus.INIT_EXCEPTION;
18.        } catch (Throwable t) {
19.            mThrowable = t;
20.            status = InitStatus.INIT_EXCEPTION;
21.        }
22.        return status;
23.    }
```

Exception handling by `InitializationTask.java`

6 Checking DeviceUsageService Capability

The `isSupported()` method returns whether the `DeviceUsageService` is supported. Refer to `InitializationTask.java`.

```
1. // Check if DeviceUsageService is supported
2. if (!DeviceUsageService.isSupported(mContextRef.get())) {
3.     // DeviceUsageService is not supported on this device
4.     status = InitStatus.NOT_SUPPORTED;
5. }
```

Available service check by `isSupported()`

7 Retrieve usage from a device

DeviceUsageService provides methods for retrieving usage on a device.

The code snippet shows example of such queries :

```
1. @Override
2.     protected DeviceUsageService doInBackground(Void... voids) {
3.         try {
4.             return DeviceUsageService.getDeviceUsageInfo(mContextRef.get(), mResult);
5.         } catch (Throwable t) {
6.             mThrowable = t;
7.         }
8.         return null;
9.     }
```

Retrieve usage data from a device in DeviceUsageTask.java

8 Legal notice

The information contained in this documentation is subject to change without notice.

HP Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. HP Inc. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this documentation may be transformed, reproduced, or translated to another language without prior.

© Copyright 2018 HP Development Company, L.P.

9 Support

The HP Solution Business Program (SBP) support staff has established a procedure for submitting technical problems to the Incident Call Center (ICC). All SBP members must be registered with the Solution Programs Portal (SPP) to access technical support and other feedback or reporting activities.

Log on to the portal at <<http://www.hp.com/go/solutions>> to submit your issue to technical support. After you submit the issue, a report will be generated for the Incident Call Center. A Technical Support representative will be assigned to validate the incident and to work on a fix. HP will contact you for further information regarding the incident as quickly as possible.