



HikCentral Professional Video WebSDK Demo

User Manual

© 2019 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

This Document (hereinafter referred to be “the Document”) is the property of Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as “Hikvision”), and it cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise expressly stated herein, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding to the Document, any information contained herein.

LEGAL DISCLAIMER

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE DOCUMENT IS PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT. IN NO EVENT WILL HIKVISION BE LIABLE FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), OR OTHERWISE, IN CONNECTION WITH THE USE OF THE DOCUMENT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

Contents

Chapter 1	Overview	1
1.1	Introduction	1
1.2	Getting Started	1
Chapter 2	Live View Demo.....	2
2.1	Initialization and Deinitialization	2
2.2	Start and Stop Live View	3
Chapter 3	Playback Demo.....	4
3.1	Initialization and Deinitialization	4
3.2	Start and Stop Playback	5

Chapter 1 Overview

1.1 Introduction

The HikCentral Professional Video WebSDK Demo (hereinafter referred to as demo) provides live view and playback functions for reference via HTML source files, i.e., *demo_window_integration_playback.html* and *demo_window_integration_preview.html*.

1.2 Getting Started

Steps:


1. Get the installation packet of video web plug-in from *bin* folder in the SDK directory.
2. Install the plug-in.
3. Double-click the *demo_window_integration_preview.html* or *demo_window_integration_playback.html* to open live view or playback demo via web browser and automatically start a plug-in process.
4. The open demo tries to run with the plug-in process and completes the startup.

Chapter 2 Live View Demo

2.1 Initialization and Deinitialization

Steps:

1. Open *demo_window_integration_preview.html* via Google Chrome or Internet Explorer.

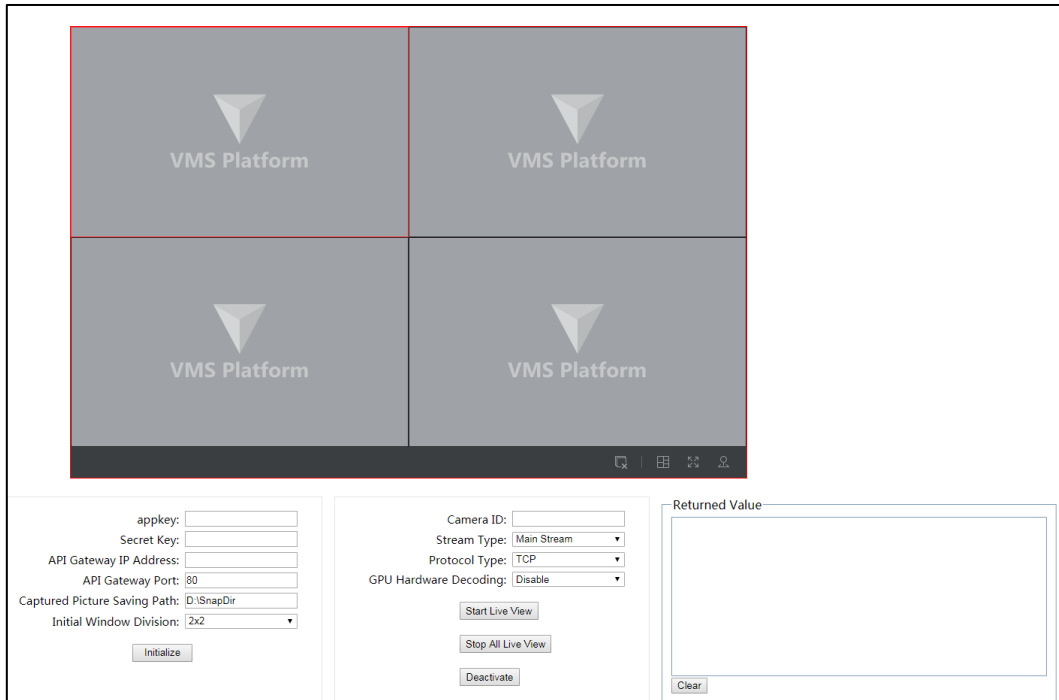

2. Configure the following parameters.
 - **appkey:** Third-party partner key in API gateway. Please contact the administrator or technical support of HikCentral Professional to get the key.
 - **Secret Key:** Third-party partner secret key in API gateway. Please contact the administrator or technical support of HikCentral Professional to get the secret key.
 - **API Gateway IP address:** The IP address of HikCentral Open Platform.
 - **API Gateway Port:** The gateway port No. of HikCentral Open Platform.
 - **Captured Picture Saving Path:** The path for saving pictures captured during live view. It should be in correct format and not end with / or \. The default path is "C:\Users\Public\HCVideoSDKWebControl\Capture", the default picture format is JPG, and the default naming rule is "snap_{camera name}_{captured time}.jpg", e.g., "snap_IPCamera 90_20190917112721.jpg".
 - **Video Saving Path:** The path for saving videos recorded during live view. It should be in correct format and not end with / or \. The default path is "C:\Users\Public\HCVideoSDKWebControl\Video", and the default naming rule is "snap_{camera name}_{recording time}.mp4", e.g., "snap_IPCamera 90_20190919161133_20190919161354.mp4".
 - **Initial Window Division:** Window division mode after initialization, the following modes are available: 1 × 1, 2 × 2, 3 × 3, and 4 × 4. The default mode is 2 × 2.

Note: During the initialization, the validity of these parameters will not be verified. If you want to

edit the parameters, please deinitialize or refresh the web page first, and then configure the parameters again.

3. Click **Initialize** to start initializing the demo.
4. (Optional) Click **Deinitialize** to clear the parameter configurations.


2.2 Start and Stop Live View

Before you start:

Make sure you have initialized the live view demo.

Steps:

1. Configure the following live view parameters.
 - Camera ID: Shows the video source, and it can be obtained by calling the APIs of Open Platform, refer to *HikCentral OpenAPI Developer Guide* for details.
 - Stream Type: The available stream type for live view includes the main stream and sub-stream.
 - Protocol Type: The transfer protocol type of live view, including UDP and TCP.
 - GPU Hardware Decoding: Decode stream by GPU or software. Enabling GPU hardware decoding is not recommended.
2. Click **Start Live View**.

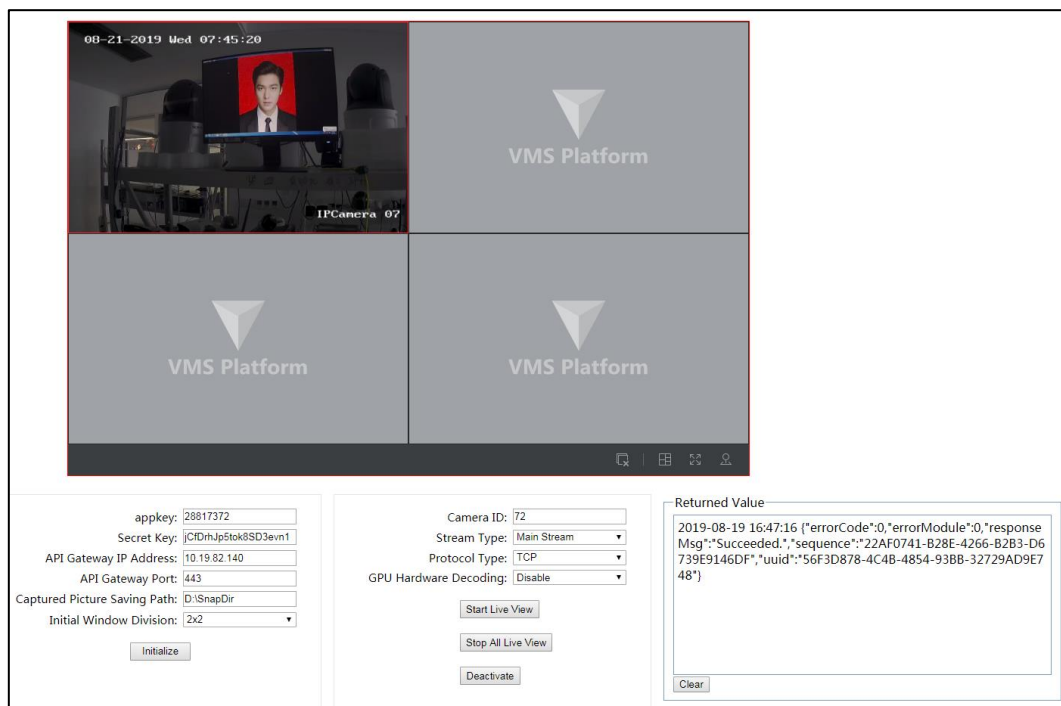


3. (Optional) Click **Stop All Live View** to stop the live view of all windows on the demo.

Chapter 3 Playback Demo

3.1 Initialization and Deinitialization

Steps:

1. Open *demo_window_integration_playback.html* via Google Chrome or Internet Explorer.

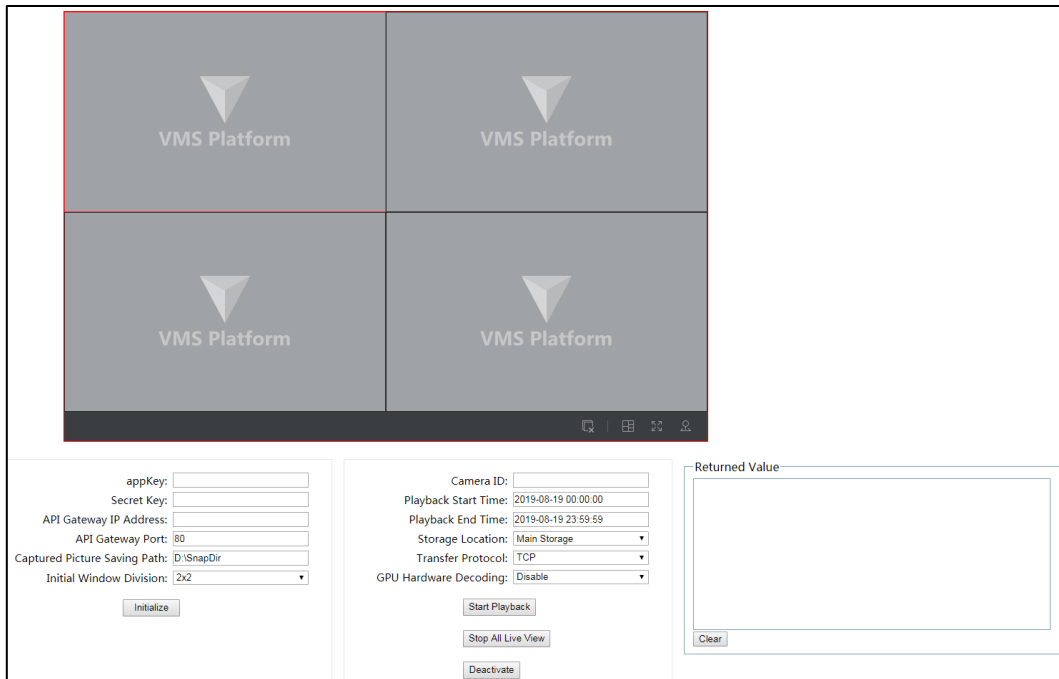

2. Configure the following parameters.
 - **appkey:** Third-party partner key in API gateway. Please contact the administrator or technical support of HikCentral Professional to get the key.
 - **Secret Key:** Third-party partner secret key in API gateway. Please contact the administrator or technical support of HikCentral Professional to get the secret key.
 - **API Gateway IP address:** The IP address of HikCentral Open Platform.
 - **API Gateway Port:** The gateway port No. of HikCentral Open Platform.
 - **Captured Picture Saving Path:** The path for saving pictures captured during playback. It should be in correct format and not end with / or \. The default path is "C:\Users\Public\HCVideoSDKWebControl\Capture", the default picture format is JPG, and the default naming rule is "snap_{camera name}_{captured time}.jpg", e.g., "snap_IPCamera 90_20190917112721.jpg".
 - **Video Saving Path:** The path for saving videos recorded during playback. It should be in correct format and not end with / or \. The default path is "C:\Users\Public\HCVideoSDKWebControl\Video", and the default naming rule is "snap_{camera name}_{recording time}.mp4", e.g., "snap_IPCamera 90_20190919161133_20190919161354.mp4".
 - **Initial Window Division:** Window division mode after initialization, the following modes are available: 1 × 1, 2 × 2, 3 × 3, and 4 × 4. The default mode is 2 × 2.

Note: During the initialization, the validity of these parameters will not be verified. If you want to

edit the parameters, please deinitialize or refresh the web page first, and then configure the parameters again.

3. Click **Initialize** to start initializing the demo.
4. (Optional) Click **Deinitialize** to clear the parameter configurations.


3.2 Start and Stop Playback

Before you start:

Make sure you have initialized the playback demo.

Steps:

1. Configure the following playback parameters.
 - Camera ID: Shows the video source, and it is obtained by calling the APIs of Open Platform, refer to *HikCentral OpenAPI Developer Guide* for details.
 - Playback Start Time: The start time of video playing.
 - Playback End Time: The end time of video playing.
 - Storage Location: The location for saving the videos, including main storage or auxiliary storage.
 - Protocol Type: The transfer protocol type of playback, including UDP and TCP.
 - GPU Hardware Decoding: Decode stream by GPU or software. Enabling GPU hardware decoding is not recommended.
2. Click **Start Playback**.

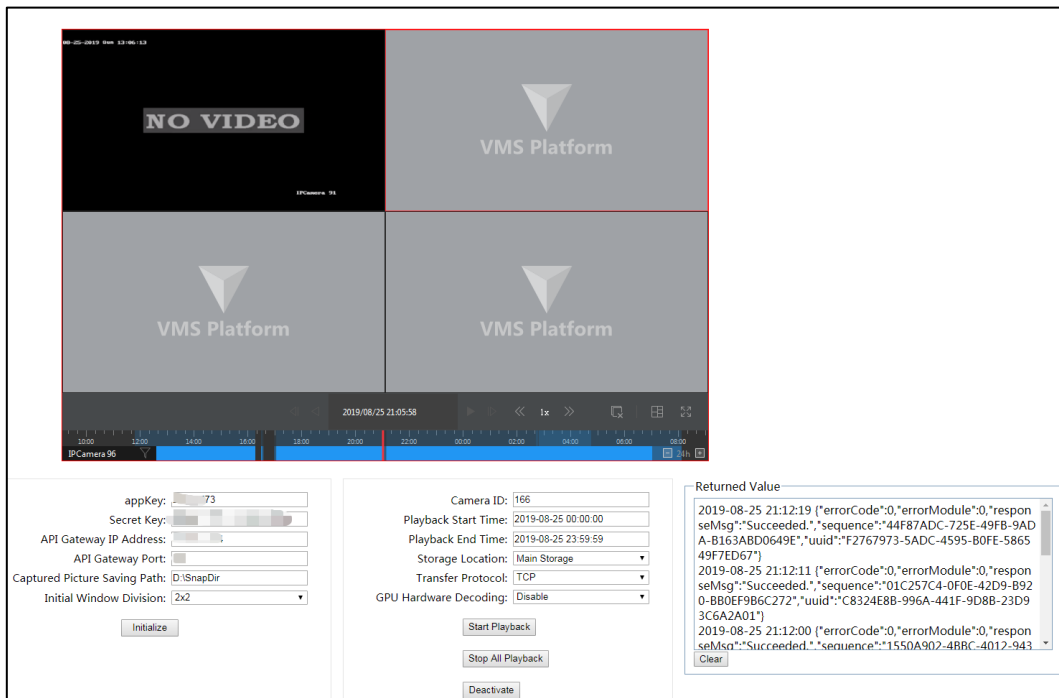

3. (Optional) Click **Stop All Playback** to stop the playback of all windows on the demo.



See Far, Go Further