



HikCentral Professional Video jsDecoder SDK Demo

User Manual

© 2020 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

This Document (hereinafter referred to be “the Document”) is the property of Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as “Hikvision”), and it cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise expressly stated herein, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding to the Document, any information contained herein.

LEGAL DISCLAIMER

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE DOCUMENT IS PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT. IN NO EVENT WILL HIKVISION BE LIABLE FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), OR OTHERWISE, IN CONNECTION WITH THE USE OF THE DOCUMENT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

Contents

Chapter 1	Overview	1
1.1	Introduction	1
1.2	Notices	1
Chapter 2	Getting Started.....	2
Chapter 3	Live View	3
Chapter 4	Playback	4
Chapter 5	Two-Way Audio.....	6

Chapter 1 Overview

1.1 Introduction

HikCentral Professional Video jsDecoder SDK demo (hereinafter referred to as demo) provides API calling examples and functions of live view and playback.

The demo has configured with 32-bit or 64-bit compilation environment, and it is provided by HTML format (i.e., *demo.html*).


1.2 Notices

- The maximum resolution of videos that can be decoded is 1080P.
- When the video resolution is 1080P, only one channel's decoding is supported. The decoding time duration of 1080P video is 22 ms, and the rendering time duration is 9 ms.
- When the video resolution is CIF, it supports four channels' decoding.

Chapter 2 Getting Started

Steps:

1. Run the executable program *webs.exe* under the same directory of *demo.html*.
2. Open the Google Chrome.
3. Enter the URL <http://127.0.0.1/demo.html> in the address bar to instantiate the jsDecoder.

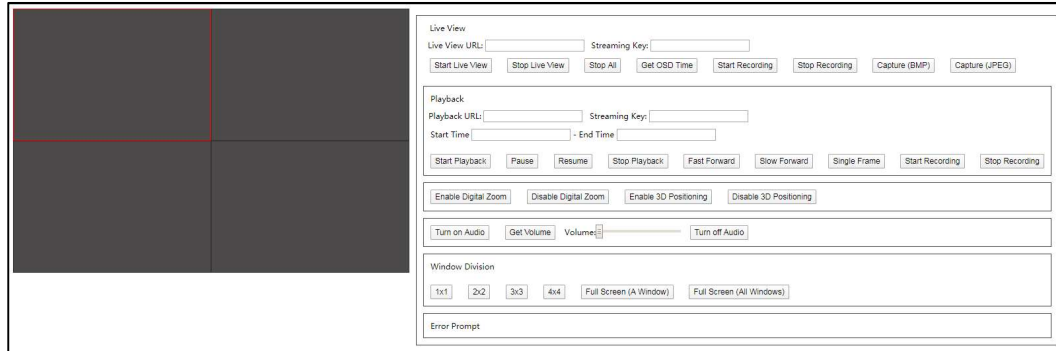

Once TLS protocol is enabled in Google Chrome, WS protocol will be disabled and you will not be able to get stream unless it is integrated via *demo_wss* in jsDecoder. Follow the instructions below:

1. Open *nginx/start.bat*.
2. Open Google Chrome.
3. Enter <https://127.0.0.1:447> in the browser to start jsDecoder.

Note: When WebSocket Secure (WSS) protocol is not connected to the platform due to a certificate problem during connection, Google Chrome will block the request address of certificate error by default, which is inefficient for development and debugging. You might want to ignore the certificate error by adding parameters to the shortcut to be entered in the browser:

```
C:\Users\user\AppData\Local\Google\Chrome\Application\chrome.exe --test-type --ignore-certificate-errors
```

Chapter 3 Live View


Purpose:

You can enter the URL information to start live view, and then stop live view. During the live view, capturing, recording, digital zoom, 3D positioning, audio control, and so on are supported.

Steps:

1. Enter the URL for getting live view stream in the **Live View URL** field.
2. Enter the key of stream media for getting stream in the **Streaming Key** field.
3. (Optional) Click **1×1**, **2×2**, **3×3**, or **4×4** in the **Window Division** field to set the display window to 1-division, 4-division, 9-division, or 16-division for live view.
4. Select a display window.
5. Click **Start Live View** to start live view.

The selected window will start playing video and the live view results will be returned by the return value.

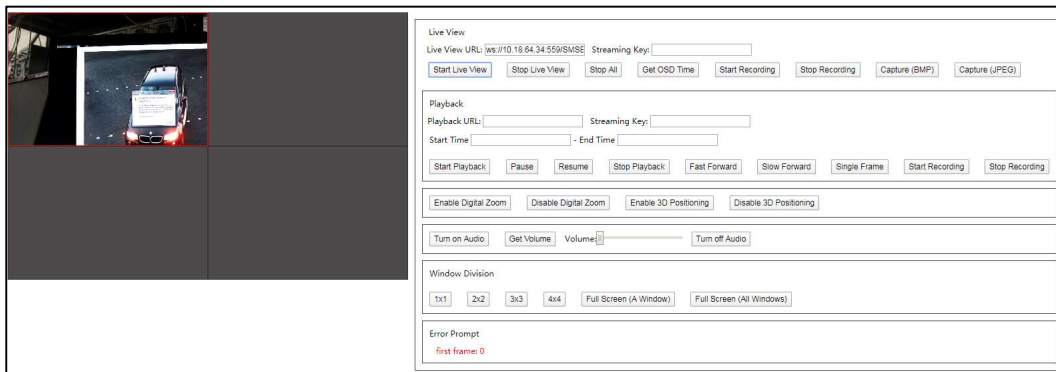

6. (Optional) Perform the following operation(s) after starting live view.
 - **Stop Live View:** Click to stop the live view of the current selected window.
 - **Stop All:** Click to stop the live view of all windows.
 - **Get OSD Time:** Click to get the time displayed on the image of the current window.
 - **Start Recording/Stop Recording:** Click to start or stop manual recording, the recorded video files are saved to the default downloading directory of the web browser.
 - **Capture (BMP)/Capture (JPEG):** Click to capture BMP or JPEG pictures during live view, the captured picture files are saved to the default downloading directory of the web browser.
 - **Enable/Disable Digital Zoom:** Click to enable or disable digital zoom of the current display window.
 - **Enable/Disable 3D Positioning:** Click to enable or disable 3D positioning of the current window.
 - **Turn on/off Audio:** Click to turn on or off the audio during live view of the current window.
 - **Get Volume:** Click to get the volume value during live view of the current window.
 - **Full Screen (A Window):** Click to display the current window in full screen mode.
 - **Full Screen (All Windows):** Click to display all windows (DIV window) in full screen mode.

Chapter 4 Playback


Purpose:

You can enter the URL information and set start/end time to start playback. During the playback, pausing or resuming playback, recording, fast or slow forward playback, and single frame playback, digital zoom, 3D positioning, audio control, and so on are supported.

Steps:

1. Enter the URL for getting playback stream in the **Playback URL** field.
2. Enter the key of stream media for getting stream in the **Streaming Key** field.
3. Set the start time and end time of playback in the **Start Time** and **End Time** field.
4. (Optional) Click **1×1**, **2×2**, **3×3**, or **4×4** in the **Window Division** field to set the display window to 1-division, 4-division, 9-division, or 16-division for playback.
5. Select a display window.
6. Click **Playback** to start playback.

The selected window will start playing video and the playback results will be returned by the return value.

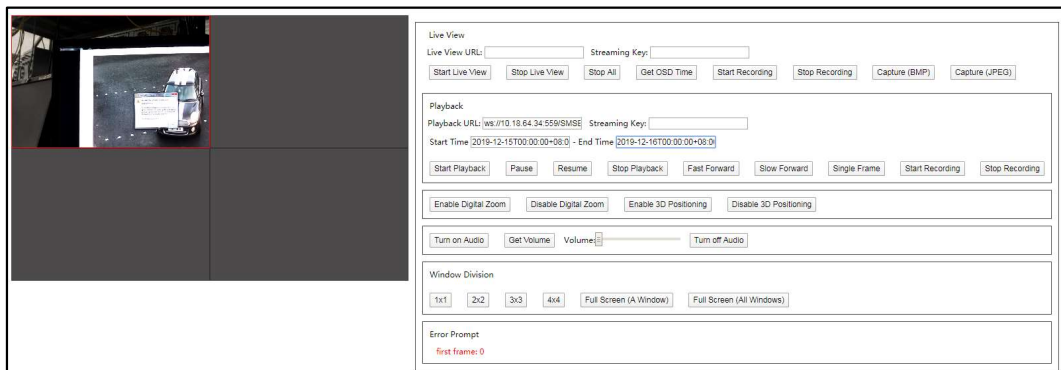

7. (Optional) Perform the following operation(s) after starting playback.
 - **Pause/Resume:** Click to pause playback or resume the paused playback of the current window.
 - **Stop Playback:** Click to stop playback of the current window, it is available only when the video is playing.
 - **Fast Forward/Slow Forward:** Click to play the video of the current window in twice or half speed.
 - **Single Frame:** Click to play the video of the current window frame by frame.
 - **Start Recording/Stop Recording:** Click to start or stop clipping the video of the current window, and the video segments are saved to the default downloading directory of the web browser.
 - **Enable/Disable Digital Zoom:** Click to enable or disable the digital zoom of the current display window.
 - **Enable/Disable 3D Positioning:** Click to enable or disable the 3D positioning of the current display window.

- **Turn on/off Audio:** Click to turn on or off the audio during playback of the current window.
- **Get Volume:** Click to get the volume value during playback of the current window.
- **Full Screen (A Window):** Click to display the current window in full screen mode.
- **Full Screen (All Windows):** Click to display all windows (i.e., DIV window) in full screen mode.


Chapter 5 Two-Way Audio

Purpose:

You can enter the URL information, and start or stop the two-way audio.

Steps:

1. Enter the URL for two-way audio in the **TalkURL** field.
2. Click **Start Two-Way Audio** to start.
3. (Optional) Drag the volume bar to adjust the volume.

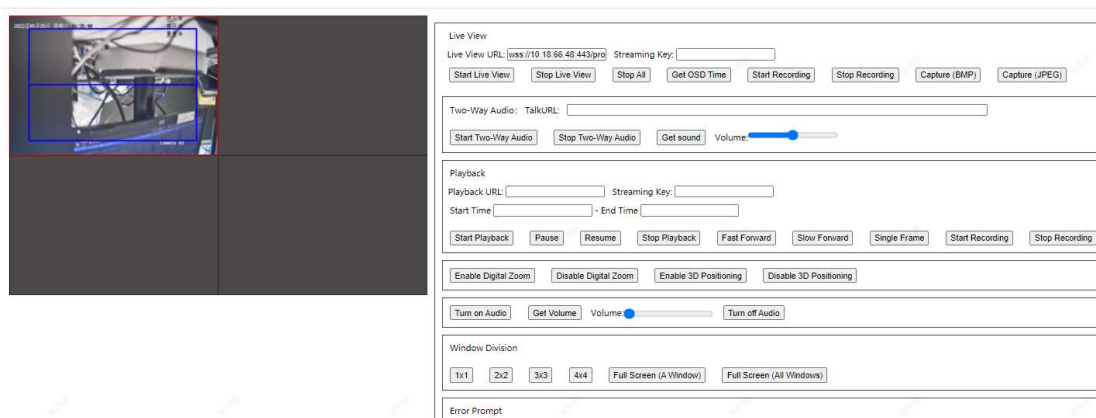



See Far, Go Further