

FIXING DUMMY OUTPUT SOUND ISSUES ON KALI LINUX

Heyyyyyyy!! faahm it's M4ST3RS again with another write up but this time sound issue on specifically on kali linux

which is the OS I've used for quite some time now

So lemme quit the yapping and go straight to address the Elephant 🐘 in the room

Atleast at some point you clicked the sound icon on the panel and saw something like


DUMMY OUTPUT

So yeah this is what will fix right now so right away to the fun part open your terminal and put on your hoodie 😊💔

Grand Unified Bootloader

Famously known as GRUB is the program that takes over from the BIOS during boot time,so basically the boot process takes place as shown below almost in every PC

BOOT PROCESS

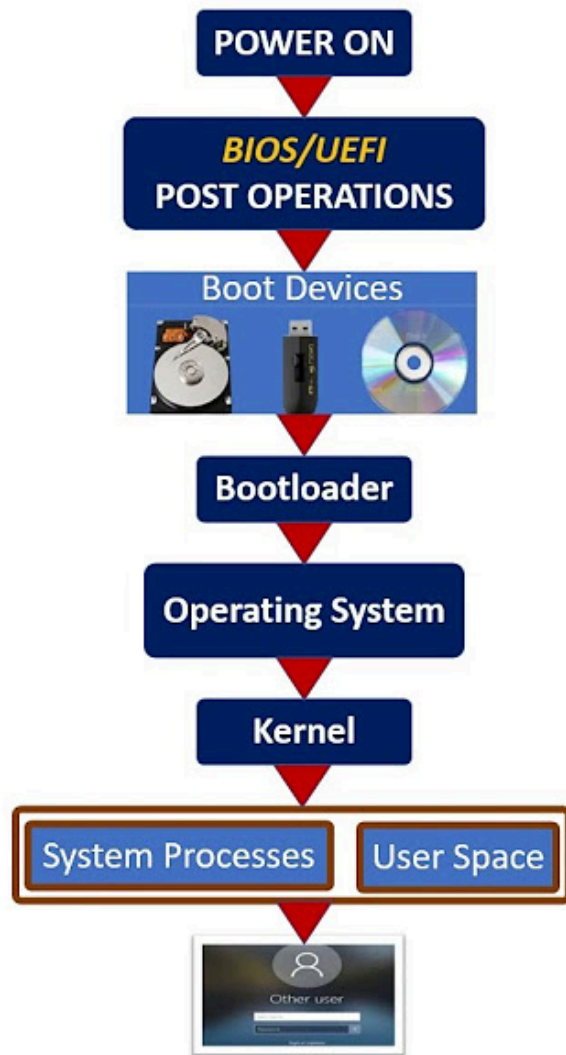

The flow in linux systems

BIOS/UEFI → GRUB → Linux Kernel → Systemd → Desktop


So the GRUB decides: > which kernel to boot

>What Kernel parameters to pass.

>Recovery mode options.

>Dual boot menus.

To fix our issue we need to modify the this file `/etc/default/grub`

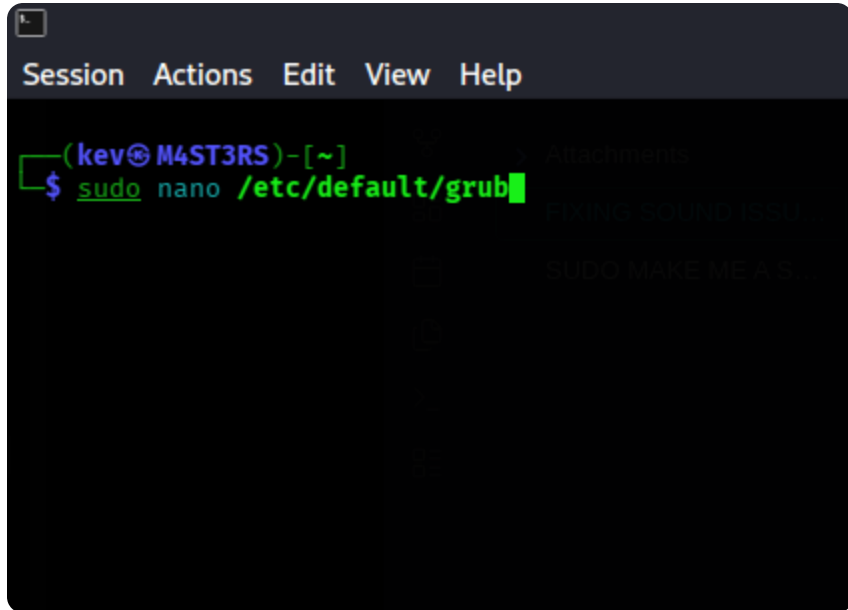A terminal window with a dark background. The title bar shows 'Session Actions Edit View Help'. The prompt is '(kev@M4ST3RS)-[~]'. The command '\$ sudo nano /etc/default/grub' is entered and highlighted in green. On the right side of the terminal, there are three vertical tabs labeled 'Attachments', 'FIXING SOUND ISSU', and 'SUDO MAKE ME A S'.

open the file and you will find the following details

- GRUB_TIMEOUT=5
- GRUB_DEFAULT=0
- GRUB_CMDLINE_LINUX_DEFAULT="quiet"

So after editing the file run the command `sudo update-grub`

This regenerates the real boot configuration used during startup

So this line `GRUB_CMDLINE_LINUX_DEFAULT="quiet"` contains the variables kernel boot parameters hence anything inside the "" is passed directly to the Linux Kernel at boot `"quiet"` in this case tells the Kernel to hide most of the boot messages:

- Loading drivers...
- Initializing ACPI...
- Starting udev...

so we need to modify that line like this : `GRUB_CMDLINE_LINUX_DEFAULT="quiet snd_intel_dspcfg.dsp_driver=1"`

Now we just added another Kernel parameter which specifically affects Intel Audio Driver behavior

```

GNU nano 8.7.1 /etc/default/grub
## If you change this file or any /etc/default/grub.d/*.cfg file,
# run 'update-grub' afterwards to update /boot/grub/grub.cfg.
# For full documentation of the options in these files, see:
#   info -f grub -n 'Simple configuration'

Your machine has:

GRUB_DEFAULT=0
GRUB_TIMEOUT=5
GRUB_DISTRIBUTOR=`(. /etc/os-release && echo ${NAME})` # Intel Cannon Point-LP HD Audio
GRUB_CMDLINE_LINUX_DEFAULT="quiet snd_intel_dspcfg.dsp_driver=1"
GRUB_CMDLINE_LINUX=""

So this parameter targets your hardware.

# If your computer has multiple operating systems installed, then you
# probably want to run os-prober. However, if your computer is a host
# for guest OSes installed via LVM or raw disk devices, running os-
# os-prober can cause damage to those guest OSes as it mounts
# filesystems to look for things.
#GRUB_DISABLE_OS_PROBER=false

DSP = Digital Signal Processor.
# Uncomment to enable BadRAM filtering, modify to suit your needs
# This works with Linux (no patch required) and with any kernel that obtains
# the memory map information from GRUB (GNU Mach, kernel of FreeBSD...) user:
#GRUB_BADRAM="0x01234567,0xfefefefe,0x89abcdef,0xefefefef"

# Uncomment to disable graphical terminal
#GRUB_TERMINAL=console

# The resolution used on graphical terminal
# note that you can use only modes which your graphic card supports via VBE/GOP/UGA
# you can see them in real GRUB with the command `videoinfo' sometimes chooses the wrong backend automatically.
#GRUB_GFXMODE=640x480

```

CTRL + X and then Y to save and exit the file after that run `sudo update-grub` and `reboot`