

There were issues affecting this run of Lighthouse:


- The page loaded too slowly to finish within the time limit. Results may be incomplete.



Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49 50–89 90–100



METRICS

[Collapse view](#)

▲ First Contentful Paint

5.3 s

First Contentful Paint marks the time at which the first text or image is painted. [Learn more about the First Contentful Paint metric.](#)

▲ Largest Contentful Paint

16.9 s

Largest Contentful Paint marks the time at which the largest text or image is painted. [Learn more about the Largest Contentful Paint metric.](#)

▲ Total Blocking Time

3,700 ms

Sum of all time periods between FCP and Time to Interactive, when task length exceeded 50ms, expressed in milliseconds. [Learn more about the Total Blocking Time metric.](#)

▲ Cumulative Layout Shift

0.703

Cumulative Layout Shift measures the movement of visible elements within the viewport. [Learn more about the Cumulative Layout Shift metric.](#)


▲ Speed Index

29.9 s

Speed Index shows how quickly the contents of a page are visibly populated. [Learn more about the Speed Index metric.](#)



[View Treemap](#)

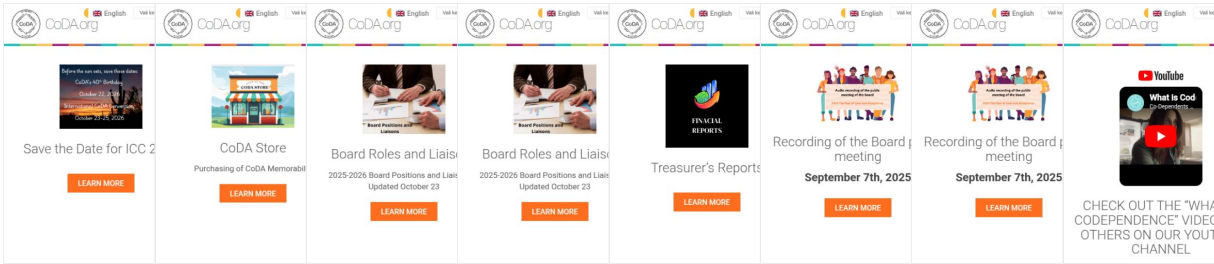

Show audits relevant to: All FCP LCP TBT CLS

DIAGNOSTICS

Avoid large layout shifts

4 layout shifts found

These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to [windowing](#). [Learn how to improve CLS](#) CLS

Element	Shift
div.container	shi

...rs=AN8SPfxZ.../m=el_main_css (www.gstatic.com)

...api/js?libraries=... (maps.googleapis.com)

...js/jquery.dataTables.min.js (cdn.datatables.net)

...sorting/natural.js (cdn.datatables.net)

...js/dataTables.responsive.min.js (cdn.datatables.net)

Element

shi



div.vc_row.wpb_row.vc_row-fluid.bannerWrap.vc_custom_1736452839057.ult-vc-hide-row.vc_row-has-fill



li.wpml-ls-slot-language.wpml-ls-item.wpml-ls-item-en.wpml-ls-current-language.wpml-ls-first-item.wpml-ls-item-legacy-dropdown

...e237d4c5/embed_ui_css.css (www.youtube.com)

...e237d4c5/embed_ui_css.css (www.youtube.com)



header.header.unscrolled.desktopOnly

...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)

A
n
re
a
tr
la

A
n
re
a
tr
la

A
n
re
a
tr
la

▲ Minimize main-thread work — 52.8 s

^

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) (TBT)

Category	Time Spent
Other	26,926 ms
Script Evaluation	13,611 ms
Style & Layout	6,588 ms

Category	Time Spent
Rendering	3,932 ms
Script Parsing & Compilation	697 ms
Parse HTML & CSS	602 ms
Garbage Collection	413 ms

▲ Largest Contentful Paint element — 16,940 ms

^

This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element](#)

Element



div.upb_row_bg.vcpb-default

Phase	% of LCP	Timing
TTFB	4%	710 ms
Load Delay	80%	13,520 ms
Load Time	7%	1,190 ms
Render Delay	9%	1,510 ms

▲ Reduce JavaScript execution time — 12.4 s

^

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT

☒ Show 3rd-party resources (8)

URL	Total CPU Time	Script Evaluation	Script Parse
coda.org 1st Party	39,990 ms	5,085 ms	100 ms
...min-js/ultimate.min.js?ver=3.21.2 (coda.org)	27,616 ms	1,785 ms	16 ms
https://coda.org	8,231 ms	180 ms	37 ms
...jquery/jquery.min.js?ver=3.7.1 (coda.org)	2,920 ms	2,117 ms	6 ms
...jsd/main.js (coda.org)	917 ms	849 ms	1 ms

URL	Total CPU Time	Script Evaluation	Script Parse
...js/scripts.js?v=10082024 (coda.org)	127 ms	15 ms	1 ms
...coda-search/coda-search.js?ver=1.0.19 (coda.org)	70 ms	69 ms	1 ms
...mediaelement/mediaelement-and-player.min.js?ver=4.2.17 (coda.org)	56 ms	40 ms	14 ms
...coda-search/instantsearch.production.min.js?ver=1.0.19 (coda.org)	54 ms	30 ms	24 ms
Google CDN Cdn	5,948 ms	4,997 ms	336 ms
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	5,948 ms	4,997 ms	336 ms
Unattributable	2,788 ms	163 ms	0 ms
Unattributable	2,788 ms	163 ms	0 ms
Google Tag Manager Tag-Manager	627 ms	543 ms	64 ms
/gtag/js?id=G-EXDFZ83S6J&cx=c>m=4e5av1 (www.googletagmanager.com)	379 ms	322 ms	38 ms
/gtm.js?id=GTM-K7F6HL6 (www.googletagmanager.com)	249 ms	220 ms	27 ms
Google Maps Utility	522 ms	338 ms	80 ms
...api/js?libraries=... (maps.googleapis.com)	334 ms	223 ms	44 ms
...14/common.js (maps.googleapis.com)	132 ms	84 ms	11 ms
...14/util.js (maps.googleapis.com)	56 ms	31 ms	24 ms
nagich.com	407 ms	368 ms	4 ms
...4.2.1/accessibility.js (aacdn.nagich.com)	407 ms	368 ms	4 ms
Other Google APIs/SDKs Utility	318 ms	284 ms	16 ms
...rs=AN8SPfrXC.../m=eI_main (translate.googleapis.com)	318 ms	284 ms	16 ms

▲

Eliminate render-blocking resources — Potential savings of 3,830 ms

^

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. [Learn how to eliminate render-blocking resources.](#) FCP LCP



There are a number of WordPress plugins that can help you [inline critical assets](#) or [defer less important resources](#). Beware that optimizations provided by these plugins may break features of your theme or plugins, so you will likely need to make code changes.

☒

Show 3rd-party resources (3)

about:blank

5/57

URL	Transfer Size	Potential Savings
Google Fonts Cdn	3.6 KiB	1,180 ms
/css2?family=Bubblegum+Sans&display=swap (fonts.googleapis.com)	0.5 KiB	860 ms
/css?family=Roboto:100,300,400,500,700,900 (fonts.googleapis.com)	2.0 KiB	160 ms
/css?family=... (fonts.googleapis.com)	1.1 KiB	160 ms
coda.org 1st Party	438.0 KiB	30,760 ms
...css/bootstrap.min.css (coda.org)	23.3 KiB	1,760 ms
...css/jquery.timepicker.min.css (coda.org)	1.1 KiB	560 ms
...css/menu.css?v=162... (coda.org)	3.6 KiB	710 ms
...css/additional.css?v=414... (coda.org)	45.6 KiB	2,810 ms
...css/theme-style.css?v=161... (coda.org)	47.2 KiB	2,960 ms
...css/tribe-events-pro-mini-calendar-block.css?ver=7.7.9 (coda.org)	1.0 KiB	560 ms
...block-library/style.min.css?ver=6.7.4 (coda.org)	18.4 KiB	1,460 ms
...mediaelement/mediaelementplayer-legacy.min.css?ver=4.2.17 (coda.org)	3.5 KiB	710 ms
...mediaelement/wp-mediaelement.min.css?ver=6.7.4 (coda.org)	1.9 KiB	560 ms
...css/views-frontend.css?ver=3.6.21 (coda.org)	4.6 KiB	710 ms
...css/style.css?ver=210701-125732 (coda.org)	1.2 KiB	560 ms
...coda-search/coda-search-page.css?ver=1.0.19 (coda.org)	1.4 KiB	560 ms
...css/styles.css?ver=6.1.3 (coda.org)	1.8 KiB	560 ms
...css/menu-image.css?ver=3.13 (coda.org)	1.6 KiB	560 ms
...css/dashicons.min.css?ver=6.7.4 (coda.org)	36.5 KiB	2,210 ms
...assets/frontend-script.css?ver=2c532d7... (coda.org)	0.8 KiB	560 ms
...legacy-dropdown/style.min.css?ver=1 (coda.org)	1.3 KiB	560 ms
...coda/style.css?ver=6.7.4 (coda.org)	1.6 KiB	560 ms
...css/js_composer.min.css?ver=8.7.2 (coda.org)	53.5 KiB	2,360 ms
...select2/select2.css?ver=6.7.4 (coda.org)	3.3 KiB	710 ms

URL	Transfer Size	Potential Savings
...css/toolset_maps_fixes.css?ver=2.2.1 (coda.org)	2.4 KiB	560 ms
...Defaults/Defaults.css?ver=3.21.2 (coda.org)	5.8 KiB	450 ms
...min-css/ultimate.min.css?ver=3.21.2 (coda.org)	59.1 KiB	2,060 ms
...public/toolset-common-es-frontend.js?ver=175000 (coda.org)	2.5 KiB	260 ms
...jquery/jquery.min.js?ver=3.7.1 (coda.org)	33.4 KiB	1,610 ms
...jquery/jquery-migrate.min.js?ver=3.4.1 (coda.org)	5.7 KiB	560 ms
...legacy-dropdown/script.min.js?ver=1 (coda.org)	1.0 KiB	260 ms
...ui/core.min.js?ver=1.13.3 (coda.org)	8.2 KiB	450 ms
...min-js/ultimate.min.js?ver=3.21.2 (coda.org)	55.7 KiB	1,760 ms
...min-js/ultimate_bg.min.js?ver=3.21.2 (coda.org)	11.1 KiB	710 ms

▲ Reduce the impact of third-party code — Third-party code blocked the main thread for 2,830 ms ^

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn how to minimize third-party impact.](#) TBT

Third-Party	Transfer Size	Main-Thread Blocking Time
Google CDN Cdn	744 KiB	1,752 ms
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	692 KiB	1,752 ms
...cLm1zuaUX.../styles__ltr.css (www.gstatic.com)	42 KiB	0 ms
...rs=AN8SPfpXZ.../m=el_main_css (www.gstatic.com)	5 KiB	0 ms
...api2/logo_48.png (www.gstatic.com)	2 KiB	0 ms
...2x/translate_24dp.png (www.gstatic.com)	2 KiB	0 ms
...1x/googlelogo_color_42x16dp.png (www.gstatic.com)	1 KiB	0 ms
Google Tag Manager Tag-Manager	254 KiB	408 ms
/gtag/js?id=G-EXDFZ83S6J&cx=c>m=4e5av1 (www.googletagmanager.com)	145 KiB	285 ms
/gtm.js?id=GTM-K7F6HL6 (www.googletagmanager.com)	108 KiB	123 ms
Google Maps Utility	324 KiB	303 ms
...api/js?libraries=... (maps.googleapis.com)	162 KiB	214 ms
...14/common.js (maps.googleapis.com)	36 KiB	83 ms
...14/util.js (maps.googleapis.com)	71 KiB	6 ms
...14/controls.js (maps.googleapis.com)	26 KiB	0 ms

Third-Party	Transfer Size	Main-Thread Blocking Time
...14/places_impl.js (maps.googleapis.com)	14 KiB	0 ms
...images/autocomplete-icons_hdpi.png (maps.gstatic.com)	7 KiB	0 ms
...images/powered-by-google-on-white3_hdpi.png (maps.gstatic.com)	4 KiB	0 ms
...14/geocoder.js (maps.googleapis.com)	2 KiB	0 ms
...mapsjs/gen_204?csp_test=true (maps.googleapis.com)	0 KiB	0 ms
nagich.com	21 KiB	221 ms
...4.2.1/accessibility.js (aacdn.nagich.com)	14 KiB	221 ms
/style/style.css (aacdn.nagich.com)	4 KiB	0 ms
...scripts/pdf.js (aacdn.nagich.com)	1 KiB	0 ms
...images/11.svg (aacdn.nagich.com)	1 KiB	0 ms
...locale/en.json (aacdn.nagich.com)	1 KiB	0 ms
/style/btncolor.css (aacdn.nagich.com)	0 KiB	0 ms
Other Google APIs/SDKs Utility	285 KiB	143 ms
...rs=AN8SPfrXC.../m=eI_main (translate.googleapis.com)	76 KiB	139 ms
/recaptcha/api.js?render=6Lc8NNQUA... &hl=en&ver=7.6.0 (www.google.com)	1 KiB	3 ms
/recaptcha/api.js?render=6LfSyb4aA...&ver=3.0 (www.google.com)	1 KiB	1 ms
...api2/anchor?ar=... (www.google.com)	45 KiB	0 ms
...api2/anchor?ar=... (www.google.com)	45 KiB	0 ms
...google.internal.waa.v1.Waa/Create (jnn-pa.googleapis.com)	44 KiB	0 ms
/translate_a/element.js? cb=googleTranslateElementInit (translate.google.com)	27 KiB	0 ms
...th/z5IbTkyD...js (www.google.com)	21 KiB	0 ms
...api2/reload?k=6LfSyb4aA... (www.google.com)	21 KiB	0 ms
/v1/supportedLanguages?client=... (translate-pa.googleapis.com)	3 KiB	0 ms
/log?hasfast=true&authuser=0&format=json (play.google.com)	1 KiB	0 ms
/element/log? format=json&hasfast=true&authuser=0 (translate.googleapis.com)	0 KiB	0 ms
...google.internal.waa.v1.Waa/GenerateIT (jnn-pa.googleapis.com)	0 KiB	0 ms
...api2/clr?k=6LfSyb4aA... (www.google.com)	0 KiB	0 ms
...api2/webworker.js?hl=en&v=cLm1zuaUX... (www.google.com)	0 KiB	0 ms
Cloudflare CDN Cdn	11 KiB	2 ms
...2.8.4/moment.min.js (cdnjs.cloudflare.com)	11 KiB	2 ms
datatables.net	36 KiB	2 ms
...js/dataTables.responsive.min.js (cdn.datatables.net)	6 KiB	1 ms
...sorting/natural.js (cdn.datatables.net)	2 KiB	1 ms
...js/jquery.dataTables.min.js (cdn.datatables.net)	28 KiB	0 ms
YouTube Video	1,246 KiB	0 ms

Third-Party	Transfer Size	Main-Thread Blocking Time
/embed/En8klpAsoBY?feature=oembed (www.youtube.com)	154 KiB	0 ms
...en_US/base.js (www.youtube.com)	676 KiB	0 ms
...www-embed-player-pc.vflset/www-embed-player-pc.js (www.youtube.com)	304 KiB	0 ms
...e237d4c5/www-player.css (www.youtube.com)	58 KiB	0 ms
...e237d4c5/embed_ui_css.css (www.youtube.com)	30 KiB	0 ms
...En8klpAsoBY/sddefault.webp (i.ytimg.com)	10 KiB	0 ms
...en_US/embed.js (www.youtube.com)	9 KiB	0 ms
/sAK3VdR-a...=s68-c-k-c0x00ffffff-no-rj (yt3.ggpht.com)	4 KiB	0 ms
...v1/log_event?alt=json (www.youtube.com)	0 KiB	0 ms
/generate_204?VXANsg (www.youtube.com)	0 KiB	0 ms
/generate_204?1I_AZA (www.youtube.com)	0 KiB	0 ms
Google Fonts Cdn	97 KiB	0 ms
...v49/KFO7CnqEu....woff2 (fonts.gstatic.com)	34 KiB	0 ms
...v48/KFO7CnqEu....woff2 (fonts.gstatic.com)	34 KiB	0 ms
...v18/KFOICnqEu....woff2 (fonts.gstatic.com)	11 KiB	0 ms
...v18/KFOmCnqEu....woff2 (fonts.gstatic.com)	11 KiB	0 ms
...v14/24px.svg (fonts.gstatic.com)	3 KiB	0 ms
/css?family=Roboto:100,300,400,500,700,900 (fonts.googleapis.com)	2 KiB	0 ms
/css?family=... (fonts.googleapis.com)	1 KiB	0 ms
/css2?family=... (fonts.googleapis.com)	1 KiB	0 ms
/css2?family=Bubblegum+Sans&display=swap (fonts.googleapis.com)	0 KiB	0 ms
Google/DoubleClick Ads Ad	1 KiB	0 ms
/instream/ad_status.js (static.doubleclick.net)	0 KiB	0 ms
/pagead/id?slf_rd=1 (googleads.g.doubleclick.net)	0 KiB	0 ms
/pagead/id (googleads.g.doubleclick.net)	0 KiB	0 ms
Google Analytics Analytics	1 KiB	0 ms
/g/collect?v=... (region1.google-analytics.com)	1 KiB	0 ms

▲

Reduce unused CSS — Potential savings of 272 KiB

⤴

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) FCP LCP



Consider reducing, or switching, the number of [WordPress plugins](#) loading unused CSS in your page. To identify plugins that are adding extraneous CSS, try running [code coverage](#) in Chrome DevTools. You can identify the theme/plugin responsible from the URL of the stylesheet. Look out for plugins that have many stylesheets in the list which have a lot of red in code coverage. A plugin should only enqueue a stylesheet if it is actually used on the page.

URL	Transfer Size	Potential Savings
coda.org 1st Party	278.6 KiB	272.4 KiB
...min-css/ultimate.min.css?ver=3.21.2 (coda.org)	58.4 KiB	58.3 KiB
...css/js_composer.min.css?ver=8.7.2 (coda.org)	52.8 KiB	52.2 KiB
...css/theme-style.css?v=161... (coda.org)	46.5 KiB	44.0 KiB
...css/additional.css?v=414... (coda.org)	44.9 KiB	42.7 KiB
...css/dashicons.min.css?ver=6.7.4 (coda.org)	35.8 KiB	35.8 KiB
...css/bootstrap.min.css (coda.org)	22.6 KiB	21.8 KiB
...block-library/style.min.css?ver=6.7.4 (coda.org)	17.7 KiB	17.7 KiB

▲ Reduce unused JavaScript — Potential savings of 925 KiB

^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) FCP LCP



Consider reducing, or switching, the number of [WordPress plugins](#) loading unused JavaScript in your page. To identify plugins that are adding extraneous JS, try running [code coverage](#) in Chrome DevTools. You can identify the theme/plugin responsible from the URL of the script. Look out for plugins that have many scripts in the list which have a lot of red in code coverage. A plugin should only enqueue a script if it is actually used on the page.

☒ Show 3rd-party resources (10)

URL	Transfer Size	Potential Savings
Google CDN Cdn	691.5 KiB	383.5 KiB
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	345.7 KiB	231.2 KiB
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	345.7 KiB	152.3 KiB
coda.org 1st Party	233.8 KiB	196.2 KiB
...coda-search/instantsearch.production.min.js?ver=1.0.19 (coda.org)	94.7 KiB	77.0 KiB
...min-js/ultimate.min.js?ver=3.21.2 (coda.org)	55.0 KiB	48.9 KiB
...coda-api/vue.min.js?ver=1 (coda.org)	41.2 KiB	35.3 KiB
...mediaelement/mediaelement-and-player.min.js?ver=4.2.17 (coda.org)	42.8 KiB	35.0 KiB
Google Maps Utility	296.2 KiB	163.9 KiB
...api/js?libraries=... (maps.googleapis.com)	162.2 KiB	86.2 KiB

URL	Transfer Size	Potential Savings
...14/util.js (maps.googleapis.com)	71.3 KiB	26.8 KiB
...14/common.js (maps.googleapis.com)	36.4 KiB	26.8 KiB
...14/controls.js (maps.googleapis.com)	26.2 KiB	24.1 KiB
Google Tag Manager Tag-Manager	253.4 KiB	112.7 KiB
/gtag/js?id=G-EXDFZ83S6J&cx=c>m=4e5av1 (www.googletagmanager.com)	145.4 KiB	57.7 KiB
/gtm.js?id=GTM-K7F6HL6 (www.googletagmanager.com)	108.0 KiB	55.0 KiB
Other Google APIs/SDKs Utility	75.5 KiB	46.4 KiB
...rs=AN8SPfrXC.../m=el_main (translate.googleapis.com)	75.5 KiB	46.4 KiB
datatables.net	27.8 KiB	22.5 KiB
...js/jquery.dataTables.min.js (cdn.datatables.net)	27.8 KiB	22.5 KiB

▲ Avoid an excessive DOM size — 2,797 elements

A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size](#). TBT

Statistic	Element	Value
Total DOM Elements		2,797
Maximum DOM Depth	option	23
Maximum Child Elements	select#wpv_control_select_wpcf-meeting_city.js-wpv-filter-trigger.form-control	761

▲ Minify CSS — Potential savings of 20 KiB

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS](#). FCP LCP



A number of [WordPress plugins](#) can speed up your site by concatenating, minifying, and compressing your styles. You may also want to use a build process to do this minification up-front if possible.

URL	Transfer Size	Potential Savings
coda.org 1st Party	92.7 KiB	19.8 KiB
...css/additional.css?v=414... (coda.org)	45.6 KiB	10.5 KiB

URL

Transfer Size

Potential Savings

...css/theme-style.css?v=161... (coda.org)

47.2 KiB

9.3 KiB

▲ Defer offscreen images — Potential savings of 824 KiB


^

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. [Learn how to defer offscreen images.](#) FCP LCP



Install a [lazy-load WordPress plugin](#) that provides the ability to defer any offscreen images, or switch to a theme that provides that functionality. Also consider using [the AMP plugin](#).

☒ Show 3rd-party resources (1)

	URL	Resource Size	Potential Savings
	coda.org 1st Party	831.9 KiB	821.0 KiB
img	...uploads/Board-Roles-Liaisons.png (coda.org)	179.8 KiB	179.8 KiB
img	...uploads/Is-CoDAteen-for-YOU.png (coda.org)	163.9 KiB	163.9 KiB
img	...uploads/Lighting-....png (coda.org)	131.2 KiB	122.3 KiB
img	...uploads/coda-birthday.jpg (coda.org)	96.7 KiB	96.7 KiB
img	...uploads/recording-board-meeting-2.png (coda.org)	88.3 KiB	88.3 KiB
img	...uploads/CoDA-Store_.png (coda.org)	46.7 KiB	46.7 KiB
 div.upb_row_bg.vcpb-default	...12/home_form-min.jpg (coda.org)	45.6 KiB	45.6 KiB
 img	...06/announcements.png (coda.org)	29.3 KiB	27.3 KiB
img.menu-image.menu-image-title-after	...09/drop4.jpg (coda.org)	14.1 KiB	14.1 KiB
img	...uploads/Financial-reports.png (coda.org)	13.0 KiB	13.0 KiB
img.menu-image.menu-image-title-after	...09/drop2.jpg (coda.org)	9.6 KiB	9.6 KiB
img.menu-image.menu-image-title-after	...09/drop1.jpg (coda.org)	9.6 KiB	9.6 KiB

about:blank


12/57



	URL	Resource Size	Potential Savings
img	... uploads/coda_youtube_logo.jpg (coda.org)	4.2 KiB	4.2 KiB
Google Fonts Cdn		3.3 KiB	3.3 KiB
div#goog-gt-tt > div#goog-gt-vt > div.VlpgJd-yAWNEb-hvhgNd-Ud7fr > img			
	...v14/24px.svg (fonts.gstatic.com)	3.3 KiB	3.3 KiB

▲ Serve images in next-gen formats — Potential savings of 544 KiB

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more about modern image formats](#). FCP LCP

 Consider using the [Performance Lab](#) plugin to automatically convert your uploaded JPEG images into WebP, wherever supported.

	URL	Resource Size	Potential Savings
coda.org 1st Party		1,021.1 KiB	543.7 KiB
img	...uploads/Board-Roles-Liaisons.png (coda.org)	179.8 KiB	135.2 KiB
img	...uploads/Is-CoDAteen-for-YOU.png (coda.org)	163.9 KiB	106.9 KiB
img	...uploads/Lighting-....png (coda.org)	131.2 KiB	79.3 KiB
 img.vc_single_image-img	...12/home_block_1-min.jpg (coda.org)	130.7 KiB	61.3 KiB
img.vc_single_image-img	...12/home_block_2-min.jpg (coda.org)	103.0 KiB	47.6 KiB
img	...uploads/CoDA-Store_.png (coda.org)	46.7 KiB	29.3 KiB
img	...uploads/coda-birthday.jpg (coda.org)	96.7 KiB	26.5 KiB
img	...uploads/recording-board-meeting-2.png (coda.org)	88.3 KiB	24.7 KiB


	URL	Resource Size	Potential Savings
 div.upb_row_bg.vcpb-default	...12/home_banner-min.jpg (coda.org)	35.2 KiB	19.4 KiB
 div.upb_row_bg.vcpb-default	...12/home_form-min.jpg (coda.org)	45.6 KiB	13.4 KiB

▲ Properly size images — Potential savings of 665 KiB

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn how to size images.](#) FCP

LCP

 Upload images directly through the [media library](#) to ensure that the required image sizes are available, and then insert them from the media library or use the image widget to ensure the optimal image sizes are used (including those for the responsive breakpoints). Avoid using Full Size images unless the dimensions are adequate for their usage. [Learn More.](#)

	URL	Resource Size	Potential Savings
coda.org 1st Party		879.6 KiB	664.7 KiB
img	...uploads/Board-Roles-Liaisons.png (coda.org)	179.8 KiB	145.0 KiB
img	...uploads/Is-CoDAteen-for-YOU.png (coda.org)	163.9 KiB	132.2 KiB
img	...uploads/Lighting-....png (coda.org)	131.2 KiB	105.9 KiB
img	...uploads/coda-birthday.jpg (coda.org)	96.7 KiB	88.8 KiB
img	...uploads/recording-board-meeting-2.png (coda.org)	88.3 KiB	81.1 KiB
 img.vc_single_image-img	...12/home_block_1-min.jpg (coda.org)	130.7 KiB	55.3 KiB
img	...uploads/CoDA-Store_.png (coda.org)	46.7 KiB	24.6 KiB
img	...06/announcements.png (coda.org)	29.3 KiB	23.6 KiB

	URL	Resource Size	Potential Savings
img	...uploads/Financial-reports.png (coda.org)	13.0 KiB	8.0 KiB

▲ Page prevented back/forward cache restoration — 1 failure reason

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#)

Failure reason	Failure type
Internal error. /embed/En8klpAsoBY?feature=oembed (www.youtube.com)	Not actionable

Image elements do not have explicit width and height

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS

URL	
coda.org 1st Party	
img	...uploads/coda-birthday.jpg (coda.org)
img	...uploads/coda-birthday.jpg (coda.org)
img	...uploads/recording-board-meeting-2.png (coda.org)
img	...uploads/recording-board-meeting-2.png (coda.org)
img	...uploads/Is-CoDAteen-for-YOU.png (coda.org)
img	...uploads/Lighting-....png (coda.org)
img	...06/announcements.png (coda.org)
img	...uploads/Board-Roles-Liaisons.png (coda.org)
img	...uploads/Is-CoDAteen-for-YOU.png (coda.org)
img	...uploads/Lighting-....png (coda.org)
 img	...06/announcements.png (coda.org)
img	...uploads/Board-Roles-Liaisons.png (coda.org)

URL

img

...uploads/Financial-reports.png (coda.org)

img

...uploads/Financial-reports.png (coda.org)

img

...uploads/CoDA-Store_.png (coda.org)

img


...uploads/CoDA-Store_.png (coda.org)

img

...uploads/CoDA-Pamphlets-290.jpg (coda.org)

img

...uploads/CoDA-Pamphlets-290.jpg (coda.org)



img

...uploads/CoDA-logo-full_1.svg (coda.org)



img

...09/search.svg (coda.org)

img

...uploads/coda_youtube_logo.jpg (coda.org)

img

...uploads/coda_youtube_logo.jpg (coda.org)



img.wpml-is-flag

...flags/en.png (coda.org)



img.wpml-is-flag

...flags/es.png (coda.org)

Minify JavaScript — Potential savings of 4 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#) FCP LCP



A number of [WordPress plugins](#) can speed up your site by concatenating, minifying, and compressing your scripts. You may also want to use a build process to do this minification up front if possible.

URL	Transfer Size	Potential Savings
inline: // Owl Carousel v2.3.4 !functi...	12.4 KiB	3.5 KiB

about:blank

16/57

Serve static assets with an efficient cache policy — 10 resources found



A long cache lifetime can speed up repeat visits to your page. [Learn more about efficient cache policies.](#)



Read about [Browser Caching in WordPress.](#)

URL	Cache TTL	Transfer Size
nagich.com		14 KiB
...4.2.1/accessibility.js (aacdn.nagich.com)	25d 12h 26m 40s	14 KiB
YouTube Video		14 KiB
...En8klpAsoBY/sddefault.webp (i.ytimg.com)	2h	10 KiB
...En8klpAsoBY/sddefault.webp (i.ytimg.com)	2h	0 KiB
...En8klpAsoBY/sddefault.webp (i.ytimg.com)	2h	0 KiB
...En8klpAsoBY/sddefault.webp (i.ytimg.com)	2h	0 KiB
/sAK3VdR-a...=s68-c-k-c0x00ffff-no-rj (yt3.ggpht.com)	1d	4 KiB
Google CDN Cdn		2 KiB
...api2/logo_48.png (www.gstatic.com)	7d	2 KiB
...api2/logo_48.png (www.gstatic.com)	7d	0 KiB
Google/DoubleClick Ads Ad		0 KiB
/instream/ad_status.js (static.doubleclick.net)	15m	0 KiB
/instream/ad_status.js (static.doubleclick.net)	15m	0 KiB

Ensure text remains visible during webfont load



Warnings: Lighthouse was unable to automatically check the `font-display` values for the origin <https://fonts.gstatic.com>.

Leverage the `font-display` CSS feature to ensure text is user-visible while webfonts are loading. [Learn more about font-display.](#)

URL	Potential Savings
Google Fonts Cdn	160 ms

URL

Potential Savings

...v49/KFO7CnqEu....woff2 (fonts.gstatic.com)

160 ms

Some third-party resources can be lazy loaded with a facade — 1 facade alternative available

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. [Learn how to defer third-parties with a facade.](#) TBT

Product	Transfer Size	Main-Thread Blocking Time
YouTube Video	1,246 KiB	0 ms
YouTube Embedded Player (Video)	1,246 KiB	0 ms
...en_US/base.js (www.youtube.com)	676 KiB	0 ms
...www-embed-player-pc.vflset/www-embed-player-pc.js (www.youtube.com)	304 KiB	0 ms
/embed/En8klpAsoBY?feature=oembed (www.youtube.com)	154 KiB	0 ms
...e237d4c5/www-player.css (www.youtube.com)	58 KiB	0 ms
...e237d4c5/embed_ui_css.css (www.youtube.com)	30 KiB	0 ms
Other resources	24 KiB	0 ms

Does not use passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. [Learn more about adopting passive event listeners.](#)

Source

coda.org 1st Party

jquery.min.js:2

Avoid serving legacy JavaScript to modern browsers — Potential savings of 8 KiB

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. [Learn how to use modern JavaScript](#) FCP LCP

☐ Show 3rd-party resources (1)

URL	Potential Savings
datatables.net	8.2 KiB

URL	Potential Savings
...js/jquery.dataTables.min.js (cdn.datatables.net)	8.2 KiB
jquery.dataTables.min.js:113	Array.isArray
coda.org 1st Party	0.2 KiB
...public/toolset-common-es-frontend.js? ver=175000 (coda.org)	0.1 KiB
toolset-common-es-frontend.js:1	@babel/plugin-transform-classes
...coda-api/axios.min.js?ver=1 (coda.org)	0.1 KiB
axios.min.js:1	@babel/plugin-transform-classes
...mediaelement/mediaelement-and-player.min.js? ver=4.2.17 (coda.org)	0.1 KiB
mediaelement-and-player.min.js:12	@babel/plugin-transform-classes
...coda-search/instantsearch.production.min.js? ver=1.0.19 (coda.org)	0.0 KiB
instantsearch.production.min.js:2	@babel/plugin-transform-classes

Avoid enormous network payloads — Total size was 5,096 KiB

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#)



Consider showing excerpts in your post lists (e.g. via the more tag), reducing the number of posts shown on a given page, breaking your long posts into multiple pages, or using a plugin to lazy-load comments.

☒ Show 3rd-party resources (6)

URL	Transfer Size
YouTube Video	980.3 KiB
...en_US/base.js (www.youtube.com)	676.1 KiB
...www-embed-player-pc.vflset/www-embed-player-pc.js (www.youtube.com)	304.2 KiB
Google CDN Cdn	692.1 KiB
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	346.3 KiB
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	345.8 KiB
coda.org 1st Party	607.1 KiB

URL	Transfer Size
...uploads/Board-Roles-Liaisons.png (coda.org)	180.0 KiB
...uploads/ls-CoDateen-for-YOU.png (coda.org)	164.1 KiB
...uploads/Lighting-....png (coda.org)	131.6 KiB
...12/home_block_1-min.jpg (coda.org)	131.4 KiB
Google Maps Utility	162.4 KiB
...api/js?libraries=... (maps.googleapis.com)	162.4 KiB
Google Tag Manager Tag-Manager	145.5 KiB
/gtag/js?id=G-EXDFZ83S6J&cx=c>m=4e5av1 (www.googletagmanager.com)	145.5 KiB

Avoid long main-thread tasks

— 20 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT

☒ Show 3rd-party resources (12)

URL	Start Time	Duration
coda.org 1st Party		2,130 ms
...min-js/ultimate.min.js?ver=3.21.2 (coda.org)	6,814 ms	513 ms
...jsd/main.js (coda.org)	21,448 ms	456 ms
...jquery/jquery.min.js?ver=3.7.1 (coda.org)	20,736 ms	320 ms
...jquery/jquery.min.js?ver=3.7.1 (coda.org)	21,057 ms	252 ms
...recaptcha/index.js?ver=6.1.3 (coda.org)	17,346 ms	225 ms
...public/toolset-common-es-frontend.js?ver=175000 (coda.org)	6,426 ms	202 ms
...jquery/jquery.min.js?ver=3.7.1 (coda.org)	20,574 ms	162 ms
Google CDN Cdn		1,634 ms
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	1,898 ms	508 ms
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	34,597 ms	279 ms
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	1,631 ms	267 ms
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	35,317 ms	250 ms

URL	Start Time	Duration
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	34,998 ms	194 ms
...cLm1zuaUX.../recaptcha__en.js (www.gstatic.com)	36,879 ms	136 ms
Google Tag Manager Tag-Manager		487 ms
/gtag/js?id=G-EXDFZ83S6J&cx=c>m=4e5av1 (www.googletagmanager.com)	25,187 ms	334 ms
/gtm.js?id=GTM-K7F6HL6 (www.googletagmanager.com)	20,199 ms	153 ms
Google Maps Utility		354 ms
...api/js?libraries=... (maps.googleapis.com)	36,260 ms	209 ms
...api/js?libraries=... (maps.googleapis.com)	20,421 ms	145 ms
nagich.com		208 ms
...4.2.1/accessibility.js (aacdn.nagich.com)	17,571 ms	208 ms
Unattributable		189 ms
Unattributable	2,507 ms	189 ms
Other Google APIs/SDKs Utility		186 ms
...rs=AN8SPfrXC.../m=el_main (translate.googleapis.com)	19,272 ms	186 ms

User Timing marks and measures — 3 user timings


Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)


Name	Type	Start Time	Duration
translate:page_load_to_initialized	Measure	95.50 ms	2,054.80 ms
translate:initialized	Mark	2,150.33 ms	
clearMeasures	Mark	2,151.74 ms	

Avoid non-composited animations — 10 animated elements found




Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS

Element	Name
a.vc_general.vc_btn3.vc_btn3-size-md.vc_btn3-shape-rounded.vc_btn3-style-modern.vc_btn3-color-grey.dbtn	
Unsupported CSS Property: padding-bottom	padding-bottom
Unsupported CSS Property: padding-left	padding-left
Unsupported CSS Property: padding-right	padding-right
Unsupported CSS Property: padding-top	padding-top
Unsupported CSS Property: color	color
Unsupported CSS Property: font-size	font-size
Unsupported CSS Property: border-bottom-color	border-bottom-color
Unsupported CSS Property: border-bottom-left-radius	border-bottom-left-radius
Unsupported CSS Property: border-bottom-right-radius	border-bottom-right-radius
Unsupported CSS Property: border-bottom-width	border-bottom-width
Unsupported CSS Property: font-weight	font-weight
Unsupported CSS Property: border-left-color	border-left-color
Unsupported CSS Property: border-left-width	border-left-width
Unsupported CSS Property: border-right-color	border-right-color
Unsupported CSS Property: border-right-width	border-right-width
Unsupported CSS Property: border-top-color	border-top-color
Unsupported CSS Property: border-top-left-radius	border-top-left-radius

Element	Name
Unsupported CSS Property: border-top-right-radius	border-top-right-radius
Unsupported CSS Property: border-top-width	border-top-width
	
a.vc_general.vc_btn3.vc_btn3-size-md.vc_btn3-shape-rounded.vc_btn3-style-modern.vc_btn3-color-grey.dbtn	
Unsupported CSS Property: padding-bottom	padding-bottom
Unsupported CSS Property: padding-left	padding-left
Unsupported CSS Property: padding-right	padding-right
Unsupported CSS Property: padding-top	padding-top
Unsupported CSS Property: color	color
Unsupported CSS Property: font-size	font-size
Unsupported CSS Property: border-bottom-color	border-bottom-color
Unsupported CSS Property: border-bottom-left-radius	border-bottom-left-radius
Unsupported CSS Property: border-bottom-right-radius	border-bottom-right-radius
Unsupported CSS Property: border-bottom-width	border-bottom-width
Unsupported CSS Property: font-weight	font-weight
Unsupported CSS Property: border-left-color	border-left-color
Unsupported CSS Property: border-left-width	border-left-width
Unsupported CSS Property: border-right-color	border-right-color
Unsupported CSS Property: border-right-width	border-right-width

Element	Name
Unsupported CSS Property: border-top-color	border-top-color
Unsupported CSS Property: border-top-left-radius	border-top-left-radius
Unsupported CSS Property: border-top-right-radius	border-top-right-radius
Unsupported CSS Property: border-top-width	border-top-width
	
a.vc_general.vc_btn3.vc_btn3-size-md.vc_btn3-shape-rounded.vc_btn3-style-modern.vc_btn3-color-grey.dbtn	
Unsupported CSS Property: padding-bottom	padding-bottom
Unsupported CSS Property: padding-left	padding-left
Unsupported CSS Property: padding-right	padding-right
Unsupported CSS Property: padding-top	padding-top
Unsupported CSS Property: color	color
Unsupported CSS Property: font-size	font-size
Unsupported CSS Property: border-bottom-color	border-bottom-color
Unsupported CSS Property: border-bottom-left-radius	border-bottom-left-radius
Unsupported CSS Property: border-bottom-right-radius	border-bottom-right-radius
Unsupported CSS Property: border-bottom-width	border-bottom-width
Unsupported CSS Property: font-weight	font-weight
Unsupported CSS Property: border-left-color	border-left-color
Unsupported CSS Property: border-left-width	border-left-width

Element	Name
Unsupported CSS Property: border-right-color	border-right-color
Unsupported CSS Property: border-right-width	border-right-width
Unsupported CSS Property: border-top-color	border-top-color
Unsupported CSS Property: border-top-left-radius	border-top-left-radius
Unsupported CSS Property: border-top-right-radius	border-top-right-radius
Unsupported CSS Property: border-top-width	border-top-width
	
a.vc_general.vc_btn3.vc_btn3-size-md.vc_btn3-shape-rounded.vc_btn3-style-modern.vc_btn3-color-grey.dbtn	
Unsupported CSS Property: padding-bottom	padding-bottom
Unsupported CSS Property: padding-left	padding-left
Unsupported CSS Property: padding-right	padding-right
Unsupported CSS Property: padding-top	padding-top
Unsupported CSS Property: color	color
Unsupported CSS Property: font-size	font-size
Unsupported CSS Property: border-bottom-color	border-bottom-color
Unsupported CSS Property: border-bottom-left-radius	border-bottom-left-radius
Unsupported CSS Property: border-bottom-right-radius	border-bottom-right-radius
Unsupported CSS Property: border-bottom-width	border-bottom-width
Unsupported CSS Property: font-weight	font-weight

Element	Name
Unsupported CSS Property: border-left-color	border-left-color
Unsupported CSS Property: border-left-width	border-left-width
Unsupported CSS Property: border-right-color	border-right-color
Unsupported CSS Property: border-right-width	border-right-width
Unsupported CSS Property: border-top-color	border-top-color
Unsupported CSS Property: border-top-left-radius	border-top-left-radius
Unsupported CSS Property: border-top-right-radius	border-top-right-radius
Unsupported CSS Property: border-top-width	border-top-width
div.VlpgJd-ZVi9od-aZ2wEe-wOHMyf > div.VlpgJd-ZVi9od-aZ2wEe-OiiCO > svg.VlpgJd-ZVi9od-aZ2wEe > circle.VlpgJd-ZVi9od-aZ2wEe-Jt5cK <circle class="VIpgJd-ZVi9od-aZ2wEe-Jt5cK" fill="none" stroke-width="6" stroke-linecap="round" cx="33" cy="33" r="30">	
Unsupported CSS Property: stroke-dashoffset	spinner-dash
button.owl-dot	
Unsupported CSS Property: background-color	background-color
button.owl-dot.active	
Unsupported CSS Property: background-color	background-color
button.owl-dot	

Element

Name

backgro
und-
color

Unsupported CSS Property: background-color

button.owl-dot

backgro
und-
color

Unsupported CSS Property: background-color

button.owl-dot

backgro
und-
color

Unsupported CSS Property: background-color

Initial server response time was short — Root document took 50 ms

Keep the server response time for the main document short because all other requests depend on it. [Learn more about the Time to First Byte metric.](#) FCP LCP

 Themes, plugins, and server specifications all contribute to server response time. Consider finding a more optimized theme, carefully selecting an optimization plugin, and/or upgrading your server.

URL	Time Spent
coda.org 1st Party	50 ms
https://coda.org	50 ms

Avoid chaining critical requests — 84 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn how to avoid chaining critical requests.](#)

Maximum critical path latency: **1,055.298 ms**

Initial Navigation

https://coda.org

...css/font-awesome.min.css (coda.org) - 245.14 ms, 8.31 KiB

/css2?family=Bubblegum+Sans&display=swap (fonts.googleapis.com) - 235.063 ms, 0.47 KiB

/css?family=Roboto:100,300,400,500,700,900 (fonts.googleapis.com)

...v49/KFO7CnqEu....woff2 (fonts.gstatic.com) - 155.009 ms, 33.89 KiB

/css2?family=... (fonts.googleapis.com) - 227.085 ms, 0.86 KiB

about:blank

27/57

...css/bootstrap.min.css (coda.org) - **249.045 ms, 23.33 KiB**

...css/jquery.timepicker.min.css (coda.org) - **97.964 ms, 1.13 KiB**

...css/menu.css?v=162... (coda.org) - **239.807 ms, 3.64 KiB**

...css/additional.css?v=414... (coda.org) - **291.799 ms, 45.57 KiB**

...css/theme-style.css?v=161... (coda.org) - **269.569 ms, 47.17 KiB**

...css/tribe-events-pro-mini-calendar-block.css?ver=7.7.9 (coda.org) - **120.002 ms, 0.95 KiB**

...block-library/style.min.css?ver=6.7.4 (coda.org) - **275.512 ms, 18.39 KiB**

...mediaelement/mediaelementplayer-legacy.min.css?ver=4.2.17 (coda.org) - **243.733 ms, 3.50 KiB**

...mediaelement/wp-mediaelement.min.css?ver=6.7.4 (coda.org) - **140.483 ms, 1.94 KiB**

...css/views-frontend.css?ver=3.6.21 (coda.org) - **163.798 ms, 4.57 KiB**

...css/style.css?ver=210701-125732 (coda.org) - **153.573 ms, 1.15 KiB**

...coda-search/coda-search-page.css?ver=1.0.19 (coda.org) - **153.507 ms, 1.38 KiB**

...css/styles.css?ver=6.1.3 (coda.org) - **153.417 ms, 1.77 KiB**

...css/menu-image.css?ver=3.13 (coda.org) - **162.139 ms, 1.57 KiB**

...css/dashicons.min.css?ver=6.7.4 (coda.org) - **248.496 ms, 36.45 KiB**

...assets/frontend-script.css?ver=2c532d7... (coda.org) - **162.358 ms, 0.80 KiB**

...legacy-dropdown/style.min.css?ver=1 (coda.org) - **162.455 ms, 1.27 KiB**

/css?family=... (fonts.googleapis.com) - **222.965 ms, 1.14 KiB**

...coda/style.css?ver=6.7.4 (coda.org) - **161.893 ms, 1.58 KiB**

...css/js_composer.min.css?ver=8.7.2 (coda.org) - **286.918 ms, 53.50 KiB**

...select2/select2.css?ver=6.7.4 (coda.org) - **166.799 ms, 3.31 KiB**

...css/toolset_maps_fixes.css?ver=2.2.1 (coda.org) - **244.293 ms, 2.42 KiB**

...Defaults/Defaults.css?ver=3.21.2 (coda.org) - **242.759 ms, 5.84 KiB**

...min-css/ultimate.min.css?ver=3.21.2 (coda.org) - **283.223 ms, 59.10 KiB**

...animate.css/animate.min.css?ver=8.7.2 (coda.org) - **68.701 ms, 5.77 KiB**

...css/views_filter_distance_frontend.css?ver=2.2.1 (coda.org) - **68.653 ms, 1.02 KiB**

...public/toolset-common-es-frontend.js?ver=175000 (coda.org) - **252.645 ms, 2.51 KiB**

...jquery/jquery.min.js?ver=3.7.1 (coda.org) - **209.364 ms, 33.40 KiB**

...jquery/jquery-migrate.min.js?ver=3.4.1 (coda.org) - **251.922 ms, 5.74 KiB**

...legacy-dropdown/script.min.js?ver=1 (coda.org) - **203.361 ms, 0.97 KiB**

...ui/core.min.js?ver=1.13.3 (coda.org) - **208.921 ms, 8.18 KiB**

...min-js/ultimate.min.js?ver=3.21.2 (coda.org) - **251.145 ms, 55.70 KiB**

...min-js/ultimate_bg.min.js?ver=3.21.2 (coda.org) - **232.293 ms, 11.14 KiB**

/translate_a/element.js?cb=googleTranslateElementInit (translate.google.com) - **275.432 ms, 27.00 KiB**

...js/bootstrap.min.js (coda.org) - **52.529 ms, 11.56 KiB**

...js/plugins.js?v=10082024 (coda.org) - **52.505 ms, 13.27 KiB**

...js/scripts.js?v=10082024 (coda.org) - **66.824 ms, 5.36 KiB**

...js/jquery.dataTables.min.js (cdn.datatables.net) - **365.663 ms, 28.09 KiB**

...sorting/natural.js (cdn.datatables.net) - **361.497 ms, 1.75 KiB**

...js/dataTables.responsive.min.js (cdn.datatables.net) - **358.125 ms, 6.20 KiB**

...2.8.4/moment.min.js (cdnjs.cloudflare.com) - **241.801 ms, 10.97 KiB**

...js/user-agent.js?ver=da75d0b... (coda.org) - **68.615 ms, 0.91 KiB**

...coda-api/vue.min.js?ver=1 (coda.org) - **87.007 ms, 41.93 KiB**

...coda-api/axios.min.js?ver=1 (coda.org) - **85.01 ms, 20.08 KiB**

...js/plugin.js?ver=210701-125732 (coda.org) - **96.746 ms, 1.68 KiB**

...coda-search/instantsearch.production.min.js?ver=1.0.19 (coda.org) - **250.224 ms, 95.41 KiB**

...coda-search/algoliasearch-lite.umd.js?ver=1.0.19 (coda.org) - 81.717 ms, 5.59 KiB
...coda-search/coda-search.js?ver=1.0.19 (coda.org) - 75.13 ms, 2.78 KiB
...dist/hooks.min.js?ver=4d63a3d... (coda.org) - 91.765 ms, 2.39 KiB
...dist/i18n.min.js?ver=5e580eb... (coda.org) - 80.275 ms, 4.44 KiB
...js/index.js?ver=6.1.3 (coda.org) - 94.271 ms, 4.39 KiB
...js/index.js?ver=6.1.3 (coda.org) - 230.335 ms, 5.17 KiB
...assets/frontend-script.js?ver=2c532d7... (coda.org) - 231.1 ms, 2.04 KiB
...js/skip-link-focus-fix.js?ver=20160412 (coda.org) - 113.496 ms, 0.71 KiB
...js/functions.js?ver=20160412 (coda.org) - 161.115 ms, 2.79 KiB
...dist/js_composer_front.min.js?ver=8.7.2 (coda.org) - 160.7 ms, 6.20 KiB
...ui/datepicker.min.js?ver=1.13.3 (coda.org) - 230.397 ms, 12.50 KiB
...js/underscore-before.js (coda.org) - 160.431 ms, 0.92 KiB
...js/underscore.min.js?ver=1.13.7 (coda.org) - 230.44 ms, 8.32 KiB
...js/underscore-after.js (coda.org) - 160.405 ms, 0.84 KiB
...jquery/suggest.min.js?ver=1.1-20110113 (coda.org) - 168.266 ms, 2.06 KiB
...js/main.js?ver=4.5.0 (coda.org) - 172.274 ms, 1.28 KiB
...js/date.js?ver=4.5.0 (coda.org) - 229.808 ms, 3.05 KiB
/recaptcha/api.js?render=6LfSyb4aA...&ver=3.0 (www.google.com) - 202.733 ms, 1.03 KiB
...vendor/wp-polyfill.min.js?ver=3.15.0 (coda.org) - 228.506 ms, 14.89 KiB
...recaptcha/index.js?ver=6.1.3 (coda.org) - 170.417 ms, 1.19 KiB
...vc_waypoints/vc-waypoints.min.js?ver=8.7.2 (coda.org) - 172.316 ms, 3.40 KiB
...api/js?libraries=... (maps.googleapis.com) - 546.01 ms, 162.44 KiB
...js/jquery.geocomplete.min.js?ver=1.7.0 (coda.org) - 171.754 ms, 3.65 KiB
...js/views_filter_distance_frontend.js?ver=2.2.1 (coda.org) - 176.528 ms, 3.68 KiB
...ui/mouse.min.js?ver=1.13.3 (coda.org) - 176.497 ms, 1.85 KiB
...ui/slider.min.js?ver=1.13.3 (coda.org) - 178.618 ms, 4.04 KiB
...jquery/jquery.ui.touch-punch.js?ver=0.2.2 (coda.org) - 179.268 ms, 1.28 KiB
...mediaelement/mediaelement-and-player.min.js?ver=4.2.17 (coda.org) - 227.017 ms, 43.54 KiB
...mediaelement/mediaelement-migrate.min.js?ver=6.7.4 (coda.org) - 182.826 ms, 1.24 KiB
...mediaelement/wp-mediaelement.min.js?ver=6.7.4 (coda.org) - 182.769 ms, 1.23 KiB
...js/wp-util.min.js?ver=6.7.4 (coda.org) - 182.705 ms, 1.45 KiB
...js/backbone.min.js?ver=1.6.0 (coda.org) - 223.917 ms, 9.26 KiB
...mediaelement/wp-playlist.min.js?ver=6.7.4 (coda.org) - 186.178 ms, 1.91 KiB
...js/views-frontend.js?ver=3.6.21 (coda.org) - 203.061 ms, 16.49 KiB

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (11)

Hide

Efficiently encode images	^
Optimized images load faster and consume less cellular data. Learn how to efficiently encode images. FCP LCP	
 Consider using an image optimization WordPress plugin that compresses your images while retaining quality.	
Enable text compression	^

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more about text compression.](#) FCP LCP



You can enable text compression in your web server configuration.

Preconnect to required origins ^

Warnings: A `<link rel=preconnect>` was found for "https://fonts.gstatic.com" but was not used by the browser. Check that you are using the `crossorigin` attribute properly.

Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. [Learn how to preconnect to required origins.](#) LCP FCP

Avoid multiple page redirects ^

Redirects introduce additional delays before the page can be loaded. [Learn how to avoid page redirects.](#) LCP FCP

Use HTTP/2 ^

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more about HTTP/2.](#) LCP FCP

Use video formats for animated content ^

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more about efficient video formats](#) FCP LCP



Consider uploading your GIF to a service which will make it available to embed as an HTML5 video.

Remove duplicate modules in JavaScript bundles ^

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP

Preload Largest Contentful Paint image ^

If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. [Learn more about preloading LCP elements.](#) LCP

☐ Largest Contentful Paint image was not lazily loaded ^

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more about optimal lazy loading.](#) LCP

Avoids `document.write()` ^

For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn how to avoid document.write\(\)](#).

Has a `<meta name="viewport">` tag with `width` or `initial-scale` ^

A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag](#).



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

ARIA

▲ Elements with an ARIA `[role]` that require children to contain a specific `[role]` are missing some or all of those required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements](#).

Failing Elements



ul



li.wpml-ls-slot-language.wpml-ls-item.wpml-ls-item-en.wpml-ls-current-language.wpml-ls-first-item.wpml-ls-item-legacy-dropdown

▲ `[role]`s are not contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element](#).

Failing Elements



a.js-wpml-ls-item-toggle.wpml-ls-item-toggle

Failing Elements



span.wpml-ls-native

These are opportunities to improve the usage of ARIA in your application which may enhance the experience for users of assistive technology, like a screen reader.

NAMES AND LABELS

▲ Buttons do not have an accessible name

^

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

Failing Elements



button.owl-dot



button.owl-dot



button.owl-dot.active



button.owl-dot



button.owl-dot




button.owl-dot


about:blank

32/57


Failing Elements




button.owl-dot



button.owl-dot



button.owl-dot



button.owl-dot

▲ Image elements do not have `[alt]` attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Failing Elements

img

img

img

img

img

img

img

img

img

img


img

Failing Elements

img

img

img



img

img

img

img

img

img

▲ Form elements do not have associated labels



Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

Failing Elements



input#toolset-maps-distance-value.form-control.js-toolset-maps-distance-value.js-wpv-filter-trigger

▲ Links do not have a discernible name



Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

Failing Elements



a.slicknav_btn.slicknav_collapsed

a.blankLink

Failing Elements

a.blankLink

a.blankLink

a.blankLink

a.blankLink

a.blankLink

a.blankLink

a.blankLink

a.blankLink


a.blankLink

a.blankLink

a.blankLink

a.blankLink

a.blankLink



a.blankLink


a.blankLink

a.blankLink

a.blankLink

a.blankLink

a.blankLink



a.vc_single_image-wrapper.vc_box_border_grey

Failing Elements

a.vc_single_image-wrapper.vc_box_border_grey

▲ Select elements do not have associated label elements.

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#)

Failing Elements

select#toolset-maps-distance.js-toolset-maps-distance-unit.form-control.js-wpv-filter-trigger

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

BEST PRACTICES

▲ [user-scalable="no"] is used in the <meta name="viewport"> element or the [maximum-scale] attribute is less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

Failing Elements

meta

▲ Touch targets do not have sufficient size or spacing.



Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. [Learn more about touch targets.](#)

Failing Elements


button.owl-dot

button.owl-dot


Failing Elements




button.owl-dot



button.owl-dot




button.owl-dot.active




button.owl-dot.active




button.owl-dot




button.owl-dot




button.owl-dot




button.owl-dot.active



button.owl-dot




button.owl-dot



button.owl-dot




button.owl-dot



button.owl-dot


Failing Elements




button.owl-dot




button.owl-dot



button.owl-dot




button.owl-dot



button.owl-dot




button.owl-dot



button.owl-dot




button.owl-dot




button.owl-dot




button.owl-dot



button.owl-dot




button.owl-dot



button.owl-dot

Failing Elements



a



a



a




a



a



a



a



a



a



a



a





a



a

Failing Elements



a



a




a



a




a



a




a



a



a




a



a




a




a

Failing Elements



a



a




a




a



a




a




a




a



a



a



a



a

These items highlight common accessibility best practices.





CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio.



Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

Failing Elements



Failing Elements

div.copyrightBar

These are opportunities to improve the legibility of your content.

NAVIGATION

▲

Some elements have a `[tabindex]` value greater than 0

^

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#)

Failing Elements

button.INDshortcutBtn

button

These are opportunities to improve keyboard navigation in your application.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

○

Interactive controls are keyboard focusable

^

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#)

○

Interactive elements indicate their purpose and state

^

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#)

○

The page has a logical tab order

^

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#)

○

Visual order on the page follows DOM order

^

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#)

○

User focus is not accidentally trapped in a region

^

A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#)

about:blank

43/57

☐ The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content.	
☐ HTML5 landmark elements are used to improve navigation	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements.	
☐ Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.	
☐ Custom controls have associated labels	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels.	
☐ Custom controls have ARIA roles	^
Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls.	

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (23)

Hide

[aria-*] attributes match their roles	^
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Learn how to match ARIA attributes to their roles.	
[aria-hidden="true"] is not present on the document <body>	^
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body.	
[role] s have all required [aria-*] attributes	^
Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes.	
[aria-*] attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.	
[aria-*] attributes are valid and not misspelled	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA	

attributes.	
Input buttons have discernible text.	^
Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons.	
[accesskey] values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys.	
button , link , and menuitem elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible.	
ARIA attributes are used as specified for the element's role	^
Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.	
[aria-hidden="true"] elements do not contain focusable descendents	^
Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.	
Elements use only permitted ARIA attributes	^
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.	
[role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles.	
Document has a <title> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.	
<frame> or <iframe> elements have a title	^
Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles.	
<html> element has a [lang] attribute	^
If a page doesn't specify a <code>lang</code> attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the <code>lang</code> attribute.	

<html> element has a valid value for its [lang] attribute	^
Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.	
Lists contain only elements and script supporting elements (<script> and <template>).	^
Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.	
List items () are contained within , or <menu> parent elements	^
Screen readers require list items () to be contained within a parent , or <menu> to be announced properly. Learn more about proper list structure.	
[lang] attributes have a valid value	^
Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn how to use the Lang attribute.	
Heading elements appear in a sequentially-descending order	^
Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.	
Uses ARIA roles only on compatible elements	^
Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIA roles.	
Deprecated ARIA roles were not used	^
Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles.	
Image elements do not have [alt] attributes that are redundant text.	^
Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the alt attribute.	

NOT APPLICABLE (23)

Hide

☐ Elements with role="dialog" or role="alertdialog" have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible.	
☐ ARIA input fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels.	

☐ ARIA <code>meter</code> elements have accessible names	^
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements .	
☐ ARIA <code>progressbar</code> elements have accessible names	^
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label progressbar elements .	
☐ Elements with the <code>role=text</code> attribute do not have focusable descendents.	^
Adding <code>role=text</code> around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. Learn more about the role=text attribute .	
☐ ARIA toggle fields have accessible names	^
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields .	
☐ ARIA <code>tooltip</code> elements have accessible names	^
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements .	
☐ ARIA <code>treeitem</code> elements have accessible names	^
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements .	
☐ The page contains a heading, skip link, or landmark region	^
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks .	
☐ <code><dl></code> 's contain only properly-ordered <code><dt></code> and <code><dd></code> groups, <code><script></code> , <code><template></code> or <code><div></code> elements.	^
When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly .	
☐ Definition list items are wrapped in <code><dl></code> elements	^
Definition list items (<code><dt></code> and <code><dd></code>) must be wrapped in a parent <code><dl></code> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly .	
☐ ARIA IDs are unique	^
The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs .	
☐ No form fields have multiple labels	^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels.	
☐ <code><html></code> element has an <code>[xml:lang]</code> attribute with the same base language as the <code>[lang]</code> attribute. If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.	
☐ <code><input type="image"></code> elements have <code>[alt]</code> text When an image is being used as an <code><input></code> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text.	
☐ Links are distinguishable without relying on color. Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable.	
☐ The document does not use <code><meta http-equiv="refresh"></code> Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag.	
☐ <code><object></code> elements have alternate text Screen readers cannot translate non-text content. Adding alternate text to <code><object></code> elements helps screen readers convey meaning to users. Learn more about alt text for object elements.	
☐ Skip links are focusable. Including a skip link can help users skip to the main content to save time. Learn more about skip links.	
☐ Tables have different content in the summary attribute and <code><caption></code>. The summary attribute should describe the table structure, while <code><caption></code> should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption.	
☐ Cells in a <code><table></code> element that use the <code>[headers]</code> attribute refer to table cells within the same table. Screen readers have features to make navigating tables easier. Ensuring <code><td></code> cells using the <code>[headers]</code> attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the headers attribute.	
☐ <code><th></code> elements and elements with <code>[role="columnheader"/"rowheader"]</code> have data cells they describe. Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers.	
☐ <code><video></code> elements contain a <code><track></code> element with <code>[kind="captions"]</code> When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more about video captions.	



Best Practices

GENERAL

▲

Uses deprecated APIs — 1 warning found

^

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Deprecation / Warning	Source
coda.org 1st Party <code>`StorageType.persistent`</code> is deprecated. Please use standardized <code>`navigator.storage`</code> instead.	main.js:1

○

Detected JavaScript libraries

^



All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Name	Version
LitElement	4.1.1
lit-html	3.2.1
Google Maps	3.61.14
jQuery	3.7.1
jQuery UI	1.13.3
Preact	10
Backbone	1.6.0
Underscore	1.13.7
Vue	2.7.16
Moment.js	2.8.4
WordPress	6.7.4
core-js	core-js-global@3.35.1

USER EXPERIENCE

▲ Serves images with low resolution

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

URL	Displayed size	Actual size	Expected size
coda.org  img.wpml-ls-flag ...flags/en.png (coda.org) <td>18 x 12</td> <td>18 x 12</td> <td>27 x 18</td>	18 x 12	18 x 12	27 x 18
coda.org  img.wpml-ls-flag ...flags/es.png (coda.org) <td>18 x 12</td> <td>18 x 12</td> <td>27 x 18</td>	18 x 12	18 x 12	27 x 18

TRUST AND SAFETY

○ Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#)

Description	Directive	Severity
No CSP found in enforcement mode		High

PASSED AUDITS (13)

Hide

Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

Avoids third-party cookies

Chrome is moving towards a new experience that allows users to choose to browse without third-party cookies. [Learn more about third-party cookies.](#)

Allows users to paste into input fields

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers.[Learn more about user-friendly input fields.](#)

Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission.](#)

Avoids requesting the notification permission on page load

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications.](#)

Displays images with correct aspect ratio

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

Has a `<meta name="viewport">` tag with `width` or `initial-scale`

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag.](#)

Document uses legible font sizes — 99.96% legible text

Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥12px. [Learn more about legible font sizes.](#)

Source	Selector	% of Page Text	Font Size
coda.org 1st Party			
additional.css:3282	.header .menuWrap .gTransBox .skiptranslate	0.04%	0px
Unattributable			
Legible text		99.96%	≥ 12px

Page has the HTML doctype

Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

Properly defines charset

A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

No browser errors logged to the console

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

No issues in the **Issues** panel in Chrome Devtools ^

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Page has valid source maps ^

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#)

URL	Map URL
coda.org 1st Party	
...coda-search/instantsearch.production.min.js?ver=1.0.19 (coda.org)	...coda-search/instantsearch.production.min.js.map (coda.org)
Error: Failed fetching source map (404)	
...coda-api/axios.min.js?ver=1 (coda.org)	...coda-api/axios.min.js.map (coda.org)
Error: Failed fetching source map (404)	

NOT APPLICABLE (1) Hide

☐ Redirects HTTP traffic to HTTPS ^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

CONTENT BEST PRACTICES

Links do not have descriptive text — 23 links found ^

Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

☒ Show 3rd-party resources (2)

Link destination	Link Text
YouTube Video	
/@co-dependentsanonymouscoda8948 (www.youtube.com)	LEARN MORE
/@co-dependentsanonymouscoda8948 (www.youtube.com)	LEARN MORE
coda.org 1st Party	
/codateen/ (coda.org)	LEARN MORE
/service-info/literature-main-page/ (coda.org)	LEARN MORE
/meeting-materials/service-materials/ (coda.org)	LEARN MORE
/announcements/ (coda.org)	LEARN MORE
/purchase/ (coda.org)	LEARN MORE
/service-info/coda-board-liaisons/ (coda.org)	LEARN MORE
/service-info/treasurers-reports/ (coda.org)	LEARN MORE
/codateen/ (coda.org)	LEARN MORE
/service-info/literature-main-page/ (coda.org)	LEARN MORE
/meeting-materials/service-materials/ (coda.org)	LEARN MORE
/announcements/ (coda.org)	LEARN MORE
/purchase/ (coda.org)	LEARN MORE
/service-info/coda-board-liaisons/ (coda.org)	LEARN MORE
/service-info/treasurers-reports/ (coda.org)	LEARN MORE
/newcomers/ (coda.org)	LEARN MORE
/what-is-codependency/ (coda.org)	LEARN MORE
/meeting-materials/twelve-steps/ (coda.org)	LEARN MORE
/meeting-materials/twelve-steps/ (coda.org)	LEARN MORE
/your-first-meeting/ (coda.org)	LEARN MORE
Unattributable	
/Board%20Recordings/September%207,%202025%20Board%20Public%....m4a (codependents.org)	LEARN MORE
/Board%20Recordings/September%207,%202025%20Board%20Public%....m4a (codependents.org)	LEARN MORE

▲ Image elements do not have `[alt]` attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Failing Elements

img

img

img

img

img

img

img

img

img


img

img

img

img

img



img

img

img

img

img

img

Format your HTML in a way that enables crawlers to better understand your app's content.

CRAWLING AND INDEXING

 Links are not crawlable

Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

Uncrawlable Link

a

a

a

a

a

a

a

a

a

a

a

a

a

a

a

a

a

a

a

a

about:blank

55/57

Uncrawable Link
a

To appear in search results, crawlers need access to your app.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

☐ Structured data is valid

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more about Structured Data.](#)

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (7)

Hide

Page isn't blocked from indexing	^
Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more about crawler directives.	
Document has a <title> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.	
Document has a meta description	^
Meta descriptions may be included in search results to concisely summarize page content. Learn more about the meta description.	
Page has successful HTTP status code	^
Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes.	
robots.txt is valid	^
If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt.	
Document has a valid hreflang	^
hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about hreflang.	
Document has a valid rel=canonical	^
Canonical links suggest which URL to show in search results. Learn more about canonical links.	

■ Captured at Nov 4, 2025, 10:06 AM GMT+2

■ Initial page load

■ Emulated Moto G Power with Lighthouse 12.2.1

■ Slow 4G throttling

■ Single page session

■ Using Chromium 132.0.0.0 with devtools

Generated by **Lighthouse** 12.2.1 | [File an issue](#)