


Output:

Main file with output:

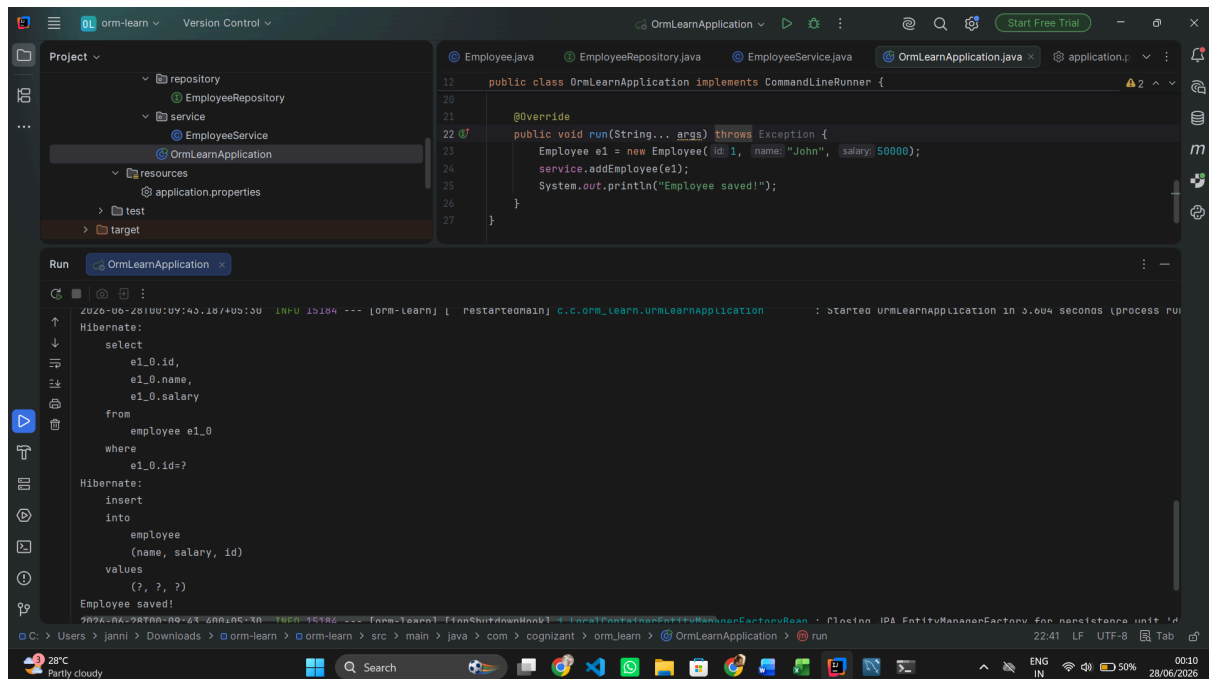

src/main/resources/application.properties

```
spring.application.name=orm-learn

spring.datasource.url=jdbc:mysql://localhost:3306/ormlearn
spring.datasource.username=root
spring.datasource.password=997662

spring.jpa.hibernate.ddl-auto=validate
spring.jpa.show-sql=true
```

src/main/java/com/cognizant/orm_learn/model/Employee.java

```
package com.cognizant.orm_learn.model;

import jakarta.persistence.Entity;
import jakarta.persistence.Id;
import jakarta.persistence.Table;

@Entity
@Table(name = "employee")
public class Employee {

    @Id
    private int id;
    private String name;
    private double salary;
```

```

public Employee() {}

public Employee(int id, String name, double salary) {
    this.id = id;
    this.name = name;
    this.salary = salary;
}

public int getId() {
    return id;
}

public void setId(int id) {
    this.id = id;
}

public String getName() {
    return name;
}

public void setName(String name) {
    this.name = name;
}

public double getSalary() {
    return salary;
}

public void setSalary(double salary) {
    this.salary = salary;
}
}

```

src/main/java/com/cognizant/orm_learn/repository/**EmployeeRepository.java**

```

package com.cognizant.orm_learn.repository;

import org.springframework.data.jpa.repository.JpaRepository;
import com.cognizant.orm_learn.model.Employee;

public interface EmployeeRepository extends JpaRepository<Employee, Integer>
{
}

```

src/main/java/com/cognizant/orm_learn/service/**EmployeeService.java**

```

package com.cognizant.orm_learn.service;

import com.cognizant.orm_learn.repository.EmployeeRepository;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Service;
import org.springframework.transaction.annotation.Transactional;

```

```

import com.cognizant.orm_learn.model.Employee;

@Service
public class EmployeeService {

    @Autowired
    private EmployeeRepository employeeRepository;

    @Transactional
    public void addEmployee(Employee employee) {
        employeeRepository.save(employee);
    }
}

```

src/main/java/com/cognizant/orm_learn/OrmLearnApplication.java

```

package com.cognizant.orm_learn;

import com.cognizant.orm_learn.model.Employee;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.boot.CommandLineRunner;
import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

import com.cognizant.orm_learn.service.EmployeeService;

@SpringBootApplication
public class OrmLearnApplication implements CommandLineRunner {

    @Autowired
    private EmployeeService service;

    public static void main(String[] args) {
        SpringApplication.run(OrmLearnApplication.class, args);
    }

    @Override
    public void run(String... args) throws Exception {
        Employee e1 = new Employee(1, "John", 50000);
        service.addEmployee(e1);
        System.out.println("Employee saved!");
    }
}

```