


Output:

Main with output:

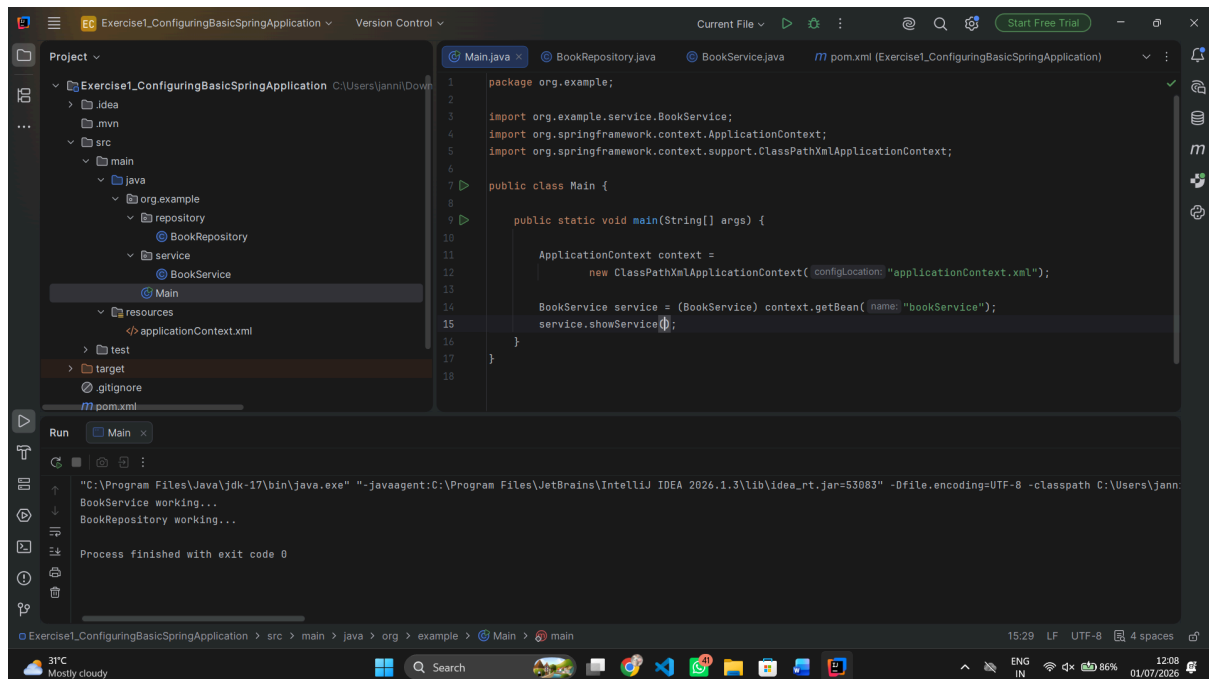

src/main/resources/applicationContext.xml

```
<?xml version="1.0" encoding="UTF-8"?>

<beans xmlns="http://www.springframework.org/schema/beans"
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
       xsi:schemaLocation="
           http://www.springframework.org/schema/beans
           http://www.springframework.org/schema/beans/spring-beans.xsd">

    <bean id="bookRepository" class="org.example.repository.BookRepository"/>
    <bean id="bookService" class="org.example.service.BookService">
        <property name="bookRepository" ref="bookRepository"/>
    </bean>
</beans>
```

org/example/repository/BookRepository.java

```
package org.example.repository;

public class BookRepository {
    public void display() {
        System.out.println("BookRepository working...");
    }
}
```

org/example/service/BookService.java

```
package org.example.service;
import org.example.repository.BookRepository;

public class BookService {
    private BookRepository bookRepository;

    public void setBookRepository(BookRepository bookRepository) {
        this.bookRepository = bookRepository;
    }

    public void showService() {
        System.out.println("BookService working...");
        bookRepository.display();
    }
}
```