


Output:

Output with main:

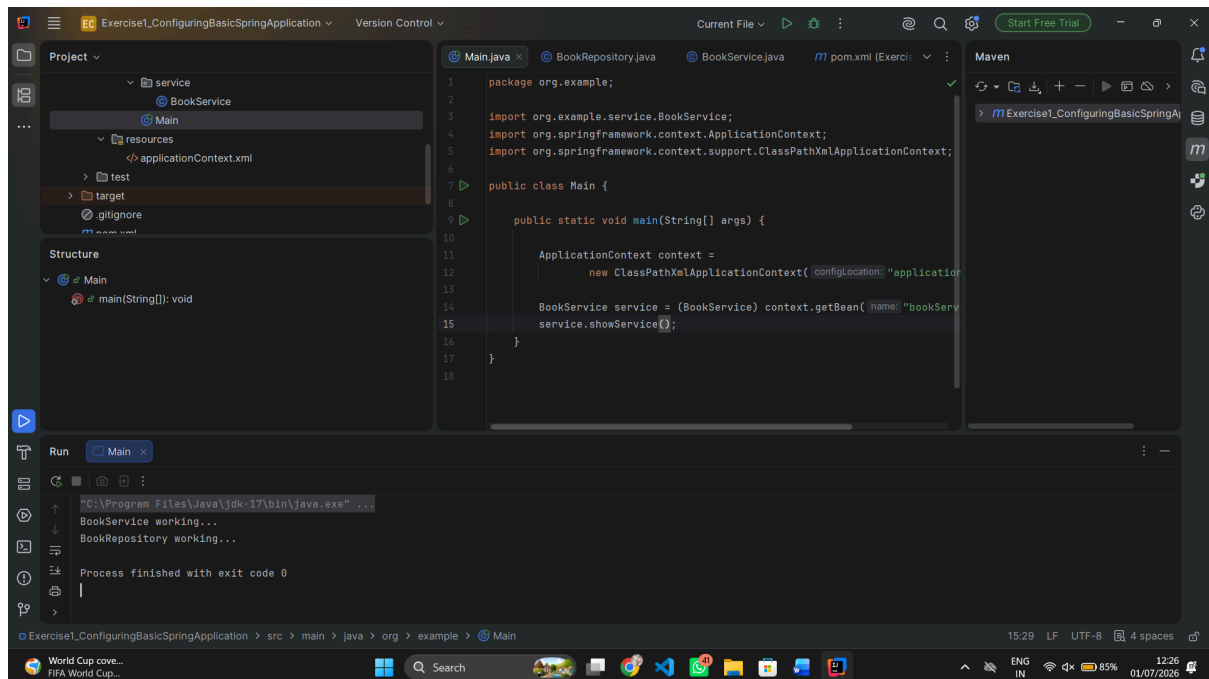

pom.xml

```
<?xml version="1.0" encoding="UTF-8"?>

<project xmlns="http://maven.apache.org/POM/4.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
    http://maven.apache.org/xsd/maven-4.0.0.xsd">

  <modelVersion>4.0.0</modelVersion>

  <groupId>org.example</groupId>
  <artifactId>Exercise1_ConfiguringBasicSpringApplication</artifactId>
  <version>1.0-SNAPSHOT</version>

  <properties>
    <maven.compiler.source>1.8</maven.compiler.source>
    <maven.compiler.target>1.8</maven.compiler.target>
    <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
  </properties>

  <dependencies>
    <dependency>
      <groupId>org.springframework</groupId>
      <artifactId>spring-context</artifactId>
      <version>5.3.30</version>
    </dependency>
  </dependencies>
</project>
```

```

        <dependency>
            <groupId>org.springframework</groupId>
            <artifactId>spring-aop</artifactId>
            <version>5.3.30</version>
        </dependency>

        <dependency>
            <groupId>org.springframework</groupId>
            <artifactId>spring-webmvc</artifactId>
            <version>5.3.30</version>
        </dependency>
    </dependencies>

    <build>
        <plugins>
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-compiler-plugin</artifactId>
                <version>3.8.1</version>
                <configuration>
                    <source>1.8</source>
                    <target>1.8</target>
                </configuration>
            </plugin>
        </plugins>
    </build>
</project>

```

bookService.java

```

package org.example.service;

import org.example.repository.BookRepository;

public class BookService {

    private BookRepository bookRepository;

    public void setBookRepository(BookRepository bookRepository) {
        this.bookRepository = bookRepository;
    }

    public void showService() {
        System.out.println("BookService working...");
        bookRepository.display();
    }

}

```

BookRepository.java

```
package org.example.repository;

public class BookRepository {

    public void display() {
        System.out.println("BookRepository working...");
    }
}
```

ApplicationContext.xml

```
<?xml version="1.0" encoding="UTF-8"?>

<beans xmlns="http://www.springframework.org/schema/beans"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation="
            http://www.springframework.org/schema/beans
            http://www.springframework.org/schema/beans/spring-beans.xsd">

    <bean id="bookRepository" class="org.example.repository.BookRepository"/>

    <bean id="bookService" class="org.example.service.BookService">
        <property name="bookRepository" ref="bookRepository"/>
    </bean>

</beans>
```