


## Output:

## Output with main:

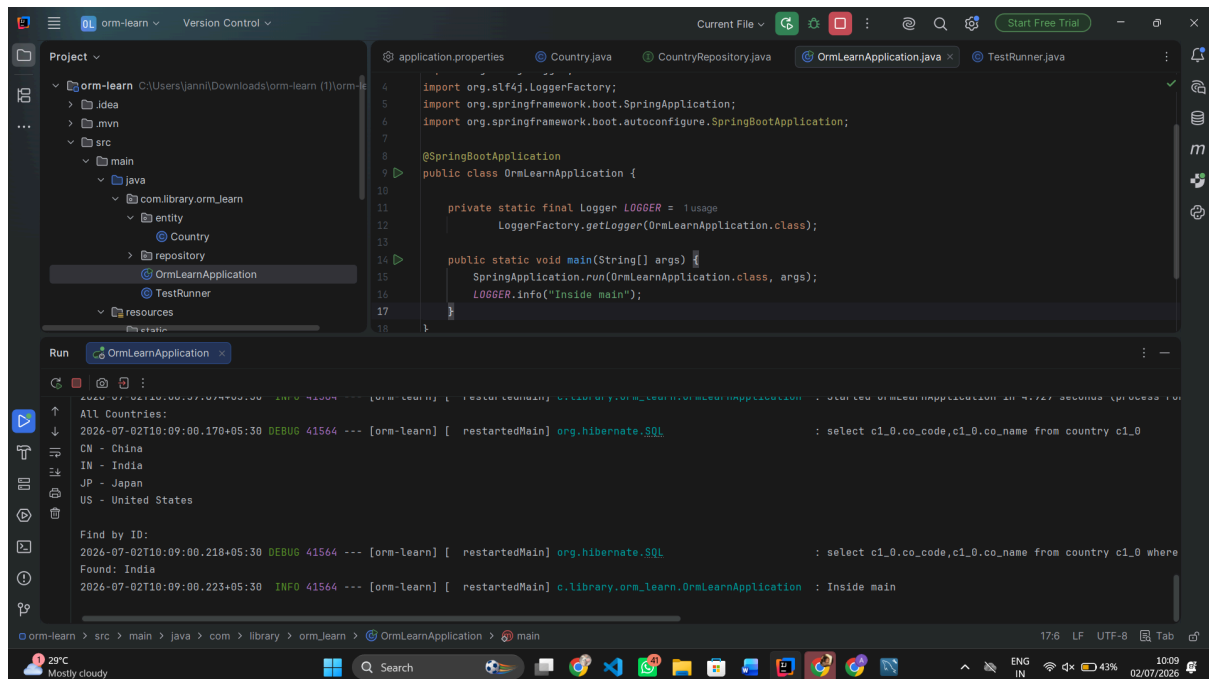

The screenshot shows an IDE with the following components:

- Project View:** Shows the project structure with folders like `src`, `main`, `java`, `com.library.orm_learn`, `entity`, `Country`, `repository`, `OrmLearnApplication`, and `TestRunner`.
- Editor:** Displays the `OrmLearnApplication.java` file. The code includes imports for `org.slf4j.LoggerFactory`, `org.springframework.boot.SpringApplication`, and `org.springframework.boot.autoconfigure.SpringBootApplication`. It defines a `@SpringBootApplication` class with a `main` method that logs "Inside main".
- Run Console:** Shows the execution output. It starts with "All Countries:" and lists countries: CN - China, IN - India, JP - Japan, and US - United States. It then shows a debug message: `[orm-learn] [ restartedMain] org.hibernate.SQL : select c1_0.co_code,c1_0.co_name from country c1_0 where`. This is followed by a log message: `2026-07-02T10:09:00.223+05:30 INFO 41564 --- [orm-learn] [ restartedMain] c.library.orm_learn.OrmLearnApplication : Inside main`.

## src/main/resources/application.properties

```
spring.application.name=orm-learn

logging.level.org.springframework=info
logging.level.com.cognizant=debug

logging.level.org.hibernate.SQL=trace
logging.level.org.hibernate.type.descriptor.sql=trace

spring.datasource.url=jdbc:mysql://localhost:3306/ormlearn
spring.datasource.username=root
spring.datasource.password=997662

spring.jpa.hibernate.ddl-auto=validate
spring.jpa.database-platform=org.hibernate.dialect.MySQLDialect
```

## com/library/orm\_learn/entity/Country.java

```
package com.library.orm_learn.entity;

import jakarta.persistence.*;

@Entity
@Table(name = "country")
public class Country {

    @Id
```

```

@Column(name = "co_code")
private String code;

@Column(name = "co_name")
private String name;

public Country() {
}

public Country(String code, String name) {
    this.code = code;
    this.name = name;
}

public String getCode() {
    return code;
}

public void setCode(String code) {
    this.code = code;
}

public String getName() {
    return name;
}

public void setName(String name) {
    this.name = name;
}
}

```

## com/library/orm\_learn/repository/CountryRepository.java

```

package com.library.orm_learn.entity;

import jakarta.persistence.*;

@Entity
@Table(name = "country")
public class Country {

    @Id
    @Column(name = "co_code")
    private String code;

    @Column(name = "co_name")
    private String name;

    public Country() {
    }

    public Country(String code, String name) {
        this.code = code;
        this.name = name;
    }
}

```

```

    }

    public String getCode() {
        return code;
    }

    public void setCode(String code) {
        this.code = code;
    }

    public String getName() {
        return name;
    }

    public void setName(String name) {
        this.name = name;
    }
}

```

## com/library/orm\_learn/TestRunner.java

```

package com.library.orm_learn;

import com.library.orm_learn.repository.CountryRepository;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.boot.CommandLineRunner;
import org.springframework.stereotype.Component;

@Component
public class TestRunner implements CommandLineRunner {

    @Autowired
    private CountryRepository repository;

    @Override
    public void run(String... args) {

        System.out.println("All Countries:");

        repository.findAll().forEach(country ->
            System.out.println(country.getCode() + " - " +
country.getName())
        );

        System.out.println("\nFind by ID:");

        repository.findById("IN").ifPresent(country ->
            System.out.println("Found: " + country.getName())
        );
    }
}

```