


Output:

Output with main:

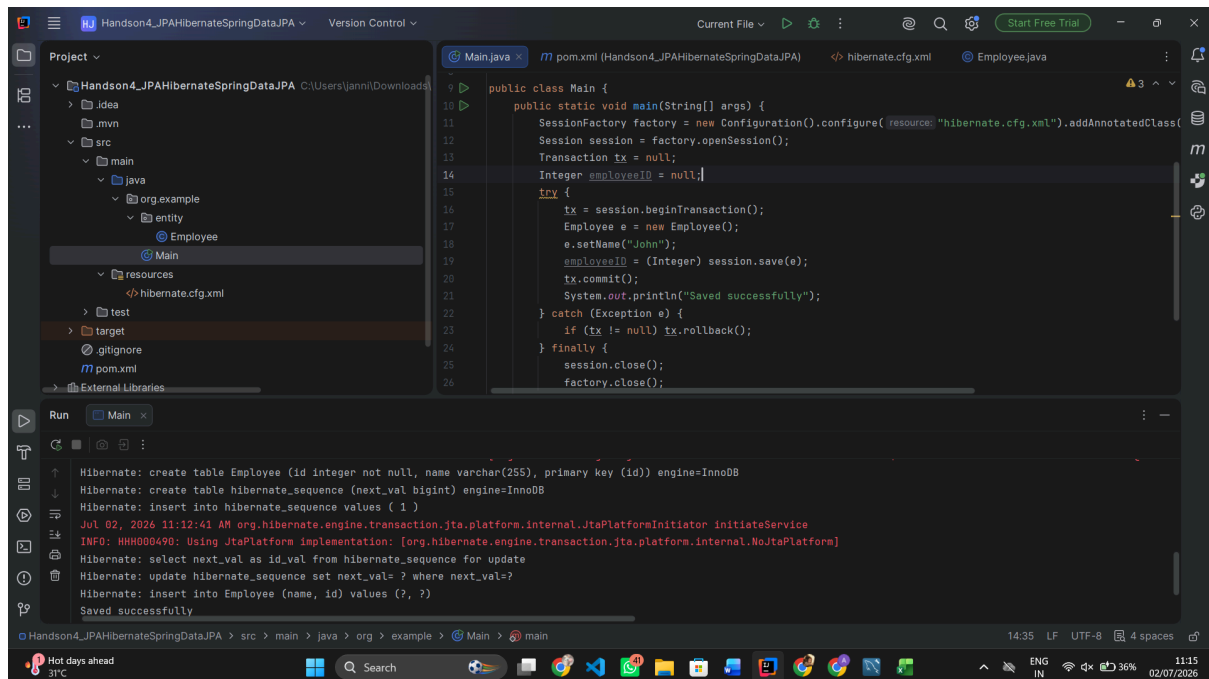

```
public class Main {
    public static void main(String[] args) {
        SessionFactory factory = new Configuration().configure("hibernate.cfg.xml").addAnnotatedClass(Employee.class).buildSessionFactory();
        Session session = factory.openSession();
        Transaction tx = null;
        Integer employeeID = null;
        try {
            tx = session.beginTransaction();
            Employee e = new Employee();
            e.setName("John");
            employeeID = (Integer) session.save(e);
            tx.commit();
            System.out.println("Saved successfully");
        } catch (Exception e) {
            if (tx != null) tx.rollback();
        } finally {
            session.close();
            factory.close();
        }
    }
}
```

```

Hibernate: create table Employee (id integer not null, name varchar(255), primary key (id)) engine=InnoDB
Hibernate: create table hibernate_sequence (next_val bigint) engine=InnoDB
Hibernate: insert into hibernate_sequence values ( 1 )
Jul 02, 2026 11:12:41 AM org.hibernate.engine.transaction.jta.platform.internal.JtaPlatformInitiator initiateService
INFO: HH0000490: Using JtaPlatform implementation: [org.hibernate.engine.transaction.jta.platform.internal.NoJtaPlatform]
Hibernate: select next_val as id_val from hibernate_sequence for update
Hibernate: update hibernate_sequence set next_val= ? where next_val=?
Hibernate: insert into Employee (name, id) values (?, ?)
Saved successfully

```

org/example/entity/Employee.java

```
package org.example.entity;
import javax.persistence.Entity;
import javax.persistence.GeneratedValue;
import javax.persistence.Id;

@Entity
public class Employee {

    @Id
    @GeneratedValue
    private int id;

    private String name;

    public void setName(String name) {
        this.name = name;
    }

    public String getName() {
        return name;
    }

    public int getId() {
        return id;
    }
}
```

src/main/resources/hibernate.cfg.xml

```
<hibernate-configuration>
  <session-factory>

    <property
name="connection.driver_class">com.mysql.cj.jdbc.Driver</property>
    <property
name="connection.url">jdbc:mysql://localhost:3306/test</property>
    <property name="connection.username">root</property>
    <property name="connection.password">997662</property>

    <property
name="dialect">org.hibernate.dialect.MySQL8Dialect</property>
    <property name="hbm2ddl.auto">update</property>
    <property name="show_sql">true</property>

  </session-factory>
</hibernate-configuration>
```

pom.xml

```
<dependencies>
  <dependency>
    <groupId>org.hibernate</groupId>
    <artifactId>hibernate-core</artifactId>
    <version>5.6.15.Final</version>
  </dependency>

  <dependency>
    <groupId>com.mysql</groupId>
    <artifactId>mysql-connector-j</artifactId>
    <version>8.3.0</version>
  </dependency>
</dependencies>
```