


Output:

Main & output

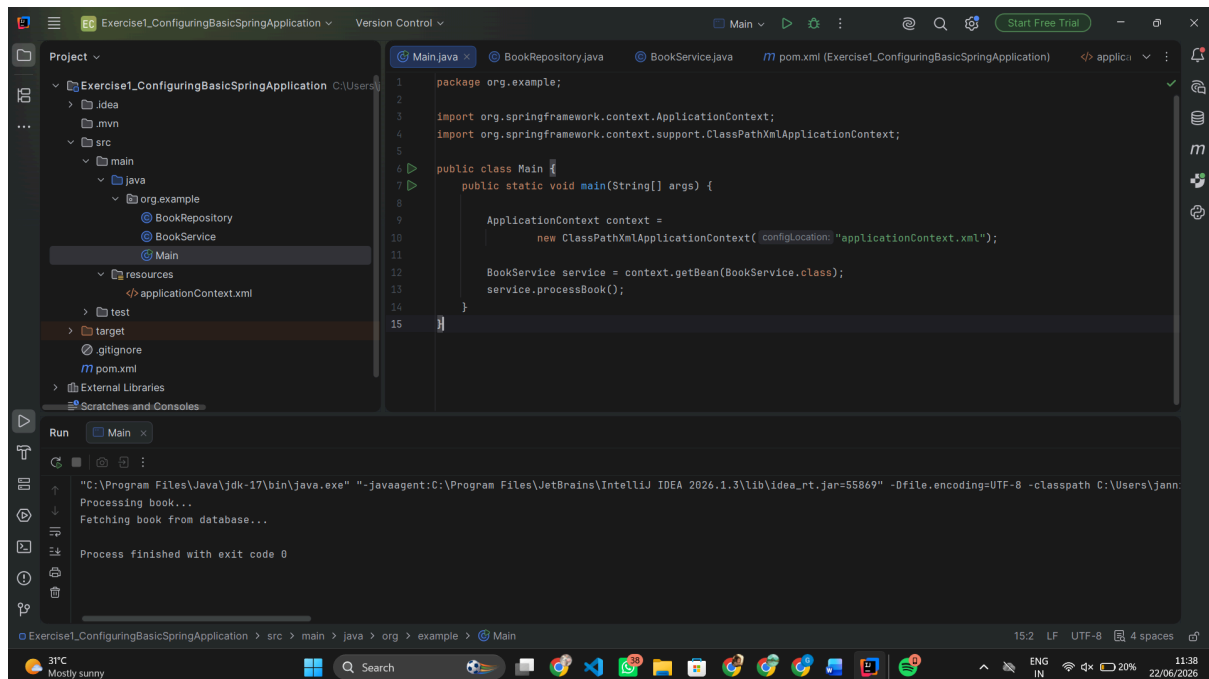

BookRepository.java

```
package org.example;

public class BookService {

    private BookRepository bookRepository;

    public void setBookRepository(BookRepository bookRepository) {
        this.bookRepository = bookRepository;
    }

    public void processBook() {
        System.out.println("Processing book...");
        bookRepository.getBook();
    }
}
```

BookService.java

```
package org.example;

public class BookService {

    private BookRepository bookRepository;

    public void setBookRepository(BookRepository bookRepository) {
```

```

        this.bookRepository = bookRepository;
    }

    public void processBook() {
        System.out.println("Processing book...");
        bookRepository.getBook();
    }
}

```

applicationContext.xml

```

<beans xmlns="http://www.springframework.org/schema/beans"
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
       xsi:schemaLocation="
           http://www.springframework.org/schema/beans
           http://www.springframework.org/schema/beans/spring-beans.xsd">

    <!-- Repository Bean -->
    <bean id="bookRepository" class="org.example.BookRepository"/>

    <!-- Service Bean -->
    <bean id="bookService" class="org.example.BookService">
        <!-- Dependency Injection -->
        <property name="bookRepository" ref="bookRepository"/>
    </bean>

</beans>

```

pom.xml (added these dependencies)

```

<dependencies>
    <dependency>
        <groupId>org.springframework</groupId>
        <artifactId>spring-context</artifactId>
        <version>6.0.0</version>
    </dependency>
</dependencies>

```