

Output:

localhost:8761

spring Eureka

HOME LAST 1000 SINCE STARTUP

System Status

Environment	test	Current time	2026-07-06T11:28:31 +0530
Data center	default	Uptime	00:07
		Lease expiration enabled	false
		Renews threshold	5
		Renews (last min)	4

EMERGENCY! EUREKA MAY BE INCORRECTLY CLAIMING INSTANCES ARE UP WHEN THEY'RE NOT. RENEWALS ARE LESSER THAN THRESHOLD AND HENCE THE INSTANCES ARE NOT BEING EXPIRED JUST TO BE SAFE.

DS Replicas

localhost

Instances currently registered with Eureka

Application	AMIs	Availability Zones	Status
ACCOUNT-SERVICE	n/a (1)	(1)	UP (1) - hello:account-service:8080
LOAN-SERVICE	n/a (1)	(1)	UP (1) - hello:loan-service:8081

32°C Partly sunny


Search

ENG IN 20% 11:37 06/07/2026

localhost:8080/accounts/123


Pretty print ☒

```
{
  "number": "123",
  "balance": 234343,
  "type": "savings"
}
```

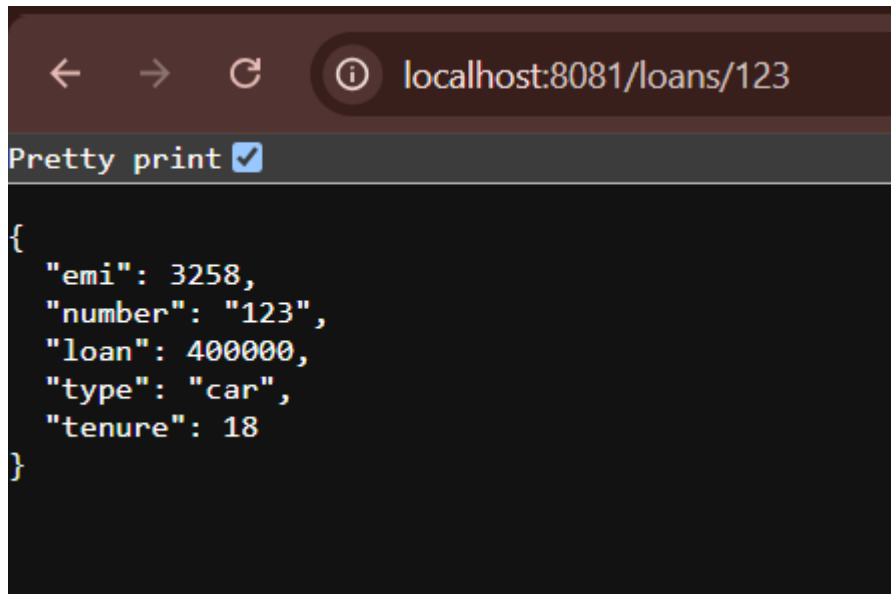


EUREKA

application.properties

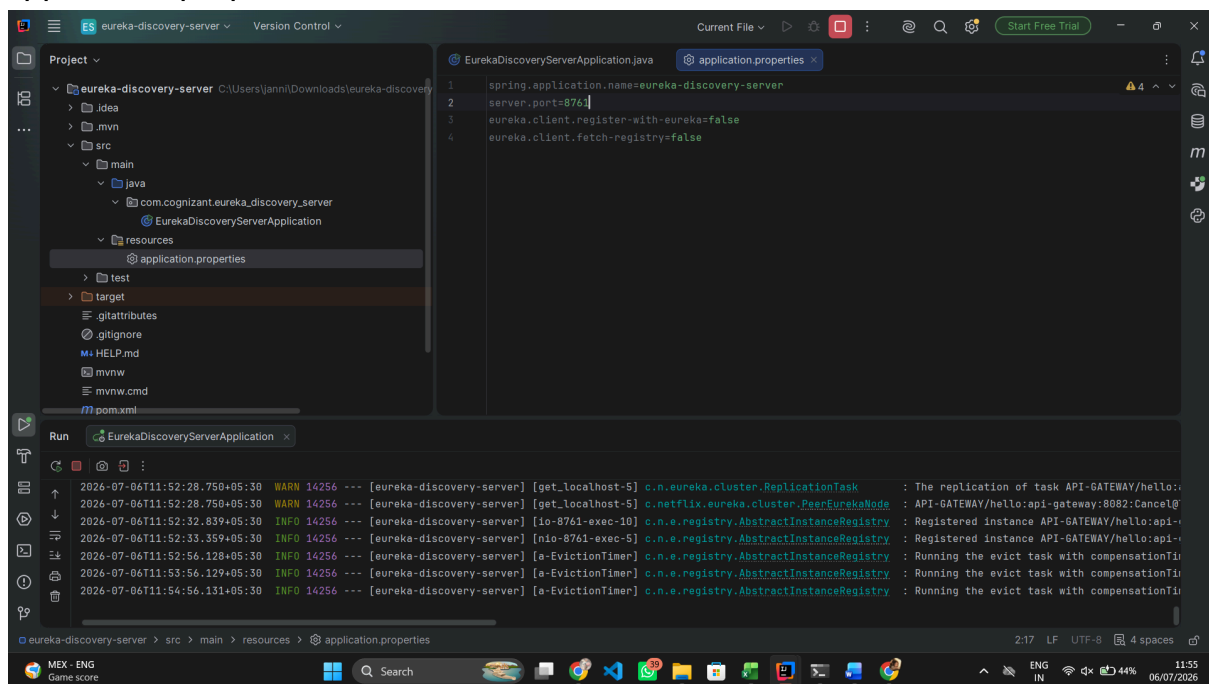

Main -> add this `@EnableEurekaServer`

ACCOUNT: accountController

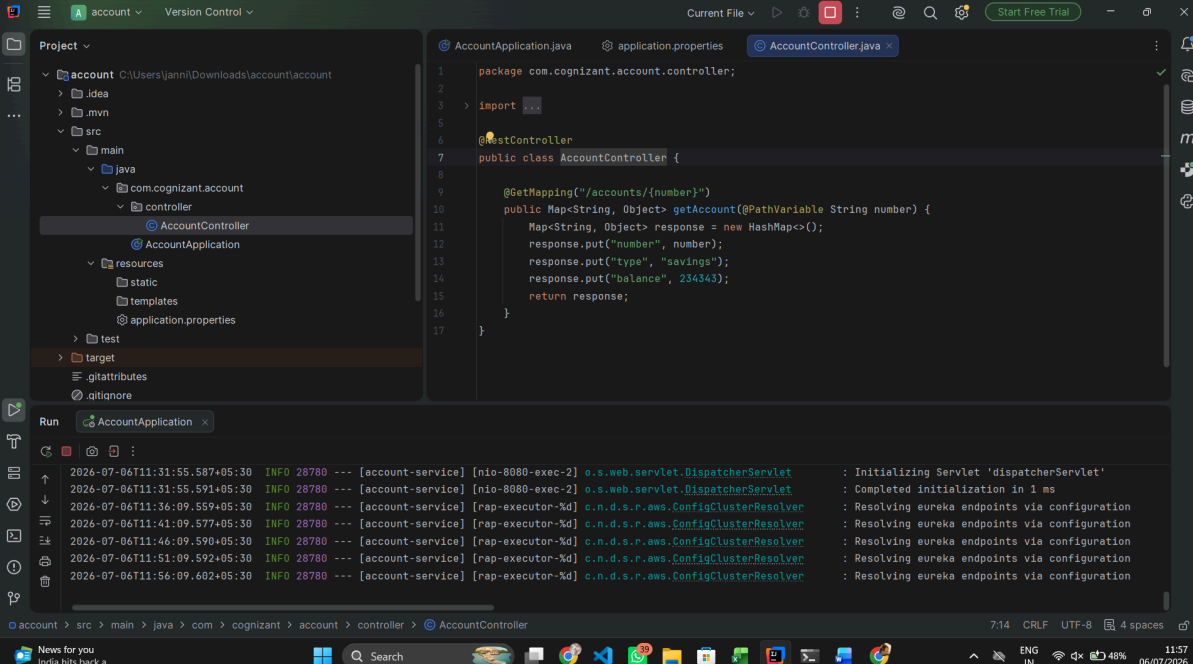


The screenshot shows the IntelliJ IDEA IDE with the `AccountController.java` file open. The project structure on the left includes `account` (C:\Users\janni\Downloads\account\account) with subdirectories `idea`, `mvn`, `src` (containing `main` and `test`), and `target`. The `main` directory contains `com.cognizant.account` (with `controller` and `resources` subdirectories) and `AccountApplication`. The `AccountController.java` file is located at `src/main/java/com/cognizant/account/controller/AccountController.java`. The code defines a `@RestController` with a `getAccount` method that returns a `Map` of account details.

```
1 package com.cognizant.account.controller;
2
3 import ...
4
5 @RestController
6 public class AccountController {
7
8     @GetMapping("/accounts/{number}")
9     public Map<String, Object> getAccount(@PathVariable String number) {
10         Map<String, Object> response = new HashMap<>();
11         response.put("number", number);
12         response.put("type", "savings");
13         response.put("balance", 234343);
14         return response;
15     }
16 }
17
```

The Run console shows the following logs:

```
2026-07-06T11:31:55.587+05:30 INFO 28780 --- [account-service] [nio-8080-exec-2] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherServlet'
2026-07-06T11:31:55.591+05:30 INFO 28780 --- [account-service] [nio-8080-exec-2] o.s.web.servlet.DispatcherServlet : Completed initialization in 1 ms
2026-07-06T11:36:09.559+05:30 INFO 28780 --- [account-service] [rap-executor-8d] c.n.d.s.r.aws.ConfigClusterResolver : Resolving eureka endpoints via configuration
2026-07-06T11:41:09.577+05:30 INFO 28780 --- [account-service] [rap-executor-8d] c.n.d.s.r.aws.ConfigClusterResolver : Resolving eureka endpoints via configuration
2026-07-06T11:46:09.590+05:30 INFO 28780 --- [account-service] [rap-executor-8d] c.n.d.s.r.aws.ConfigClusterResolver : Resolving eureka endpoints via configuration
2026-07-06T11:51:09.592+05:30 INFO 28780 --- [account-service] [rap-executor-8d] c.n.d.s.r.aws.ConfigClusterResolver : Resolving eureka endpoints via configuration
2026-07-06T11:56:09.602+05:30 INFO 28780 --- [account-service] [rap-executor-8d] c.n.d.s.r.aws.ConfigClusterResolver : Resolving eureka endpoints via configuration
```

application.properties

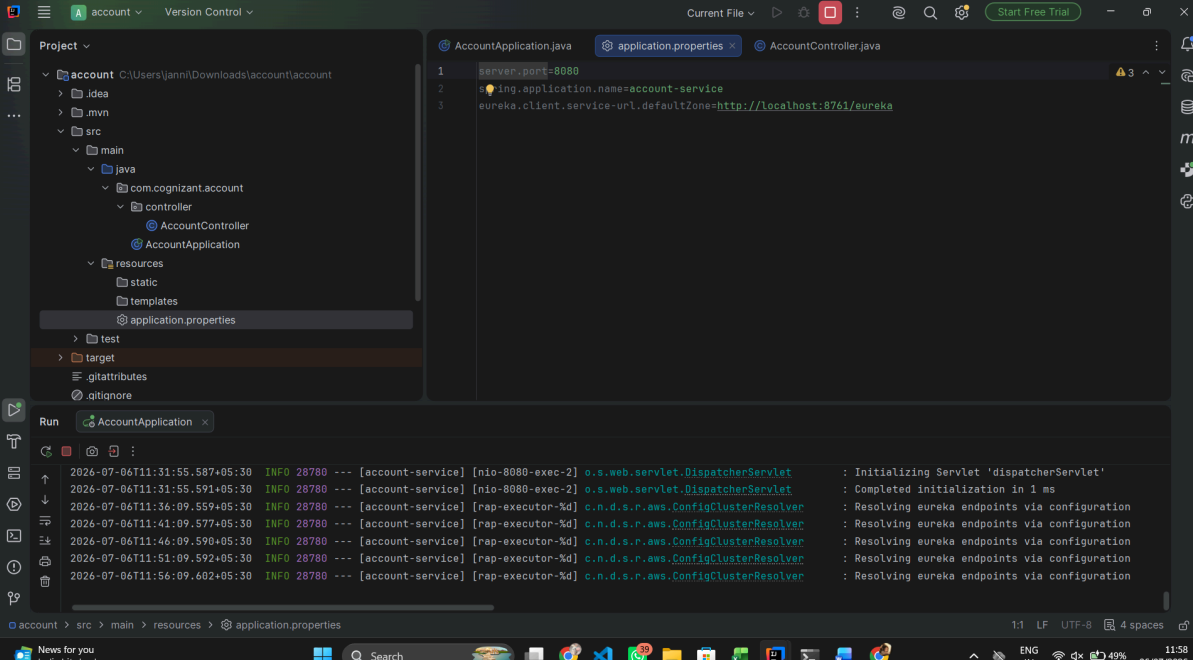

The screenshot shows the IntelliJ IDEA IDE with the `application.properties` file open. The project structure is the same as the previous screenshot. The `application.properties` file is located at `src/main/resources/application.properties`. The file contains the following properties:

```
1 server.port=8080
2 spring.application.name=account-service
3 eureka.client.service-url.defaultZone=http://localhost:8761/eureka
```

The Run console shows the same logs as the previous screenshot, indicating that the application is running successfully and resolving eureka endpoints via configuration.

main -> add `@EnableDiscoveryClient`

LOAN

loanController

```
8 public class LoanController {
9
10     @GetMapping("/loans/{number}")
11     public Map<String, Object> getLoan(@PathVariable String number) {
12
13         Map<String, Object> response = new HashMap<>();
14         response.put("number", number);
15         response.put("type", "car");
16         response.put("loan", 400000);
17         response.put("emi", 3250);
18         response.put("tenure", 10);
19
20         return response;
21     }
22 }
```

application.properties

```
1 server.port=8081
2 spring.application.name=loan-service
3 eureka.client.service-url.defaultZone=http://localhost:8761/eureka
```

main -> add @EnableDiscoveryClient