


Output:

output:

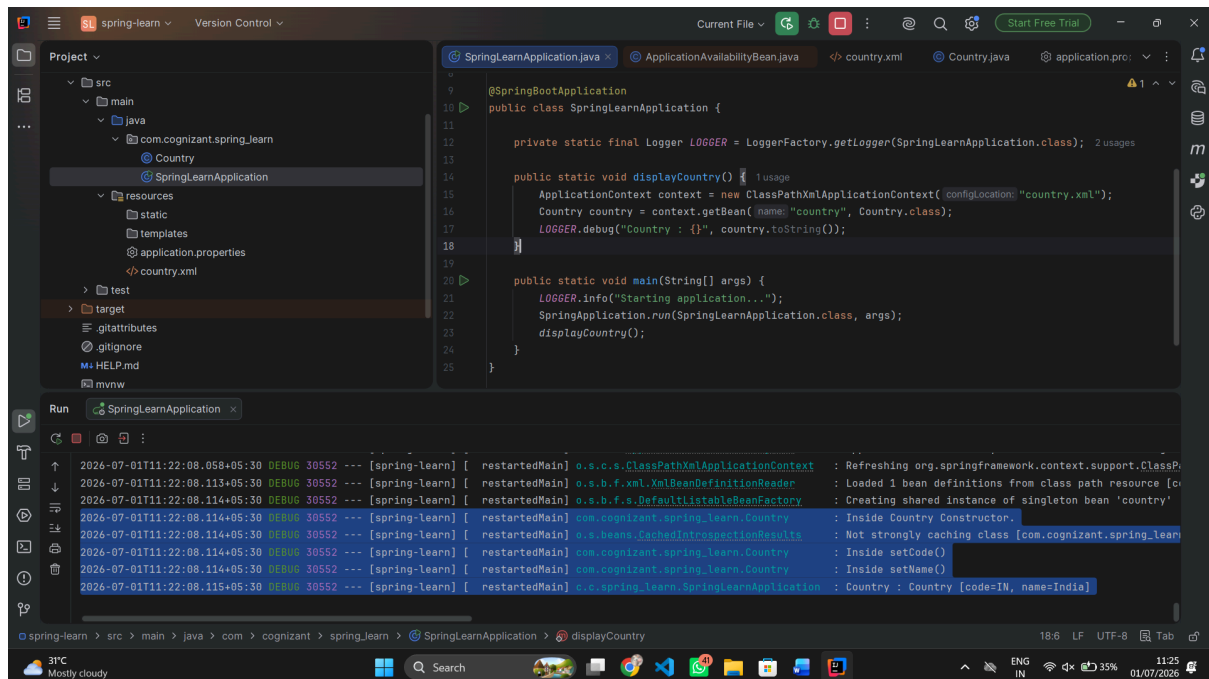

The screenshot shows an IDE with the following components:

- Project Explorer:** Shows the project structure with 'src/main/resources/country.xml' and 'application.properties' highlighted.
- Editor:** Displays the `SpringLearnApplication.java` file. It includes a `@SpringBootApplication` annotation, a `displayCountry()` method that loads the `country.xml` file and logs the country details, and a `main()` method that starts the application.
- Run Console:** Shows the output of the application. It includes logs for the `refreshContext()` method, the `loadBeanDefinitions()` method, the `createBean()` method, and the `setCode()` and `setName()` methods. The final output is: `Country : Country [code=IN, name=India]`.

src/main/resources/country.xml

```
<beans xmlns="http://www.springframework.org/schema/beans"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="
http://www.springframework.org/schema/beans
http://www.springframework.org/schema/beans/spring-beans.xsd">

<bean id="country" class="com.cognizant.spring_learn.Country">
<property name="code" value="IN"/>
<property name="name" value="India"/>
</bean>

</beans>
```

src/main/resources/application.properties

```
spring.application.name=spring-learn
logging.level.root=DEBUG
```

com/cognizant/spring_learn/Country.java

```
package com.cognizant.spring_learn;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class Country {

    private static final Logger LOGGER =
        LoggerFactory.getLogger(Country.class);

    private String code;
    private String name;

    public Country() {
        LOGGER.debug("Inside Country Constructor.");
    }

    public String getCode() {
        LOGGER.debug("Inside getCode()");
        return code;
    }

    public void setCode(String code) {
        LOGGER.debug("Inside setCode()");
        this.code = code;
    }

    public String getName() {
        LOGGER.debug("Inside getName()");
        return name;
    }

    public void setName(String name) {
        LOGGER.debug("Inside setName()");
        this.name = name;
    }

    @Override
    public String toString() {
        return "Country [code=" + code + ", name=" + name + "];"
    }
}
```