


Output:

output:

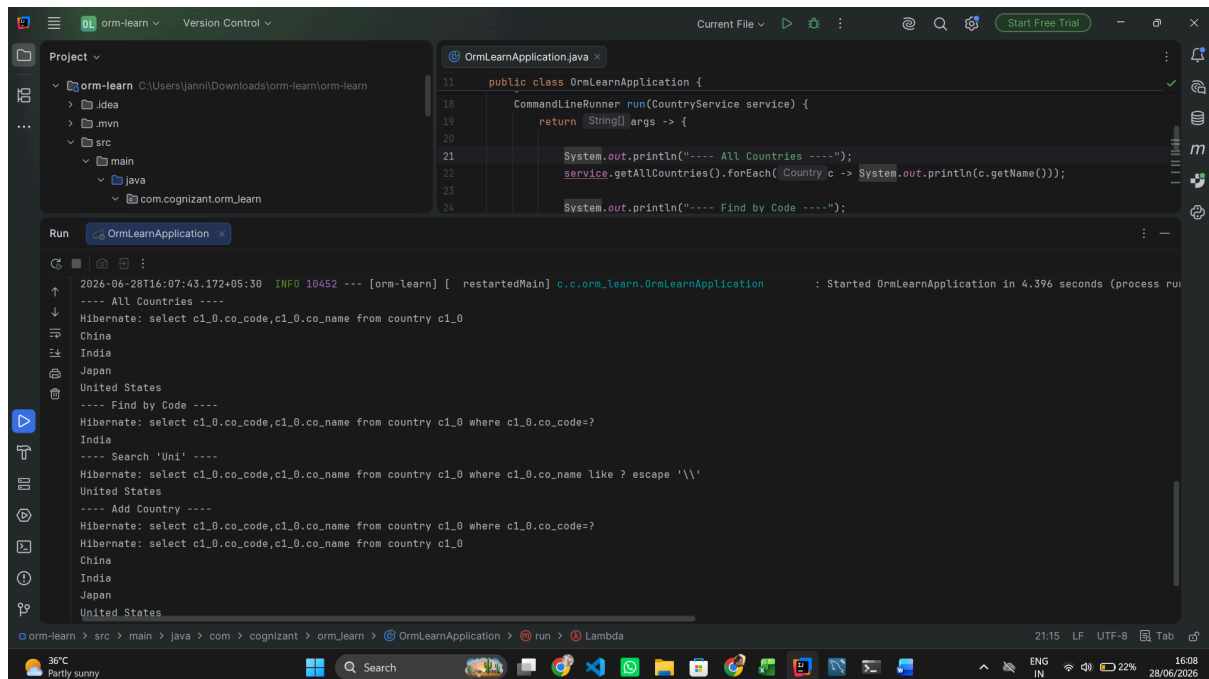

```
11 public class OrmLearnApplication {
18     CommandLineRunner run(CountryService service) {
19         return String[] args -> {
20
21             System.out.println("---- All Countries ----");
22             service.getAllCountries().forEach( Country c -> System.out.println(c.getName()));
23
24             System.out.println("---- Find by Code ----");
```

```
2026-06-28T16:07:43.172+05:30 INFO 10452 --- [orm-learn] [ restartedMain] c.c.orm_learn.OrmLearnApplication : Started OrmLearnApplication in 4.396 seconds (process ru
---- All Countries ----
Hibernate: select c1_0.co_code,c1_0.co_name from country c1_0
China
India
Japan
United States
---- Find by Code ----
Hibernate: select c1_0.co_code,c1_0.co_name from country c1_0 where c1_0.co_code=?
India
---- Search 'Uni' ----
Hibernate: select c1_0.co_code,c1_0.co_name from country c1_0 where c1_0.co_name like ? escape '\\'
United States
---- Add Country ----
Hibernate: select c1_0.co_code,c1_0.co_name from country c1_0 where c1_0.co_code=?
Hibernate: select c1_0.co_code,c1_0.co_name from country c1_0
China
India
Japan
United States
```

src/main/resources/application.properties

```
spring.application.name=orm-learn

spring.datasource.url=jdbc:mysql://localhost:3306/ormlearn
spring.datasource.username=root
spring.datasource.password=997662

spring.jpa.hibernate.ddl-auto=validate
spring.jpa.show-sql=true
```

src/main/java/com/cognizant/orm_learn/model/Country.java

```
package com.cognizant.orm_learn.model;

import jakarta.persistence.Entity;
import jakarta.persistence.Id;
import jakarta.persistence.Table;
import jakarta.persistence.Column;

@Entity
@Table(name = "country")
public class Country {

    @Id
    @Column(name = "co_code")
    private String code;
```

```

    @Column(name = "co_name")
    private String name;

    public Country() {}

    public Country(String code, String name) {
        this.code = code;
        this.name = name;
    }

    public String getCode() { return code; }
    public void setCode(String code) { this.code = code; }

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }
}

```

src/main/java/com/cognizant/orm_learn/repository/CountryRepository.java

```

package com.cognizant.orm_learn.repository;

import org.springframework.data.jpa.repository.JpaRepository;
import com.cognizant.orm_learn.model.Country;
import java.util.List;

public interface CountryRepository extends JpaRepository<Country, String> {

    List<Country> findByNameContaining(String text);

}

```

src/main/java/com/cognizant/orm_learn/service/CountryService.java

```

package com.cognizant.orm_learn.service;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Service;
import com.cognizant.orm_learn.model.Country;
import com.cognizant.orm_learn.repository.CountryRepository;

import java.util.List;
import java.util.Optional;

@Service
public class CountryService {

    @Autowired
    private CountryRepository countryRepository;

    public List<Country> getAllCountries() {
        return countryRepository.findAll();
    }

}

```

```

public Country getCountry(String code) {
    Optional<Country> result = countryRepository.findById(code);
    return result.orElse(null);
}

public List<Country> searchCountries(String text) {
    return countryRepository.findByNameContaining(text);
}

public Country addCountry(Country country) {
    return countryRepository.save(country);
}
}

```

src/main/java/com/cognizant/orm_learn/OrmLearnApplication.java

```

package com.cognizant.orm_learn;

import org.springframework.boot.CommandLineRunner;
import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.context.annotation.Bean;
import com.cognizant.orm_learn.service.CountryService;
import com.cognizant.orm_learn.model.Country;

@SpringBootApplication
public class OrmLearnApplication {
    public static void main(String[] args) {
        SpringApplication.run(OrmLearnApplication.class, args);
    }

    @Bean
    CommandLineRunner run(CountryService service) {
        return args -> {

            System.out.println("---- All Countries ----");
            service.getAllCountries().forEach(c ->
System.out.println(c.getName()));

            System.out.println("---- Find by Code ----");
            System.out.println(service.getCountry("IN").getName());

            System.out.println("---- Search 'Uni' ----");
            service.searchCountries("Uni").forEach(c ->
System.out.println(c.getName()));

            System.out.println("---- Add Country ----");
            service.addCountry(new Country("JP", "Japan"));

            service.getAllCountries().forEach(c ->
System.out.println(c.getName()));
        };
    }
}

```