


Weight-sharing vs a locally-connected baseline, as input size grows

translation-invariant motif, 32 train examples · mean of 250 seeds, error bars = ± 1 SD

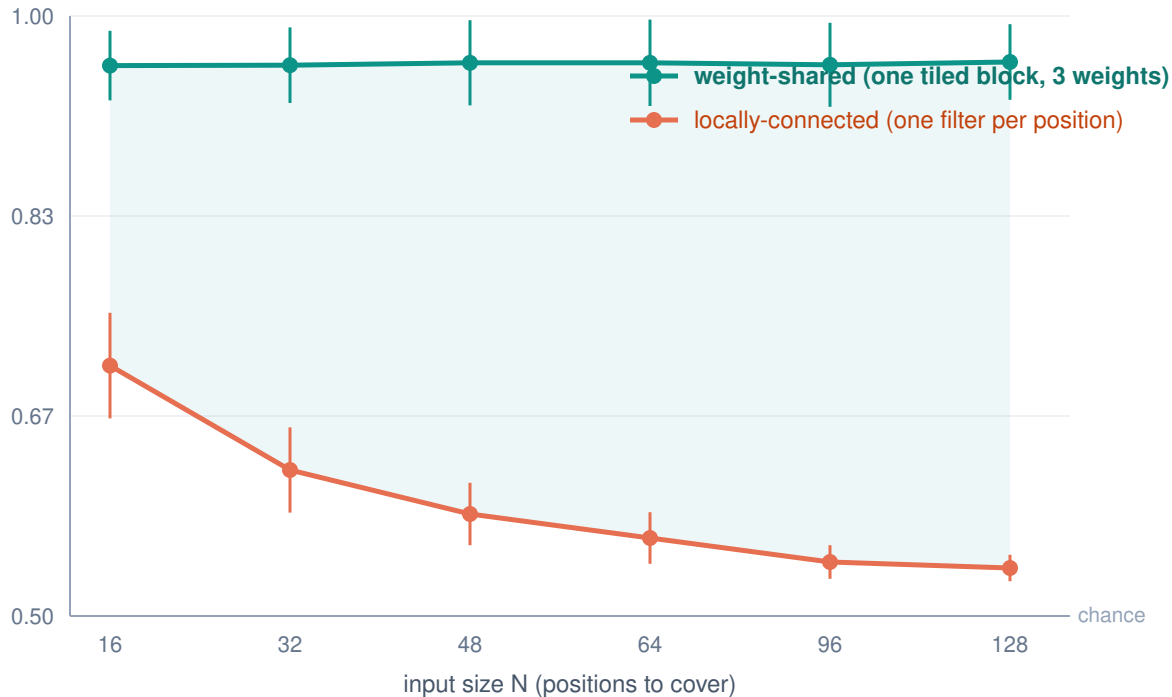

The shared block is size-independent; the local baseline starves and falls to chance, the gap widens, then saturates once it hits the floor.