



SiteScope培训

2008年8月18日



目录

SiteScope 介绍

SiteScope 安装

SiteScope 基本功能

实例

SiteScope 简介

- **SiteScope**是一种为确保分布式IT基础部件的可用性和性能的非代理的监视解决方案
- **SiteScope**监控的分布式基础部件包括服务器、操作系统、网络设备、网络服务、应用程序及应用组件
- **SiteScope**可以提供您所需要的基础部件的实时信息，提供问题的通知，以便能在问题变棘手之前及时解决

SiteScope的优点

- 可以采集基础部件的详细性能数据
- 消除在产品系统中运行代理程序所带来的额外内存和CPU资源
- 通过在一台服务器上集中进行维护，来减少维护的总时间和代价


SiteScope的优点

- 消除为调试监视代理程序以及共存的其他代理程序所浪费的时间
- 避免由于不可靠的代理程序引起的系统停工或交易丢失的可能性
- 消除为升级代理程序而导致产品系统中断的任何风险

SiteScope的特性

- **SiteScope**是提供无需运行在产品系统上的基础部件监视的软件，也提供故障转移能力，支持同时监视大量系统，支持通过**SSH**的安全连接，能够与其他应用管理解决方案进行整合
- **SiteScope**能够监视超过**65**种危及健康和性能的特性，并且提供标准的通知方法
- **SiteScope**支持**Windows**、**Unix**、**Linux**操作系统，能够覆盖绝大多数不同类型的环境

SiteScope基本结构图

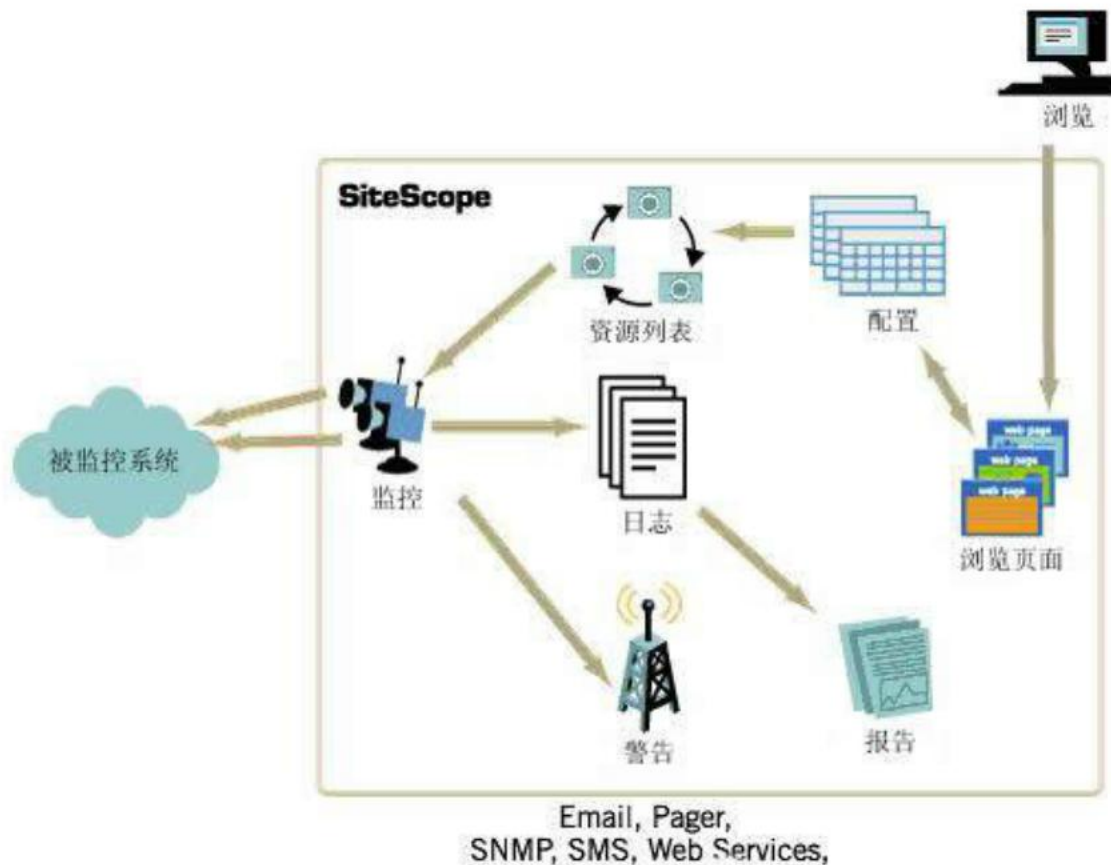

目录

SiteScope 介绍

SiteScope 安装

SiteScope 基本功能

实例

SiteScope Windows安装

- 步骤1：双击SiteScope安装文件，进入安装向导，见<图1>



图1

SiteScope Windows安装

- 步骤2: 点击下一步, 见<图2>



图2

SiteScope Windows安装

- 步骤3：点击下一步，进入选择文件路径，见<图3>



图3

SiteScope Windows安装

- 步骤4: 点击下一步, 选择安装类型, 见<图4>



图4

SiteScope Windows安装

- 步骤5：选择标准安装，点击下一步，进入配置窗口，见<图5>



图5

SiteScope Windows安装

- 步骤6：配置正确的配置项，进入输入序列号窗口，见<图6>



图6

SiteScope Windows安装

- 步骤7：输入序列号，进入总结信息窗口，见<图7>



图7

SiteScope Windows安装

- 步骤8：点击下一步，开始安装，见<图8>



图8

SiteScope Windows安装

- 步骤9：点击下一步，完成安装，见<图9>



图9

SiteScope Linux安装

- 安装SiteScope

进入安装文件存在的文件夹，执行`./linux_setup.bin --console`
配置相应的参数，完成SiteScope安装。

- 卸载SiteScope

进入安装目录（`/opt/SiteScope/`）中的`_uninst`文件中
执行`./uninstall.bin --console`
配置相应的参数，完成SiteScope卸载。

目录

SiteScope 介绍

SiteScope 安装

SiteScope 基本功能

实例

SiteScope基本功能

- SiteScope 主界面主要分为两大功能区域：导航条和主视图区。
- 导航区主要包括SiteScope、Alerts、Reports、Health、Preference和Help 六大项。
- 主视图区主要包括用户新建的监控组。

SiteScope基本功能

- 界面如图:



SiteScope基本功能

- 导航条

- **SiteScope**

登陆SiteScope 后，该按钮显示为灰色按下状态。说明该模块显示的是返回主页的信息，主要是返回主视图区。比如，如果在某个模块中，想退出可以直接按此键返回主视图区。

- **Alerts**

点击Alerts 后，进入报警设置页面，在该页面中可以查看以往报警记录、为监控对象或监控组添加报警事件、查看报警报告或报警日志等

SiteScope基本功能

- 警告界面如图：

Alert Definitions

Do	Group	For	Do	History	Edit	Test	Del
error x 1	all groups	any monitor	Send Mail	History	Edit	Test	X

Alert Actions:


Add	Add a new alert for one or more monitors or groups
Disable	Disable all alerts
Enable	Enable all alerts previously disabled
Test E-Mail	Send a test E-Mail Alert using current E-Mail Preferences
Test Pager	Send a test Pager Alert using current Pager Preferences
Test SNMP Trap	Send a test SNMP Trap Alert using current SNMP Trap Preferences
Alert Report	View a report of alerts that have been sent
Alert Log	View the the log of alerts sent

MERCURY™

SiteScope基本功能

- **Reports**

点击导航条“Reports”，浏览器将显示SiteScope上已经定义好的report，若无定义，可以根据需要自行定义。如图所示

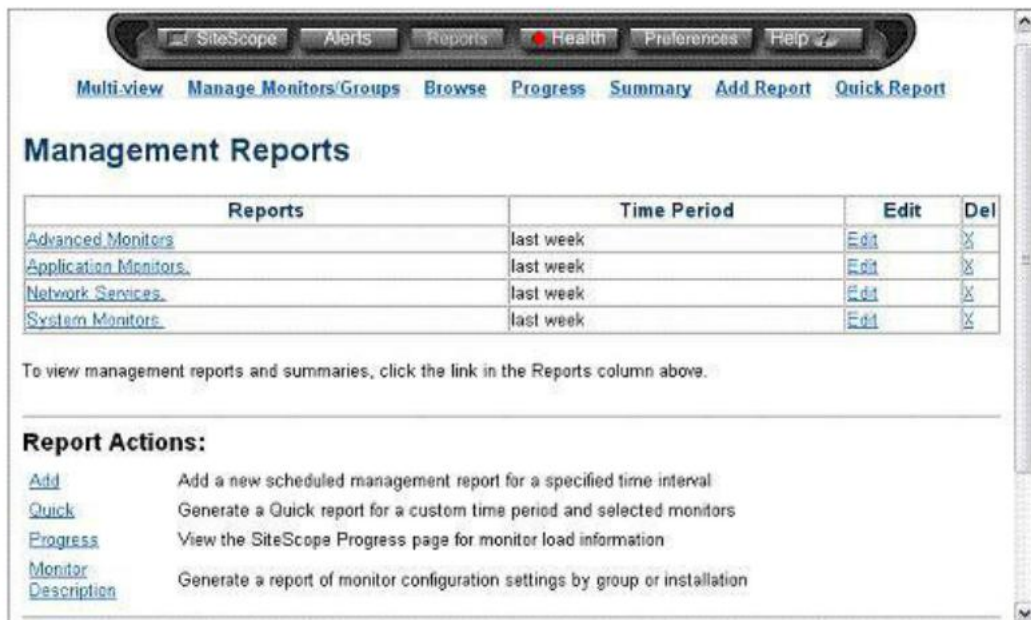

SiteScope基本功能

- Health

点击导航条“Health”，显示SiteScope自身的运行状态。如图所示：



The screenshot shows the SiteScope web interface. The navigation bar at the top includes links for SiteScope, Alerts, Reports, Health (highlighted), Preferences, and Help. Below the navigation bar, there are links for Multi-view, Manage Monitors/Groups, Browse, Remote UNIX, Remote Windows, Tools, Progress, and Summary. The main content area is titled "Health" and displays "Health Alerts : 0" and "Health Reports : 1". A table lists the status of various components.

State	Alerts	Reports	Status	Name	More	Edit	Refresh	Updated	Del
●	○	□	已手动禁用	(disabled)Log Event Checker	Reset	Edit		下午2:50 08-7-23	X
●	○	□	Current Monitors Run Per Minute=0.0 Current Monitors Running=2 Current Monitors Waiting=0 Maximum Monitors Run Per Minute=0.0 Maximum Monitors Running=0 Maximum Monitors Waiting=1 上午11:35 08-8-19	Monitor Load Checker		Edit	Refresh	上午11:35 08-8-19	X
●	○	□	Currently logging to Business Availability Center 0 metrics/minute	BAC Integration Statistics		Edit	Refresh	上午11:32 08-8-19	X
			Used Disk Space on SiteScope Drive MegaBytes Available on SiteScope Drive 0 Used Disk Space on / MegaBytes Available on / Disk Blocks Written/sec FD						

SiteScope基本功能

- **Preference**

点击导航条“Preference”，浏览器将显示SiteScope site本身的设置项。也是您首次安装完毕之后，需要首先进行设置的地方。如图所示：

General Preferences

License Number:	PM90815892099998-99101472	Enter the license number for this copy of SiteScope. The license number is given to you when you purchase a license and is required after the 10 day evaluation period.
License Status:	许可证:永久, 点: 99998, 已使用: 68, 选项: Apache, Ariba, ASP, Asset, CheckPoint, CheckPoint OPSEC, Cisco, ColdFusion, Composite, CPU, Database, DHCP, Directory, Disk Space, DNS, Dynamo, eBusiness, F5, File, FTP, IIS Server, LDAP, Link, Log, Mail, Memory, Netscape, Network, News, NT Counter, NT Dialup, NT Event Log, Oracle 9i, Ping, Ping Remote, Port, Radius, Real, RTSP, Script, Service, SilverStream, Simulation, SNMP, SNMP Trap, SQL Server, Sybase, Telnet, Unix Counter, URL, URL Content, URL List, URL Remote, URL Remote Sequence, URL Sequence, WebLogic 5x, Web Server, Web Service, WebSphere, Windows Media, BroadVision 5.5, Siebel Monitors and Solutions, Quick Test, Astra Load Test, Port Remote, WebLogic 6x, SAPPortal, SAP R/3 Solution Template, EJBMonitor, J2EE Monitors, Com+ Monitor, EMS Monitors, WebSphere MQ Monitor, Sun One Monitor, Exchange Solution Template, Active Directory Solution Template, WebLogic Solution Template, WebSphere Solution Template, Oracle Solution Template	
Option Licenses:	PM90815892099998-017203,PM908	Enter the license or licenses for SiteScope optional monitors. Separate multiple licenses with a "," (comma).
Options Enabled:	Apache, Ariba, ASP, Asset, CheckPoint, CheckPoint OPSEC, Cisco, ColdFusion, Composite, CPU, Database, DHCP, Directory, Disk Space, DNS, Dynamo, eBusiness, F5, File, FTP, IIS Server, LDAP, Link, Log, Mail, Memory, Netscape, Network, News, NT Counter, NT Dialup, NT Event Log, Oracle 9i, Ping, Ping Remote, Port, Radius, Real, RTSP, Script, Service, SilverStream, Simulation, SNMP, SNMP Trap, SQL Server, Sybase, Telnet, Unix Counter, URL, URL Content, URL List, URL Remote, URL Remote Sequence, URL Sequence, WebLogic 5x, Web Server, Web Service, WebSphere, Windows Media, BroadVision 5.5, Siebel Monitors and Solutions, Quick Test, Astra Load Test, Port Remote, WebLogic 6x, SAPPortal, SAP R/3 Solution Template, EJBMonitor, J2EE Monitors, Com+ Monitor, EMS Monitors, WebSphere MQ Monitor, Sun One Monitor, Exchange Solution Template, Active Directory Solution Template, WebLogic Solution Template, WebSphere Solution Template, Oracle Solution Template	

当您首次安装好SiteScope之后，进入Preference如图所示。如果您没有license，那么您只有10天的试用期。填完license并update之后，您将可以看到license的状态，该license所支持的总点数，以及您可以使用不同类型的监视器

SiteScope基本功能

Preference 其他设置，如图所示：

SiteScope Security and Web Server

SiteScope contains a built-in web server to serve its pages. The options below control the port and the access requirements to the SiteScope pages may also be served through a standalone, third party web server.

IP Addresses Allowed:

Enter the IP address that is always allowed

Use a trailing address and Login option below to,

当填写了某段IP(如206.168.191.*), 则只有该段内的IP用户可以访问SiteScope

For example, 206.168.191.* allow

Require IP address and Login

☐

若设置此项，则每个访问SiteScope的用户必须首先进行身份识别，非授权用户不能访问

s option to limit SiteScope access: d IP address and a correct userna

When this option is turned off, access is allowed to anyone who has either an allowed IP address (as : Profile (with username and password).

SiteScope Port:

8889
(current port: 8888)

可自定义端口，默认设置为8888

Enter the port number for the SiteScope bui

Note: Leaving this field blank will prevent SiteScope from serving web pages.

Serving SiteScope through an external Web server

Static HTML Pages

☐

用于在Report或者Alert中显示该 SiteScope的域名或者IP地址。

tion if you plan to serve SiteS server application.

Web Server Address:

http://www.sitescopedemo.co.uk - Agentless N

Enter the domain name or address of the w serve SiteScope pages.

SiteScope基本功能

- 功能链接
- 在导航条的下方，也有一些功能链接，包括：Multi-view、Manage Monitors/Groups、Browse、Tools、Progress、Summary，如图所示



功能链接




SiteScope基本功能

- Multi-view

点击，出现一个袖珍版的监控查看器，显示各个监控组的监控状态，点击edit，还可以设置查看器显示的列数、边框大小、背景颜色等选项



SiteScope基本功能

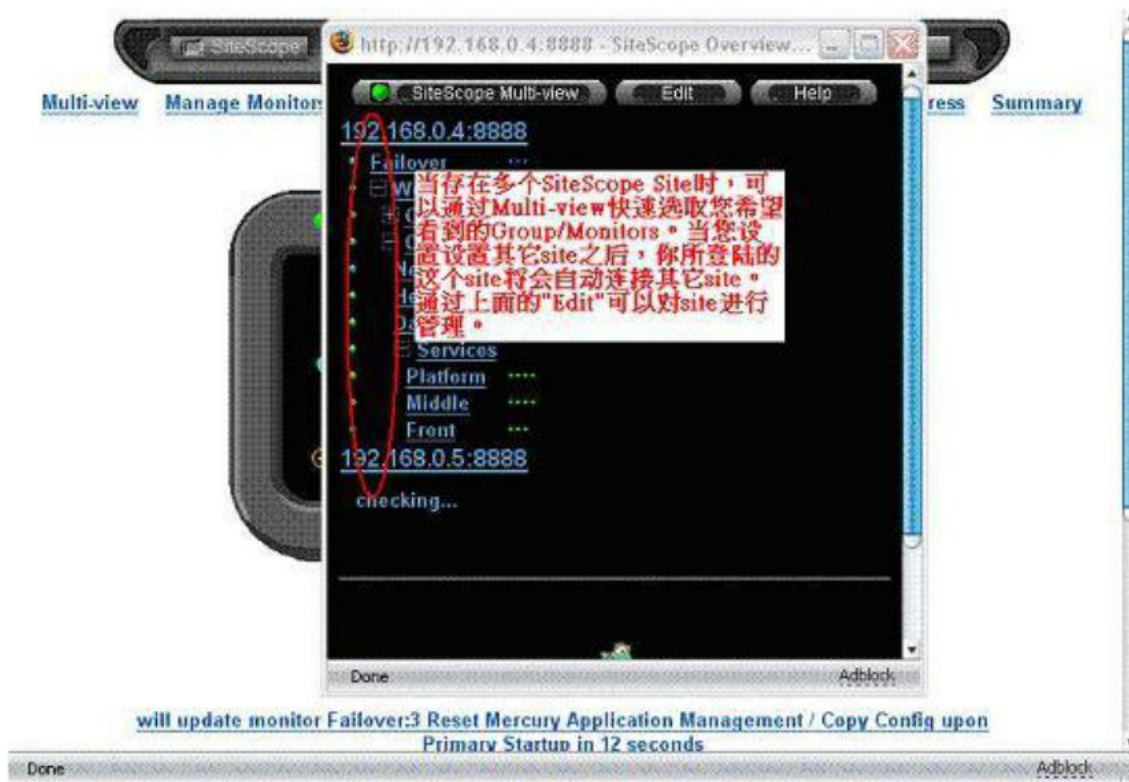

SiteScope基本功能

可以添加服务列表，设置Multi-view的显示的列数、边框大小、背景颜色等选项

[Multi-view](#) [Manage Monitors/Groups](#) [Browse](#) [Remote UNIX](#) [Remote NT](#) [Tools](#) [Progress](#) [Summary](#)

SiteScope Server List

Name	Edit	Del
192.168.0.4:8888	Edit	
192.168.0.5:8888	Edit	X

[Add to the SiteScope server list](#)
[Add a group to the SiteScope server list](#)

Multi-View Preferences

Number of Columns:

Refresh Rate:

Multi-view Window Options:

Table Options:

Background Color:

the Multi-view Settings

SiteScope基本功能

- **Manage Monitors/Groups**

管理监控器和组，该部分列出了所有的组和监控器，可以选择某个组或监控器进行相应的操作，如果组和监控器过多，也可以对其进行过滤，过滤的选项有Name、Machine 和MonitorType

Manage Monitors and Groups

Select one or more groups and monitors and then choose the action you wish to perform from the controls below the tree display. Click the  to expand a group, and the  to collapse a group. Use the **Filter Settings** to display a filtered list of groups and monitors.

Filter Settings:
Match Name: Match Machine: For Monitor Type:

☐ **Health**

- ☐ Log Event Checker (disabled)
- ☐ Monitor Load Checker
- ☐ BAC Integration Statistics
- ☐ SiteScope Server Health

☐ **GEFW 测试**

- ☐ [WEB 业务管理机](#)
- ☐ [COMADMIN 通讯管理机](#)
- ☐ [WEBDB 业务数据库](#)
- ☐ [SNMP 网管机](#)
- ☐ [SNMPDB 网管数据库](#)
- ☐ [SMS 短信机](#)
- ☐ [COMM 通讯机](#)

☐ **gegw_performance**


- ☐ 192.168.0.196_CPU
- ☐ 192.168.0.196_memory

选择组或监控器后可以进行的操作有：Move、Copy、Duplicate、Delete、Disable、Enable、Refresh、Replace、Baseline

SiteScope基本功能

- **Browse**

可根据不同类型的过滤条件快速查看个监视器的状态，如图所示

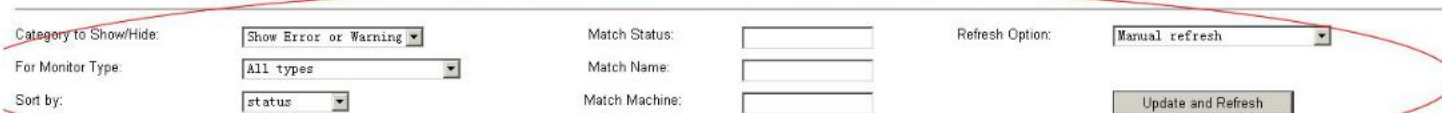A screenshot of the SiteScope filter controls. A red oval highlights the filter section. It includes dropdown menus for 'Category to Show/Hide' (set to 'Show Error or Warning'), 'For Monitor Type' (set to 'All types'), and 'Sort by' (set to 'status'). There are input fields for 'Match Status', 'Match Name', and 'Match Machine'. A 'Refresh Option' dropdown is set to 'Manual refresh'. An 'Update and Refresh' button is located at the bottom right of the filter section.

Category to Show/Hide: Match Status: Refresh Option:

For Monitor Type: Match Name:

Sort by: Match Machine:

Browse Monitors (3 out of 72)

Use the [Monitor Description Report](#) to view current monitor configuration settings.

State	Status	Name	Group	Edit	Refresh	Machine	Updated	Alerts	Reports
◆	未找到	192.168.0.32_openvpn	COMM_32	Edit	Refresh	192.168.0.32	下午2:50 08-8-19	▲	☐
◆	未找到	192.168.0.52_comm_app	COMM_52	Edit	Refresh	192.168.0.52	下午2:50 08-8-19	▲	☐
◆	未找到	192.168.0.52_WebSphere	COMM_52	Edit	Refresh	192.168.0.52	下午2:50 08-8-19	▲	☐

SiteScope基本功能

- Remote Unix/Windows

添加用于监视的机器，如图所示

Remote Unix Servers

A list of UNIX servers with connectivity and remote access permissions for monitoring from this SiteScope instance. Remote connection options include: HTTP, telnet, rlogin, or SSH.

Note: Connections using SSH version 2 require additional set up.


Name	Server	Status	OS	Method	Edit	Test	Detailed Test	Del
192.168.0.34	192.168.0.34	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.72	192.168.0.72	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.193	192.168.0.193	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.13	192.168.0.13	connection successful	Red Hat Advance Server Linux 4	SSH	Edit	Test	Detailed Test	X
192.168.0.16	192.168.0.16	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.54	192.168.0.54	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.163	192.168.0.163	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.21.175	192.168.21.175	connection successful	Red Hat Advance Server Linux 4	SSH	Edit	Test	Detailed Test	X
192.168.0.22	192.168.0.22	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.191	192.168.0.191	remote command error 未知错误 (-1) (-1)	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.196	192.168.0.196	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.63	192.168.0.63	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.32	192.168.0.32	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.194	192.168.0.194	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.192	192.168.0.192	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.195	192.168.0.195	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.39	192.168.0.39	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.52	192.168.0.52	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X

[Add a Remote Machine](#)

SiteScope基本功能

- Tools

SiteScope还额外提供一些不同类型的工具来帮助您建立不同的监视器，如图所示

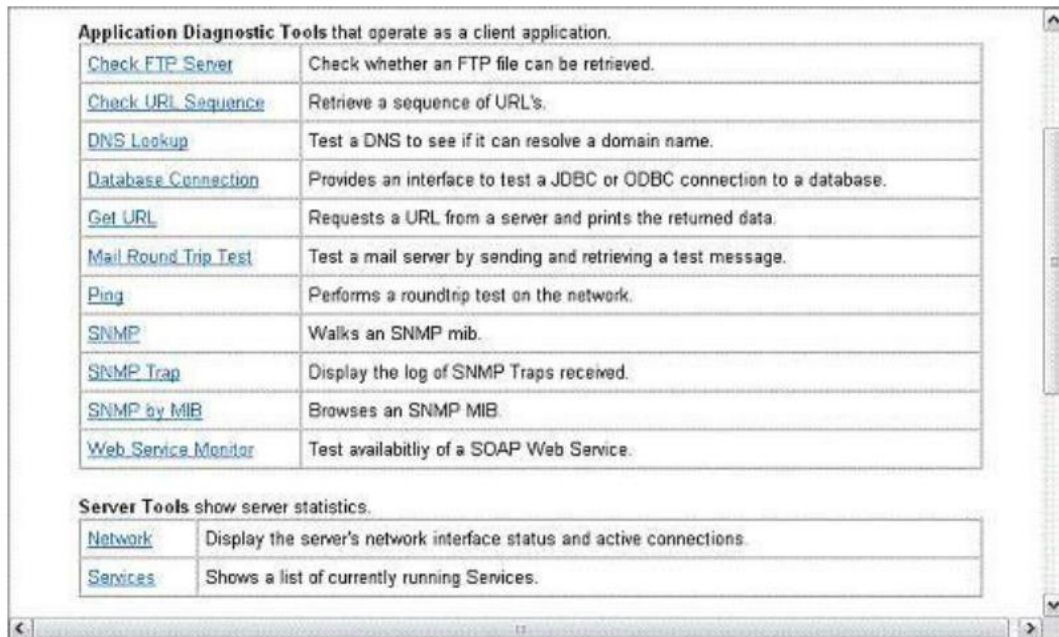

SiteScope基本功能

- Progress

显示出当前SiteScope运行的状态。图中标明的是当前SiteScope所运行的监视器负载数，如图所示

SiteScope Progress Report

Monitoring Load

	Monitors Run Per Minute	Monitors Running	Monitors Waiting
Current	0.5	2	0
Maximum	0.5 at 下午3:12 08-8-19	2 at 下午3:12 08-8-19	1 at 下午3:10 08-8-19

Maximums are since last startup at 下午3:10 08-8-19

Recent Monitors

Date	Group	Monitor	
下午3:12 08-8-19	gegw_performance	192.168.0.196_memory	starting the monitor update... (previous update at 上午10:41 08-8-19)
下午3:12 08-8-19	gegw_performance	192.168.0.196_CPU	CPUmonitor retrieving the CPU Used on unix machine... (previous update at 上午
下午3:12 08-8-19	Health	Monitor Load Checker	good, Current Monitors Run Per Minute=0.0, Current Monitors Running=3, Current Monitors Waiting=0, Maximum Monitors Waiting=1 下午3:10 08-8-19

(page will refresh every 20 seconds)



SiteScope基本功能

- **Summary**

此部分可以按照用户的要求生成一个简要的监控报告，并可以以**cvs**、**txt**、**html**等形式导出该报告。可选择的项目有报告主题、显示的列、排列顺序、导出文件格式等，最后点击**Show Report** 可以生成一份简要报告，如果选择了**Export to File**，可以在本地找到该报告

目录

SiteScope 介绍

SiteScope 安装

SiteScope 基本功能

实例

实例一

建立监控报警

点击导航条“Alerts”，浏览器将显示SiteScope上已经定义好的alert，若没有定义，您可以根据需要自行定义。如图所示

Alert Definitions

Alerts created or modified from the new user interface are not supported by this user interface.

Do	Group	For	Do	History	Edit	Test	Delete
(disabled) 加 注，事件出现 1次	GEOW 测试	192.168.0.16_CPU, 192.168.0.63_oracle(5), 192.168.0.22_Tomcat, 192.168.0.32_WebSphere, 192.168.0.52_opensmp, 192.168.0.16_Memory, 192.168.0.63_CPU, 192.168.0.22_WebSphere, 192.168.0.52_Disk, 192.168.0.13_CPU, 192.168.0.39_Memory, 192.168.0.54_CPU, 192.168.0.52_CPU, 192.168.0.63_Memory, 192.168.0.13_oracle(5), 192.168.0.72_tomcat, 192.168.0.63_oracle(1), 192.168.0.13_Memory, 192.168.0.39_CPU, 192.168.0.54_WebSphere, 192.168.0.63_listener, 192.168.0.13_Disk, 192.168.0.34_Memory, 192.168.0.32_Memory, 192.168.0.63_oracle(3), 192.168.0.63_oracle(4), 192.168.0.54_Disk, 192.168.0.16_Disk, 192.168.0.72_Memory, 192.168.0.22_Disk, 192.168.0.72_F5Sync, 192.168.0.32_CPU, 192.168.0.32_Disk, 192.168.0.13_oracle(3), 192.168.0.34_WebSphere, 192.168.0.34_opensmp, 192.168.0.13_listener, 192.168.0.163_Memory, 192.168.0.39_comm_app, 192.168.0.54_comm_app, 192.168.0.63_oracle(2), 192.168.0.52_WebSphere, 192.168.0.54_opensmp, 192.168.0.13_oracle(1), 192.168.0.163_Disk, 192.168.0.34_Disk, 192.168.0.22_Memory, 192.168.0.32_opensmp, 192.168.0.13_oracle(4), 192.168.0.163_CPU, 192.168.0.39_Disk, 192.168.0.52_Disk, 192.168.0.54_CPU, 192.168.0.163_samrtimer, 192.168.0.22_CPU, 192.168.0.52_Memory, 192.168.0.72_CPU, 192.168.0.39_opensmp, 192.168.0.32_comm_app, 192.168.0.34_comm_app, 192.168.0.54_Memory, 192.168.0.72_Disk, 192.168.0.39_WebSphere, 192.168.0.16_smsgateway, 192.168.0.52_comm_app, 192.168.0.13_oracle(2)	Sends an alert message via e-mail.	History	Edit	Test	Delete

Alerts created or modified from the new user interface are not supported by this user interface.

Alert Actions:

Add	Add a new alert for one or more monitors or groups
Disable	Disable all alerts
Enable	Enable all alerts previously disabled
Test E-Mail	Send a test E-Mail Alert using current E-Mail Preferences
Test Pager	Send a test Pager Alert using current Pager Preferences
Test SNMP Trap	Send a test SNMP Trap Alert using current SNMP Trap Preferences
Alert Report	View a report of alerts that have been sent
Alert Log	View the log of alerts sent



实例一

建立监控报警

点击“Add”，添加新的报警，点击“Define Alert”

Alerting on: Choose the monitor status that should trigger the alert

☒ Error ☐ Warning ☐ Ok

Alert Type Choose the type of alert to create

☐ Database Alert	Sends an alert to a database by calling a stored procedure or inserting a record.	Help
☐ Disable or Enable Monitor(s) Alert	Disables or enables a set of groups or monitors.	Help
☒ E-Mail Alert	Sends an alert message via e-mail.	Help
☐ Pager Alert	Sends an alert message via a alphanumeric or numeric pager.	Help
☐ Post Alert	Sends an alert message via submitting a form to a CGI script.	Help
☐ Script Alert	Runs a shell script on this machine or a remote machine.	Help
☐ SNMP Trap Alert	Sends an SNMP trap.	Help
☐ Sound Alert	Plays an alert sound on the machine where SiteScope is running.	Help

Define Alert



实例一

建立监控报警

点击“Edit E-mail Preferences”来创建自己的Email信息，以便SiteScope发送alert到设定的Email地址。如图所示

E-mail Preferences		
Mail Server Domain Name:	194.205.110.133	Enter the domain name of the mail server to use for sending SiteScope messages and alerts. This server should be an SMTP mail server. For example, gateway.this-company.com.
Administrator E-mail Address:	gheaton@mercury-eur.com	Enter the administrator e-mail address where SiteScope will send status messages. For example, support@mercury.com.
SiteScope Status Messages	☐ Daily Status ☐ SiteScope Starts/Restarts	Select which regular SiteScope status messages you would like to receive.
From Email Address:	Alerten@Sitescopedemo.co.uk	(optional) Enter the email address used as the From Address for SiteScope messages. This is used to make it easier to browse or sort email generated by SiteScope. For example, support@mercury.com.
Backup Mail Server		(optional) Enter the domain name of a backup

实例一

建立监控报警

根据实际情况配置报警的详细信息。如图所示

Template: Default 可根据不同的模版选择不同的类型内容。

choose which template to use for formatting the contents of the message. e.g. for sending mail to a pager, choose one of the "short" templates.

When:

- ☐ Always, after the condition has occurred at least times
only cause an Alert after the condition occurs **at least** this many times, consecutively.
- ☒ Once, after condition occurs exactly times
only cause an Alert after the condition occurs **exactly** this many times, consecutively.
- ☐ Initial alert and repeat every times afterwards
cause an Alert after the condition occurs X consecutive times and repeat the alert every Y consecutive times thereafter.
- ☐ Once, after group errors
cause an alert the first time that any monitor in this group gets this many consecutive error readings.
- ☐ Once, when all monitors of this group are in error
cause an alert when all of the monitors in the group are in error.

请仔细阅读发送Alert的条件！

E-Mail Alert

Advanced Options

Disable Alert

- ☒ Enable Alert
- ☐ Disable alert permanently
- ☐ Disable alerts for the next minutes
- ☐ Disable alerts from to

实例二

在SiteScope中添加Linux监控

创建一个监控组

点击主视图区的**Create Group**，进入**Add Group** 页面。在页面上部填写组名，注意下面合法组名的提示。点击**add**，新组添加成功。下半部分是组的高级选项，如图所示

Advanced Options

Description:

Enter an optional description that is displayed at the top of the Group Detail page. You can enter a multi-row, two column table by entering description name value pairs separated by a '\t'. Placed one pair per line.

Depends On:

Choose the monitor to that controls whether monitors in this group are enabled.

Depends
Condition:

If OK, this group is only enabled if the Depends On monitor is OK. Use this to disable monitoring when a router or an entire server goes down.

If Error, this group is only enabled when the Depends On monitor is in Error. Use this to enable "failover" monitoring if another monitoring system goes down

Group

实例二

在SiteScope中添加Linux监控

在该部分主要有Description、Depends On、Depends Condition 三项

Description: 填写组的描述，将显示于组的监控列表上方

Depends On : 可选择整个SiteScope 中所有的监控项目，选择后，该组的状态（enable/disable）将受控于该项目。

Depends Condition: 选择组的受控条件，只有该组依靠的监控项目达到选择的状态时，该组才为enable 状态。

[Multi-view](#) [Manage Monitors/Groups](#) [Browse](#) [Remote UNIX](#) [Remote Windows](#) [Tools](#) [Progress](#) [Summary](#)

Monitors in the Group: test

Group Alerts : 

Group Reports : 

State	Alerts	Reports	Status	Name	More	Edit	Refresh	Updated	Del
No monitors currently defined. Use the Add to Group actions below to add monitors or create subgroups									

Click the state icon for monitor and alert disable/enable options.

Add to Group:

Monitor	Add a new monitor instance to this group
Monitor Set	Add a new Monitor Set instance to this group
Solution Template	Add a new Monitoring Solution to this group
Subgroup	Create a new subgroup within this group

Group Actions:

Edit	Edit the Name, Description, or Dependencies of this group
Disable	Disable all the monitors in this group or temporarily disable alerts for monitors in this group
Enable	Enable all the monitors previously disabled in this group or enable temporarily disabled alerts
Refresh	Refresh all the monitors in this group
Reorder	Edit the display order of monitors in this group
Delete	Delete this group and all monitors in this group

实例二

在SiteScope中添加Linux监控

创建一个监控组

点击主视图区的**Create Group**，进入**Add Group** 页面。在页面上部填写组名，注意下面合法组名的提示。点击**add**，新组添加成功。下半部分是组的高级选项，如图所示

Advanced Options

Description:

Enter an optional description that is displayed at the top of the Group Detail page. You can enter a multi-row, two column table by entering description name value pairs separated by a '\t'. Placed one pair per line.

Depends On:

Choose the monitor to that controls whether monitors in this group are enabled.

Depends
Condition:

If OK, this group is only enabled if the Depends On monitor is OK. Use this to disable monitoring when a router or an entire server goes down.

If Error, this group is only enabled when the Depends On monitor is in Error. Use this to enable "failover" monitoring if another monitoring system goes down

Group

实例二

在SiteScope中添加Linux监控

在Add to Group 下的项目是可以向该组中添加的项目，有Monitor、Monitor Set、SolutionTemplate、Subgroup 四项，分别是添加监控器、监控实例、解决方案，子组。本文主要讲述如何添加Monitor（监控器）。

在Group Actions 下面显示的是可以对组进行的操作，有Edit、Disable、Enable、Refresh、SiteScopeReorder、Delete 六项，即编辑、使无效、激活、刷新、排序、删除。

实例二

在SiteScope中添加Linux监控

连接要监控的服务器

要监控Linux 的系统资源，必须先取得与服务器的连接，监控系统将找不到监控主机或采集不到监控数据。在SiteScope 中，监控Linux 的系统资源前必须先要Setup Unix Remote。

点击导航条下方的Remote Unix，出现Remote Unix Servers 列表页面，显示已经添加的unix 主机，如图所示

Remote Unix Servers

A list of UNIX servers with connectivity and remote access permissions for monitoring from this SiteScope instance. Remote connection options include: HTTP, telnet, rlogin, or SSH.
Note: Connections using SSH version 2 require additional set up.

Name	Server	Status	OS	Method	Edit	Test	Detailed Test	Del
192.168.0.34	192.168.0.34	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.72	192.168.0.72	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.193	192.168.0.193	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.13	192.168.0.13	connection successful	Red Hat Advance Server Linux 4	SSH	Edit	Test	Detailed Test	X
192.168.0.16	192.168.0.16	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.54	192.168.0.54	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.163	192.168.0.163	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.21.175	192.168.21.175	connection successful	Red Hat Advance Server Linux 4	SSH	Edit	Test	Detailed Test	X
192.168.0.22	192.168.0.22	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.191	192.168.0.191	remote command error 未知错误 (-1) (-1)	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.196	192.168.0.196	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.63	192.168.0.63	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.32	192.168.0.32	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.194	192.168.0.194	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.192	192.168.0.192	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.195	192.168.0.195	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.39	192.168.0.39	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X
192.168.0.52	192.168.0.52	connection successful	RedHat AS5	SSH	Edit	Test	Detailed Test	X

[Add a Remote Machine](#)

实例二

在SiteScope中添加Linux监控

点击下方的Add a Remote Machine，添加一个新的Remote Machine。

在Add Remote Server 页面，显示配置和Add Remote Server 的连接方式及ssh 连接的高级选项。主要有以下内容：

Server Address: 填写server 的ip 地址

OS: 选择server 的操作系统

Connection Method: 选择连接方式，有HTTP、rlogin、SSH、Telnet 等项

Login: 登陆server 的用户名

Password: 登陆用户名对应的密码

Title: remote server 的标题，默认为Server Address

Prompt: 对于telnet 和rlogin 连接方式的命令准备符，选择SSH 时可不填

Login Prompt: 针对telnet 连接方式，可不填

Password Prompt: 针对telnet 连接方式，可不填

实例二

在SiteScope中添加Linux监控

Secondary Prompt: 针对telnet 连接方式，可不填

Secondary Response: 针对telnet 连接方式，可不填

Remote Machine Encoding: remote server 的编码方式

Initialize Shell Environment: 初始化 shell 环境

Trace, Add and TestAdd Only, SSH Advanced Options 一般情况下，选择默认即可

点击**Add** 后，系统将根据用户填写的以上信息进行与remote server 的连接测试，测试完毕后，添加的remote server 将出现在servers 列表中，在表中的**Status** 列显示的是连接状态


（**successful/failed**），另外可以编辑（**Edit**）、测试（**Test**）、详细测试（**Detailed Test**）、删除（**X**）。

实例二

在SiteScope中添加Linux监控

添加Linux 资源监控项目

添加remote server 后，即可以对添加的server 进行系统监控。
选择相应的group 后，点击Add to Group 下的Monitor，在可监控的资源列表中选择CPU Utilization，点击choose server，如图所示

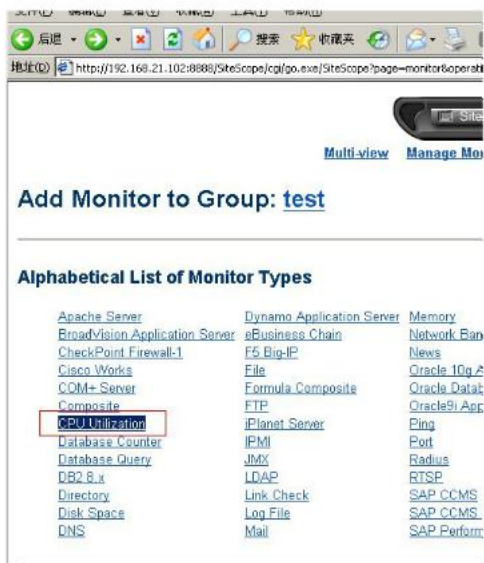

实例二

在SiteScope中添加Linux监控

可以发现，在server 的下拉菜单中包括了remote servers 列表中的servers，选择一个要监控的服务器，点击 Choose。进入如下画面，填写信息，注意更新频率应该为15秒以上，如图所示



SiteScope

[Multi-view](#) [Manage Monitors/Groups](#)

Add CPU Utilization Monitor in Group : test

Server [choose server](#)
the server to monitor

更新频率 分钟
监控器检查的间隔时间

标题
应在监控器表中显示的标题 (可选)

Monitor

实例二

在SiteScope中添加Linux监控

点击add，添加完成，如图所示



The screenshot shows the SiteScope web interface in a Microsoft Internet Explorer browser window. The address bar shows the URL: <http://192.168.21.102:8888/SiteScope/html/docs/Detailtest.html>. The interface includes a navigation bar with buttons for SiteScope, Alerts, Reports, Health, Preferences, and Help. Below the navigation bar, there are links for Multi-view, Manage Monitors/Groups, Browse, Remote UNIX, Remote Windows, Tools, Progress, and Summary. The main content area is titled "Monitors in the Group: test". To the right of the title, there are "Group Alerts" and "Group Reports" sections. Below the title, there is a table with the following columns: State, Alerts, Reports, Status, Name, More, Edit, Refresh, Updated, and Del. The table contains one row representing a monitor with the following data:

State	Alerts	Reports	Status	Name	More	Edit	Refresh	Updated	Del
			4% avg cpu1 4% cpu2 5%	192.168.0.22		Edit	Refresh	下午5:45 08-8-19	X

Below the table, there is a note: "Click the state icon for monitor and alert disable/enable options."



实例二

在SiteScope中添加Linux监控

生成Group Report

在主视图区中，点击进入一个监控组，点击监控器列表上方的**Group Reports** 按钮，进入**Add Management Report** 页面，可以进行**Report** 的基本和高级配置并将该组添加到**Management Report** 中，添加成功后，监控器列表上方的**Group Reports** 按钮变成与监控组状态相同的颜色（添加前是白色）。

添加完成后，点击导航条中的**Reports**，在**Report** 列表中将显示用户新添加的组信息，如图所示：

实例二

在SiteScope中添加Linux监控

生成Group Report

找不到服务器 - Microsoft Internet Explorer

文件(F) 编辑(E) 查看(V) 收藏(A) 工具(T) 帮助(H)

后退 前进 刷新 搜索 收藏夹 历史记录 地址栏 地址

地址: http://192.168.21.102:8888/SiteScope/cgi-bin.exe/SiteScope?page=reports&account=administrator

SiteScope Alerts Reports Health Preferences Help

Multi-view Manage Monitors/Groups Browse Progress Summary Add Report Quick Report

Management Reports

Reports	Time Period	Edit	Del
192.168.0.196_CPU Monitor	last 12 hours	Edit	X
192.168.0.196_memory Monitor	last 12 hours	Edit	X
192.168.0.22 Monitor	last day	Edit	X
COMMMACMIN 通信管理机 Group	last day	Edit	X
COMMMACMIN 通信管理机, COMM 通信机, COMM 32, COMM 34, COMM 39, COMM 52, COMM 54, SMS 短信机, SHMPDB 网管数据库, SHMP 网管机, WEEDB 业务数据库, WEB 业务管理机, Groups and 192.168.0.72_CPU, 192.168.0.72_Disk, 192.168.0.72_Memory, 192.168.0.72_Tomcat, 192.168.0.72_F5Sync, 192.168.0.32_CPU, 192.168.0.32_Disk, 192.168.0.32_Memory, 192.168.0.32_WebSphere, 192.168.0.32_comm_app, 192.168.0.32_openspn, 192.168.0.34_CPU, 192.168.0.34_Disk, 192.168.0.34_Memory, 192.168.0.34_WebSphere, 192.168.0.34_comm_app, 192.168.0.34_openspn, 192.168.0.39_CPU, 192.168.0.39_Disk, 192.168.0.39_Memory, 192.168.0.39_WebSphere, 192.168.0.39_comm_app, 192.168.0.39_openspn, 192.168.0.52_CPU, 192.168.0.52_Disk, 192.168.0.52_Memory, 192.168.0.52_WebSphere, 192.168.0.52_comm_app, 192.168.0.52_openspn, 192.168.0.54_CPU, 192.168.0.54_Disk, 192.168.0.54_Memory, 192.168.0.54_WebSphere, 192.168.0.64_comm_app, 192.168.0.64_openspn, 192.168.0.16_CPU, 192.168.0.16_Disk, 192.168.0.16_Memory, 192.168.0.16_smsgateway, 192.168.0.63_CPU, 192.168.0.63_Disk, 192.168.0.63_Memory, 192.168.0.63_oracle(1), 192.168.0.63_oracle(2), 192.168.0.63_oracle(3), 192.168.0.63_oracle(4), 192.168.0.63_oracle(5), 192.168.0.63_listener, 192.168.0.163_CPU, 192.168.0.163_Disk, 192.168.0.163_Memory, 192.168.0.163_snmpd, 192.168.0.13_CPU, 192.168.0.13_Disk, 192.168.0.13_Memory, 192.168.0.13_oracle(1), 192.168.0.13_oracle(2), 192.168.0.13_oracle(3), 192.168.0.13_oracle(4), 192.168.0.13_oracle(5), 192.168.0.13_listener, 192.168.0.22_CPU, 192.168.0.22_Disk, 192.168.0.22_Memory, 192.168.0.22_WebSphere, 192.168.0.22_Tomcat Monitors	last day	Edit	X

To view management reports and summaries, click the link in the Reports column above.



无限地享受无线的生活

