MIT APP INVENTOR FOR LUCK MODE:

Blocks-

BLOCK 1 — Screen Initialize
BLOCK 2 — Scan Button (find CandyGame)
BLOCK 3 — Device Found (auto-connect to CandyGame)
BLOCK 4 — Connected Successfully
BLOCK 5 — WIN Button (host confirms jackpot)
BLOCK 6 — SKIP Button (host confirms no match)
BLOCK 7 — Receive Reply from ESP32
BLOCK 8 — Safety Timeout (re-enable buttons if no reply in 5 s)
BLOCK 9 — Disconnect Button
BLOCK 10 — Disconnected Handler

open → scan → connect → win/skip → ESP32 reply → back to ready.

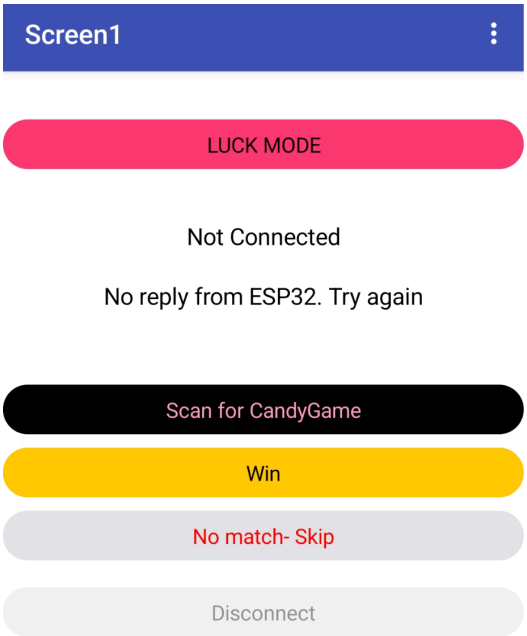

```
when Screen1 .Initialize
do  set lblstatus . Text to " Not Connected "
    set lblresulttext . Text to " Connect to the ESP32 first "
    set btnwin . Enabled to false
    set btnskip . Enabled to false
    set tndisconnected . Enabled to false
```

```
when scan .Click
do  set lblstatus . Text to " Scanning... "
    call BluetoothLE1 .StartScanning
```

```
when BluetoothLE1 .DeviceFound
do  if BluetoothLE1 . ConnectedDeviceName = " CandyGame "
    then call BluetoothLE1 .StopScanning
         set lblstatus . Text to " Connecting "
         call BluetoothLE1 .ConnectMatchingName
                                        name
```

```
when BluetoothLE1 .Connected
do  set lblstatus . Text to " Connected to CandyGame "
    set lblresulttext . Text to " Ready! Spin the slot machine "
    set btnwin . Enabled to true
    set btnskip . Enabled to true
    set tndisconnected . Enabled to true
    set scan . Enabled to false
    call BluetoothLE1 .RegisterForStrings
                                  serviceUuid " 6E400001-B5B4-4455-8D65-B8843E86D541 "
                                  characteristicUuid " 6E400003-B5B4-4455-8D65-B8843E86D541 "
                                  utf16 false
```

```
when CLOCKTIMEOUT .Timer
do set CLOCKTIMEOUT . TimerEnabled to false
   set btnwin . Enabled to true
   set btnskip . Enabled to true
   set iblresulttext . Text to " No reply from ESP32. Try again "
```

```
when tndisconnected .Click
do call BluetoothLE1 .Disconnect
```

```
when BluetoothLE1 .Disconnected
do set iblstatus . Text to " Disconnected "
   set iblresulttext . Text to " Tap Scan to reconnect "
   set btnwin . Enabled to false
   set btnskip . Enabled to false
   set tndisconnected . Enabled to false
   set scan . Enabled to true
```

```
when btnwin .Click
do call BluetoothLE1 .WriteStrings
        serviceUuid "6E400001-B5B4-4455-8D65-B8843E86D541"
        characteristicUuid "6E400001-B5B4-4455-8D65-B8843E86D541"
        utf16 false
        values "WIN"
   set lblresulttext . Text to "WIN sent! Dispensing candy.."
   set btnwin . Enabled to false
   set btnskip . Enabled to false
   set CLOCKTIMEOUT . TimerEnabled to true
```

```
when btnskip .Click
do call BluetoothLE1 .WriteStrings
        serviceUuid "6E400001-B5B4-4455-8D65-B8843E86D541"
        characteristicUuid "6E400001-B5B4-4455-8D65-B8843E86D541"
        utf16 false
        values "SKIP"
   set lblresulttext . Text to "❌ SKIP sent! No candy this round."
   set btnwin . Enabled to false
   set btnskip . Enabled to false
   set CLOCKTIMEOUT . TimerEnabled to true
```

```
when BluetoothLE1 .StringsReceived
   serviceUuid  characteristicUuid  stringValues
do set global reply to select list item list get stringValues
                                     index 1
   set CLOCKTIMEOUT . TimerEnabled to false
   if contains text "Win Done"
                piece get global reply
   then set lblresulttext . Text to "JACKPOT! Candy dispensed from all 3 slots!"
        call Notifier1 .ShowAlert
                notice "JACKPOT! Candy dispensed! 🍬🍬🍬"
   else if contains text "SKIP DONE"
                piece get global reply
   then set lblresulttext . Text to "No match. Better luck next spin"
        set btnwin . Enabled to true
        set btnskip . Enabled to true
```