

VLAN 11: 1-4  
 VLAN 2: 5-8  
 VLAN 18: 9-12

```
enable
config t

vlan 11
exit
...

interface fa0/1
  switchport mode access
  switchport access vlan 11
exit
...
```

```
show interface status
```



VLAN 11: 1-4  
 VLAN 2: 5-8  
 VLAN 18: 9-12

```
enable
config t


vlan 11
exit

interface fa0/1
  switchport mode access
  switchport access vlan 11
exit
```

```
show interface status
```

```
enable
config t

interface range fa0/1 - 4
  switchport mode access
  switchport access vlan 11
exit
```

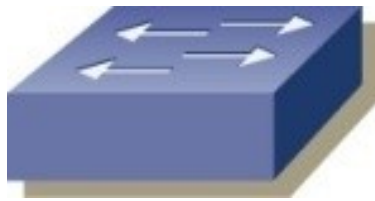

VLAN 11: 1-4  
VLAN 2: 5-8  
VLAN 18: 9-12

```
enable
config t
```

```
vlan 27
exit
```

```
interface fa0/1
switchport mode access
switchport access vlan 27
exit
```

```
show interface status
show vlan brief
show vlan id 10
show interface fa0/24 trunk
```


```
enable
config t
```

```
interface fa0/24
switchport mode trunk
```


#### albo:

```
interface fa0/24
switchport trunk encapsulation dot1q
switchport mode trunk
```

#### Konfiguracja „routera na patyku”



trunk

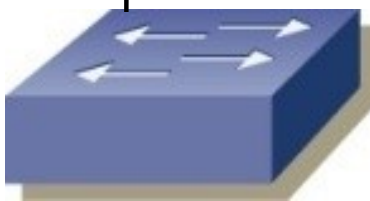

```
enable
conf t
int fa0/0.11
encapsulation dot1q 11
ip address 192.168.10.254 255.255.255.0
exit
int fa0/0.2
encapsulation dot1q 2
ip address 2.2.2.254 255.255.255.0
exit
int fa0/0
no shutdown
```