Replenish Storage Location

Last updated: 07/04/2025

- Replenish Storage Location Configuration
  - Replenish Storage Location Strategy
    - Replenish Storage Location Strategy - Attributes
  - Replenish Storage Location Criteria
    - Replenish Storage Location Criteria - Attributes
- Replenish Storage Location Override Criteria
  - Replenish Storage Location Override Criteria - Attributes
- Replenish Location Task Creation
  - Replenish Location Task Creation Strategy
  - Task Creation Template
  - Task Creation Template Sequence Criteria
- Process
  - Enter Location
    - Validations
  - Enter Item
    - Validations
  - Item Prompt
  - Enter Quantity
    - Validations
  - Execution Modes
  - Labor Transaction and Activity Tracking

This document describes the Replenish Storage Location configuration and process. This transaction can be used to replenish any storage location. The source inventory that can be replenished is identified using the replenishment strategy configured on the Allocation parameters configuration.

Replenish Storage Location Configuration

For configuring a replenish storage location mobile UI, we need the following configuration elements

- Replenish Storage Location Strategy
- Replenish Storage Location Criteria

Replenish Storage Location Strategy

The Replenish Storage Location Strategy provides the ability to perform standalone replenishment to a chosen location and for a chosen item and quantity.

Copyright © 2026 Manhattan Associates, Inc.

Replenish Storage Location Strategy - Attributes

S.No	Attribute	Description	Valid Value
1	Replenish Storage Location Strategy ID	The Replenish Storage Location Id is the Unique Identifier for the Replenish Storage Location Strategy.	-
2	Description	It is the User-defined Description of the Replenish Storage Location Strategy Created.	-

Replenish Storage Location Criteria

Each replenish storage location strategy can be tied to a replenish storage criteria via rules. Rules are based on the transaction that has to be tied to this configuration.

Replenish Storage Location Criteria - Attributes

S.No	Parameter Description	Description	Valid Values
1	ReplenishStorageLocationCriteriaId	Unique Identifier for the Replenish Storage Location Criteria.	-
2	Description	User-defined Description for Replenish Storage Location Criteria	-
3	ReplenStorageExecutionModeId	Replenished storage location can be executed in the following modes: • Create Replenishment Allocations: New replenishment allocations are created for the entered quantity. These allocations are sent to work release for the task creation process (using the default replenishment task creation strategy). The solution creates multiple replenishment allocations to meet the user-entered quantity. • Find Open Replenishment Task and Execute: The existing replenishment task for the storage location is executed. Otherwise, the solution prompts the user to enter the quantity. New replenishment allocations are created for the entered quantity. These allocations are sent to work release for the task creation process (using the default replenishment task creation strategy). The solution creates multiple replenishment allocations to meet the user-entered quantity. • Find existing tasks and execute. If not found, create one replenishment allocation: The existing replenishment task for the storage location is executed. If no tasks are available, only one replenishment allocation is created for one UOM of the configured zone. The allocation is sent to work release for the task creation process (using the default replenishment task creation strategy). • Find existing tasks and execute. If not found, create one replenishment task: The existing replenishment task for the storage location is executed. If no tasks are available, only one replenishment allocation is created for one UOM of the configured zone. The solution immediately creates a task using the 'Replenish location task creation strategy' and assigns the task to the current user for execution. • Find existing tasks and execute. If not found, prompt for replenishment quantity and then execute the task: The existing replenishment task for the storage location is executed. If no tasks are available, then the solution prompts the user to enter the quantity. The solution creates one replenishment allocation and then immediately creates a task using the 'Replenish location task creation strategy' and assigns the task to the current user for execution.	• Create Replenishment Allocations • Find Open Replenishment Task and Execute • Find existing tasks and execute. If not found, create one replenishment allocation • Find existing tasks and execute. If not found, create one replenishment task • Find existing tasks and execute. If not found, prompt for replenishment quantity and then execute the task
4	LaborActivityId	Labor activity ID used to register the user activity	Valid labor activities setup in the system
5	displayUnitOfMeasureId	Display Unit of Measure	It can be configured to be any of the valid standard UOMs
6	Use Item Display UOM	When the criteria and the override criteria display UOM is not configured then system will consider item’s display UOM. If Item is not configured with display UOM then system will use location’s capacity and storage UOM.	
7	releaseDeferredForCapacityReplenishment	Release deferred for capacity replenishments	It is a boolean flag. If it is set to Yes,, deferred for capacity replenishment allocations are released if there are no released tasks available for execution
8	releaseHeldTasks	Release held tasks	It is a boolean flag. If it is set to Yes,, held tasks are released if there are no released tasks available for execution.
9	replenishLocationTaskStrategyId	Replenish location execution task creation strategy	Tasks are created for the deferred capacity replenishment allocations based on this task creation strategy.

Replenish Storage Location Override Criteria

One or more override criteria can be defined and each override criteria can have a value of display UOM. Rules can be defined based

Copyright © 2026 Manhattan Associates, Inc.

on the location attributes.

Replenish Storage Location Override Criteria - Attributes

S.No	Parameter Description	Description	Valid Values
1	ReplenishStorageOverrideCriteriaId	An unique Identifier for the Replenish Storage Location overrides the criteria.	-
2	Description	User defined Description for Replenish Storage Location Criteria	-
3	displayUnitOfMeasureId	Display Unit of Measure	It can be configured to be any of the valid standard UOMs

Replenish Location Task Creation

Replenish location task creation configuration is used when tasks have to be created during the Replenish Location option. When deferred for capacity, replenishments are released and tasks are created or when no existing tasks or allocations exist and replenishment tasks have to be created, this task creation strategy is used.

Replenish Location Task Creation Strategy

The replenish location task creation strategy has the following attributes:

S.No	Parameter Description	Description	Valid Values
1	TaskCreationStrategyID	Unique Identifier for the Replenish Location Task Creation Strategy.	-
2	Description	User defined Description for Replenish Location Task Creation Strategy	-

Task Creation Template

One or more task creation templates can be associated to a Replenishment Location Task Creation Strategy. Strategy is tied to the criteria using rules.

S.No	Parameter Description	Description	Valid Values
1	TaskCreationTemplateID	Unique Identifier for the Replenish Location Task Creation Template.	-
2	Description	User defined Description for Replenish Location Task Creation Template	-
3	TransactionId	Transaction to be invoked when the task is executed	
4	TaskCreationStatus	Whether task has be be created in Created or Held status	Created Held
5	TaskPriority	Priority of the task created	
6	TaskSequencingMethod	Task sequencing Method	By Proximity By Rule

Task Creation Template Sequence Criteria

If the task sequencing method is configured as "By Rule", then a set of attributes can be defined on which the task details have to be sequenced.

> **Note**: The wave-based replenishments, on-demand replenishments, replenishments created during pick exceptions and the lean time replenishments all use the Replenishment Task strategy configured in Work Release. The Replenish Location Task Creation strategy is configured in pick pack component, primarily for task creation during the Replenish Location transaction, so that the transaction doesn't have to wait for work release to create tasks. Task creation happens immediately during execution of a Replenish Location transaction and the task is assigned to the current user so that it can be executed on the run.

Process

Copyright © 2026 Manhattan Associates, Inc.

Enter Location

This prompt is used to accept the location where replenishment needs to happen.

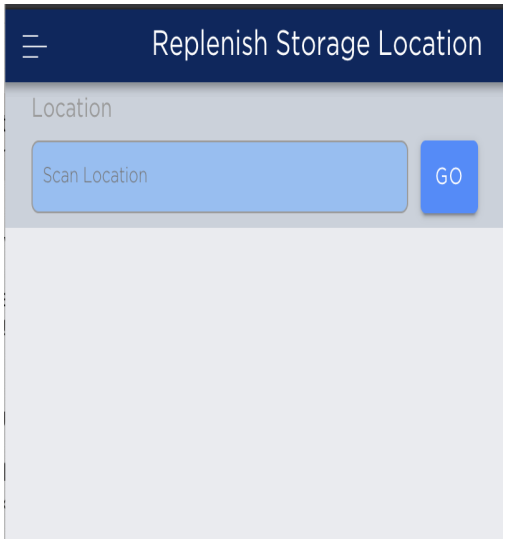

Validations

- The entered location should be a storage location.
- The location should be replenishable

Enter Item

This prompt is used to enter the item that needs to be replenished to the location.

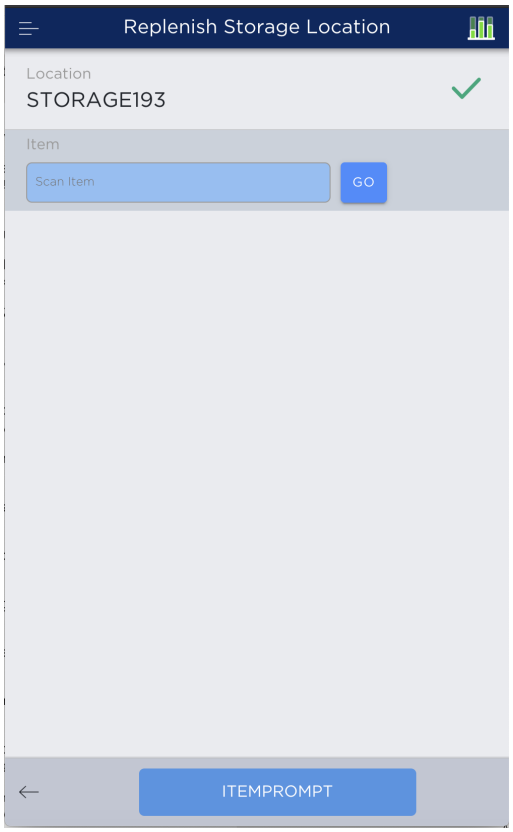

Copyright © 2026 Manhattan Associates, Inc.

Validations

- The item should be valid
- The item should be assigned to the location

> **Note**: When the scanned item barcode has multiple items available in a warehouse and multiple items are assigned to the location as well, the system will prompt the user to choose one item from the list of items. The screen is similar to the item prompt screen below.

Item Prompt

This button can be used when the user wants to view the items assigned to the location and select the required item.

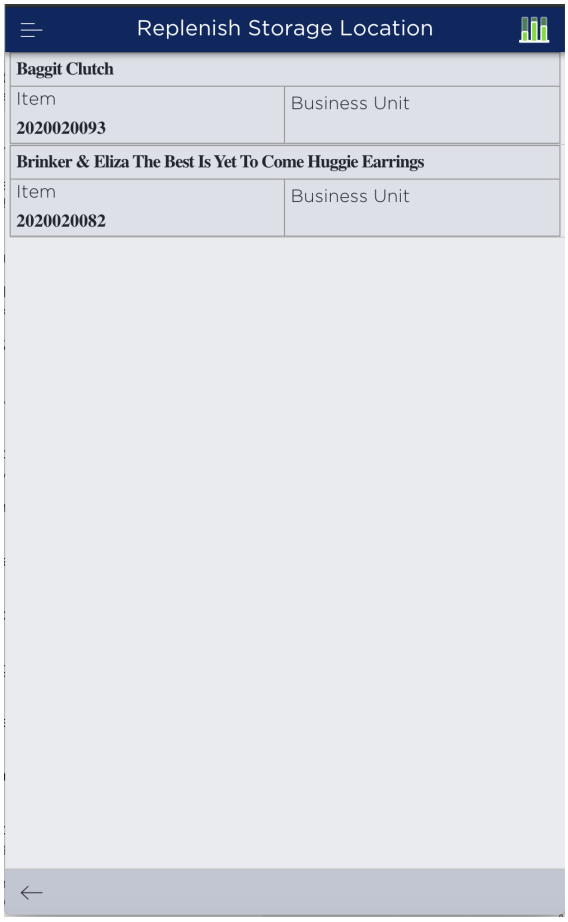

Enter Quantity

After the required item is entered or selected, the quantity screen is displayed. This screen also shows the following quantity of information:

- Current quantity
- Directed quantity
- Max quantity

The system uses the location's capacity UOM if available, else the location's storage UOM to calculate the quantity.
After calculation, all the quantities are displayed in terms of display UOM configured. If the override criteria are defined and the location satisfies the override criteria, then the display UOM is used from the override criteria. If override criteria are not defined, the

Copyright © 2026 Manhattan Associates, Inc.

display UOM is used from the replenish storage criteria.

When the criteria and override criteria display UOM is not configured, then the system will consider the item's display UOM based on the criteria parameter 'Use Item display UOM?'. If an item is not configured with a display UOM, then the system will use the location's capacity UOM. If the capacity UOM is not configured, then the system will use the location's storage UOM as a display UOM.

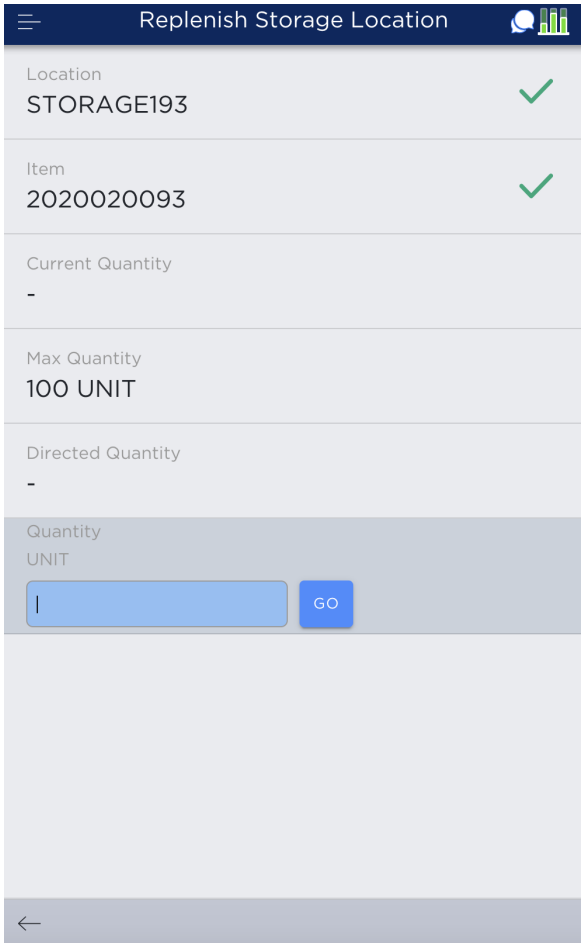

Validations

- The entered quantity should not exceed the location's capacity (Max - (Current + Directed))
- The entered quantity should be greater than 0

Execution Modes

- Create Replenishment - For the entered quantity, a replenishment request is created which is then processed by an event-based mechanism. Based on the replenishment strategy configured in the allocation parameters, a replenishment allocation is created for the entered quantity from the source location to the location that needs to be replenished. The task creation uses the default replenishment resource strategy and task creation strategy.
- Execute Replenishment Tasks - In this mode, the system tries to find an existing task that can be executed. If there is an open replenishment task for the location and item, the system will direct the user to execute the task so that the required quantity can be replenished to the location. If there are no released tasks available, then held tasks are released if the release held task parameter is set to Yes. If there are no released and held tasks and there are any deferred for capacity replenishment allocations, then those will be released if the release deferred for capacity replenishments parameter is set to Yes. Based on the replenishment execution task creation strategy, replenishment tasks are created and executed.

Copyright © 2026 Manhattan Associates, Inc.

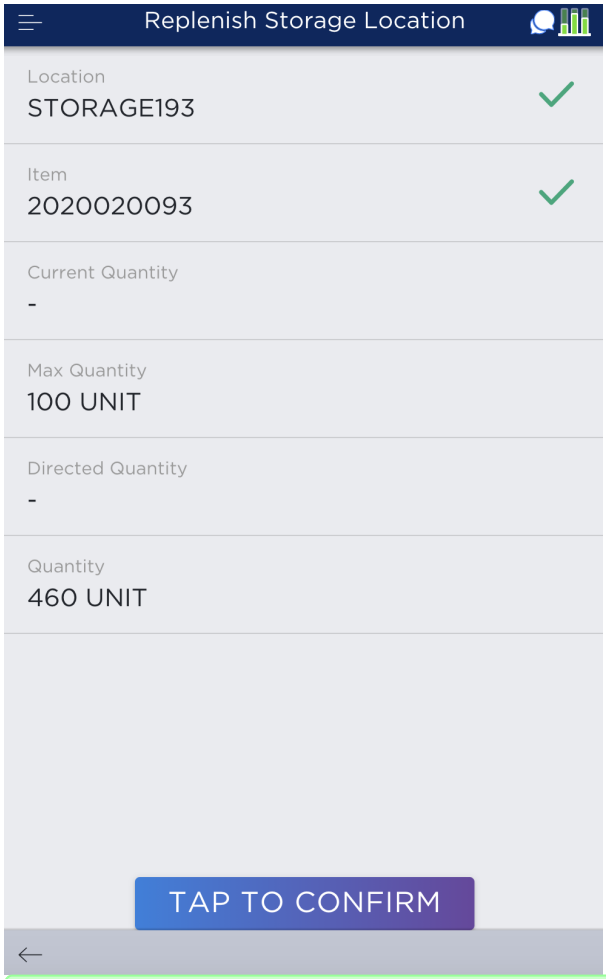

Note: If an open putaway task exists for the location, then the user is prompted to complete the putaway task so that the scanned location can be replenished.

- Execute replenishment task. If not found, create one allocation - In this mode, the system tries to find an existing task that can be executed like the previous mode. Held tasks and deferred for capacity replenishment allocations are released based on the criteria parameter if there are no released tasks available. If no tasks/allocations are found, then a new replenishment allocation is created for the location and selected item. Based on the zone priority configured in the replenishment inventory criteria configuration, one replenishment allocation is created. E.g. if the zone priority is allocated UOM as LPN, one LPN will be replenished to the location.
- Execute replenishment task. If not found, create one task- In this mode, the system tries to find an existing task that can be executed like the previous mode. Held tasks and deferred for capacity replenishment allocations are released based on the criteria parameter if there are no released tasks available. If no tasks/allocations are found, then a new replenishment allocation is created for the location and selected item. A task is also created for the allocation based on the replenishment execution task creation strategy. In the previous mode, only the replenishment request is submitted. But in this mode, a replenishment request is immediately processed and replenishment allocation is created, followed by the task. Based on the zone priority configured in the replenishment inventory criteria configuration, one replenishment allocation is created. E.g. if the zone priority is allocated UOM as LPN, one LPN will be replenished to the location. If inventory is not available or replenishment allocation creation fails due to any other reason, an error message is displayed saying "Replenishment Creation Failed".

Note: The system only considers replenishment zone priority configurations from replenishment strategy (configured in allocation parameters). Replenishment strategy parameters are not at all considered. Replenishment inventory criteria

Copyright © 2026 Manhattan Associates, Inc.

parameters like 'replenish upto need', 'replenish upto max', various 'excess need options', and dynamic replenishment parameters are not considered during replenish storage transaction execution.

Labor Transaction and Activity Tracking

A labor transaction is written for the entered location and item. Also, an activity tracking record is written to track the activity performed during the replenish storage location.

Copyright © 2026 Manhattan Associates, Inc.