Work Release Configuration

Last updated: 01/07/2026

- Order Planning Strategy
  - Sort Pack Resource Strategy
  - Replenishment Resource Strategy
  - Work Release Criteria (Work Release Template)
  - Resource Group Eligibility
  - Override Constraint
  - Picking Task Creation Strategy
  - Replenishment Task Creation Strategy
    - Task Criteria
    - Task Sequencing
    - Print Sequencing
    - Task Threshold Criteria
    - Override Threshold
    - Pick Cart Plan ID
  - Tote Template
- Resource Group Family
  - Resource Group
  - Work Resource
  - Task Group
  - Location Group
    - Work Release Parameters
- Work Release Next-up Numbers

Configuration Diagram

Copyright © 2026 Manhattan Associates, Inc.

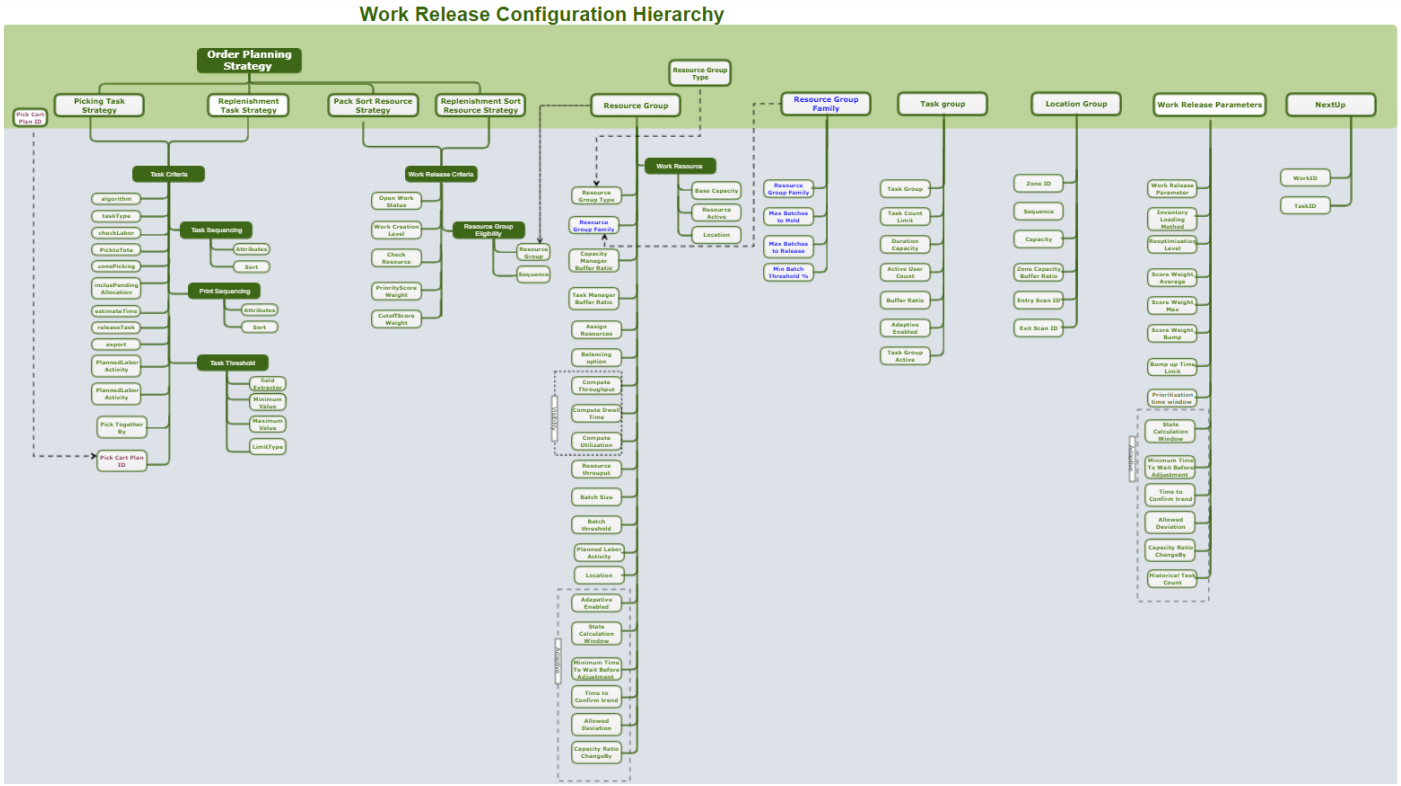

Order Planning Strategy

Order planning strategy ties all the strategies like Selection, Allocation, Replenishment, Cubing, Work Release etc., together for a wave or stream run process. Work Release has 5 strategies, namely:

- Sort Pack Resource Strategy
- Replenishment Resource Strategy
- Picking Task Strategy
- Replenishment Task Strategy
- Work Re-prioritization Strategy

Except for the work re-prioritization strategy, all four are tied to an order planning strategy. The work re-prioritization strategy is at a component level.

Sort Pack Resource Strategy

Sort Pack Resource Strategy is a grouping of parameters used to control the behavior of sort pack work (order fulfillment) managed by work release. The following are the attributes of the Sort Pack Resource Strategy. This is configured to process pick/pack and pack allocations.

Name	Description	Valid Values	Mandatory?
Sort Pack Strategy Name	Sort Pack Resource Strategy Name.	User-Defined	Yes
Sort Pack Strategy Description	A brief description of the Sort Pack Resource Strategy.	User-Defined	No
Is this your default strategy?	Defines if this strategy is default or not. Only one strategy can be a default strategy. **Note:** Work release uses the strategy selected in the Order Planning Strategy for template determination. If there is no strategy selected, then this strategy will be used.	Yes, No (Default)	No

Name	Description	Valid Values	Mandatory?
Work Release Criteria (Work Release Template)	Work Release Criteria are used to configure the aspects of work creation. This must be configured for the Sort Pack and Replenishment Resource Strategy. It is mandatory for pack, pick/pack, and replenishment allocations to have work release criteria. If it cannot be determined, then the allocation will go into a failed status.		
Name	Name of the Criteria	User-Defined	Yes
Description	Description of the Criteria	User-Defined	No
Selection Rules	Defines the rules based on which the criteria are selected	Pre-populated list of attributes	Yes
Work Release Criteria Parameters			
Work Creation Level	Regulates the level at which allocations are grouped into work For example, if set as oLPN, all allocations associated with that oLPN and sharing the same work release criteria will be grouped under one work. **Note:** This is not applicable to work release criteria under the Replenishment Resource Strategy.	Values: • Order • oLPN • Allocation • Pallet Default: Order	Yes
Open Work Status	Controls the status up to which an incoming allocation can be added to an existing work.	Values • Ready for Capacity Manager • Ready for Tasking • Ready for Distribution • Ready for Release • Released • Picking Started • Picking Completed • Work Started • Work Completed Default: Work Completed	Yes
Work Capacity Expression	Attribute or Expression that evaluates the number of units of space a single work would occupy For example, if the work is 5 units, then the work size will be set as 5.	Base-provided expressions are as follows: **Work** – 1 work – 1 work size **Total Quantity** – 1 work – Total allocation quantity as work size **Total Lines** – 1 work – Total order lines as work size Custom MVEL expressions, such as Product Class or Country of Origin, can also be configured.	Yes
Check Resource Capacity	Controls whether the capacity check should be carried out for equipment. If yes, assigning resource group(s) is recommended; otherwise, it is optional.	Yes (Default), No	Yes
Check Inventory	When this flag is set to 'Yes,' only allocations that meet these criteria and have available inventory in pick locations will be considered for tasking. If set to 'No,' all allocations meeting these criteria will be sent for tasking regardless of inventory levels.	Yes (Default), No	Yes
What weight should be given to priority while calculating work scores?	Weightage that should be given to priority while calculating a work score. Priority and cutoff weightages add up to 1.	Between 0 -1, Default - 0.5	Yes
Batch Together By	Controls the grouping of work to ensure each group is added to the same batch during Pack Wave or Resource Group Family batching. When set to "Order," all work (groups of allocations based on the work creation level) for the same order is included in a single Pack Wave or Resource Group Family batch. This facilitates packing all oLPNs for an order together.	Base-provided expressions are as follows: • None • Order Custom attributes that are part of allocation, such as OlpnId, ShipmentId, or PlannedParentContainerId, can also be configured.	No
Send Task Release event to DI?	Controls whether the Task Release Events are sent to Device Integration (DI). When this parameter is set to Yes, the solution sends the Bulk Pack Type Task Release Events to DI.	Yes (Default), No	No
Held Allocations for Capacity Manager	Selecting "Yes" keeps the status of work release allocations in "**Held for CM**". When "No" is selected, the allocations in "**Ready for CM**" will be automatically picked by the scheduler for further processing. **Note:** Selecting *Yes* activates the "**Move to Ready for CM**" button in the Work Release Allocations, Work Visibility, and Sort Pack Resource Strategy screens, allowing the selection of specific allocations to be sent to the scheduler.	Yes, No (Default)	No
Use Next up number for Work ID generation	When enabled, a next-up number is used for generating the Work ID. When disabled, a random number is used to generate the Work ID.	Yes (Default), No	Yes

Copyright © 2026 Manhattan Associates, Inc.

Name	Description	Valid Values	Mandatory?
Resource Group Eligibility	Configuration that specifies which resource group is permitted to process work based on the defined work release criteria. It needs to be configured only if the work requires a resource group for processing work. It lists the resource groups and the sequence in which resources will be considered for assignment to work. This configuration gets enabled only if the **Check Resource Capacity** in these Criteria is selected.		
Resource Group ID	Resource groups configured in the system and available for selection. Multiple resource groups can be configured for eligibility. Refer to the Resource Group section for details on configuring resource groups.		Yes
Sequence	Sequence or Priority in which the Resource group will be considered for capacity. **Note**: If multiple resource groups are configured and the resource group with higher priority does not have capacity, then the next resource group in the sequence will be considered for processing work.		Yes

Replenishment Resource Strategy

The replenishment Resource Strategy is a grouping of parameters that are used to control the behavior of replenishment work and are managed by the work release. The following are the attributes of the Replenishment Resource Strategy. This needs to be configured for processing replenishment allocations.

Name	Description	Valid Values	Mandatory?
Replenishment Resource Strategy Name	Replenishment Resource Strategy Name	User-Defined	Yes
Replenishment Resource Strategy Description	A brief description of the Replenishment Resource Strategy	User-Defined	No
Is this your default strategy?	Defines if this strategy is default or not. Only one strategy can be a default strategy. **Note:** Work release uses the strategy selected in the Order Planning Strategy for template determination. If there is no strategy selected, then this strategy will be used.	Yes, No (Default)	No
Work Release Criteria (Work Release Template)	Work Release Criteria are used to configure the aspects of work creation. This needs to be configured both for the Sort Pack and Replenishment Resource Strategy. It is mandatory for pack, pick/pack, and replenishment allocations to have work release criteria. If it cannot be determined, then the allocation will go into a failed status.		
Name	Name of the Criteria	User-Defined	Yes
Description	Description of the Criteria	User-Defined	No
Selection Rules	Defines the rules based on which the criteria are selected	Pre-populated list of attributes	Yes
Work Release Criteria Parameters			
Work Capacity Expression	Attribute or Expression that evaluates the number of units of space a single work would occupy. For example, If the work is 5 units, then the work size will be set as 5.	Base-provided expressions are as follows: **Work** – 1 work – 1 work size **Total Quantity** – 1 work – Total allocation quantity as work size **Total Lines** – 1 work – Total order lines as work size Custom MVEL expressions, such as Product Class or Country of Origin, can also be configured.	Yes
Check Resource Capacity	Controls whether capacity checks should be carried out for equipment. If yes, it is recommended to assign resource group(s), else it is optional.	Yes (Default), No	Yes
Check Inventory	When this flag is set to 'Yes,' only allocations that meet these criteria and have available inventory in pick locations will be considered for tasking. If set to 'No,' all allocations meeting these criteria will be sent for tasking regardless of inventory levels.	Yes (Default), No	Yes
What weightage should be given to the cutoff while calculating a work score?	Weightage that should be given to cutoff while calculating a work score. Cutoff and priority weightages add up to 1. **Note:** This is not applicable to work release criteria under the Replenishment Resource Strategy.	Between 0 -1 Default - 0.5	Yes

Copyright © 2026 Manhattan Associates, Inc.

Name	Description	Valid Values	Mandatory?
Batch Together By	Controls the grouping of work to ensure each group is added to the same batch during Pack Wave or Resource Group Family batching. When set to "Order," all work (groups of allocations based on the work creation level) for the same order is included in a single Pack Wave or Resource Group Family batch. This facilitates packing all oLPNs for an order together.	The base-provided expressions are as follows: • None • Order Custom attributes that are part of allocation, such as OLPNID, ShipmentID, or PlannedParentContainerID can also be configured.	No
Send Task Release event to DI?	Controls whether the Task Release Events are sent to Device Integration (DI). When this parameter is set to Yes, the solution sends the Bulk Pack Type Task Release Events to DI.	Yes (Default), No	No
Held Allocations for Capacity Manager	Selecting "Yes" keeps the status of work release allocations in "**Held for CM**". When "No" is selected, the allocations in "**Ready for CM**" will be automatically picked by the scheduler for further processing. **Note:** Selecting Yes activates the "**Move to Ready for CM**" button in the Work Release Allocations, Work Visibility, and Sort Pack Resource Strategy screens, allowing the selection of specific allocations to be sent to the scheduler.		
Use Next up number for Work ID generation	When enabled, a next-up number is used for generating the Work ID. When disabled, a random number is used to generate the Work ID.	Yes (Default), No	Yes
Resource Group Eligibility	Configuration that specifies which resource group is permitted to process work based on the defined work release criteria. It needs to be configured only if the work requires a resource group for processing work. It lists the resource groups and the sequence in which resources will be considered for assignment to work. This configuration gets enabled only if the **Check Resource Capacity** in these Criteria is selected.		
Resource Group ID	Resource groups configured in the system and available for selection. Multiple resource groups can be configured for eligibility. Refer to the **Resource Group** section for details on configuring resource groups.		Yes
Sequence	Sequence or Priority in which the Resource group will be considered for capacity. **Note**: If multiple resource groups are configured and the resource group with higher priority does not have capacity, then the next resource group in the sequence will be considered for processing work.		Yes

Work Release Criteria (Work Release Template)

Work Release Criteria are used to configure the aspects of work creation. This needs to be configured both for the Sort Pack and Replenishment Resource Strategy. It is mandatory for pack, pick/pack, and replenishment allocations to have work release criteria. If it cannot be determined, then the allocation will go into a failed status.

Name	Description	Valid Values	Mandatory?
Name	Name of the Criteria	User-Defined	Yes
Description	Description of the Criteria	User-Defined	No
What is the maximum work status till which allocations can be added to a work?	This controls the status till which an incoming allocation can be added to an existing work. **Note:** This is not relevant to replenishment work release criteria.	Values Ready for Capacity Manager Ready for Tasking Ready for Distribution Ready for Release Released Picking Started Picking Completed Work Started Work Completed Work Completed is Default	Yes

Name	Description	Valid Values	Mandatory?
What is the work creation level?	This controls the grouping level of allocations to work. For example, if set as oLPN, all allocations belonging to an oLPN and with the same work release criteria will be grouped under one work. **Note:** This is not relevant to replenishment work release criteria.	Values Order oLPN Allocation Pallet Order is Default	Yes
Do you plan to check for equipment capacity?	This controls whether capacity check should be carried out for equipment. If yes, it is recommended to assign resource group(s), else it is optional.	Yes, No (Default)	Yes
What weight should be given to priority while calculating work scores?	The weightage should be given priority while calculating a work score. It is recommended that the priority and cutoff weightages are added up to 1. **Note:** This is not relevant to replenishment work release criteria.	Between 0 -1, Default - .5	Yes
What weightage should be given to the cutoff while calculating a work score?	The weightage that should be given to cutoff while calculating work score. It is recommended that the priority and cutoff weightages are added up to 1. **Note:** This is not relevant to replenishment work release criteria.	Between 0 -1 Default - .5	Yes
Batch Together By	This controls the grouping of work such that each group is added to the same Batch during Pack Wave/Resource Group Family batching. When the value is set as "Order", all the work (group of allocations based on work creation level) for the same order will be part of the same Pack Wave/Resource Group Family batch. This helps with packing out all oLPNs of an order together.	None Order	No
Send Task Release event to DI?	Controls whether the Task Release Events are sent to Device Integration (DI). When this parameter is set to Yes, the solution sends the Bulk Pack Type Task Release Events to DI.	Yes (Default), No	No
Use Next up number for Work ID generation	When enabled, a next-up number is used for generating the Work ID. When disabled, a random number is used to generate the Work ID.	Yes (Default), No	No

Resource Group Eligibility

If the work requires a resource group for processing work, resource group eligibility needs to be configured for the work release criteria. It lists the resource groups and the sequence in which it will be considered for assignment to work.

Name	Description	Valid Values	Mandatory?
Resource Group Id	Resource group	Dropdown displays resource groups available in the component. See Resource group section on configuration of resource groups.	Yes
Sequence	Sequence	Identifies the sequence in which a resource group will be considered for capacity. For example, if the resource group does not have capacity, the second resource group will be considered for processing work.	Yes

Override Constraint

The override constraint is defined within the work release criteria (Work Release Template). It allows rules to be set up to bypass the inventory validation and enable the release of allocations that are in "Ready for CM" status when inventory is unavailable. For more information, refer to the Work Release Process Guide.

Name	Description	Valid Values	Mandatory?
Name	Enter the Override Constraint Name.	User-Defined	Yes

Name	Description	Valid Values	Mandatory?
Description	Enter Override Constraint Description.	User-Defined	No
Override Type	This controls the type of override used.	Value Inventory Constraint	Yes
Override Rules	This defines the rules to bypass the inventory check.	Attributes used in rules are from the following entities: • Work Release Allocations	

Note: This is applicable for both Pick/Pack (configured in Sort Pack Resource Criteria) and Replenishment (configured in Replenishment Resource Criteria) allocations.

Picking Task Creation Strategy

Picking Task Creation Strategy is a grouping of parameters that control how pick tasks are created, released by work release, and subsequently processed in Pick Pack. Configuration of this strategy is essential to enable tasking for pick/pack and pick allocations.

Name	Description	Valid Values	Mandatory?
Name	Name of the Strategy	User-Defined	Yes
Description	Description of the Strategy	User-Defined	No
Default	Defines if this strategy is default or not. Only one strategy can be a default strategy. **Note:** Work release uses the strategy selected in the Order Planning Strategy for template determination. If there is no strategy selected, then this strategy will be used.	Yes, No (Default)	No
Do you want to bypass failures and force release the eligible allocations?	Defines whether to force the release of eligible allocations within the wave. When set to "Yes", the eligible allocations within the wave will be released based on the threshold percentage configured. When set to "No", all the allocations within the wave will be held back from task creation and release process if there are any allocations that have failed the template assignment. **Note**: This is applicable only for **Direct Task Creation** flow.	Yes (Default), No	No
Allocation Failure Threshold for Direct Task Creation	Defines the maximum percentage of template assignment failed allocations that can be tolerated to allow the release of eligible allocations. If the percentage of the failed allocations within a wave is equal to or falls below the configured threshold, the system will bypass the failures and proceed with the task creation process for the eligible allocations. If the failure percentage exceeds the threshold, the system will not trigger the task creation process for the wave until any corrective action is taken. The values configured for this parameter can range from 0 through 1. For example, setting a threshold value of 0.2 denotes that any failures up to 20% is the maximum failure limit allowed. If the percentage of failed allocations goes beyond 20%, no allocations within the wave are released.	User-Defined The default is 1, considered as 100%	No
Task Criteria (Task Release Template)	Task Criteria are used to configure the aspects of task creation. This needs to be configured both for the Picking Task Creation Strategy and the Replenishment Task Strategy. It is mandatory for pick, pick/pack, slotting, and replenishment allocations to have task criteria. Allocations that do not have the task criteria will not be considered for tasking.		
Name	Name of the Criteria	User-Defined	Yes
Description	Description of the Criteria	User-Defined	No
Selection Rules	Defines the rules based on which the criteria are selected	Pre-populated list of attributes	Yes
Task Criteria Parameters			
Construction Heuristic	Defines the construction heuristic used to build the initial solution for task generation. If set to RULE, the initial solution will be constructed using the task threshold, sequencing, and break criteria. If set to REGRET, the initial solution will be constructed using the regret insertion algorithm. Note: If the construction heuristic is configured, it takes priority over the work release parameter configuration.	RULE, REGRET	No

Copyright © 2026 Manhattan Associates, Inc.

Name	Description	Valid Values	Mandatory?
Task Creation Method	Controls whether the tasks are created through rules or pick path optimization.	Values Rule-based System optimized Default: Rule-based	Yes
Should the system check for Labor availability when releasing the task?	Select 'Yes' if the tasks are to be released based on labor constraints. Note: Labor constraints are defined in the task group configuration. Refer to the **Task group** section for more details.	Yes, No (Default)	Yes
Bypass capacity	Select 'Yes' if the task has to be released even if the task group capacity is full. If 'No' is selected, then the task will not be released until the task group has capacity. **Note**: Releasing the task will still consume capacity from that task group. This is enabled only when the attribute "Should the system check for Labor availability when releasing the task?" is set to "Yes".	Yes, No (Default)	No
What Should the Task Execution Mode be?	Task Execution Mode represents the kind of transaction to be used during task execution.	Values Pick into Cart Pick into iLpn Pick into oLPN Pick into Tote Default: Pick into oLPN	Yes
Pick Cart Plan ID	Indicates the Pick cart plan to be used during task creation. **Note**: This is enabled only when the Task Execution Mode is set to '**Pick into Cart**' Refer to the **Pick Cart Plan** configuration section on how to configure **Pick Cart Plan**.	Pre-populated list of Pick Cart Plans	Yes
Should the Task be Auto Completed?	Controls whether the system should automatically complete the created task. **Note**: This is enabled only when the Task Execution Mode is set to Pick into oLPN	Yes, No (Default)	No
Task together by	Set 'oLPN' if the allocations of an oLPN are to be grouped under the same task. If set to 'None', the allocations of an oLpn can be part of different tasks. **Note**: This is enabled only when the Task Execution Mode is set to **Pick into Tote.** The recommendation is to set this value as oLPN when the Task Creation Method is set as System optimized.	Values None oLPN	No
Should the System Enable Zone Picking?	Select if this criteria is configured for Zone Picking.	Yes, No (Default)	No
Should task creation consider allocations that are not yet ready for tasking?	Select 'Yes' if task creation should include allocations intended for future tasking within the same task, which may not be immediately available due to inventory or resource constraints.	Yes, No (Default)	No
Should the system estimate task time duration?	Select 'Yes' if the system should estimate task time for the created task.	Yes, No (Default)	No
Transaction for the Task	Indicates the transaction to be used during task execution by the user in the warehouse.	Values Pick To Tote Pick To oLPN Pull iLPN Pick to Cart Pick To Multi-Need Container Pull iLPN and Aggregate Across oLPNs	Yes
Planned Labor Activity	Indicates the Labor activity to be considered during task time estimate. **Note**: Mandatory to configure this if the value for 'Should the system estimate task time duration?' is set to Yes.	Default Picking Activity	Yes
Should the system export tasks?	Select 'Yes' to export tasks along with task details (allocations) for execution in Pick Pack. If set to 'No,' only task details will be exported. **Note**: Some transactions, like '**Make Pick Cart**,' require only allocations (task details) without the full task. This feature enables sending only the allocations to Pick Pack.	Yes (Default), No	No
How many allocations should be further looked upon to add to the task?	Controls the number of allocations to look ahead if task capacity is exceeded. **Note**: This is not relevant for pick path optimization.	User-Defined Default is 0	No

Copyright © 2026 Manhattan Associates, Inc.

Name	Description	Valid Values	Mandatory?
Should the system release task?	Select ‘Yes’ to release tasks for execution. If set to ‘No’, the tasks will be in Held status until manually released.	Yes (Default), No	No
What should be the priority of the task?	Priority of the Task	0 to 99 **Note**: 0 is the highest priority, while 99 will be the lowest.	Yes
Should the system ignore batches during task creation	Select 'Yes' to allow allocations from the batch to be grouped with other allocations during task creation. If set to 'No,' all allocations from a batch will be combined into a single task.	Yes, No (Default)	No
Send Task Release event to DI?	Controls whether the Task Release Events are sent to Device Integration (DI). When this parameter is set to Yes, the system sends the Pick, Pick/Pack Type Task Release Events to DI.	Yes (Default), No	No
Should the system evaluate Full Container Allocated for Multi Item iLPN?	Select 'Yes' persist task details and evaluate if the task includes allocations from a Multi-Item LPN. If the entire iLPN is allocated and all allocations are within the same task, the system will set fullContainerAllocated as True in TaskDetails.	Yes, No (Default)	No
When do you want to release the task group capacity?	Controls whether the task group capacity is released upon task picking completion or as each task is started by the user.	Values Release capacity on task completion Release capacity on task start Default: Release capacity on task completion	No
What group of allocation should be picked together for the same task?	The logical entity against which all the allocations should be grouped together in the same task. **Note**: This is honored for tasks that are created via pick path optimization.	Values None Order oLPN Work No default is none.	Yes
Task Sequencing	Task sequencing is configured as part of task criteria to determine the order of allocations during task creation. If multiple attributes are specified, allocations are sorted according to each attribute in the sequence they appear on the screen. For **rule-based** task creation, sequencing criteria can be configured to sequence allocations. If no specific criteria are set, the default sequencing will be by allocation ID. For **System-Optimized** task creation, this option is disabled. In this case, sequencing and task creation are automatically based on travel distance to optimize efficiency.		
Criteria	Attribute on which the sequencing is based.	Pre-populated list of attributes	No
Sequencing	Controls the order in which allocations are sequenced.	Ascending (Default), Descending	No
Print Sequencing	Print sequencing is configured as part of the task criteria to control the sequencing of task details within the task. If multiple attributes are specified, task details are sequenced according to their order of appearance on the screen. **Note:** It is not recommended to specify the print sequencing criteria for **System Optimized** task creation.		
Criteria	Attribute on which the sequencing of task details is based.	Pre-populated list of attributes	No
Sequencing	Controls the order in which task details are sequenced.	Ascending (Default), Descending	No
Task Threshold	The task threshold is configured as part of the task criteria, though specifying them is optional. These attributes define the minimum and maximum thresholds that must be met to ensure valid task creation. For **Rule based** task creation, it is recommended to align the attributes in Task Threshold with those used in Task Sequencing.		
Limit Type	Used to group tasks based on the specific type of limit applied	Value Distinct Limit Capacity Limit Range Limit Feasibility	Yes
Attribute	Attribute on which the tasks are grouped	Pre-populated list of attributes	Yes

Copyright © 2026 Manhattan Associates, Inc.

Name	Description	Valid Values	Mandatory?
Minimum Value	Minimum threshold to be met for the task to be created	User-Defined Mandatory in the case of Range Limit Type Not mandatory for Distinct and Capacity Limit Types Not Applicable to the Feasibility Limit Type	No
Maximum Value	Maximum threshold to be met for the task to be created	User-Defined Mandatory for Range, Distinct, and Capacity Limit Types Not Applicable to the Feasibility Limit Type	No
Tote Template	The Tote Template is configured as part of the task criteria and is enabled only when the Task Execution Mode is set to 'Pick into Cart.' The Tote Template specifies the Tote Type, attributes, and thresholds for grouping allocations within the same tote. It also defines the minimum and maximum thresholds that must be met to ensure the creation of valid totes. Note: This is enabled only when the Task Execution Mode is set to ***Pick into Cart.*** Refer to the Work Release Process Guide.		
Tote template ID	Name of the Tote Template	User-Defined	Yes
Tote type	Specifies the type of Tote	Pre-populated list of Tote types	Yes
Tote together attribute	The logical entity against which all the allocations should be grouped together in the same tote.	Values None Order oLPN Work Default: None	Yes
Tote Template Criteria			
Tote Criteria Limit Type	Used to group allocations in a tote based on the specific type of limit applied	Value Distinct Limit Capacity Limit Range Limit Feasibility	Yes
Tote Criteria Field Extractor	The attributes on which the allocations in a tote are grouped	Pre-populated list of attributes	Yes
Tote Criteria Minimum Limit Value	Minimum threshold to be met for the tote to be created	User-Defined Mandatory in the case of Range Limit Type Not mandatory for Distinct and Capacity Limit Types Not Applicable to the Feasibility Limit Type	No
Tote Criteria Maximum Limit Value	The maximum threshold to be met for the tote to be created	User-Defined Mandatory for Range, Distinct, and Capacity Limit Types Not Applicable to the Feasibility Limit Type	No
Override Threshold	Override Threshold is configured as part of the task criteria, allowing rules to be set that override the minimum task threshold and force the release of allocations when the minimum threshold is not met.		
Name	Name of the Override Threshold	User-Defined	Yes
Description	Description of the Override Threshold	User-Defined	No
Override Type	Types of constraints that can be overridden during task creation	Pre-populated list of attributes	Yes
Override Rules	Defines the rules to override the minimum task threshold during task creation	Pre-populated list of attributes	Yes
Use Next up number for Task ID generation	When enabled, a next-up number is used for generating the Task ID. When disabled, a random number is used to generate the Task ID.	Yes(Default), No	Yes

Replenishment Task Creation Strategy

This controls the Replenishment task that will be created and released by Work Release and subsequently processed in Pick Pack.

This needs to be configured to ensure tasking for Replenishment Allocations.

Name	Description	Valid Values	Mandatory?
Replenishment Task Strategy Name	Replenishment Task Strategy Name	User-Defined	Yes
Replenishment Task Strategy Description	A brief description of the Replenishment Task Strategy	User-Defined	No
Is this your default strategy?	Defines if this strategy is default or not. Only one strategy can be a default strategy. **Note:** During template determination, if the task criteria are not determined by allocation's original strategy, the work release will use the default strategy to determine the task criteria.	Yes, No (Default) In the case of replenishment for a stream mode, only a default replenishment strategy will be used. It is advised to maintain a default strategy for replenishment.	No
Direct Task Creation	Controls whether tasks should be created directly or follow the standard work release process, including work creation, scoring, and checking of constraints (Resource, Inventory, Task group).	Yes, No (Default) When set to 'Yes', the standard work release processes will be skipped and the tasks will be created directly.	Yes

Task Criteria

The replenishment and picking task strategy are associated with one or multiple task criteria. It carries the attributes which control the tasks that are to be created, released, and executed. Allocation that does not have the task criteria will not be considered for tasking. The task criteria have the following attributes:

Name	Description	Valid Values	Mandatory?
Task Criteria Name	Enter Task Criteria Name.	User-Defined	Yes
Task Criteria Description	Enter Task Creation Criteria Description.	User-Defined	No
Should the system check for labor availability when releasing the task?	If tasks are to be released based on labor constraints, then select yes. **Note**: The labor constraints are defined in the task group configuration.	Yes, No (Default)	Yes
Is this a pick to tote task? (**Note**: Not relevant for replenishment)	Select yes if the task execution requires picking items for a tote. **Note:** This is not relevant to replenishment task criteria.	Yes, No (Default)	Yes
Are these tasks executed through zone picking? (**Note**: Not relevant for replenishment)	This controls whether the task criteria are for zone picking. **Note:** This is not relevant to replenishment task criteria. The zone picking configuration is defined in the location group configuration.	Yes, No (Default)	Yes
Should the system release tasks?	If yes, the system releases tasks for execution. If not, the system holds back tasks at work and releases the status "READY FOR RELEASE".	Yes (Default), No	No
Should task creation consider allocations that are not yet ready for tasking?	The task creation can hold allocations which can be tasked for other allocations which can be part of the same task but are not yet ready for tasking (due to inventory or resource constraints)?	Yes, No (Default)	Yes
Should the system estimate task time durations?	This controls the task time estimation that should be done for tasks.	Yes, No (Default)	Yes
What is the planned labor activity of tasks on this template?	This controls labor activity (for example. Pick) planned for tasks on this task criterion. **Note**: It is mandatory to provide this value if the estimated task time duration is set yes.	Labor activity dropdown	Yes

Copyright © 2026 Manhattan Associates, Inc.

Name	Description	Valid Values	Mandatory?
Should the system export tasks?	This controls the release level for a task. If yes, then the tasks are exported for execution. If not, then allocation is sent. **Note**: Certain transactions like "Make Pick Cart" require allocations alone to be present and not the task. This feature allows only the allocation to be sent over to Pick Pack.	Yes (Default), No	No
What is the destination of the task?	This controls the destination of a task. This is Location ID value as maintained in the DC Inventory Location	It should be the location where the task is dropped off.	Yes
What should be the Task Type for these tasks?	Specify the task type for the task criteria.	It should be a valid task type as defined in the Pick Pack configuration.	
Which method should be used to create tasks?	This controls whether the tasks are created through rules or pick path optimization.	Values Rule Based Pick Path Optimization Default is Rule Based	Yes
How many allocations should be further looked upon to add to the task?	This controls the number of allocations to look further if task capacity is exceeded. **Note:** This is not relevant for pick path optimization.	User-Defined Default is 0	No
What group of allocation should be picked together for the same task?	The logical entity against which all the allocations should be grouped together in the same task. **Note:** This is honored for tasks that are created via pick path optimization. This is not relevant to replenishment task criteria.	Values None Order oLPN Work No default is none.	Yes
Pick Cart Plan ID	This controls the pick cart ID. This is relevant if the task is a pick to tote set as no.	List of values from the Pick Cart Plan ID	
Should the Task be Auto Completed?	This controls whether the task created should be auto-completed by the system.	True False	No
Should the system ignore batches during task creation?	This controls whether the system should combine allocations within a task irrespective of the batch ID stamped on it.	True False	No
Send Replenishment Task Release event to DI ?	When this is set to Yes, the system sends the Task Release Events to DI. Allowed Values: Yes and No. Default: Yes The parameter controls the flow of Replenishment type Task release messages to DI.	Yes, No	No

Copyright © 2026 Manhattan Associates, Inc.

Name	Description	Valid Values	Mandatory?
Should the system evaluate Full Container Allocated for Multi Item iLPN?	When this is set as True, while persisting the task details at Pick Pack Component, system evaluates whether the task has allocations from a Multi Item LPN and if the entire iLPN is allocated and all the allocations are in the same task, then system sets fullContainerAllocated as True at TaskDetails.	Yes, No (Default)	No
Task together by	This controls whether all the allocations of an oLPN are grouped together in the same task when task execution mode is set to **Pick to Tote**. • **None/Null**: Doesn't group allocations of an oLPN to the same task. • **oLPN**: Groups all allocations part of the same oLPN to the same task. Let's consider the following scenario: • Allocation1 and Allocation2 are of oLPN1 • Allocation3 and Allocation4 are of oLPN2 When the **oLPN** option is selected, the system groups Allocation1 and Allocation2 to Task1, and Allocation3 and Allocation4 are grouped into either Task1 or to a new task based on the task threshold configuration in the task release template.	NONE, oLPN	No
When do you want to release the task group capacity?	Defines whether the task group capacity is released after the task is pick completed or as and when the task is started.	Release capacity on task completion (Default), Release capacity on task start	
Construction Heuristic	Defines the construction heuristic used to build the initial solution for task generation. If set to RULE, the initial solution will be constructed using the task threshold, sequencing and break criteria. If set to REGRET, the initial solution will be constructed using the regret insertion algorithm. If the construction heuristic is configured in task release template, it takes the priority over the work release parameter configuration.	RULE, REGRET	No
How do you want to split the allocation during task creation?	Controls how the allocations are split during the task creation process. Valid Values: • Break by maximum capacity threshold: The allocations are split based on the maximum capacity value defined in the task threshold configuration. • Break by UOM: The allocations are split into a single shippable UOM. **Note:** This is not relevant to picking task creation criteria and applies only to replenishment. This is applicable for both replenishment and recall allocations.	• Break by maximum capacity threshold • Break by UOM	No
Use Next up number for Task ID generation	When enabled, a next-up number is used for generating the Task ID. When disabled, a random number is used for generating the Task ID.	Yes(Default), No	Yes

Task Sequencing

Task sequencing is configured as a part of task criteria. Task sequencing is used to sequence the allocations for task creation. If

multiple attributes are specified, the allocations are sorted based on all the attributes in the order they appear on the screen. If the task creation is “System Optimized”, the task sequencing criteria will not be considered. The sequencing and task creation are done based on the travel distance. If the task creation is “Rule based”, then the sequencing criteria can be configured to sequence the allocations. If no criteria are configured, a default sequencing for the allocation ID will be used during task creation.

Name	Description	Valid Values	Mandatory?
Criteria	Attribute to sorting	Pre-populated list of attributes	Yes
Sequencing	Controls how attributes are sequenced	Ascending Descending Ascending is default	Yes

Print Sequencing

This controls the sorting of the task details after task creation. The attributes that are available for task creation are also available for sequencing. If multiple attributes are specified, then the task details are sorted based on the order in which they appear on the screen. Print sequencing is configured as a part of task criteria.

Note: It is not relevant to specify the print sequencing criteria for picking path optimization.

Name	Description	Valid Values	Mandatory?
Criteria	Attribute to sorting	Pre-populated list of attributes	Yes
Sequencing	Controls how attributes are sequenced	Ascending Descending Ascending is default	Yes

Task Threshold Criteria

The task threshold criteria specify the maximum and the minimum threshold that should be met to ensure that the task is valid. The maximum conditions control the break criteria, that is the capacity (or other constraints) at which the task should be sealed and a new task should be created. For example, if a template has a criterion which specifies a maximum of 25 lb per task. As the allocations are added to the task, a check will be made if the addition will make the task go above 25 lb. If yes, then the task will be broken and the allocation will be added to a new task, else the allocation will be added (provided no other maximum criteria are violated) to the current task. The task threshold criteria are configured as a part of the task criteria. It is not mandatory to specify the task threshold criteria.

If a rule based algorithm is used, ensure that the allocations are sequenced by the attributes which are specified in the task threshold criteria. For example, if the task should not exceed 4 oLPNs, ensure that the allocation is sequenced by the oLPN in the task sequence criteria. For Pick Path optimization, no such sequencing is required. To achieve the same in pick path optimization, set “Group together by” attribute as oLPN in task criteria.

Name	Description	Valid Values	Mandatory?
Limit Type	This controls the limit type.	Value Distinct Limit Capacity Limit Range Limit Feasibility	Yes
Attribute	This controls the attribute	Pre-populated list of attributes	Yes
Maximum Value	Maximum value of attribute	User-Defined	No
Minimum Value	Minimum value of attribute	User-Defined	No

Limit Type “Feasibility” allows using mathematical expressions as the attribute while configuring the threshold criteria. You can define expressions to achieve results, such as having only a unique country of origin for an item within a task. Import the required expression to work release. Set the limit type as feasibility and the attribute as the imported expression label.

If the Limit Type is set as "Capacity Limit", the system requires the Minimum Value field to be configured as a numeric value (i.e. 0).

Copyright © 2026 Manhattan Associates, Inc.

The field cannot be null.

If the Limit Type is set to "Distinct Limit", the system requires the Minimum Value field to be configured as null.

Override Threshold

The override threshold is configured as part of the task criteria. Rules can be configured to override the minimum task threshold and force the release of allocations in "Ready for Tasking" status when the minimum threshold is not met.

Name	Description	Valid Values	Mandatory?
Name	Enter the Override Threshold Name.	User-Defined	Yes
Description	Enter Override Threshold Description.	User-Defined	No
Override Type	This controls the type of override used.	Value Minimum Threshold	Yes
Override Rules	This defines the rules to override the minimum task threshold during task creation.	Attributes used in rules are from the following entities: • Work Release Allocations • oLPN	

Pick Cart Plan ID

This allows for defining the pick cart configuration for oLPN pick carts. The configuration represents the physical layout of the cart. The configuration follows the hierarchy. A pick cart contains one or more slots. Each slot may have multiple sub-slots.

Name	Description	Valid Values	Mandatory
Pick Cart Plan ID	Pick Cart Plan ID	User-Defined	Yes
Description	Brief description of the pickup cart	User-Defined	No
What is the type of pick cart ?	This controls the pickup cart type.	oLPN	Yes
Each pick cart must have at least one slot. The slot details that can be configured are:			
Slot ID	Enter slot Id (typically a barcode associated with the slot).	User-Defined	Yes
Slot Width	Enter Slot Width	User-Defined	Yes
Slot Depth	Enter slot Depth	User-Defined	Yes
Slot Height	Enter slot Height	User-Defined	Yes
Each slot can have one or more sub-slots.			
Sub-Slot ID	Enter sub-slot Id	User-Defined	No
priority	Controls the priority of sub-slot consumption.	User-Defined	No

Tote Template

The Tote Template defines the layout and organization of totes within a pick cart. It can be created and assigned to picking and replenishment tasks to standardize tote placement and improve task efficiency.

You can perform the following tasks:

- Assign an existing Tote Type to the template
- Configure rules
- Assign the threshold criteria for the Tote Template

> **Note**: You must select the *Pick into Cart* option from the ***Task Execution Mode*** drop-down to enable the Tote Template configuration.

When you click ***Create*** on the Tote Template step, you must specify the following details:

- Template ID of the Tote template in the **Tote template ID** field
- Tote type from the ***Tote type*** drop-down list

> **Note**: To configure a Tote Type, go to the Menu search bar and search for Tote Types. Click ***Create*** from the Tote Types screen, enter the required details, and click ***Save and Finish***.

- One of the following values from the ***Tote together attribute*** drop-down list.
  - Work: To assign the template for the work release task.
  - OLPN: To assign the template to oLPN.
  - Order: To assign the template to an order.

By default, ***None*** is selected from the drop-down list.
You can specify the values from the ***Attribute*** and ***Operator*** drop-down lists and enter a value in the ***Value*** field to define additional rules for the template.
For example, select iLPN.weight and < from the **Attribute** and **Operator** drop-down lists and enter *10* in the ***Value*** field to define a rule to check whether the ilpn weight is less than 10. The system automatically calculates the Unit of measure (UOM) for the Weight attribute.
You can click ***Add New*** and define the threshold criteria for the Tote Template using the ***Limit Type*** and ***Field Extractor*** drop-down lists. To define the criteria, you must select one of the following values from the *Limit Type* drop-down list:

- Capacity: Determines the minimum and maximum value that the template uses. For example, if you select item.weight from the **Field Extractor** drop-down list, and enter 2 and 10 in the minimum and maximum value fields, then the total item weight in a task should be at least two and cannot exceed 10.
- Distinct Value: Determines how many distinct values the template considers. For example, if you select itemID from the ***Field Extractor*** drop-down list and enter 5 in the maximum value field, then the task can only have five distinct item IDs.
- Feasibility: allows using mathematical expressions as the attribute while configuring the threshold criteria.
- Range: Determines the range (max-min difference) values that the template uses. For example, if user selects Priority as the attribute name and 5 as the limit value; tasks created cannot have AIDs where the minimum and maximum priority values cannot be more than 5 units apart.

> **Note:** If you do not specify the minimum value, then the system assigns Zero as the value in the ***Minimum Value*** field.

Click ***Save and Finish***. The tote template is created with the specified values and criteria.

Resource Group Family

This allows the defining the resource group family, which is a collection of resource groups that make up a single batch-eligible entity. An example of a resource group family would be the resource groups that make up an entire unit sorter equipment (as batching for pack waves happens at the unit sorter level), attributes where the work will get processed.

Name	Description	Valid Values	Mandatory
Resource Group Family Name	Resource group family	User-Defined	Yes
Resource Group Family Description	Brief description of the Resource Group Family	User-Defined	No
Maximum batches to release	The maximum number of batches that can be in progress (not yet completed) for the given family	User-Defined	Yes
Maximum Batches to Hold	The maximum number of batches that the system should hold back from release at any time for the given family	User-Defined	Yes

Name	Description	Valid Values	Mandatory
Minimum batch size threshold for release	The minimum size of a batch that is allowable to be released, in terms of a percentage of the active resource capacity	User-Defined	Yes
Should the batches be held for manual release?	This flag controls whether the batches created by the system should be automatically released by the system or manually released by the user.	True False	No

Resource Group

This allows the defining resource groups attributes where the work will get processed. Prior to resource group configuration, configure resource group. This controls the resource group type with which the resource group is associated. For example, Unit Sorter and Putwall. In addition, configure resource group family first, if using.

Name	Description	Valid Values	Mandatory
Resource Group Name	Resource group	User-Defined	Yes
Resource Group Description	Brief description of the Resource Group	User-Defined	No
What is the Resource Group type?	This controls the resource group type with which the resource group is associated. For example: Unit Sorter and Putwall.	Pick the value from the entity resource group type	Yes
To which Resource Group Family does this Resource Group belong, if any?	When selected, work is amassed and released as a single batch for the selected resource group family (e.g., for a whole unit sorter). If there is no resource group, family-level batching is required, leave this field blank.	Picks the value from the entity resourcegroup family	No
Should the system assign the resources to this Resource Group up front?	This controls whether a system should assign resources to work. Not required if a Resource Group Family is set	Yes, No Default is No	Yes
How should the system distribute the work to the resources in this Resource Group?	This controls the "how" of resource assignment. Required if resource assignment is set as true. **Only required if the assigned resource is set to yes**. Not required if a Resource Group Family is set	Value Balance Across Capacity Maximize Available Capacity Default is Balance Across Capacity.	No
What is the Capacity Manager Buffer Ratio?	This controls the amount of additional work, over and above base capacity, that will be considered for tasking.	User-Defined	Yes
What is the Task Manager Buffer Ratio?	This controls the amount of additional work, over and above base capacity, that will be actually released to the floor. Not required if a Resource Group Family is set	User-Defined	Yes
Resource Group Capacity Threshold	This specifies the minimum percentage of available capacity required to release work to a resource group. If the threshold is not met, work is not released. See Work Release Process Guide.	User-Defined	Yes
Should the system auto-determine the buffer ratio?	If enabled, the system will automatically adjust the buffer ratios based on historical data.	Yes, No (Default)	Yes
What is the mandatory lag (minutes) between consecutive buffer ratio adjustments?	Mandatory lag between consecutive buffer ratio adjustments Only required if the auto-determined buffer ratio is set to yes.	User-Defined	No
If there is a trend (up or down) in this resource group's processing rate, after how many minutes is the trend worthy of an adjustment to the buffer capacity ratio?	Time to wait to confirm a trend (increase and decrease buffer ratio) before making any adjustments. **Only required if the auto-determined buffer ratio is set to yes**	User-Defined	No
What is the allowable tolerance of this resource group's expected throughput rate?	Any deviation within this specified limit will not be considered for trend. **Only required if the auto-determined buffer ratio is set to yes**	User-Defined	No
By how many percentage points should the system adjust the buffer capacity ratio during an adjustment?	This controls the increments by which the buffer ration will be increased or decreased. **Only required if the auto-determined buffer ratio is set to yes**	User-Defined	No
Do you want to compute throughput for the resource group?	Enabling this will provide throughput metrics for this resource group on a visibility dashboard.	Yes (Default), No	Yes
Do you want to compute dwell time for the resource group?	Enabling this will provide dwell time metrics for this resource group on the visibility dashboard.	Yes (Default), No	Yes
Do you want to compute utilization for the resource group?	Enabling this will provide utilization metrics for this resource group on a visibility dashboard.	Yes (Default), No	Yes
What is the goal number of work records completed per hour for each resource in this group?	This will be used as goal throughput in the visibility dashboard.	User-Defined	Yes
What is the maximum batch size, in terms of number of work records, that the system can release for this resource group?	This controls the batch size. Not required if a Resource Group Family is set	User-Defined	No

Copyright © 2026 Manhattan Associates, Inc.

Name	Description	Valid Values	Mandatory
What is the staging location for the Resource Group?	This controls the staging for Resource Group. This needs to be the value as maintained in location id attribute of the location entity in the DC Inventory.	User-Defined	Yes
What is the planned labor activity for employees working with this resource?	This controls labor activity (e.g., SORT) planned for this Resource Group.”	User-Defined	Yes
What is the minimum allowable batch size the system can release, as a percentage of the maximum batch size?	This controls the minimum batch size that can be released for the resource group. Only required if the maximum batch size is > 0, and not required if a Resource Group Family is set	Between 0-1 Default 1.	Yes

Work Resource

Each resource group consists of one or more work resources. Work resources are the atomic units such as chutes and putwall where the work gets processed. As the work release receives packing feedback, it receives the work resources where the work is being processed. It is important that the work resources are modeled in work release. If not, the feedback will be ignored and will result in work release reflecting improper work status.

Note: Ensure that the resources configured in the component have a matching resource name in Pick Pack for the pack station and the putwall flow.

Name	Description	Valid Values	Mandatory
Resource Name	Name of the Work Resource	User-Defined	Yes
Capacity of the Work Resource in terms of work records	Capacity of resources in terms of # work	User-Defined	Yes
Whether the Work Resource is enabled or disabled	If a resource is inactive, it is not counted towards available capacity.	Yes, No Yes is Default	Yes
What is the staging location for the Resource Group?	This controls the staging for work resources. This needs to be the value as maintained in the location ID attribute of the location entity in the DC Inventory.	User-Defined	No
Maximum number of units	This is the maximum number of units allowed when assigning work to this resource. It is only available if a Resource Group Family is set.	User-defined	No
Maximum allowable volume	This is the maximum volume allowed when assigning work to this resource. It is only available if a Resource Group Family is set.	User-defined	No
Maximum allowable weight	This is the maximum weight allowed when assigning work to this resource. It is only available if a Resource Group Family is set.	User-defined	No

Task Group

The task group configuration allows for defining configurations where task release is subject to constraints based on the number of

Copyright © 2026 Manhattan Associates, Inc.

pickers or duration capacity. With each work release, the entity is refreshed with the latest data from Labor Management (LM). If a new task group is added, then ensure that the task group configuration (Task Group, Task group Eligibility) exists in the Task Assignment.

Note: The task groups are synched up with Task Assignment and LM for every run of work release.

Name	Description	Valid Values	Mandatory
Task Group ID for the Task Group	Identifies the Task Group	User-Defined	Yes
Number of Active users in the Task Group	Number of Active users in the Task Group	This is determined based on the clocked-in users from LM	Yes
Should the system auto-determine task group capacity buffer ratio?	This controls adaptive configuration. The system automatically adjusts the buffer ratios based on the historical data. **Only required if the number of tasks is set to 0.**	Yes, No	Yes
What is the Task Group capacity buffer Ratio?	Task Capacity Buffer ratio **Only required if the number of tasks is set to 0.**	User-Defined	Yes
How many tasks should be released for this task group?	Maximum number of open tasks.	User-Defined	Yes
Maximum number of open minutes?	If configured, the total of open minutes for a task group does not exceed this value. The total open minutes correspond to tasks that are released and yet to be completed.	User-Defined	Yes
Should the task group be considered for tasking?	Only active Task Groups are considered for assignment to tasks.	Yes, No	Yes

Location Group

The location group configuration allows you to configure for scenarios where the task release is subject to zone container capacity constraints. All the zone for zone picking should be configured in work release.

Name	Description	Valid Values	Mandatory
Unique key to identifying Pick Zone	Zone Name	User-Defined	Yes
Indicate the sequence in which Zones are visited	Zone Sequence	User-Defined	Yes
Capacity for the zone in terms of Containers	This specifies the capacity of the Zone in terms of containers (it can be totes or oLPNs).	User-Defined	Yes
Additional buffer for number of containers	This controls how much additional containers, over and above base zone capacity, are to be considered for tasking.	User-Defined	Yes
WCS Scanner ID for the entry point of the Zone	Entry Scan ID	User-Defined	Yes
WCS Scanner ID for the exit point of the Zone	Exit Scan ID	User-Defined	Yes

Work Release Parameters

This has parameters which are at work release component level. It stores default values and technical parameters. It is mandatory to configure work release parameters.

Name	Description	Valid Values	Mandatory

Keep Together By	This parameter allows you to use a logical entity to group allocations to the same Work Release Batch ID and creates tasks only when all allocations that belong to the same group are in *Ready for CM* status. • **None:** No attribute-based grouping happens on the allocations. • **Shipment**: The allocations that belong to the same shipment are grouped into the same work release batch ID. • **Pallet**: The allocations that belong to the same pallet are grouped into the same work release batch ID. **Notes:** • You can use the *Save keepTogetherBy* API to add an extended attribute to the **Keep together by** drop-down menu. Specify Extended.<*attribute_name*> in the KeepTogetherById parameter. The specified extended attribute is displayed in the drop-down menu. • The **Keep wave together** flag should not be enabled when the **Keep together by** flag is set to Shipment, Pallet, or Extended Attribute options. • This is applicable only for non-bulk (Pick/Pack) allocations.	NONE, Pallet, Shipment	No
Inventory Loading Method	This controls the inventory that is loaded from the inventory component for inventory checks by the capacity manager. As inventory data is fetched from a different component, this parameter allows you to control inventory fetch in two modes. ALL_PENDING_REPL - Loads inventory for all the pending replenishment inventory. PENDING_REPL_ITEM_LOCATIONS - Loads inventory only for the required item location pairs in the current capacity manager run.	ALL_PENDING_REPL PENDING_REPL_ITEM_LOCATIONS Default is ALL_PENDING_REPL	Yes

Copyright © 2026 Manhattan Associates, Inc.

Reoptimization Level	This parameter allows the facility to optimize work allocations throughout the day so that the system can create tasks for the assigned resources. Only relevant for non-bulk allocations. Work release can reoptimize the work, and during re-optimization, you can apply a new Sort Pack and a 'Picking Task Creation' template to each allocation. For example, Work release assigns the configured templates when the wave is run. However, if you set the re-optimization flag, then the Work release reassigns the Sort Pack or Picking task template. • Pre Capacity Manager: The system considers all the work release allocations marked in Ready for CM and assigns a new work release template. • Capacity Manager: The system considers all the work release allocations marked in Ready for Tasking and reassigns the Sort Pack and Task Rule Manager, changes the allocation to Waiting for CM status if there is no inventory, and nullifies both Sort Pack and Picking Task Creation strategies during the next scheduler run. • Task Rule Manager: The system considers all the work release allocations marked in Ready for Tasking and nullifies the task template if no task is assigned to the allocation. The system reevaluates the Picking Task Creation Rule rule and assigns the new template.	By default, set to No Reoptimization. Valid Values: • Pre Capacity Manager • Capacity Manager • Task Rule Manager
Reprioritize Open Replenishment Tasks	This parameter allows the system to consider replenishment allocations(tasked but not started and non- tasked) for the item location combinations corresponding to yet to be released pick pick allocations ordered by descending score . For those pick pack allocations needing replenishment and quantity on the allocation is less than on the replenishment allocation, system copies the score on the pick pack allocation onto the replenishment allocation and triggers task re-priotization based on the new replenishment score. Note - This parameter is considered only when inventory check is enabled and only no bulk pick pack allocations are considered	

Copyright © 2026 Manhattan Associates, Inc.

<table>
<tr><td>Allocation Distribution Across work release templates</td><td>This parameter is used to load allocations across eligible templates up to the scheduler record limit value.
• Prorated: Uses the distribution logic and the specified record limit value to calculate the allocations for each run, and assigns the highest number of allocations to the template that has the highest number of open allocations.
• Balanced: Distributes allocations equally among all templates. Any excess allocations are distributed among all templates equally.
The following table depicts the allocations when the record limit is set to 10000, and the distribution among 5 templates:
<table>
<tr><th>Template</th><th>Open Allocations</th><th>Prorated - Allocations loaded</th><th>Balanced - Allocations loaded</th></tr>
<tr><td>A</td><td>10000</td><td>4000</td><td>2000</td></tr>
<tr><td>B</td><td>6000</td><td>2400</td><td>2000</td></tr>
<tr><td>C</td><td>4000</td><td>1600</td><td>2000</td></tr>
<tr><td>D</td><td>3000</td><td>1200</td><td>2000</td></tr>
<tr><td>E</td><td>2000</td><td>800</td><td>2000</td></tr>
</table></td><td>Valid Values:
• Prorated
• Balanced
By default, set to Prorated.</td><td></td></tr>
<tr><td>Score Allocations</td><td>When set to 'No', the system does not score the allocations. Any recalculation of score that happens within the workflow is not propagated to the allocations.</td><td>Yes/No
Default is Yes.</td><td></td></tr>
<tr><td>Weight for Average Contribution to Allocation Score</td><td rowspan="2">The tasks comprise allocations. An overall score for a task is achieved by looking at the average score and maximum score.
The two parameter guides as to how much weightage should be given to each of them</td><td rowspan="3">User-Defined
Each attribute has a default value of .33334. The sum of all the three weights should always be 1.</td><td>Yes</td></tr>
<tr><td>Weight for Max Contribution to Allocation Score</td><td>Yes</td></tr>
<tr><td>Weight for Bump Up Contribution to Allocation Score</td><td>A bump up score is calculated for the task. It is driven by the aging of allocation presents in the task. The parameter guides as to how much weightage should be given to the bump-up score.</td><td>Yes</td></tr>
<tr><td>Bump Score Limit (in min)</td><td>This value should be in minutes. This controls the aging of allocation, i.e. if an allocation has been in a status for more than this time, it is scored higher to reflect the aging.</td><td>Yes</td><td></td></tr>
<tr><td>Skip Allocation Estimates</td><td>When this parameter is turned on, system will not send allocation estimates. Allocation estimates are not required for non order streaming flows since Task Estimates are immediately sent to Labor</td><td>Yes/No</td><td></td></tr>
</table>

Copyright © 2026 Manhattan Associates, Inc.

Allow feedback for Direct Task Creation	When enabled, the system propagates the events from the execution component to the work release, and the pick/pack tasks and the corresponding work release allocations are canceled when: • The allocated iLPN is not counted or counted in another location during the cycle count. • The user selects the De-allocate action from the iLPNs screen.	Yes/No	
The following parameters control the adaptive configuration at the component level. The same parameters are also in the resource group. If, adaptivity is enabled for the resource group and values are maintained, it takes priority to the values maintained below:			
Prioritization Time Window (in seconds)	This controls the prioritization time window. Among other conditions, only those work records that have been prioritized before this window are considered for re-prioritization.	User-Defined Default is 1800	Yes
Stats Calculation Time Window (seconds)	Time window to consider for adaptive stats calculation (in seconds)	User-Defined Default is 0	Yes
What is the mandatory lag (minutes) between consecutive buffer ratio adjustments?	Mandatory lag between consecutive buffer ratio adjustments. If a specific value is not maintained at resource group level, the system uses it as a default value.	User-Defined Default is 180	No
If there is a trend (up or down) in this resource group's processing rate, after how many seconds is the trend worthy of an adjustment to the buffer capacity ratio?	Time to wait to confirm a trend (Increase/Decrease Buffer ratio) before making any adjustments. If a specific value is not maintained at resource group level, the system uses it as a default value.	User-Defined Default is 900	No
What is the allowable tolerance for the expected throughput rate?	Range between 0-1. Any deviation within this specified limit is not considered for trend. If a specific value is not maintained at resource group level, the system uses it as a default value.	User-Defined Default is .2	No
By how many percentage points should the system adjust the buffer capacity ratio during an adjustment?	Range between 0-1. Any deviation within this specified limit is not considered for trend. If a specific value is not maintained at resource group level, the system uses it as a default value.	User-Defined Default is .1	No

Copyright © 2026 Manhattan Associates, Inc.

Historical Task Count	This is the limit of the historical task Count used for Task Group Adaptive Logic. It is relevant if auto-computation of task group buffer capacity is enabled. This controls the number of historical tasks the system should investigate while determining the task counts for the task group.	User Defined Default is 51	No
Stop sending Labor Estimates?	When this parameter is enabled, system will not send any labor estimate (both allocation and task time)	boolean	No
Enable Business Unit-level processing?	When this parameter is enabled, the system will process the work release allocations at the Business Unit level. **Note:** To avoid invalid configuration, this parameter must be consistent across all the profiles (both business unit-level and facility level). Mixed settings within the same facility will default the processing at facility level.	Yes/No Default is No.	No

Work Release Next-up Numbers

The next configuration allows the user to configure **work, task id and pick cart id** generation. This allows the user to configure the work and task ids in a manner which is more meaningful to their implementation. The user can define prefix, range, increments, etc. for work and task ids.

Refer to Next-up Numbers Configurations.