Inertial Filter

Component Design Document

1 Description

Inertial attitude filter. Estimates the body attitude and body rate from the star tracker attitude and rate with a square root unscented Kalman filter, and publishes the estimate for the guidance and control algorithms. The filter state, the variance of each state, and the residuals of each measurement are published as data products. The filter synchronizes its time to the first tick after it is built or reset and propagates from there, so the star tracker time tag and the tick's call time must be on the same clock. Wraps the InertialFilterAlgorithm C++ algorithm via its C shim.

2 Requirements

No requirements have been specified for this component.

3 Design

3.1 At a Glance

Below is a list of useful parameters and statistics that give a quick look into the makeup of the component.

- **Execution** - *passive*
- **Number of Connectors** - 6
- **Number of Invokee Connectors** - 4
- **Number of Invoker Connectors** - 2
- **Number of Generic Connectors** - *None*
- **Number of Generic Types** - *None*
- **Number of Unconstrained Arrayed Connectors** - *None*
- **Number of Commands** - *None*
- **Number of Parameters** - 8
- **Number of Events** - *None*
- **Number of Faults** - *None*
- **Number of Data Products** - 4
- **Number of Data Dependencies** - 1
- **Number of Packets** - *None*

3.2 Diagram

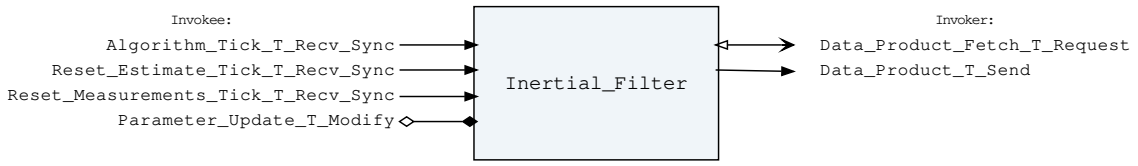


Figure 1: Inertial Filter component diagram.

3.3 Connectors

Below are tables listing the component's connectors.

3.3.1 Invokee Connectors

The following is a list of the component's *invokee* connectors:

Table 1: Inertial Filter Invokee Connectors

Name	Kind	Type	Return_Type	Count
Algorithm_Tick_T_Recv_Sync	recv_sync	Algorithm_Tick.T	-	1
Reset_Estimate_Tick_T_Recv_Sync	recv_sync	Tick.T	-	1
Reset_Measurements_Tick_T_Recv_Sync	recv_sync	Tick.T	-	1
Parameter_Update_T_Modify	modify	Parameter_Update.T	-	1

Connector Descriptions:

- **Algorithm_Tick_T_Recv_Sync** - Run the filter up to the tick's call time, folding in a fresh star tracker reading when there is one.
- **Reset_Estimate_Tick_T_Recv_Sync** - Re-seed the filter state and covariance from the configured initial values and clear the pending measurements and residuals. The filter synchronizes its time again at the next tick. The assembly fires this on every entry to the navigation state, where the filter is first put into use.
- **Reset_Measurements_Tick_T_Recv_Sync** - Clear the pending measurements and residuals, keeping the filter state and covariance. The filter synchronizes its time again at the next tick. The assembly fires this on every transition between pointing states.
- **Parameter_Update_T_Modify** - The parameter update connector.

3.3.2 Invoker Connectors

The following is a list of the component's *invoker* connectors:

Table 2: Inertial Filter Invoker Connectors

Name	Kind	Type	Return_Type	Count
Data_Product_Fetch_T_Request	request	Data_Product_Fetch.T	Data_Product_Return.T	1

Data_Product_T_Send	send	Data_Product.T	-	1

Connector Descriptions:

- **Data_Product_Fetch_T_Request** - Fetch a data product item from the database.
- **Data_Product_T_Send** - The data product invoker connector

3.4 Interrupts

This component contains no interrupts.

3.5 Initialization

Below are details on how the component should be initialized in an assembly.

3.5.1 Component Instantiation

This component contains no instantiation parameters in its discriminant.

3.5.2 Component Base Initialization

This component contains no base class initialization, meaning there is no `init_Base` subprogram for this component.

3.5.3 Component Set ID Bases

This component contains commands, events, packets, faults, or data products that require a base identifier to be set at initialization. The `set_Id_Bases` procedure must be called with the following parameters:

Table 3: Inertial Filter Set Id Bases Parameters

Name	Type
Data_Product_Id_Base	Data_Product_Types.Data_Product_Id_Base
Parameter_Id_Base	Parameter_Types.Parameter_Id_Base

Parameter Descriptions:

- **Data_Product_Id_Base** - The value at which the component's data product identifiers begin.
- **Parameter_Id_Base** - The value at which the component's parameter identifiers begin.

3.5.4 Component Map Data Dependencies

This component contains data dependencies that need their IDs mapped to valid data product IDs at initialization. Each data dependency also needs a stale limit provided in microseconds. If the timestamp of the data dependency is older than the reference time (usually the current time) minus the stale limit then the data dependency is considered too old to safely use. The `map_Data_Dependencies` procedure must be called with the following parameters:

Table 4: Inertial Filter Map Data Dependencies Parameters

Name	Type
Star_Tracker_Attitude_Id	Data_Product_Types.Data_Product_Id

Star_Tracker_Attitude_Stale_Limit	Ada.Real_Time.Time_Span

Parameter Descriptions:

- **Star_Tracker_Attitude_Id** - The external data product ID used to fetch the value for the 'Star_Tracker_Attitude' data dependency.
- **Star_Tracker_Attitude_Stale_Limit** - The stale limit used for the 'Star_Tracker_Attitude' data dependency. If the fetched data product is older than the given Time_Span then it is deemed stale and unfit for use by the component.

3.5.5 Component Implementation Initialization

The calling of this implementation class initialization procedure is mandatory. Initializes the inertial filter with the default parameter values, which seed the filter state and covariance. The `init` subprogram takes no parameters.

3.6 Commands

The Inertial Filter component has no commands.

3.7 Parameters

Parameters for the Inertial Filter component. The process noise and the initial covariance are given by their diagonals, since the full matrices do not fit in a parameter.

Table 5: Inertial Filter Parameters

Local ID	Parameter Name	Type	Default Value
0x0000 (0)	Alpha	Packed_F64.T	(Value=>0.02)
0x0001 (1)	Beta	Packed_F64.T	(Value=>2.0)
0x0002 (2)	Process_Noise_Diagonal	Packed_F64x6.T	[1.0E-14, 1.0E-14, 1.0E-14, 1.0E-16, 1.0E-16,1.0E-16]
0x0003 (3)	Initial_State	Packed_F64x6.T	[0.0,0.0,0.0, 0.0,0.0,0.0]
0x0004 (4)	Initial_Covariance_Diagonal	Packed_F64x6.T	[1.0E-4,1.0E-4,1.0E-4, 1.0E-4,1.0E-4,1.0E-4]
0x0005 (5)	St_Measurement_Noise_Std	Packed_F64.T	(Value=>1.0E-4)
0x0006 (6)	Rate_Measurement_Noise_Std	Packed_F64.T	(Value=>0.001)
0x0007 (7)	Measurement_Delay	Packed_F64.T	(Value=>0.0)

Parameter Descriptions:

- **Alpha** - [-] Sigma point spread. Must be in (0, 1].
- **Beta** - [-] Prior knowledge tunable. Must be in [0, 2].

- **Process_Noise_Diagonal** - [-] Diagonal of the N x N process noise covariance, one entry per state: the attitude MRP followed by the body rate. Every entry must be finite and not negative.
- **Initial_State** - [-] State the filter is seeded with, the attitude MRP followed by the body rate in rad/s. Must be finite.
- **Initial_Covariance_Diagonal** - [-] Diagonal of the N x N covariance the filter is seeded with, one entry per state. Every entry must be finite and not negative.
- **St_Measurement_Noise_Std** - [-] Standard deviation of the star tracker attitude measurement noise. Must be greater than zero.
- **Rate_Measurement_Noise_Std** - [rad/s] Standard deviation of the rate measurement noise. Must be greater than zero.
- **Measurement_Delay** - [s] Processing delay for late readings. A reading is applied only once the filter time has reached its time tag plus the delay. Both readings come from the one star tracker product, so they always arrive in time order and zero, which applies every reading at once, is the right setting until a source with another latency is added. The filter queue holds five readings and two arrive per tick, so it holds the readings of two ticks: a delay that holds a reading past the tick after the one it arrives on drops readings. Must not be negative.

3.8 Events

The Inertial Filter component has no events.

3.9 Data Products

Data products for the Inertial Filter component.

Table 6: Inertial Filter Data Products

Local ID	Data Product Name	Type
0x0000 (0)	Attitude_Estimate	Nav_Att_Output.T
0x0001 (1)	Filter_State	Inertial_Filter_State.T
0x0002 (2)	St_Att_Residuals	Inertial_Filter_Fit_Residuals.T
0x0003 (3)	Rate_Residuals	Inertial_Filter_Fit_Residuals.T

Data Product Descriptions:

- **Attitude_Estimate** - Estimated body attitude and body rate, stamped with the time the filter advanced to. The sun direction is not estimated by this filter and is zero.
- **Filter_State** - The filter state after the update, the variance of each state, and the system time of the last star tracker reading applied.
- **St_Att_Residuals** - Star tracker attitude residuals of this update, with whether that measurement fired.
- **Rate_Residuals** - Rate residuals of this update, with whether that measurement fired.

3.10 Data Dependencies

Data dependencies for the Inertial Filter component.

Table 7: Inertial Filter Data Dependencies

Data Dependency Name	Type
Star_Tracker_Attitude	St_Att.T

Data Dependency Descriptions:

- **Star_Tracker_Attitude** - Star tracker attitude and body rate in the body frame, with the time tag of the measurement on the system clock. Both are fed to the filter as measurements when the time tag has advanced since the last reading consumed.

3.11 Packets

The Inertial Filter component has no packets.

3.12 Faults

The Inertial Filter component has no faults.

4 Unit Tests

The following section describes the unit test suites written to test the component.

4.1 *Inertial_ Filter_ Tests* Test Suite

This is a unit test suite for the Inertial Filter component

Test Descriptions:

- **Test** - Feed a constant star tracker attitude and check the estimate converges to it while the covariance shrinks, as in the algorithm's Python reference test, to ensure the Ada to C to C++ integration is sound. The filter state and residual products report the update and its time.
- **Test_Rate_Update** - Feed a constant body rate about one axis with the attitude that rotation gives, and check the rate estimate converges to it while the attitude tracks the truth.
- **Test_Propagation** - Ensure a star tracker product whose time tag has not advanced is not fed to the filter, so the estimate holds and the covariance carries the process noise.
- **Test_Reset** - Ensure the estimate reset re-seeds the state and covariance while the measurements reset keeps them.
- **Test_Reading_Before_Sync** - Ensure a star tracker reading not refreshed since before a reset is not consumed again, one stamped before the tick the filter synchronized its time to is consumed and dropped, and a later one is applied.
- **Test_Time_Anomalies** - Ensure a reading stamped after the tick is applied at once without shutting out the readings that follow for good, and a product stale between star tracker solutions is still read.
- **Test_Parameter_Update** - Ensure a parameter update reaches the filter while keeping the current estimate, with the new seed showing only at the next estimate reset.
- **Test_Reset_Applies_Pending_Parameters** - Ensure an estimate reset applies a configuration that was updated but not yet ticked, so the filter restarts from the new seed.
- **Test_Reset_Measurements_Applies_Pending_Parameters** - Ensure a measurements reset applies a configuration that was updated but not yet ticked while keeping the estimate, so a new delay holds the readings that follow.
- **Test_Measurement_Delay** - Ensure a configured measurement delay holds a reading until the filter time has reached its time tag plus the delay, then applies it.

- **Test_Invalid_Parameter** - Ensure a staged configuration the algorithm would reject is refused at validation.
- **Test_Invalid_Data_Dependency** - Ensure a data dependency with the wrong identifier is treated as a wiring defect and fails the tick's assertion.

5 Appendix

5.1 Preamble

This component contains no preamble code.

5.2 Packed Types

The following section outlines any complex data types used in the component in alphabetical order. This includes packed records and packed arrays that might be used as connector types, command arguments, event parameters, etc..

Algorithm_Tick.T:

The tick an algorithm component runs on, with the time the algorithm propagates to already converted to nanoseconds. The component that dispatches the algorithm ticks converts the tick time once and hands the same value to every algorithm it runs in that tick, so the clock the algorithms propagate on is chosen in exactly one place.

Table 8: Algorithm_Tick Packed Record : 144 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Current_Tick	Tick.T	-	80	0	79
Call_Time	Interfaces.Unsigned_64	0 to 18446744073709551615	64	80	143

Field Descriptions:
- **Current_Tick** - The tick as scheduled. Algorithm components stamp their data products with its time and use it as the stale reference for their data dependencies.
- **Call_Time** - [ns] The time the algorithm propagates to, in nanoseconds of the tick time.

Data_Product.T:

Generic data product packet for holding arbitrary data types

Table 9: Data_Product Packed Record : 1096 bits *(maximum)*

Name	Type	Range	Size (Bits)	Start Bit	End Bit	Variable Length
Header	Data_Product_Header.T	-	72	0	71	-
Buffer	Data_Product_Types.Data_Product_Buffer_Type	-	1024	72	1095	Header.Buffer_Length

Field Descriptions:
- **Header** - The data product header

- **`Buffer`** - A buffer that contains the data product type

Data_Product_Fetch.T:

A packed record which holds information for a data product request.

Table 10: Data_Product_Fetch Packed Record : 16 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Id	Data_Product_Types. Data_Product_Id	0 to 65535	16	0	15

Field Descriptions:
- **`Id`** - The data product identifier

Data_Product_Header.T:

Generic data_product packet for holding arbitrary data_product types

Table 11: Data_Product_Header Packed Record : 72 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Time	Sys_Time.T	-	48	0	47
Id	Data_Product_Types. Data_Product_Id	0 to 65535	16	48	63
Buffer_Length	Data_Product_ Types.Data_Product_ Buffer_Length_Type	0 to 128	8	64	71

Field Descriptions:
- **`Time`** - The timestamp for the data product item.
- **`Id`** - The data product identifier
- **`Buffer_Length`** - The number of bytes used in the data product buffer

Data_Product_Return.T:

This record holds data returned from a data product fetch request.

Table 12: Data_Product_Return Packed Record : 1104 bits *(maximum)*

Name	Type	Range	Size (Bits)	Start Bit	End Bit	Variable Length
The_ Status	Data_ Product_ Enums. Fetch_ Status.E	0 => Success 1 => Not_Available 2 => Id_Out_Of_Range	8	0	7	-
The_ Data_ Product	Data_ Product. T	-	1096	8	1103	-

Field Descriptions:

- **The_Status** - A status relating whether or not the data product fetch was successful or not.
- **The_Data_Product** - The data product item returned.

Inertial_Filter_Fit_Residuals.T:

Residuals of one measurement kind from one inertial filter update, before and after the update. Built from the residuals the inertialFilter C shim returns, without the measured value, which is already published by the sensor product.

Table 13: Inertial_Filter_Fit_Residuals Packed Record : 392 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Valid	Boolean	0 => False 1 => True	8	0	7
Pre_Fit	Packed_F64x3.T	-	192	8	199
Post_Fit	Packed_F64x3.T	-	192	200	391

Field Descriptions:

- **Valid** - Whether this measurement fired and was applied this update. The residuals are meaningful only when it did.
- **Pre_Fit** - [-] Residual before the update.
- **Post_Fit** - [-] Residual after the update.

Inertial_Filter_State.T:

State of the inertial filter after an update, the estimated state, the variance of each state, and when the last star tracker reading was consumed. Built from the snapshot the inertialFilter C shim returns, with the N x N covariance reduced to its diagonal.

Table 14: Inertial_Filter_State Packed Record : 832 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
State	Packed_F64x6.T	-	384	0	383
Covariance_Diagonal	Packed_F64x6.T	-	384	384	767
Last_Measurement_Time	Interfaces.Unsigned_64	0 to 18446744073709551615	64	768	831

Field Descriptions:

- **State** - [-] Estimated state, the body attitude MRP followed by the body rate in rad/s.
- **Covariance_Diagonal** - [-] Diagonal of the state covariance, the variance of each state.
- **Last_Measurement_Time** - [ns] System time of the last star tracker reading consumed by the filter, zero until one arrives after the filter is built or reset. Tells when the star tracker last fed the filter once this product is sampled into a packet.

Nav_Att_Output.T:

Table 15: Nav_Att_Output Packed Record : 352 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Time_Tag	Long_Float	-inf to inf	64	0	63
Sigma_Bn	Packed_F32x3.T	-	96	64	159
Omega_Bn_B	Packed_F32x3.T	-	96	160	255
Veh_Sun_Pnt_Bdy	Packed_F32x3.T	-	96	256	351

Field Descriptions:

- **Time_Tag** - [s] Time tag of navigation solution
- **Sigma_Bn** - MRP attitude of body w.r.t. inertial frame
- **Omega_Bn_B** - [rad/s] Angular velocity of body w.r.t. inertial, body frame components
- **Veh_Sun_Pnt_Bdy** - Sun direction unit vector in body frame

Packed_F32x3.T:

Packed 3 element vector of 32-bit floats.

Table 16: Packed_F32x3 Packed Array : 96 bits

Type	Range	Element Size (Bits)	Length	Total Size (Bits)
Short_Float	-3.40282e+38 to 3.40282e+38	32	3	96

Packed_F64.T:

Single component record for holding packed 64-bit floating point number.

Table 17: Packed_F64 Packed Record : 64 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Value	Long_Float	-inf to inf	64	0	63

Field Descriptions:

- **Value** - The 64-bit floating point number.

Packed_F64x3.T:

Packed 3 element vector of 64-bit floats.

Table 18: Packed_F64x3 Packed Array : 192 bits

Type	Range	Element Size (Bits)	Length	Total Size (Bits)
Long_Float	-inf to inf	64	3	192

Packed_F64x6.T:

Packed 6 element vector of 64-bit floats.

Table 19: Packed_F64x6 Packed Array : 384 bits

Type	Range	Element Size (Bits)	Length	Total Size (Bits)
Long_Float	-inf to inf	64	6	384

Parameter.T:

Generic parameter packet for holding a generic parameter

Table 20: Parameter Packed Record : 792 bits *(maximum)*

Name	Type	Range	Size (Bits)	Start Bit	End Bit	Variable Length
Header	Parameter_ Header.T	-	24	0	23	-
Buffer	Parameter_ Types. Parameter_ Buffer_Type	-	768	24	791	Header.Buffer_ Length

Field Descriptions:

- **Header** - The parameter header
- **Buffer** - A buffer that contains the parameter type

Parameter_Header.T:

Generic parameter header for holding arbitrary parameters

Table 21: Parameter_Header Packed Record : 24 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Id	Parameter_Types. Parameter_Id	0 to 65535	16	0	15
Buffer_Length	Parameter_Types. Parameter_Buffer_ Length_Type	0 to 96	8	16	23

Field Descriptions:

- **Id** - The parameter identifier
- **Buffer_Length** - The number of bytes used in the parameter type buffer

Parameter_Update.T:

A record intended to be used as a provide/modify connector type for updating/fetching parameters.

Table 22: Parameter_Update Packed Record : 824 bits *(maximum)*

Name	Type	Range	Size (Bits)	Start Bit	End Bit	Variable Length

Table_Id	Parameter_Types.Parameter_Table_Id	0 to 65535	16	0	15	-
Operation	Parameter_Enums.Parameter_Operation_Type.E	0 => Stage 1 => Update 2 => Fetch 3 => Validate 4 => Discard	8	16	23	-
Status	Parameter_Enums.Parameter_Update_Status.E	0 => Success 1 => Id_Error 2 => Validation_Error 3 => Length_Error	8	24	31	-
Param	Parameter.T	-	792	32	823	-

Field Descriptions:

- **Table_Id** - The ID for the table that contains this parameter
- **Operation** - The parameter operation to perform.
- **Status** - The parameter return status.
- **Param** - The parameter that has been updated or fetched.

St_Att.T:

Table 23: St_Att Packed Record : 256 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Time_Tag	Interfaces.Unsigned_64	0 to 18446744073709551615	64	0	63
Sigma_Bn	Packed_F32x3.T	-	96	64	159
Omega_Bn_B	Packed_F32x3.T	-	96	160	255

Field Descriptions:

- **Time_Tag** - [ns] Time tag associated with measurement
- **Sigma_Bn** - [-] MRP from inertial to body frame
- **Omega_Bn_B** - [rad/s] Body-frame angular velocity w.r.t. inertial

Sys_Time.T:

A record which holds a time stamp using EMA VTC format including seconds and subseconds since epoch (1-5-1980 to 1-6-1980 midnight).

Table 24: Sys_Time Packed Record : 48 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Seconds	Interfaces. Unsigned_32	0 to 4294967295	32	0	31
Subseconds	Interfaces. Unsigned_16	0 to 65535	16	32	47

Field Descriptions:

- **Seconds** - The number of seconds elapsed since epoch.
- **Subseconds** - The number of 1/(2^16) sub-seconds.

Tick.T:

The tick datatype used for periodic scheduling. Included in this type is the Time associated with a tick and a count.

Table 25: Tick Packed Record : 80 bits

Name	Type	Range	Size (Bits)	Start Bit	End Bit
Time	Sys_Time.T	-	48	0	47
Count	Interfaces. Unsigned_32	0 to 4294967295	32	48	79

Field Descriptions:

- **Time** - The timestamp associated with the tick.
- **Count** - The cycle number of the tick.

5.3 Enumerations

The following section outlines any enumerations used in the component.

Data_Product_Enums.Fetch_Status.E:

This status denotes whether a data product fetch was successful.

Table 26: Fetch_Status Literals:

Name	Value	Description
Success	0	The data product was returned successfully.
Not_Available	1	No data product is yet available for the provided id.
Id_Out_Of_Range	2	The data product id was out of range.

Parameter_Enums.Parameter_Operation_Type.E:

This enumeration lists the different parameter operations that can be performed.

Table 27: Parameter_Operation_Type Literals:

Name	Value	Description
Stage	0	Stage the parameter.

Update	1	All parameters are staged, it is ok to update all parameters now.
Fetch	2	Fetch the parameter.
Validate	3	Validate all the parameters.
Discard	4	Discard any parameters staged by this table that have not been updated.

Parameter_Enums.Parameter_Update_Status.E:

This status enumeration provides information on the success/failure of a parameter operation.

Table 28: Parameter_Update_Status Literals:

Name	Value	Description
Success	0	Parameter was successfully staged.
Id_Error	1	Parameter id was not valid.
Validation_Error	2	Parameter values were not successfully validated.
Length_Error	3	Parameter length was not correct.