



Technical University of Munich
Max Planck Institute of Quantum Optics

An atom-photon quantum gate using an atomic clock qubit and a birefringent cavity

Leart Zuka

Thesis submitted within the M.Sc. Condensed Matter Physics

Supervisor: Prof. Dr. Gerhard Rempe
Second Examiner:

April 14, 2026

Abstract

Single atoms coupled to optical cavities provide a powerful platform for photonic quantum information processing. Minimizing the influence of external factors like magnetic field fluctuations is a key goal in this endeavor. In this work, I investigate a novel gate protocol that employs a single ^{87}Rb atom prepared in a magnetic-field-insensitive clock qubit and coupled to a high-finesse birefringent FabryPerot cavity. The cavity's high birefringence creates two well-separated polarization eigenmodes, enabling polarization-selective reflectivity that depends on the atomic qubit state. This allows for the implementation of a controlled phase (CPHASE) gate between the atomic clock states and our photonic qubits. By rotating the basis of the photonic qubit, one is then able to realize an atom-photon controlled-NOT (CNOT) gate.

Show some results here and talk about how well it works and also how one might be able to use the gate

I present simulations based on inputoutput theory and master-equation modeling that quantify the conditional reflection amplitudes, gate truth table, and resulting fidelities under realistic experimental imperfections such as finite mode matching, cavity loss channels, and multiphoton contributions. Our results indicate that atom-state-dependent phase shifts on the photonic qubit are achievable in the current system, providing a viable path toward a robust, high-fidelity, cavity-assisted atomphoton quantum gate.

Contents

Abstract	1
1 Introduction	4
2 Theory	7
2.1 Cavity Quantum Electrodynamics	7
2.1.1 Cavity Birefringence	8
2.1.2 External Drive	9
2.2 Reflection from an Atom-Cavity System	10
2.3 Atom-State-Dependent Cavity Reflection	10
3 Atom-Cavity platform	13
3.1 Cavity system	13
3.2 Trapping of a Single Atom	13
3.2.1 Magneto-optical trap	13
3.2.2 Trapping and Positioning of Single Atom	14
3.3 Atomic Qubit Preparation	16
4 Photonic Qubit Path	19
4.1 Polarization-Dependent Losses	19
4.2 Inducing Losses via a Brewster Window Array	20
4.3 Photon Qubit Input-Output Path	22
5 Atom-Photon Gate	26
5.1 Experimental Parameters relevant for the gate mechanism	26
5.1.1 Cavity coupling and losses	26
5.1.2 Brewster plate attenuation	29
5.2 Atom-Photon gate performance	30
5.2.1 Gate Truth Tables	30
5.2.2 Brewster window Scan	31
5.2.3 Mean photon number Scan	31
5.2.4 Generation of Bell States	31
5.2.5 Limitations and imperfections	31
6 Summary and Outlook	32
A Numerical Simulation of the Atom-Photon Gate	33
A.1 Simulation Model	33
A.1.1 Hamiltonian	33
A.1.2 Dissipation	34
A.1.3 Output Fields and Detection Probabilities	34
A.1.4 Simulation Parameters	34
A.2 Brewster Window Transmission Scan	35

A.3 Mean Photon Number Scan	36
Bibliography	37

Chapter 1

Introduction

Few theories have reshaped modern technologies and thus our day to day life as profoundly as quantum mechanics when it was discovered in the early 1900s. The examination of the black-body radiation of celestial bodies such as our sun and later formulation of the Planck's law by Max Planck, explaining the quantized energy exchange between a black-body and a radiation field, laid the ground work for many theories and technologies. Among these is the laser which is based on Albert Einstein's theory on stimulated emission [1]. The laser has found its usage both in day-to-day life (e.g. the barcode scanner at the register, or scanner within a computer mouse) as well as research (e.g. Sisyphus cooling [2] or trapping of atoms in a magneto optical trap [3]). Another technology of great importance is the atomic clock, which is based on Norman Ramsey's work [4], allowing for the clear definition of a single second [5]. One piece of technology, which shapes our modern civilization the most, is that of the transistor, specifically the metaloxidesemiconductor field-effect transistor (MOSFET). The MOSFET transistor is the most used type of transistor found in modern electronics [6] that either allows or denies the passage of electrical current. By either blocking the current or letting it pass through the component, one is able to essentially construct a miniaturized switch, that can be used to realize a single *bit*. Interestingly enough, the theory which explains the passage of current through such a device, that being the electronic band structure model, is again rooted in quantum mechanics.[7]

In an attempt to predict the following years of chip evolution, Gordon Moore made the bold assumption in 1965 that with each coming year, the number of components crammed on an integrated chip will double [8]. This would later on be known as *Moore's Law*, and would pave the way for chip manufacturers to keep on increasing the amount of transistors in their chips, in order to subconsciously keep up with the predictions made by Moore. Back in the day, with the way technology was evolving, this enthusiasm towards simply increasing the amount of transistors by following a "plenty of room at the bottom"-mentality from the likes of Richard Feynman [9] and thus achieving an increase in computing performance, would eventually hit fundamental limits. In order to pack more transistors onto the same sized computer chip, the transistors themselves would need to be shrunk down. However in recent years, this approach of increasing computing performance has led to the realization that simply going smaller, does not yield the hoped-for performance increase. [10]

As the tasks one concerns themselves with become much more intricate, like finding the most efficient delivery route for a logistics company[11], or accurately simulating small subsystems [12, 13, 14], it is clear that classical computation has hit a limit and a new kind of computation platform is needed. As Feynman points out in his talk "Simulating Physics with Computers":

“Nature isn't classical, dammit, and if you want to make a simulation of nature, you'd better make it quantum mechanical, and by golly it's a wonderful problem, because it doesn't look so easy.”[12]

So while classical computers were still trying to realize the trend Moore predicted in 1965, the foundation for a new paradigm of computation were already being laid. In 1980, Paul Benioff proposed

the first quantum mechanical model for a Turing Machine[15], demonstrating that computation could in principle be carried out using quantum mechanical processes. This new way of computing is called *quantum computing*, which instead of using fixed bits that can either be a 1 or a 0, uses the so called *qubits*. These qubits are in itself a two-state quantum-mechanical system, and can be placed in any *superposition* state $|\psi\rangle = \alpha|0\rangle + \beta|1\rangle$. That is, until a measurement is performed and the state collapses back to being either $|0\rangle$ or $|1\rangle$ again. What makes the qubit interesting however, is the relationship multiple qubits can have with one another, and that they can be *entangled* with one another, thus not allowing for description of one qubit state, without the state of another qubit. By leveraging these two fundamental quantum mechanical principles, many protocols have been implemented that in theory should outperform their classical counterparts. Be it in the realm of encryption where certain quantum algorithms now promise an exponential speedup [16], in quantum key distribution where the laws of quantum mechanics enable fundamentally secure communication [17], or in the transfer of quantum states between distant nodes via quantum teleportation [18].

However, as time went on, and different hardware platforms were investigated that could serve as a foundation for a quantum computer, one problem (along many others), became apparent: scalability. As one tries to increase the amount of qubits used in a quantum computer, being able to keep external noise and errors that each component produces at bay, becomes more and more of a challenge[19]. In order to be able to scale these new systems up, it was proposed that instead of building one large quantum computer, where one would try to keep errors at bay via error correction algorithms integrated into the fundamental structure of the computer [20], one would instead split the computational horsepower up into multiple smaller decentralized pieces.[21, 22] Each of these pieces would then represent a single quantum node, that is able to create entanglement between a stationary atom and a mediating qubit, transfer the state of the mediating qubit onto the stationary one, and also process information through the use of quantum logic gates. By linking many of these quantum nodes one aims to overcome size-scaling and error-correction problems that would limit the size of machines for quantum processing.[22, 23]. This network of nodes would then appropriately be named a *Quantum Internet*. One way of realizing such a quantum internet is via the strong coupling interaction of single photons and atoms in the setting of cavity quantum electrodynamics (*cQED*). Here, each quantum node would store a set number of stationary atoms in between two highly reflective mirrors, which are able to be individually controlled, and interlinked with one another through another set of quantum channels, realized by photons that travel in between the nodes through optical fibers.

One of these cavity systems is the *CavityX* system at the Max Planck Institute for Quantum Optics which features a ^{87}Rb atom trapped between two crossed fiber optic cavities, hence the letter X in the name. In the past this setup has been used to achieve atom-photon entanglement with a fidelity of 87% [24], successfully transfer the information from a photonic qubit onto an atomic qubit with a fidelity of 94.7%[25], and recently realize atom-atom entanglement between two nodes connected via a fiber going through the Munich city center all the way out to the research campus in Garching while still achieving a fidelity of include distance, number and citation here. However as mentioned before, in order to realize a full quantum internet, the last milestone is the realization of the processing nature of the quantum node part mentioned in the definition of the quantum internet by Jeff Kimble [22].

This is where this thesis comes into play. The goal of this thesis is to realize an atom-photon reflection gate using one of the two fiber cavities in the CavityX setup, that one being birefringent, while preparing the atom in either of the two clock states of the D_2 -line ground states, thus minimizing the influence of external factors like magnetic field fluctuations. Using a setup inspired by Duan and Kimble [21] and storing the information in the polarization of a photonic qubit has the advantage of allowing for controlled gate operations between a flying photon and a resonantly coupled atom trapped inside of the cavity. With the realization of a quantum gate between a stationary atom and a flying photonic qubit, one would be able to reuse this setup to build further identical quantum nodes and thus completing the final requirement for a fully functional quantum network node, ready for integration into a Quantum Internet.

The structure of this thesis is as follows. Chapter 2 introduces the theoretical framework of cavity quantum electrodynamics, including the effects of cavity birefringence and the mechanism of atom-state-dependent cavity reflection that underpins the gate operation. Chapter 3 describes the experimental platform, covering the cavity system, the trapping and positioning of a single ^{87}Rb atom, and the preparation of the atomic qubit in the clock states. Chapter 4 details the photonic qubit path, addressing polarization-dependent losses and the input-output optical setup. Chapter 5 presents the main results: the characterization of the atom-photon gate performance through gate truth tables and the generation of Bell states. Finally, Chapter 6 provides a summary and outlook.

Chapter 2

Theory

This chapter introduces the theoretical framework needed to understand the key points of this thesis. First a general introduction into cavity quantum electrodynamics will be given, alongside the intricacies in the setup that will modify the general theory. Afterwards the reflection from an atom-cavity system will be explored, and finally how it can be used to construct an atom photon gate.

2.1 Cavity Quantum Electrodynamics

The field of *Cavity Quantum Electrodynamics* explains the interaction between a resonator (in this case a Fabry-Perot cavity), and a piece of matter with which the light inside the resonator interacts (here: a ^{87}Rb atom). By placing the atom between two highly-reflective mirrors forming the optical cavity, one increases the number of times a photon that is inside a cavity bounces back and forth between the two mirrors, enhancing the interaction cross-section compared to free space. The strength of this enhancement is captured by the single-atom cooperativity $C = g^2/(2\kappa\gamma)$, which must satisfy $C > 1$ for deterministic light-matter interaction.[26]

The theoretical model which explains this interaction in a fully quantum mechanical picture is called the *Jaynes-Cummings Model* [27] and was named after Edwin Jaynes and Fred Cummings who developed it in 1963. To introduce this model, we consider a three-level emitter (i.e. the atom), which is interacting with a single cavity optical mode.

The *Jaynes-Cummings* (JC) Model describes the coherent exchange of energy between a quantized cavity field and a two-level transition of the atom. The cavity supports a single optical mode at frequency ω_c . The atom, which is also located in the cavity, supports a transition frequency close to ω_c , from a coupled state $|c\rangle$ to an excited state $|e\rangle$ at a frequency ω_a . This transition is treated in the dipole approximation. In order to then complete the three-level-emitter picture, we include an uncoupled state $|u\rangle$ with which the photon does not interact due to this state not being resonantly coupled to the cavity light mode. This uncoupled state $|u\rangle$ is what enables the conditional atom-photon gate operation.

Lastly, any real atom-cavity system, additionally suffers from losses, primarily the spontaneous decay of the atomic excitation at a rate of 2γ and the cavity field decay at a rate κ .

The full Hamiltonian which describes interaction between the atom and the cavity thus reads: [27]

$$\mathcal{H}_{\mathcal{JC}} = \underbrace{\hbar\omega_c\hat{a}^\dagger\hat{a}}_{\text{cavity field}} + \underbrace{\hbar\omega_a\hat{\sigma}_{ce}^\dagger\hat{\sigma}_{ce}}_{\text{atom}} + \underbrace{\hbar g(\hat{a}\hat{\sigma}_{ce}^\dagger + \hat{a}^\dagger\hat{\sigma}_{ce})}_{\text{light-atom interaction}} \quad (2.1)$$

The three terms in (2.1) describe the energy of the cavity field, the energy of a bare atom, and the coherent coupling between the two governed by a coupling strength g .

The operators $\hat{a}^\dagger$ and $\hat{a}$ are the creation and annihilation operators of the cavity light modes, whereas $\hat{\sigma}_{ce}^\dagger = |e\rangle\langle c|$ and $\hat{\sigma}_{ce} = |c\rangle\langle e|$ are the atomic raising and lowering operators, respectively.

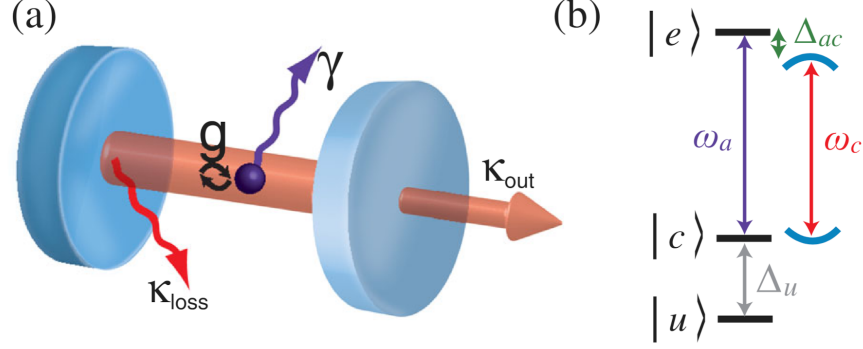


Figure 2.1: (a) Basic physical situation considered in cQED. A three-level emitter, e.g., a single atom, is located in an optical cavity, schematically represented by two facing mirrors. The atom exchanges energy with the optical field at a rate $2g$. The decay rate of photons out of the resonator is $2\kappa = 2\kappa_{\text{out}} + 2\kappa_{\text{loss}}$. The atomic polarization decay rate is γ (b) Atomic energy level scheme. The transition frequency between the coupled ground state $|c\rangle$ and the excited state $|e\rangle$ is ω_a . The cavity resonance frequency is ω_c . Atom and cavity are detuned by $\Delta_{ac} = \omega_a - \omega_c$. The third, uncoupled level $|u\rangle$ is detuned from $|c\rangle$ by Δ_u . [26]

The form of (2.1) assumes the so called *Rotating-Wave Approximation* in which fast oscillating terms at optical frequencies can be neglected.

Solving for the eigenenergies of the system one is left with:

$$E_0 = 0 \quad (2.2)$$

$$E_{\pm}(n) = n\hbar\omega_c + \hbar\frac{\Delta_{ac}}{2} \pm \frac{\hbar}{2}\sqrt{\Omega_n^2 + \Delta_{ac}^2}, \quad n \in \mathbb{N} \quad (2.3)$$

In (2.3), n is the number of excitation quanta in the system, with $\Omega_n = 2g\sqrt{n}$ being the corresponding n -quanta Rabi frequency. The term Δ_{ac} describes the detuning of the cavity resonance frequency from the atomic transition. The main take-away from (2.3) is that on resonance ($\omega_a = \omega_c$), the eigenenergies of the system are split by $2\hbar g\sqrt{n}$, giving rise to the so-called *Vacuum Rabi Splitting*.

2.1.1 Cavity Birefringence

Equation (2.1) only covers the case for having a single cavity light-mode. The setup used in this thesis, however, features a birefringent cavity. The birefringence is created by physically changing the geometric shape of the cavity mirror during production of the fiber ends.[28] This forces a change in the optical path lengths between different polarizations, leading to a frequency splitting $\Delta\nu$ proportional to the ellipticity ϵ of the mirror surfaces:[29]

$$\Delta\nu = \frac{\nu_{FSR}}{2\pi k} \frac{\epsilon^2}{R_2}. \quad (2.4)$$

The property ν_{FSR} in (2.4) describes the free spectral range, $k = \frac{2\pi}{\lambda}$ the photon wavenumber, and R_2 the radius of curvature of the cavity mirror.

This means that we need to consider a system with two different light modes for the JC Hamiltonian, which in this case are the π and the V modes. However only the π mode is resonantly coupled to the $|c\rangle \leftrightarrow |e\rangle$ transition, whereas the V mode is detuned by $\Delta_{\text{biref}} = 2\pi \cdot 500\text{MHz}$. In the context

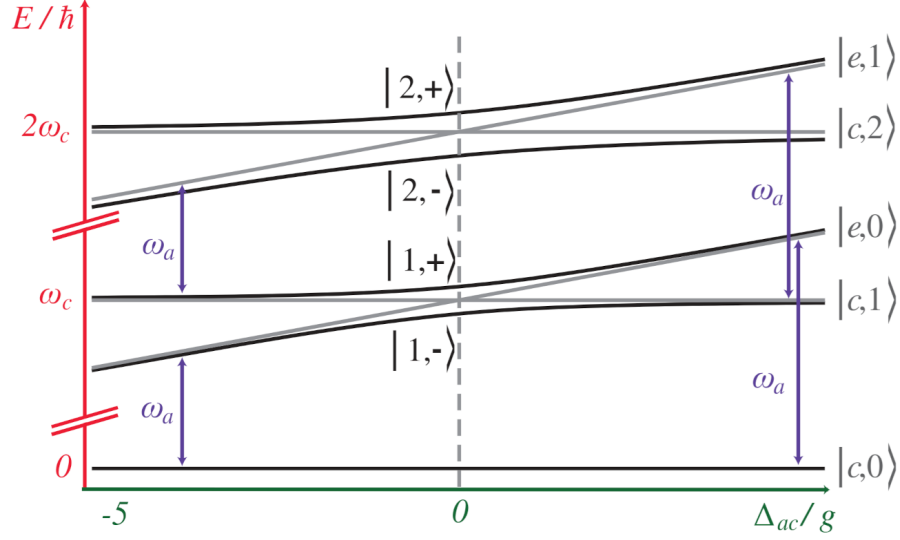


Figure 2.2: The Jaynes-Cummings ladder of the dressed energy eigenstates $|N, \pm\rangle$ of a strongly coupled atom-cavity system, where the cavity frequency is kept fixed and the emitter frequency is scanned over the resonance. Compared to the uncoupled situation (gray), the coupled states (black) exhibit pronounced avoided level crossings. At zero detuning, the levels are separated by $2g\sqrt{N}$. [26]

of this thesis $\Delta_{\text{biref}} \gg \kappa, g, \gamma$. This effectively makes the V-mode uncoupled, and can be neglected in the analytical treatment. It is, however, still included in the Hamiltonian for use in numerical simulations where both modes are driven explicitly. This leads to the extended Hamiltonian:

$$H_{JC} = \hbar\omega_{c,\pi}\hat{a}_\pi^\dagger\hat{a}_\pi + \hbar(\omega_{c,\pi} + \Delta_{\text{biref}})\hat{a}_V^\dagger\hat{a}_V + \hbar\omega_a\hat{\sigma}_{ce}^\dagger\hat{\sigma}_{ce} + \hbar g(\hat{a}_\pi\hat{\sigma}_{ce}^\dagger + \hat{a}_\pi^\dagger\hat{\sigma}_{ce} + \hat{a}_V\hat{\sigma}_{ce}^\dagger + \hat{a}_V^\dagger\hat{\sigma}_{ce}) \quad (2.5)$$

2.1.2 External Drive

At the heart of the atom-photon gate lies the reflection of the incoming photon off the cavity system. In order to describe this in a quantum mechanical way, one needs to include a driving term in the Hamiltonian with the form of $H_{D,S} = i\hbar(\epsilon e^{-i\omega_d t} + \epsilon^* e^{i\omega_d t})(\hat{a} + \hat{a}^\dagger)$. This Hamiltonian $H_{D,S}$ is defined in the Schrödinger picture, and has a complex drive amplitude ϵ and driving field frequency ω_d . After applying the rotating wave approximation (RWA), which neglects the fast oscillating terms in $H_{D,S}$, and changing into the rotating wave frame to remove the explicit time dependence, one gets the following expression:

$$H_D = i\hbar(\hat{a}_s\epsilon^* + \hat{a}_s^\dagger\epsilon) \quad (2.6)$$

where $\hat{a}_s$ denotes the annihilation operator of the cavity mode matching the input photon polarization ($s = \pi$ or V).

Adding (2.6) to (2.5), one gets the following full Hamiltonian:

$$\begin{aligned} H_{JC} = & \hbar\Delta_{c,\pi}\hat{a}_\pi^\dagger\hat{a}_\pi + \hbar(\Delta_{c,\pi} + \Delta_{\text{biref}})\hat{a}_V^\dagger\hat{a}_V + \hbar\Delta_a\hat{\sigma}_{ce}^\dagger\hat{\sigma}_{ce} \\ & + \hbar g(\hat{a}_\pi\hat{\sigma}_{ce}^\dagger + \hat{a}_\pi^\dagger\hat{\sigma}_{ce} + \hat{a}_V\hat{\sigma}_{ce}^\dagger + \hat{a}_V^\dagger\hat{\sigma}_{ce}) \\ & + i\hbar(\hat{a}_s\epsilon^* + \hat{a}_s^\dagger\epsilon) \end{aligned} \quad (2.7)$$

This then gives a definition of the JC Hamiltonian with respect to an external driving field, and based on the detunings of the driving field with respect to the cavity resonance frequency $\Delta_{c,\pi} = \omega_{c,\pi} - \omega_d$ and the atomic transition frequency $\Delta_a = \omega_a - \omega_d$, respectively.

2.2 Reflection from an Atom-Cavity System

For quantum information processing, it is essential that the photonic qubit is preserved upon reflection from the cavity. This requires that light entering through the first mirror – called the outcoupling (OC) mirror – also exits through the same mirror, rather than being lost through the opposing highly reflective (HR) mirror. The HR mirror on the other hand must have maximum reflection, making the cavity one sided, so the light exits predominantly through the OC mirror. The total losses can thus be divided into the following parts:

$$\kappa = \kappa_{oc} + \kappa_{HR} + \kappa_{paras} \quad (2.8)$$

In (2.8), κ_{oc} and κ_{HR} describes the rate at which light couples into and out of the cavity through the OC and HR mirror respectively, whereas κ_{paras} describes the rate of losses due to absorption at the mirror surfaces. In order for the light to enter and leave through the OC mirror, one needs to ensure that $\kappa_{oc} \gg \kappa_{HR}, \kappa_{paras}$. The escape probability of the photon is then defined by the outcoupling ratio $\frac{\kappa_{oc}}{\kappa}$.

Another important quantity is the matching of the spatial modes of the light when coupling into the cavity. As the incoming light gets coupled into the cavity, a mismatch between the spatial modes in transmission and reflection can occur. This lowers the efficiency at which the light can couple to the cavity itself. The mode matching is then given by the overlap integral of the mode functions for the light one is investigating. In this case it is important to quantify the mode matching between the reflected light at the first cavity and the incoming light (μ_{fr}) as well as the one for the incoming light and the optical mode inside of the cavity (μ_{fc}).

The field incident on the cavity is treated as an input field. This then can be linked to an output field via input-output formalism. When driving the system only from one side, as it is the case here, the relation between input and output becomes:[30]

$$a_{out}(t) = \mu_{fr}a_{in}(t) + \mu_{fc}\sqrt{\kappa_{oc}}\langle a \rangle(t) \quad (2.9)$$

Here (2.9) was adjusted to also consider the mode matching parameters. Solving Langevin equations for weak coherent driving and photonic wave envelopes which vary only on a time scale longer than κ , one can write down the analytical representation of the reflection amplitude[31, 32, 33]:

$$r(\omega) = \mu_{fr} - \mu_{fc}^2 \frac{2\kappa_{oc}(i\Delta_a + \gamma)}{(i\Delta_{c,\pi} + \kappa)(i\Delta_a + \gamma) + g^2} \quad (2.10)$$

The reflection amplitude in (2.10) depends on the detuning $\Delta_{c,\pi} = \omega - \omega_{c,\pi}$ between the driving laser frequency and the cavity resonance frequency $\omega_{c,\pi}$ (for the π mode) and on the detuning relative to the atomic transition frequency $\Delta_a = \omega - \omega_a$.

2.3 Atom-State-Dependent Cavity Reflection

Looking at (2.10) one can see that the behavior of the reflection amplitude at zero detuning ($\Delta_a = \Delta_{c,\pi} = 0$) is:

$$r(\Delta = 0) = \mu_{fr} - \mu_{fc}^2 \frac{2\kappa_{oc}\gamma}{\kappa\gamma + g^2} \quad (2.11)$$

In the event of an uncoupled atom-cavity system (effectively $g = 0$), which would be achieved by preparing the atom in the $|u\rangle$ state, the reflection coefficient $r < 0$. This would imply a relative phase shift of π between the reflected and incoming light field ($a_{out}(t) \approx -a_{in}(t)$). Preparing the atom in the coupled state $|c\rangle$ however, the Vacuum Rabi Splitting shifts the cavity resonances to $\omega_c \pm g$, so the cavity appears off-resonant for a photon at ω_c . The photon is therefore reflected from

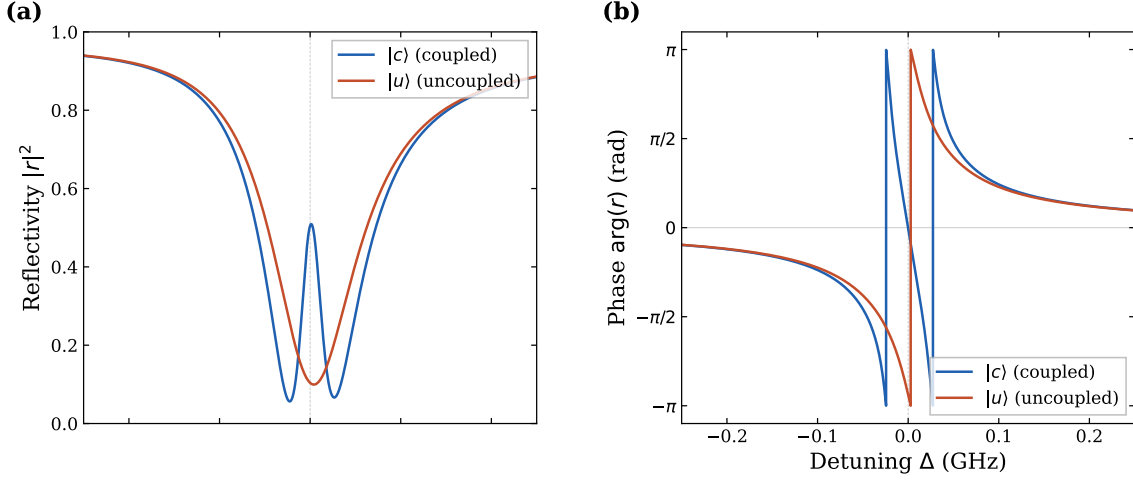


Figure 2.3: still write the caption

the OC mirror without entering the cavity, acquiring no phase shift, which is mirrored by a reflection coefficient of $r > 0$ ($a_{out}(t) \approx a_{in}(t)$). A V polarized photon, being far detuned from the cavity resonance by Δ_{biref} , is reflected without entering the cavity and acquires no phase shift, regardless of the atomic state. This state-dependent phase shift of the output field depending on the state of the atom, enables the realisation of a quantum atom-photon gate with the atom being the controlling qubit and the photon being the target qubit.[21]

Adopting standard quantum computing notation, the uncoupled state of the atom is the $|0\rangle$ state, and the coupled one the $|1\rangle$ state. The photon, either π -polarized or V -polarized, is represented as the input states $|\pi\rangle$ and $|V\rangle$. Furthermore, for all input states, the input drive is resonant with the π mode of the birefringent cavity.

For an input state $|0, \pi\rangle$, meaning the atom is prepared in the uncoupled state $|0\rangle$ and a π -polarized photon is sent in, the photon will be able to enter the cavity and (ideally) exit through the OC mirror, with a π phase-shift. For the input state $|1, \pi\rangle$, the Vacuum Rabi splitting shifts the cavity resonance away from the photon frequency, causing it to be reflected without a phase shift. When sending a $|V\rangle$ photon, it will get reflected off of the OC mirror regardless, due to the birefringence of the cavity. This results in the following reflections:

$$\begin{aligned}
 |0, \pi\rangle &\rightarrow -|0, \pi\rangle \\
 |0, V\rangle &\rightarrow |0, V\rangle \\
 |1, \pi\rangle &\rightarrow |1, \pi\rangle \\
 |1, V\rangle &\rightarrow |1, V\rangle
 \end{aligned} \tag{2.12}$$

This output from the atom-photon reflection gives us a *Controlled Phase Flip* (CPF) gate. This conditional phase shift allows the construction of a universal quantum gate that can be transformed into any two-qubit gate using rotations of the individual qubits, which in the case of the photon can be done via retardation waveplates.

Rotating the photonic basis states to:

$$\begin{aligned}
 |+\rangle &= \frac{|V\rangle + |\pi\rangle}{\sqrt{2}} \\
 |-\rangle &= \frac{|V\rangle - |\pi\rangle}{\sqrt{2}}
 \end{aligned} \tag{2.13}$$

and keeping the atom either in the coupled ($|1\rangle$) or uncoupled case ($|0\rangle$), results in the following reflection:

$$\begin{aligned}
 |0, +\rangle &\rightarrow |0, -\rangle \\
 |0, -\rangle &\rightarrow |0, +\rangle \\
 |1, +\rangle &\rightarrow |1, +\rangle \\
 |1, -\rangle &\rightarrow |1, -\rangle
 \end{aligned} \tag{2.14}$$

In the new photonic basis $\{|+\rangle, |-\rangle\}$, the CPF gate is equivalent to a *Controlled-NOT* (CNOT) gate, with the atom as the controlling qubit and the photon polarization as the target qubit. The photon polarization is flipped ($|+\rangle \leftrightarrow |-\rangle$) when the atom is in $|0\rangle$, and left unchanged when the atom is in $|1\rangle$.

Chapter 3

Atom-Cavity platform

The system uses a single ^{87}Rb coupled to a birefringent Fabry-Perot cavity inside an ultra-high vacuum (UHV) chamber. The smaller optical beam path used for the realization of the atom-photon gate is part of a much larger setup. The full setup, named *CavityX*, consists of two Fabry-Perot cavities arranged in an X formation. For the atom-photon gate, parts of the setup like the magneto-optical trap, the 850 nm red-detuned trap laser, and the microwave antennas integrated into the UHV chamber are crucial. Other components, most notably the second cavity, are not within the scope of this thesis, but will be discussed in the outlook.

3.1 Cavity system

At the heart of the CavityX system are the two crossed fiber cavities which are named the "short" cavity (SC) and the "long" cavity (LC), which differ in length ($79\,\mu\text{m}$ vs. $161\,\mu\text{m}$), and in the fact that the short cavity is birefringent. Each cavity fiber is held in place by an in-house built holder shown in figure 3.1.

The incoming light is coupled in and out via the single-mode (SM) fiber for either of the cavities. In order to ensure that most of the coupled light exits through the SM fiber, different mirror coatings are used for the fiber surfaces. The multi-mode (MM) fiber surfaces are coated with a highly reflected dielectric coating, while the opposing SM fiber has a dielectric coating with a lower reflectivity (10 ppm transmission vs. 340 ppm transmission). This asymmetric design ensures the cavity is single-sided, causing most of the coupled-in light to then exit the cavity through the same fiber through which it entered the system.[34]

The cavity fibers are fabricated using a CO_2 laser machining technique by Manuel Brekenfeld in [28]. Changing the beam profile of the CO_2 laser allows for the fabrication of either spherical or elliptical surfaces, as is the case for the short cavity. This leads to a cavity mode splitting, i.e., cavity birefringence, as shown in figure 3.2

3.2 Trapping of a Single Atom

3.2.1 Magneto-optical trap

In order to realize an atom-photon quantum gate, one is required to have an atom trapped inside the cavity with which the photon can then interact. Therefore one needs to properly position the atom and keep it trapped at the position where it most efficiently couples to the cavity to ensure the most efficient gate operation.

The starting point for this is the trapping of an atomic cloud via a magneto-optical trap (MOT). Once the atomic cloud is trapped, one turns off the MOT, causing the atoms to fall down due to

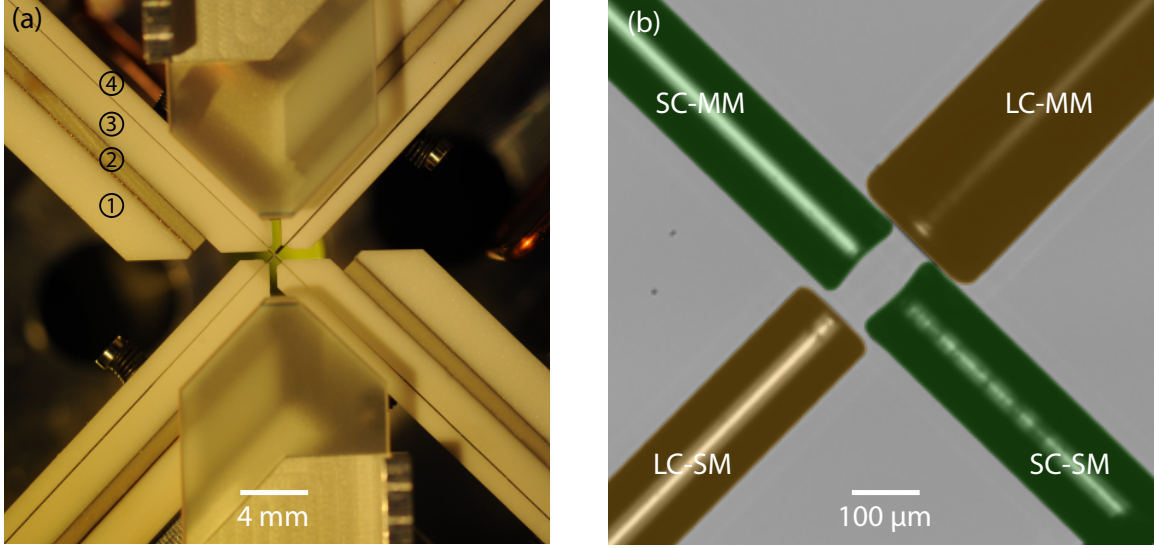


Figure 3.1: vertical top view of the construction holding the crossed fiber cavities in place. The holder of each fiber consists of 4 elements, each of which is labeled in the picture: ① Base element for mounting the fiber holder to downstream components; ② Shear piezo actuator for active stabilization of the resonator length; ③ Mount in which a V-groove is fabricated - where the fiber is positioned and mechanically clamped; ④ Lid to clamp the fiber within the V-groove mount. A zoom of the center of the picture is shown in (b). The orange-colored cavity has a length of 161 m and it is composed of a single-mode fiber (LC-SM) with a low reflective mirror coating and a multi-mode fiber (LC-MM) with a highly reflective mirror coating. The green-colored cavity is 75.7 m long and is composed of a single- (SC-SM) and multi- (SC-MM) mode fiber with reflective coatings analogous to LC-SM and LC-MM, respectively. This photo has been colored in post-production.[34]

the gravitational force, from which single atoms can then be loaded into the cavity's center. The concepts of a MOT are explained in [35].

In order to trap atomic clouds via a MOT, one needs to generate a rubidium vapor inside the UHV chamber. This is done via light-induced atom desorption (LIAD), in which atoms are dispensed from a rubidium dispenser that is placed inside of the vacuum chamber. The light source is a UV diode ILH-XQ01-S410 with an emitting wavelength of 410nm, which is pulsed for the length of time needed to load the MOT.

The MOT loading procedure can be divided into two phases: First comes the loading phase in which the MOT coils, the MOT beams (a cooling laser and a repumper laser), and the UV light are switched on simultaneously. This then creates the atomic cloud and cools it down to near the Doppler temperature of $146 \mu\text{K}$ for the ^{87}Rb D_2 -line. [36]

Next an optical molasses is applied, which aims at bringing the atom to a temperature much below the Doppler limit. Here the detuning of the MOT beams is increased, while the optical power is decreased.

At the end of the MOT cycle, the MOT coils, beams and the UV light are switched off.

3.2.2 Trapping and Positioning of Single Atom

At the end of the MOT loading phase, the ultra-cold atomic cloud then sits approximately 10 mm above the cavity plane. Turning off the MOT causes the atoms to fall towards the cavity due to gravity, until they reach the cavities' crossing point, at which point cooling and trapping laser beams are switched on.

The cooling and repumping laser are shone diagonally onto the crossing point in a counter-propagating

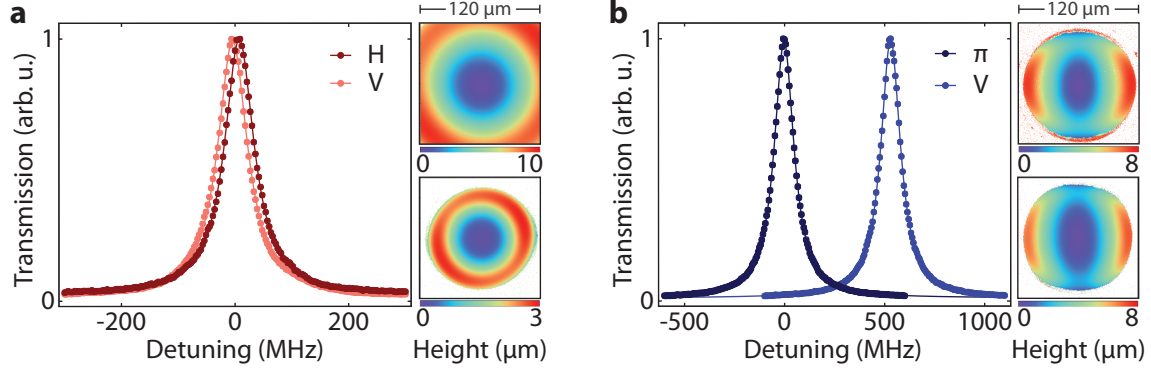


Figure 3.2: Transmission spectra were recorded for both the long (a) and short (b) cavity. For the long cavity, the probe field was polarized to match the cavity eigenmodes, revealing a small residual polarization mode splitting. Contour images of the mirrors for the MM and SM fibers are shown alongside the spectrum. In contrast, the short cavity exhibited a large polarization mode splitting, a result of the strong ellipticity of its mirror surfaces. The error bars are smaller than the data point markers.[34]

configuration. Using orthogonal polarizations in a lin⊥lin configuration for the counter-propagating lasers, the atoms are cooled to sub-Doppler temperatures via Sisyphus-cooling.

Once the atom is at the center of the cavity, two lasers are responsible for keeping it trapped there: The first one is the intracavity laser of the short cavity which has a wavelength of 772 nm, and is blue-detuned from the D_2 -line. The laser self-interferes in the cavity, forming a standing wave, thus confining the atom at the nodes, i.e., interference minima. Stabilizing the cavity length is achieved by first locking the intracavity laser using the PDH-lock technique and then locking the laser frequency to an optical frequency comb, which serves as a stable frequency reference. For the atom-photon gate the frequency of the laser was chosen so that the cavity is resonant to the D_2 -line at 780 nm.

The second laser is the 852 nm vertical trap laser, that's shone in from the above the cavities' crossing point. The laser is linearly polarized along the long cavity axis, and focussed to a diameter of about 20 μm. It is then transmitted through the chamber and collimated to a mode diameter of 1 cm. Lastly it gets transmitted through a dichroic element, a set of retardation waveplates, a piece of silica glass mounted to a galvanometer scanner (galvo), to then get retroreflected in a cat-eye configuration. Due to the laser being far detuned from the D_1 and D_2 lines of the atom, it forms a trapping standing wave, where the atoms are confined in the antinodes, i.e., interference maxima.

[Include image from gianvito's thesis about setup](#)

In order to achieve maximum cavity coupling, the galvo scans its amplitude, rotating the silica glass and thereby modifying the beam's angle of refraction, which shifts the standing-wave antinodes vertically. While this is happening, the fluorescence counts coming from the atom during the cooling phase are collected via the short cavity and detected with superconducting nanowire single-photon detectors (SNSPDs). The fluorescence counts are monitored in real time by an FPGA, which also controls the galvo scan amplitude. One can use this to determine the height and thus the maximum coupling position of the atom from the fluorescence counts. In order to ensure that only a single atom was trapped instead of two weakly coupled atoms, the FPGA sequence is as follows:

1. The FPGA starts scanning the voltage of the galvo while monitoring the amount of fluorescence counts detected in a 25 ms window coming from the atom.
2. If the fluorescence counts go above a certain threshold (noise-threshold), this means that an atom that is weakly coupled to the cavity is emitting fluorescence counts into the cavity.

Table 3.1: Cavity parameters.

Parameter	Long Cavity	Short Cavity
Radius of curvature of OC ₁	340 μm	115 μm and 283 μm
Radius of curvature of HR ₂	170 μm	96 μm and 167 μm
Cavity length	161 μm	75.7 μm
Free spectral range	0.93061 THz	1.98043 THz
Waist radius	3.5 μm	3.5 μm and 4.4 μm
Waist radius pos. from OC	7.7 μm	25.8 μm and 22.7 μm
Mode waist at OC	3.6 μm	3.9 μm and 4.6 μm
Mode waist at HR	11.3 μm	5.9 μm and 5.2 μm
Mode waist at cavity center	6.2 μm	3.5 μm and 4.4 μm
Mode volume ($\lambda = 780 \text{ nm}$)	$10200 \cdot \lambda^3$	$1900 \cdot \lambda^3$
Mode matching		0.873
$g(1' \leftrightarrow 2)/(2\pi)$ at cavity center		26 MHz
Transmission through OC	340 ppm	340 ppm
Transmission through HR	10 ppm	10 ppm
Parasitic losses	80 ppm	50 ppm
Total losses	430 ppm	400 ppm
$\kappa/(2\pi)$		58 MHz
Linewidth		116 MHz
Finesse	14089	16531
Outcoupling ratio κ_{oc}/κ		0.85
Eigenmodes freq. splitting	16 MHz	505.0(5) MHz

Table 3.2: write down table title and also notes regarding the subscripts in there

3. The FPGA then continues increasing the voltage, keeping track of the voltage (i.e., position) at which the maximum fluorescence counts were reached. In the meantime the clicks at each galvo step are summed into a single 32-bit register. This effectively represents an integral over the fluorescence counts as a function of the galvo amplitude curve.
4. Once the fluorescence counts drop below the (noise-threshold), meaning that the atom has been moved out of the cavity center, the integral of the fluorescence counts is evaluated. If the integral is within a certain range, the FPGA will set the voltage at which maximum fluorescence counts were detected. If the integral is out of range (too low: atom was badly coupled anyway; too high: multiple atoms were in one node), the galvo keeps scanning until it either finds a new atom or reaches the maximum amplitude, causing the MOT and single-atom positioning loop to start again.

3.3 Atomic Qubit Preparation

For the atom-photon gate, the single atoms must be prepared in the two $m_F = 0$ ground states of the D₂-line, those being $5S_{1/2}, F = 1, m_F = 0$ for the uncoupled state, and $5S_{1/2}, F = 2, m_F = 0$ for the coupled state.

The first step in achieving this is to optically pump (OP) the atom into the desired state. This is done by repeatedly exciting the atom from a level one wishes to depopulate to an excited state, from which it will then decay into various ground states, determined by the branching ratios of the respective transition. In order to then populate the desired state, one uses a frequency for the pump laser, where all ground states one wants to depopulate are coupled to the excited state, except for the desired one, gradually populating the target state over time.

In this work, one first pumps the atom into the $F = 1, m_F = 0$ state. This is done by using two laser beams, one that is resonant with the $F = 2 \rightarrow F' = 2$ transition of the D₂-line of ^{87}Rb , which

Table 3.3: Parameters used for the MOT loading phase.

MOT coil current	23.5 A
UV diode current	140 mA
MOT beams' diameter	12 mm
Loading phase	
Duration	1 s
Cooling laser detuning from $5S_{1/2}, F = 2 \leftrightarrow 5P_{3/2}, F' = 3$	check detuning again
Repumping laser detuning from $5S_{1/2}, F = 1 \leftrightarrow 5P_{3/2}, F' = 2$	0 MHz
Cooling laser power	20 mW
Repumping laser power	250 μ W
Molasses phase	
Duration	1 ms
Cooling laser detuning from $5S_{1/2}, F = 2 \leftrightarrow 5P_{3/2}, F' = 3$	-31 MHz
Repumping laser detuning from $5S_{1/2}, F = 1 \leftrightarrow 5P_{3/2}, F' = 2$	-20 MHz
Cooling laser ramp-down power	1.7 mW
Repumping laser power	250 μ W

Parameters used for the MOT loading phase. The UV diode and the MOT coils are permanently on the whole time. The cooling and repumping laser power is measured behind a polarizing beam splitter, which separates the horizontal MOT beam from the top-diagonal ones.

will lead to the depopulation of the $F = 2$ manifold and population of the $F = 1$ manifold. In order to then populate only the $F = 1, m_F = 0$ state, one applies another beam, resonant to the $F = 1 \rightarrow F' = 1$ transition of the D₂-line. Furthermore the beam must be π -polarized, since the $F = 1, m_F = 0 \rightarrow F' = 1, m_F = 0$ transition is forbidden.[36]. The transition scheme can be seen in figure 3.3.

Using this technique one is able to populate the $F = 1, m_F = 0$ level with a probability of $\geq 97\%$.[34]

For the atom-photon gate, one also needs to be able to prepare the $5S_{1/2}, F = 2, m_F = 0$ for the coupled state. This is achieved by first preparing the atom in the already prepared $F = 1, m_F = 0$ state and using a set of microwave antennas integrated into the UHV chamber, to drive the $|F = 1, m_F = 0\rangle \leftrightarrow |F = 2, m_F = 0\rangle$ clock transition.

Finding the transition frequency is done by performing a microwave spectroscopy measurement. The atom is pumped into the $F = 1, m_F = 0$ via the previously discussed technique. By scanning the microwave frequency at fixed phase, one measures the $F=2$ population via cavity-enhanced fluorescence state detection (SD) with a detection window of 7.5 μ s.

The resulting MW spectrum shown in ?? then shows three peaks, which correspond to the $F = 1, m_F = 0 \leftrightarrow F = 2, m_F = 0$ and $F = 1, m_F = 0 \leftrightarrow F = 2, m_F = \pm 1$ transitions. From this one can infer that the optical pumping into the $F = 1, m_F = 0$ is done with an efficiency of 97(1)%.[34]

show MW spectroscopy regarding the transition from $F = 1, m_F = 0$ to the other states

Once the frequency for the $F = 1, m_F = 0 \leftrightarrow F = 2, m_F = 0$ transition is known, one can coherently manipulate the atomic population in the ground state. By tuning the MW on resonance, one can drive Rabi oscillations [37] between two ground states, where the population evolution in the Zeeman state of $F = 2$ can be modeled as:[38]

$$P_2 = P_1 \cdot \frac{1}{2}(1 - \cos(2\pi\Omega t) \cdot e^{-\chi t}) \quad (3.1)$$

where P_1 is the initial population after optical pumping in the state $F = 1, m_F = 0$, Ω is the previously determined Rabi frequency, and χ is the damping rate. The result is a combination of a sinusoidal term which describes the coherent state transfer between the two levels, and an exponential factor representing the dissipative mechanism which damps the oscillations.

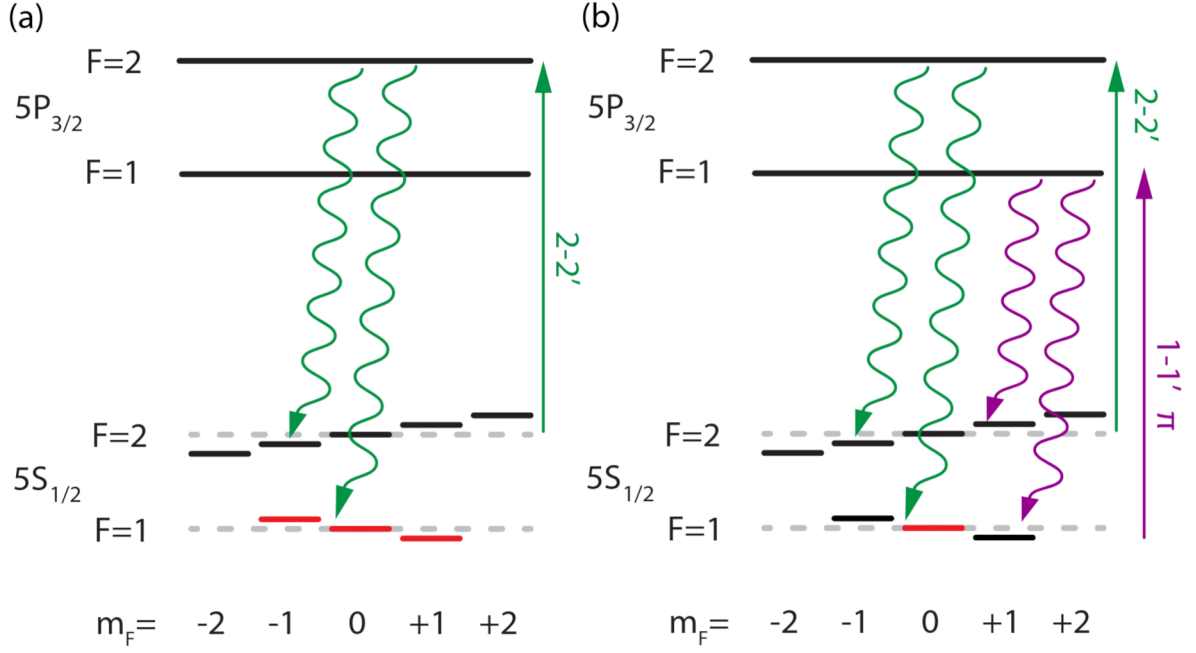


Figure 3.3: Schemes utilized for OP in $F = 1$ (a), and $F = 1, m_F = 0$ (b). Each sketch shows the used lasers (straight arrows), the atomic decay (wavy arrows), and the targeted state (red lines). [34]

By scanning the length of the π pulse at a constant MW frequency, one can determine the ideal time it takes for a state to coherently transfer from $F = 1, m_F = 0$ to $F = 2, m_F = 0$. Figure ?? shows the resulting Rabi oscillations for an atom prepared in $F = 1, m_F = 0$ and transferred to the $F = 2, m_F = 0$ state. Fitting equation (3.1): **write down fit params**

Chapter 4

Photonic Qubit Path

This chapter describes the optical beam path used to deliver photonic qubits to the atom-cavity system and analyze them after reflection. The central challenge is that the birefringent cavity introduces a polarization-dependent amplitude mismatch requiring external compensation to achieve the optimal CNOT gate overlap.

4.1 Polarization-Dependent Losses

The reflection amplitude of a photon incident on an atom-cavity system, given by equation (2.10), depends sensitively on the system parameters: the coupling strength g , the decay rate of the photons κ , the outcoupling ratio κ_{OC} , the two mode-matching parameters μ_{fr} and μ_{fc} , and the birefringence of the cavity itself $\Delta_{\text{biref}} = 2\pi \cdot 500\text{MHz}$. Looking at the reflection scheme for (2.14) in the basis defined in (2.13), it becomes apparent that in order to achieve the highest possible overlap with an ideal CNOT gate, the reflection amplitudes $|r_\pi|$ and $|r_V|$, must (ideally) be the same. However, for the cavity parameters realized in this system (characterized in section 5.1), this condition is not fulfilled.

As mentioned before, the V mode of the birefringent cavity is detuned by $\Delta_{\text{biref}} = 2\pi \cdot 500\text{MHz}$ from the π -mode, to which the atomic transition is resonantly coupled. This leads to a V polarized photon, getting reflected from the first OC mirror without entering the cavity due to being far off-resonant. This then leads to the V polarized portion of both the CNOT input basis states, having a much larger relative reflection amplitude when compared to the π polarized portion.

A π -polarized photon on the other hand interacts with the atom inside the cavity. In the coupled case $|1\rangle$, the Vacuum Rabi Splitting shifts the dressed-state resonances to $\omega_c \pm g$. This then leads to the photon getting reflected off the OC mirror, but not perfectly, due to finite cooperativity. In the uncoupled state $|0\rangle$, the π polarized photon fully enters the cavity, and eventually gets reflected with a π phase shift. But due to intracavity losses (absorption, HR mirror leakage, imperfect mode-matching), the reflection amplitude is smaller than that of the coupled case.

Using the time-domain simulation described in Appendix A with the parameters characterized in section 5.1, the following reflection amplitudes are obtained:

Table 4.1 shows that the reflection amplitude for the V polarized photon, is much bigger than that of the π polarized photon, thus giving the following relationship: $|r_V| > |r_{\pi,\text{coupled}}| > |r_{\pi,\text{uncoupled}}|$.

This amplitude mismatch ultimately reduces the overlap with an ideal CNOT gate truth table. However, since the cavity parameters are fixed by the requirements of the broader *CavityX* experiment, the atom-state-dependent amplitude difference cannot be addressed independently, as this would require changing the cavity itself. The following sections therefore focus on compensating the polarization-dependent mismatch, which can be corrected externally.

	$ 0, \pi\rangle$	$ 1, \pi\rangle$	$ 0, V\rangle$	$ 1, V\rangle$
r	$-0.256 + 0.000i$	$0.704 + 0.031i$	$0.974 + 0.071i$	$0.973 + 0.050i$
$R = r ^2$	0.064	0.493	0.953	0.948
ϕ (rad)	3.016	0.000	0.000	0.000

Table 4.1: Reflection coefficients for the four input states of the atom-photon gate, simulated via a time-domain simulation outlined in Appendix A using the system parameters characterized in section 5.1. The atomic states $|0\rangle$ and $|1\rangle$ correspond to the uncoupled and coupled ground states, respectively.

4.2 Inducing Losses via a Brewster Window Array

A Brewster window is a piece of uncoated UV fused silica. When placed at the so-called Brewster angle relative to the incoming light, then the p-polarized portion gets transmitted without any losses, while the s-polarized portion gets partially reflected. This effectively reduces the transmission through the optical element for s-polarized light. Here, the p-polarized light is identical to the π polarized light, whereas the s-polarized light matches that of the V polarized light.

As previously discussed in section 4.1, in order to maximize the overlap of the measured CNOT gate truth table with that of an ideal CNOT gate, additional polarization-dependent losses must be included in the V mode, to match those the π mode experiences.

In order to achieve this an array of Brewster windows were installed on a custom machined mount, which place the Brewster windows at the Brewster angle relative to the incoming light, so that the V polarized portion of the incoming light gets attenuated prior to interacting with the atom-cavity system. This ensures that in reflection, both polarization modes have the same reflection amplitude, allowing for the observation of the flip on the photonic qubit in the CNOT basis.

The Brewster angle can be simply calculated via:[39]

$$\tan \theta_B = n_t / n_i \quad (4.1)$$

$$n_t^2 - 1 = \frac{0.6961663\lambda^2}{\lambda^2 - 0.0684043^2} + \frac{0.4079426\lambda^2}{\lambda^2 - 0.1162414^2} + \frac{0.8974794\lambda^2}{\lambda^2 - 9.896161^2} \quad (4.2)$$

In (4.2) n_t is the refractive index of the Brewster window, and n_i would be the refractive index from which the incoming light is coming from (here: air $n_i \sim 1.004$). For light that is resonant to the $2-1'$ transition of the D_2 -line of ^{87}Rb , $n_t = 1.453667$, resulting in a Brewster angle $\theta_B = 55.467288^\circ$. Measurements outlined in section 5.1.2 determined that the average transmission through a single Brewster window placed at the Brewster angle θ_B to be $99.98 \pm 0.17\%$ and $77.40 \pm 0.13\%$ for the H and V polarization respectively.

The custom Brewster window mount as mentioned before has the main functionality of placing the elements in an array at the Brewster angle θ_b relative to the incoming light. It can house up to 12 Brewster windows when using the screw hole in the middle or 8 Brewster windows when using the screw holes on each side of the mount. The latter allows the mount to be placed on two separate posts, making the overall construction more mechanically stable, which eventually ended up being the configuration used in this project. This configuration not only provided greater mechanical stability, but was also sufficient for the experiment, since the optimal CNOT overlap was found to lie between 6 and 7 Brewster windows, as determined by a time-domain simulation of the atom-cavity system (see Appendix A.2).

Furthermore, the Brewster window mount has two sections in which the layout of one half is mirrored to that of the other half. The reason being that each Brewster window laterally displaces the transmitted beam by a fixed amount due to refraction through the tilted plate. This significantly reduces the coupling into the cavity fiber. In order to combat this, the two halves of the mount are symmetrical to one another, so that the shift of the optical beam path on both sides cancel each other out. By reversing the tilt direction in the second half of the array, each displacement is compensated

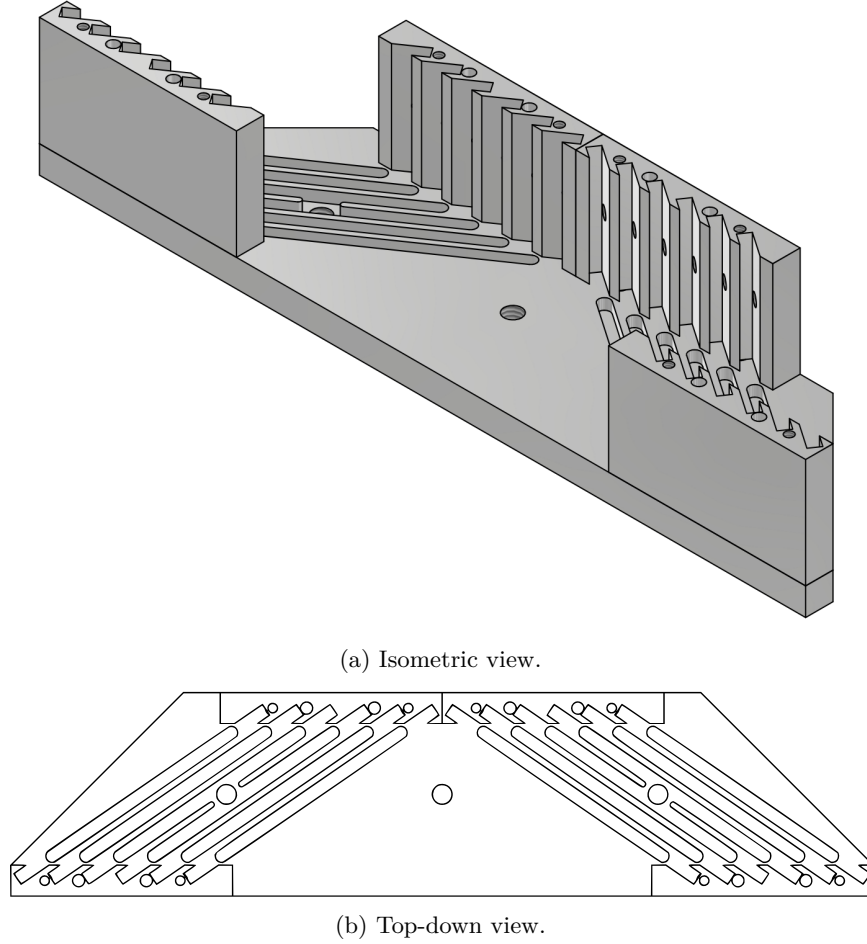


Figure 4.1: Custom-machined mount for Brewster windows. The mount features two mirrored sections of angled slots, each holding up to six Brewster windows at $\sim 55.48^\circ$.

by the corresponding window in the mirrored section. Although this is only the case when the total amount of Brewster windows is even and both halves are balanced, at most the shift would be equal to that of a single Brewster window shifting the optical beam path. This can be compensated by realigning the input beam into the cavity fiber.

4.3 Photon Qubit Input-Output Path

For the atom-photon gate, weak coherent pulses are used in order to simulate the effect of single photons getting reflected from the cavity. It is therefore imperative to precisely control the power going into the cavity, and also the frequency of the light. For that specific task the following setup was constructed.

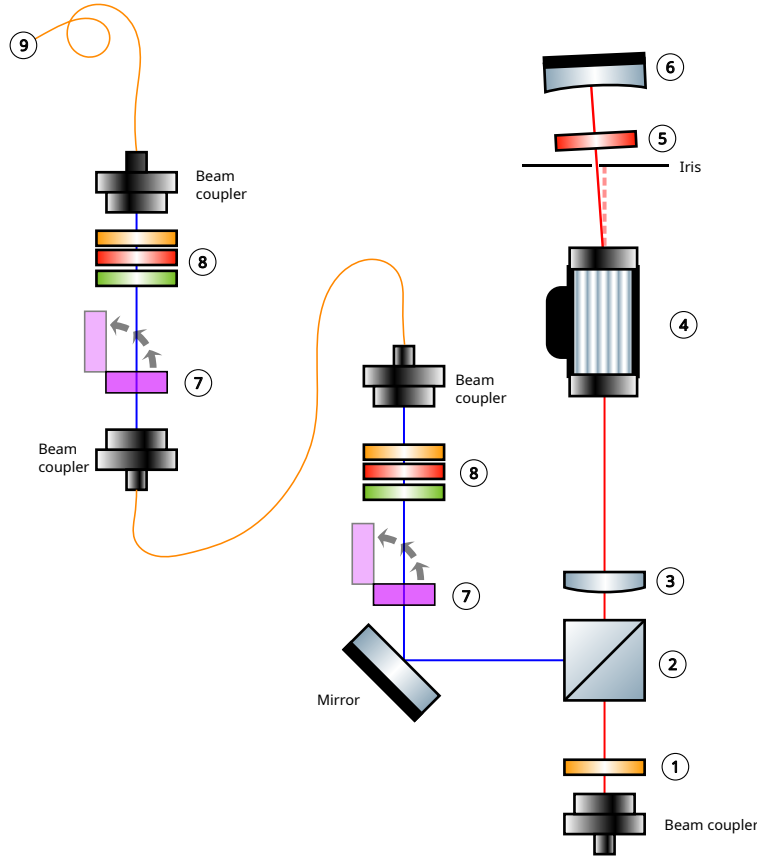


Figure 4.2: Double-pass AOM setup on the AOM table.

Figure 4.2 showcases a double-pass AOM track. The light going into the AOM track, is blue detuned to the 2-1' transition of the D₂-line by **include actual offset**. Part of the light (not shown here), can then be superimposed either with a stable reference frequency source like an optical frequency comb from the company *MenloSystems GmbH* when the laser frequency does not need to be scanned, or with another laser, for when it does need to be scanned, e.g., for performing a normal-mode spectroscopy. The polarization of the light first gets set by a $\lambda/2$ retardation waveplate (1) in order to pass through the polarizing beam splitter (PBS, 2) in full transmission. A plano convex lens (3) focuses the light into an acousto-optic modulator (AOM, 4). In the double-pass configuration shown here, the AOM shifts the optical frequency by twice its driving frequency, enabling continuous frequency tuning.

The zeroth order of the transmitted light will get blocked by an iris, whereas the minus first order of

the light is able to pass through. In order to now fully get reflected into the other arm of the PBS (marked in blue), the light passes through a $\lambda/4$ retardation plate (5) twice, while getting reflected and focused back into the AOM via a plano-concave mirror (6).

The light then passes two sets of neutral density (ND) filters (7) (write down attenuation for each one) and polarizers plus one $\lambda/2$ and $\lambda/4$ retardation waveplates (8) which allow for the alignment of the light with the principal axis of the polarization-maintaining (PM) fiber. The two sets of ND filters, can be selectively inserted into or removed from the beam path, attenuating the pulses to mean photon numbers in the range $\bar{n} = 0.05 - 2$ at the cavity input, with both inserted. The light then gets sent to the atomic-table via another PM fiber.

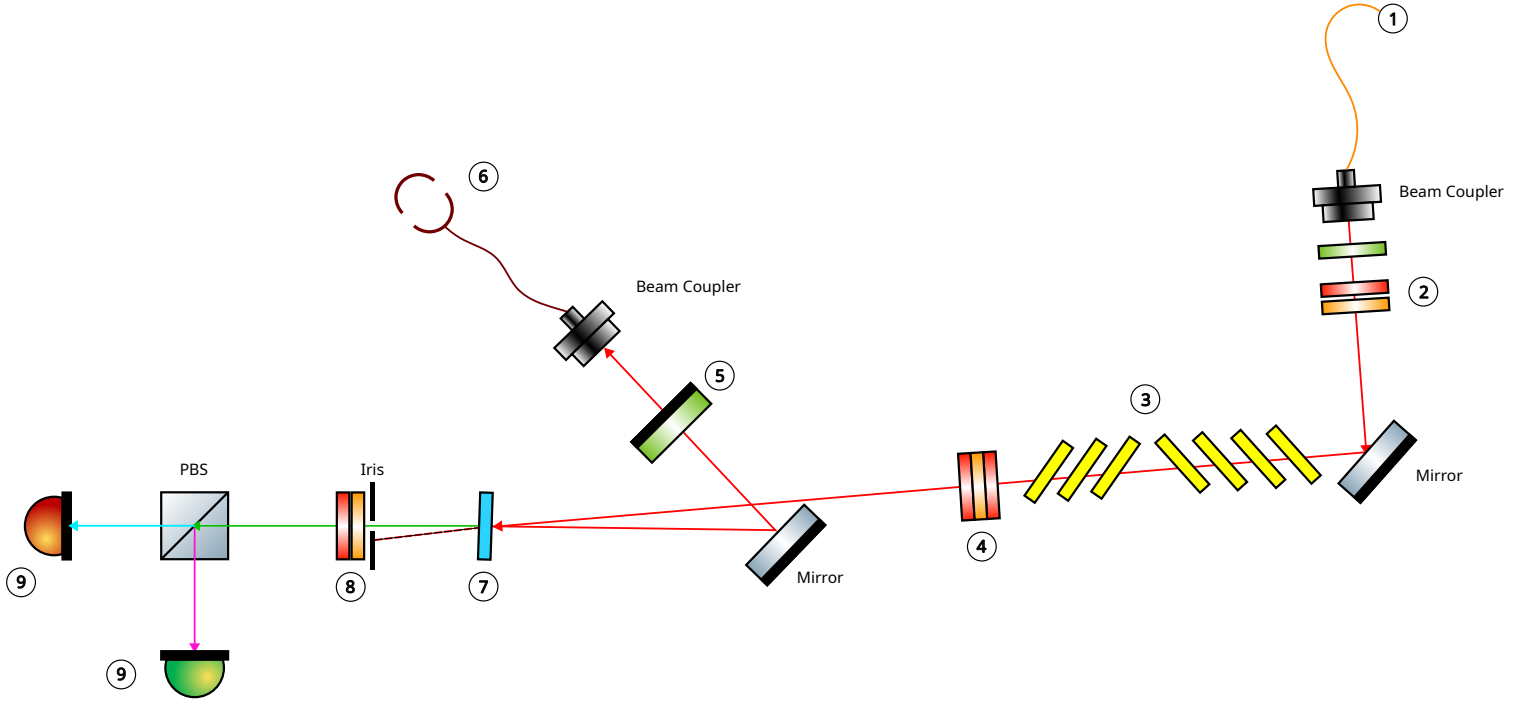


Figure 4.3: Optical setup on the atom-cavity table.

Once the light goes from the AOM table to the atom table, then the setup shown in Figure 4.3 is used. The input polarization for the atom-photon gate is able to be set via two automatically controlled retardation waveplates (2), with the light coming from the AOM table (1). In order to compensate for the polarization-dependent losses the light then passes through the array of Brewster windows (3). A set of compensation waveplates (4) then ensure that the H and V polarized light interacting with the atom-cavity system, are mapped to the π and V eigenmodes of the cavity. In order to couple the light into the cavity fiber, it is reflected off of a pellicle beam splitter (7). The pellicle beam splitter reflects 1% of the beam onto a mirror and through a dichroic mirror (5) into the cavity fiber coupler. The dichroic mirror also serves to couple the intracavity dipole trap light (not shown) into the same fiber. The light reflected from the birefringent cavity (6), passes through the dichroic mirror and reflects off the mirror back onto the pellicle. Since the pellicle transmits $\sim 99\%$ of the returning light, the reflected signal continues with minimal loss (green path) to the detection stage. An arbitrary polarization measurement basis can then be set via two automatically controlled retardation waveplates (8). Finally the light passes through another PBS, and the two arms couple into two separate superconducting nanowire single-photon detectors (SNSPDs, 9). also include detection setup specs, efficiency and dc rate

Prior to building the setup shown in Figure 4.3, the gate photons were routed via an existing beam path known as the probe beam, which had originally been used for empty-cavity spectroscopy to determine the mode-matching efficiency and photon decay rate.

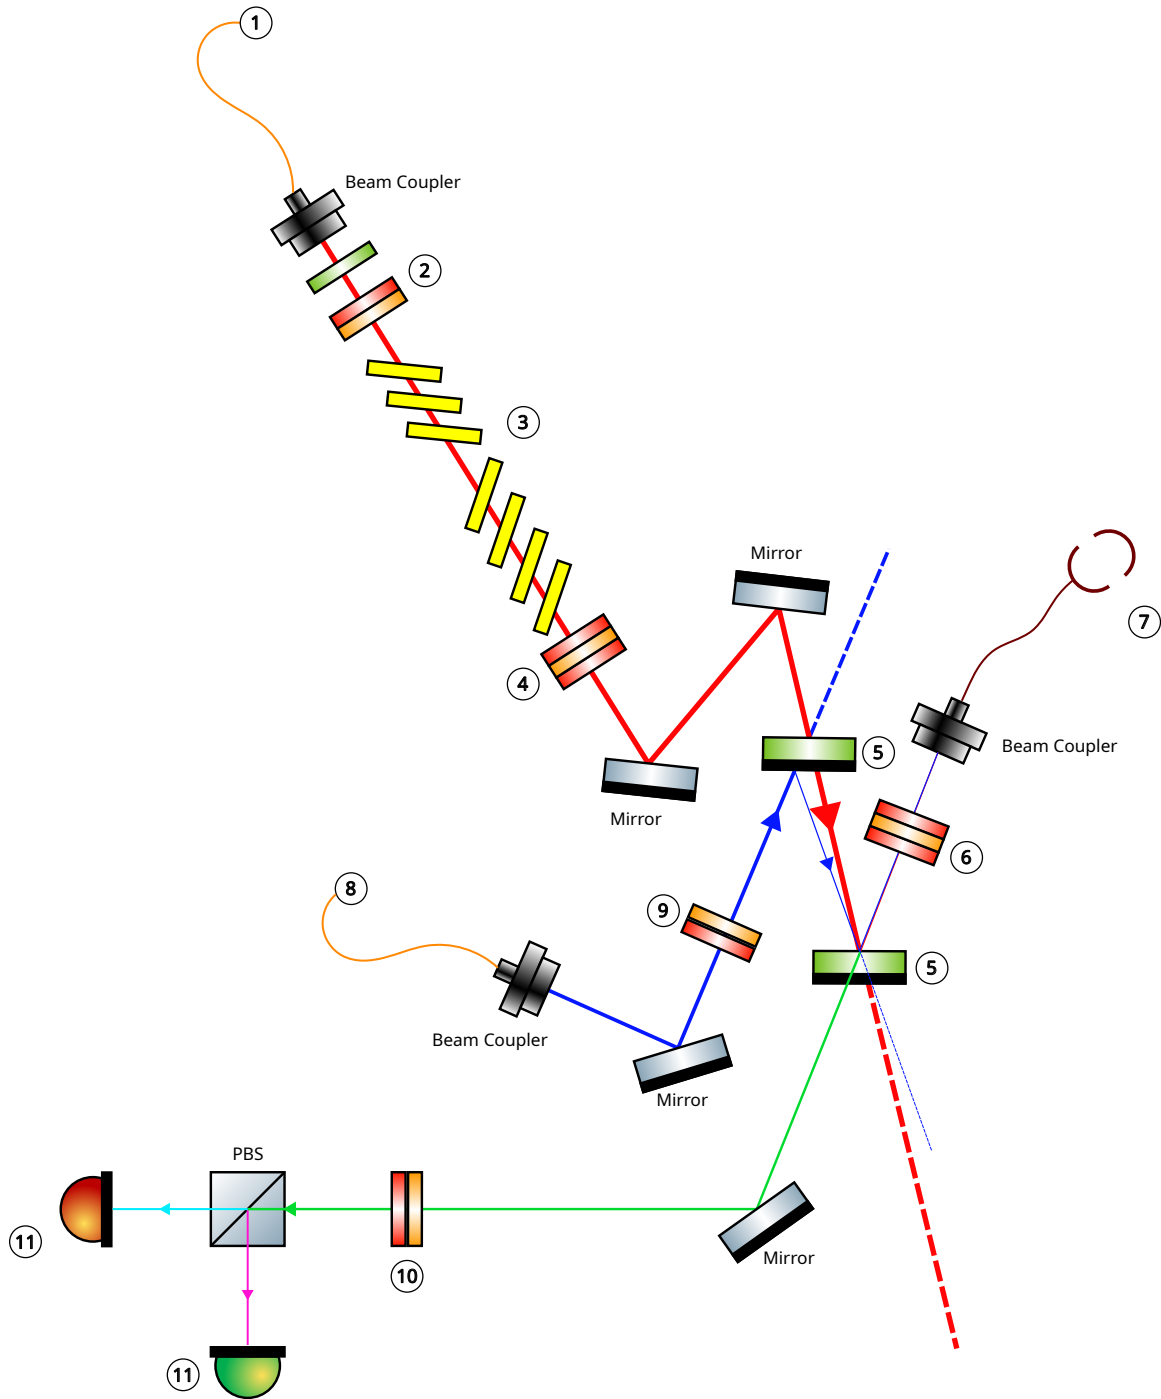


Figure 4.4: Old optical setup on the atom-cavity table.

The earlier setup can be seen in Figure 4.4. The light coming from the probe beam would be coupled into the cavity-fiber, through the transmission and subsequent reflection dichroic mirrors (5). Each of these mirrors is a [include product names here](#) from the company [include company name here](#), and possess the feature of transmitting most of the incoming light and reflecting only a small portion. This setup was chosen so that both the intracavity light trap (8) with its own set of compensation waveplates (9) and the probe beam, could be coupled into the fiber simultaneously.

The problem of this initial setup was, that precise control over the polarization and its losses is crucial, especially after reflection from the atom-cavity system. However, as it was the case with this setup, the coupling into the cavity fiber, was achieved via reflection off a dichroic mirror, which introduced additional polarization-dependent losses and rotations in the s and p polarization. In order to account for extra rotations induced by the dichroic mirrors (5), another set of compensation waveplates was included right in front of the cavity fiber coupler (6). This then meant that the first set of compensation waveplates (4), was meant to account for the rotations induced by the two dichroic mirrors, thus mapping the H and V polarization of the incoming light to the s and p polarization of the two mirrors. The second set of compensation waveplates (6) then mapped the s and p polarizations of the dichroic mirrors to the π and V mode of the cavity. However, with no means to check the polarization of the reflected light from the dichroic mirror via a polarimeter, due to spatial constraints, this setup proved to be unreliable. The measurement setup with the automatic waveplates (10) and two SNSPDs (11) would have remained the same.

Finally, by changing to the setup shown in Figure 4.3, and instead opting to use a pellicle, which had much smaller polarization-dependent losses and rotations in reflection compared to the dichroic mirrors, this issue was resolved. Furthermore, it was verified that the polarization-dependent changes both in reflection and transmission through the pellicle were minimal, thus ensuring that the correctly reflected light will not receive further penalties when going to the detectors.

[include numbers that showcase the losses for each polarization and stuff for the dichroic mirrors and also for the pellicle \(which are much smaller but still\).](#)

Chapter 5

Atom-Photon Gate

Using the setup explained in chapter 4, one can use it to first characterize important experimental parameters in order to estimate the cavity coupling as well as its losses when reflecting light off of the atom-cavity system. Furthermore using these values, the overlap with an ideal CPF/CNOT gate truth table can then be estimated and compared to the measured values.

Section 5.1 of this chapter goes over the experimental parameters which are relevant for the gate mechanism and how they were determined. Section 5.2 then reports on the performance of the atom-photon gate both in the CPF basis as well as the CNOT basis, alongside a comparison between the experimental results and simulated results regarding the Brewster window and photon number respectively.

5.1 Experimental Parameters relevant for the gate mechanism

In order to estimate the overlap between the experimentally realizable and ideal CNOT gate, one first needs to determine various experimental parameters. Using the experimental parameters one can then calculate the reflectivity for each of the input states of the atom-photon gate, and use those to calculate a theoretical overlap with an ideal CPF/CNOT gate.

5.1.1 Cavity coupling and losses

The first set of experimental parameters to extract are the total cavity decay rate κ , the mode-matching parameters μ_{fr} and μ_{fc} , and the atom-cavity coupling strength g . These are obtained from two complementary spectroscopy measurements on the locked cavity: an empty-cavity spectroscopy (without a trapped atom) to determine κ , μ_{fr} , and μ_{fc} , and a normal-mode spectroscopy (with a coupled atom) to extract g .

For the empty-cavity measurement, the probe laser is scanned across the π -mode resonance of the cavity while being phase-modulated at 300 MHz by an electro-optic modulator (EOM). The EOM sidebands appear as additional peaks in the transmission spectrum, separated by a known frequency from the carrier, and thereby provide an absolute time-to-frequency calibration of the scan axis. The π -mode of the cavity is locked during the measurement to the $F = 2, m_F = 0 \leftrightarrow F' = 1, m_F = 0$ transition, and both the transmitted and reflected signals are recorded simultaneously. Since no atom is loaded, the coupling term in equation (2.10) vanishes ($g = 0$).

The transmission spectrum is fitted with a sum of Lorentzian lineshapes. Each resonance peak is described by a cavity transfer function of the form:

$$T(\omega) = \left| \frac{A}{i(\omega - \omega_c) + \kappa} \right|^2, \quad (5.1)$$

where A is a fit amplitude, ω_c the resonance frequency, and κ the half-width at half maximum (HWHM) of the cavity mode. The full linewidth 2κ is extracted from the fit and averaged over multiple successive cavity scans, yielding $2\kappa = 2\pi \times (116.19 \pm 0.37)$ MHz.

The reflection spectrum is fitted using the empty-cavity limit of Eq. (2.10). Setting $g = 0$ and absorbing a relative phase into the mode-matching coefficient μ_{fc} , the normalized reflection amplitude simplifies to:

$$r(\omega) = \mu_{fr} e^{i\phi_{fr}} - (\mu_{fc} e^{i\phi_{fc}})^2 \frac{2\kappa_{oc}}{i(\omega - \omega_c) + \kappa}, \quad (5.2)$$

where ϕ_{fr} and ϕ_{fc} account for residual phase offsets in the fiber path. The fit yields the fiber-cavity mode-matching parameter $\mu_{fc} = 0.873 \pm 0.002$ and the free-space mode-matching parameter $\mu_{fr} = 0.978 \pm 0.006$. The outcoupling ratio $\kappa_{oc}/\kappa = 0.85$ is held fixed during the fit, as this value has been consistently measured across multiple cavity assemblies over several years. The resulting fit parameters are summarized in Table 3.1 in section 3.1, and representative transmission and reflection spectra with their respective fits are shown in Figure 5.1.

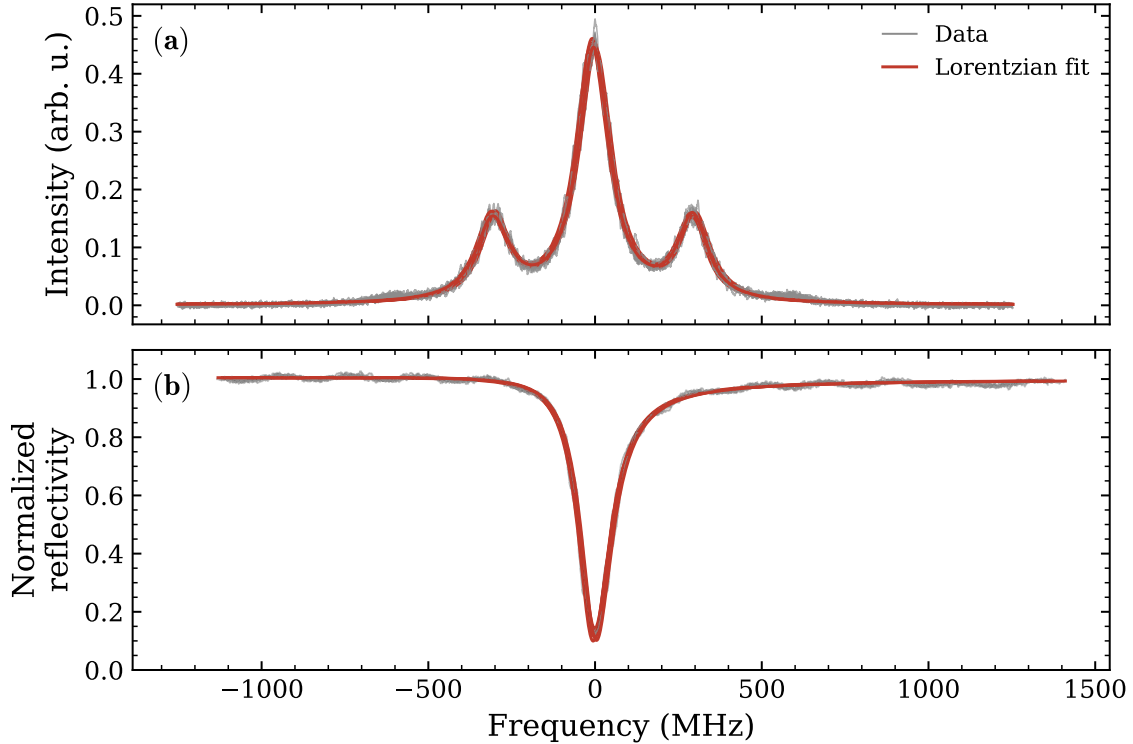


Figure 5.1: Empty-cavity spectroscopy of the π -mode. The probe laser frequency is scanned across the cavity resonance while phase-modulated at 300 MHz by an electro-optic modulator, producing sidebands that serve as frequency markers for the time-to-frequency calibration. **(a)** Cavity transmission spectrum. Multiple successive scans (grey) are individually fitted with Lorentzian lineshapes (red) according to Eq. (5.1), from which the full linewidth 2κ is extracted. **(b)** Normalized cavity reflection spectrum. The reflection dips are fitted using Eq. (5.2) to extract the mode-matching parameter μ_{fc} . Each scan is centered on its respective resonance frequency.

With κ and the mode-matching parameters determined, the remaining unknown is the atom-cavity coupling strength g . This is extracted from a normal-mode spectroscopy measurement, in which the probe laser is scanned across the cavity resonance while a single atom is trapped and coupled to the π mode.

After trapping the atom it is cooled and prepared in the $F = 1, m_F = 0$ Zeeman state via the aforementioned methods in section 3.3. One can then either record the normal-mode spectroscopy for the uncoupled ($F = 1, m_F = 0$) or coupled state ($F = 2, m_F = 0$), by choosing to use a microwave

drive and transfer the population from the uncoupled to the resonantly coupled state. A probe laser which is resonant to the $F = 2, m_F = 0 \leftrightarrow F' = 1, m_F = 0$ transition is then deployed. For the normal-mode spectroscopy the probe laser has to be scanned over a large frequency range in order to fully capture the entire reflection spectrum. This is achieved by changing the locking point (the reference detuning), which then allows its frequency to be changed in a controlled manner. The beat signal to which the laser will then be locked to, is supplied by an arbitrary waveform generator (AWG), which continuously changes the frequency over a range of 25 MHz to 300 MHz. Here, locking the laser to a beat frequency of 25 MHz would make the probe laser red-detuned to the $2 - 1'$ transition, whereas a beat frequency of 300 MHz would make it blue-detuned to the respective transition.

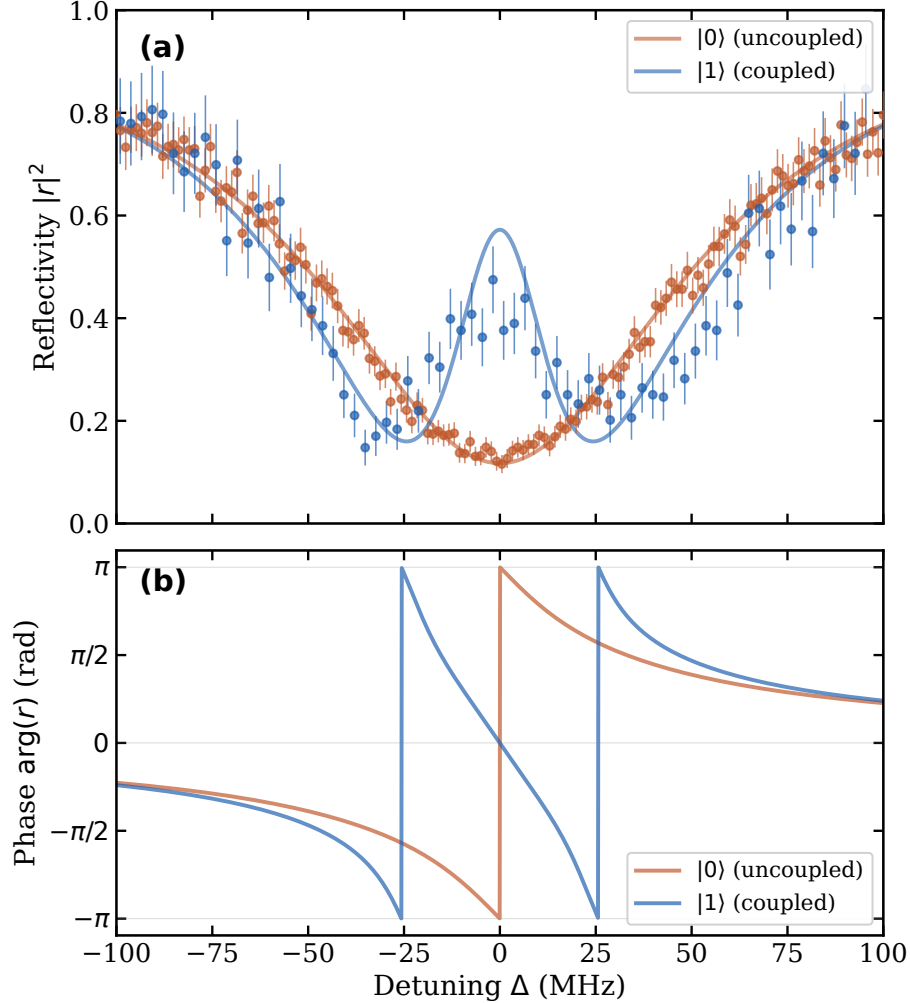


Figure 5.2: Normal-mode spectroscopy of the atom-cavity system. **(a)** Normalized reflectivity $|r|^2$ as a function of probe detuning Δ for the uncoupled state $|0\rangle$ (red) and the coupled state $|1\rangle$ (blue). The uncoupled spectrum shows the bare cavity resonance, fitted with the empty-cavity reflection coefficient, as the uncoupled state is off-resonant from the probe, so the system behaves as an empty cavity. The coupled spectrum exhibits the vacuum Rabi splitting, fitted using equation (2.10), yielding a coupling strength of $g = 2\pi \times (25.9 \pm 0.5)$ MHz. **(b)** Phase $\arg(r)$ of the reflected field computed from the respective fit models. The case for the atom in the uncoupled state showcases a phase shift of π on resonance, while the coupled system features a phase shift of 0.

From the fit in Figure 5.2 an atom-cavity coupling $g = 2\pi \times (25.9 \pm 0.5)$ MHz can be extracted.

With these parameters in hand, the next step is determining the optimal V-mode attenuation.

5.1.2 Brewster plate attenuation

Using the values determined in section 5.1, one can simulate the reflection amplitudes for each of the input states of the gate using the time-domain simulation described in Appendix A. Using the simulation results, one can simulate the ideal attenuation of the almost ideally reflected V polarized portion of the input light, in order to achieve the highest possible overlap with the ideal CNOT truth table (A.2). From the simulated overlap, one deduces that the optimal transmission of the V polarized light is at $T_V \approx 24\%$. Using this information, the ideal number of Brewster windows can thus be determined.

For the characterization of the Brewster windows themselves, two measurements were conducted. First, only a singular Brewster plate was inserted into the custom mount to check the average attenuation across a set of Brewster windows in the V polarization. This ensures that all Brewster windows operate up to spec, and that the attenuation of the V polarization is happening in constant jumps. At the Brewster angle θ_B the transmission through single Brewster window were $99.98 \pm 0.17\%$ and $77.40 \pm 0.13\%$ for the H and V polarization respectively.

The second characterization that needed to be performed, places multiple Brewster windows in an array to closely resemble the setup used in the actual experiment. In this configuration, one can then measure the powers in transmission both for H and V to determine the ideal amounts of Brewster windows one would need to use in order to achieve the highest gate fidelity.

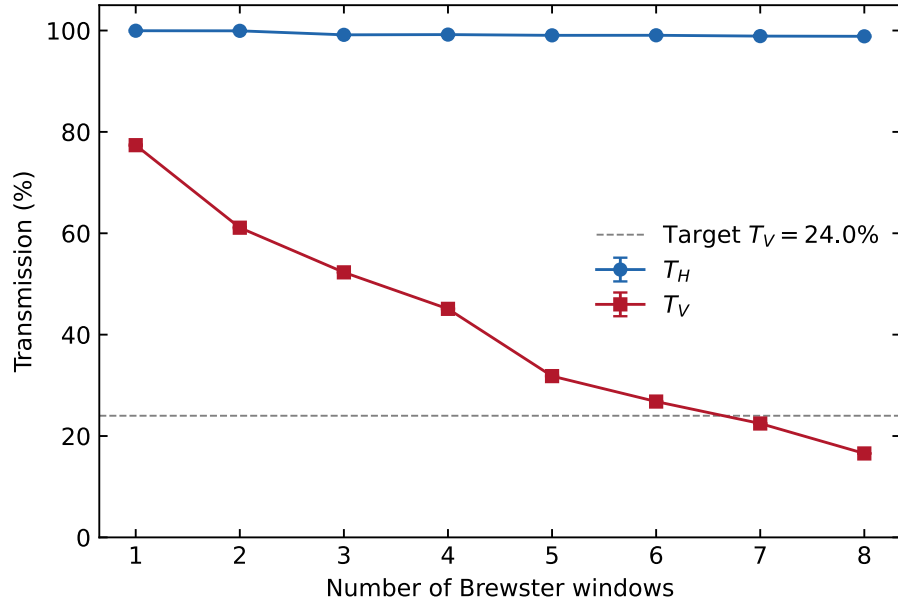


Figure 5.3: Measured transmission of H- and V-polarized light through N Brewster windows placed in series at Brewster’s angle. The H-polarization transmits near-unity for all configurations, while the V-polarization is progressively attenuated. The dashed line indicates the target V-mode transmission of 24.0% for optimal overlap with the ideal CNOT truth table.

In Figure 5.3, one can see that the configuration for the optimal overlap with the ideal CNOT truth table lies between 6–7 Brewster windows.

5.2 Atom-Photon gate performance

This section will now go over the measurements for the gate truth tables. First the experimental protocol for the measurement as well as the resulting truth tables will be showcased in section 5.2.1. Afterward, the overlap of the measured truth table will be characterized as a function of the amount of Brewster windows installed in the custom mount and the mean input photon number in sections 5.2.2 and 5.2.3 respectively. **maybe mention bell states depending if I can get that to work.** Lastly in section 5.2.5, an analysis of the limitation and imperfections of the setup will be given and how one could improve the overlap even further.

5.2.1 Gate Truth Tables

The measurement of the gate truth table starts with the preparation of the atom. Using the protocol outlined in chapter 3.3, one can choose to then prepare the atom in the coupled state $|F=2, m_f=0\rangle = |1\rangle$ by deploying a microwave π -pulse, or leave the atom in the uncoupled state $|F=1, m_f=0\rangle = |0\rangle$. Once the atom is prepared in one of the atomic eigenstates, a gated faint laser pulse will be sent to the cavity, which for the following measurements will have an input mean photon number of $\bar{n} \approx 0.1$. As explained in chapter 2, depending on the choice of the photonic qubit eigenbasis, one chooses to either realize a CPF gate (basis: $|\pi\rangle$ and $|V\rangle$) or a CNOT gate (basis: $|\pm\rangle = \frac{|V\rangle \pm |\pi\rangle}{\sqrt{2}}$). For the CPF basis, this basis is the basis of the H and V, as both of them can be mapped to the π and V-mode of the birefringent cavity via the first set of compensation waveplates shown in Figure 4.3. For the CNOT basis, one can then just use a set of orthogonal polarizations that are a superposition of H and V. In this case the CNOT basis was chosen to be the R and L basis. The choice for this eigenbasis will be explained in more detail in section 5.2.5. Once the photon pulse has been reflected off of the cavity, a state detection (SD) beam is deployed which produces SD-counts if the atom is in coupled state $|1\rangle$, or none if the atom is in the uncoupled state $|0\rangle$. A detailed protocol of the protocol is shown in figure

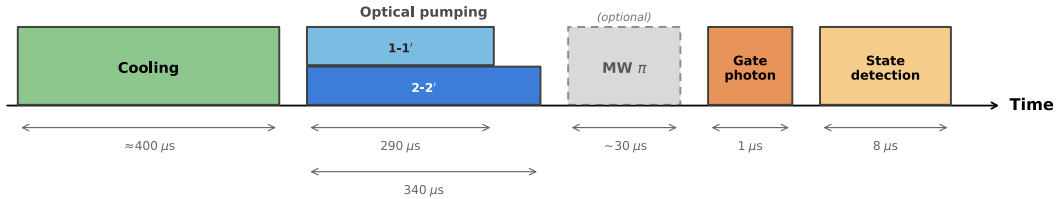


Figure 5.4: Experimental sequence for a single trial of the gate truth table measurement. Each trial begins with $\approx 400 \mu\text{s}$ of cooling, followed by optical pumping using two lasers addressing the $1 \rightarrow 1'$ and $2 \rightarrow 2'$ transitions simultaneously. The $1 \rightarrow 1'$ laser is switched off after $290 \mu\text{s}$, with the $2 \rightarrow 2'$ laser remaining on for an additional $50 \mu\text{s}$, preparing the atom in the $|F=1, m_F=0\rangle$ state. To prepare the atom in the coupled state $|1\rangle$, an optional microwave π pulse transfers population from $|0\rangle$ to $|1\rangle$ (dashed box). A weak coherent pulse of $1 \mu\text{s}$ duration and mean input photon number $\bar{n} \approx 0.1$ then probes the atom-cavity system, implementing the gate interaction. Finally, fluorescence-based state detection over $8 \mu\text{s}$ determines the atomic output state. Time axis is not to scale.

By then setting the detection waveplates from Figure 4.3 to measure the same basis as the input, one is able to measure the following truth tables for the CPF and CNOT gates:

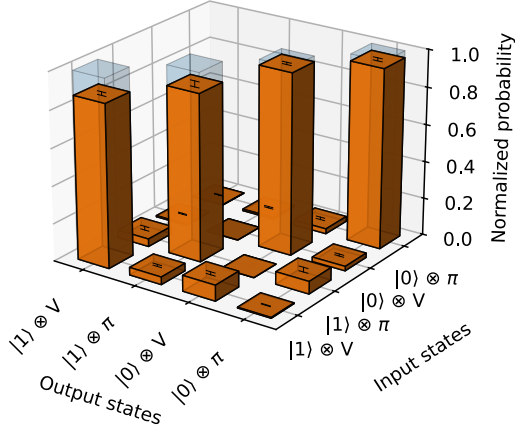
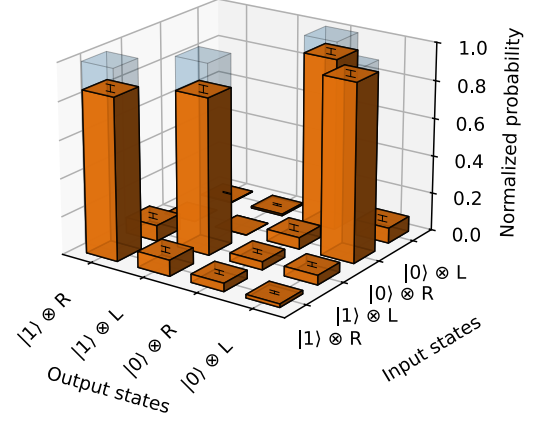
(a) CPF gate in the π/V basis.(b) CNOT gate in the R/L basis.

Figure 5.5: Measured truth tables of the atom-photon quantum gate. ...

5.2.2 Brewster window Scan

5.2.3 Mean photon number Scan

5.2.4 Generation of Bell States

5.2.5 Limitations and imperfections

Chapter 6

Summary and Outlook

Appendix A

Numerical Simulation of the Atom-Photon Gate

This appendix describes the time-domain master-equation simulations used to determine the optimal Brewster window attenuation (section A.2) and to characterize the gate fidelity as a function of mean photon number (section A.3). All simulations were implemented in Python using the QuTiP framework [40].

A.1 Simulation Model

The simulation models the full open quantum system consisting of a single ^{87}Rb atom coupled to a birefringent Fabry-Pérot cavity supporting two polarization modes (π and V). The atom is described by a four-level Hilbert space spanned by $\{|0\rangle, |1\rangle, |\text{dark}\rangle, |e\rangle\}$, where $|0\rangle$ and $|1\rangle$ are the clock qubit states, $|\text{dark}\rangle$ captures off-resonant decay channels, and $|e\rangle$ is the excited state coupled to $|1\rangle$ via the cavity mode. Each cavity mode is truncated to a Fock space of dimension $N_{\text{ph}} = 3$, yielding a total Hilbert space of dimension $3 \times 3 \times 4 = 36$.

A.1.1 Hamiltonian

In the rotating frame, the system Hamiltonian reads

$$\hat{H}_0 = \Delta_{c,\pi} \hat{a}_\pi^\dagger \hat{a}_\pi + (\Delta_{c,\pi} + \Delta_{\text{biref}}) \hat{a}_V^\dagger \hat{a}_V + \Delta_a \hat{\sigma}^\dagger \hat{\sigma}, \quad (\text{A.1})$$

with the atom-cavity interaction

$$\hat{H}_{\text{int}} = g(\hat{a}_\pi \hat{\sigma}^\dagger + \hat{a}_\pi^\dagger \hat{\sigma} + \hat{a}_V \hat{\sigma}^\dagger + \hat{a}_V^\dagger \hat{\sigma}), \quad (\text{A.2})$$

where g is the vacuum coupling rate (identical for both modes), $\Delta_{c,\pi}$ is the cavity-laser detuning for the π mode, $\Delta_{\text{biref}} = 2\pi \times 500 \text{ MHz}$ is the birefringent splitting, and Δ_a is the atom-laser detuning. The external drive is included via input-output theory. For input polarization α , the time-dependent drive term takes the form

$$\hat{H}_{\text{drive}}(t) = i \mu_{fc} \sqrt{\kappa_{OC}} \varepsilon(t) (\hat{a}_\alpha - \hat{a}_\alpha^\dagger), \quad (\text{A.3})$$

where $\varepsilon(t)$ is the temporal envelope of the input pulse, μ_{fc} is the fiber-cavity mode-matching parameter, and κ_{OC} is the outcoupling rate. For the CNOT basis states $|\pm\rangle = (|V\rangle \pm |\pi\rangle)/\sqrt{2}$, both cavity modes are driven simultaneously with the appropriate relative phase and amplitude.

A.1.2 Dissipation

The open-system dynamics are governed by the Lindblad master equation

$$\dot{\hat{\rho}} = -i[\hat{H}, \hat{\rho}] + \sum_k \mathcal{D}[\hat{L}_k] \hat{\rho}, \quad (\text{A.4})$$

with collapse operators accounting for:

- Photon loss through the outcoupling mirror: $\hat{L}_{1,2} = \sqrt{\kappa_{OC}} \hat{a}_{\pi,V}$,
- Internal cavity losses (absorption, HR mirror leakage): $\hat{L}_{3,4} = \sqrt{\kappa_{\text{int}}} \hat{a}_{\pi,V}$, where $\kappa_{\text{int}} = \kappa - \kappa_{OC}$,
- Spontaneous emission back to the coupled state: $\hat{L}_5 = \sqrt{p_{e \rightarrow 1} \gamma} |1\rangle \langle e|$,
- Spontaneous emission to off-resonant states: $\hat{L}_6 = \sqrt{p_{e \rightarrow \text{dark}} \gamma} |\text{dark}\rangle \langle e|$,

with branching ratios $p_{e \rightarrow 1} = 1/15$ and $p_{e \rightarrow \text{dark}} = 14/15$ for the $F' = 1$ excited state of the D_2 line.

A.1.3 Output Fields and Detection Probabilities

The output field in each polarization mode is computed via the input-output relation

$$\hat{a}_{\text{out},\alpha}(t) = \mu_{fr} \varepsilon(t) + \mu_{fc} \sqrt{\kappa_{OC}} \langle \hat{a}_\alpha(t) \rangle, \quad (\text{A.5})$$

where μ_{fr} is the free-space mode-matching parameter. For the CNOT basis, the output fields are transformed to the $|\pm\rangle$ basis via $\hat{a}_{\text{out},\pm} = (\hat{a}_{\text{out},V} \pm \hat{a}_{\text{out},\pi})/\sqrt{2}$.

The detection probabilities at the two SNSPD detectors include corrections for dark counts and finite detection efficiency η . The photon signal fraction is defined as

$$F_{\text{photon}} = \frac{\lambda_+ + \lambda_-}{\Gamma_+(1 + \frac{\Gamma_+}{2} p_d) + \Gamma_-(1 + \frac{\Gamma_-}{2} p_d)}, \quad (\text{A.6})$$

where $\lambda_\pm = \eta n_{\text{out},\pm}$ are the signal rates, $\Gamma_\pm = \lambda_\pm + r_{\text{dc}}$ include dark counts at rate r_{dc} , and p_d accounts for the finite detector dead time. The final detection probabilities are then

$$P_\pm = F_{\text{photon}} \cdot R_\pm + (1 - F_{\text{photon}}) \cdot \frac{1}{2}, \quad (\text{A.7})$$

with $R_\pm = n_{\text{out},\pm} / (n_{\text{out},+} + n_{\text{out},-})$.

A.1.4 Simulation Parameters

The parameters used in the simulations are summarized in Table A.1. These correspond to the experimentally characterized values presented in section 5.1.

Parameter	Symbol	Value
Atom-cavity coupling	g	$2\pi \times 26 \text{ MHz}$
Total cavity decay rate	κ	$2\pi \times 58 \text{ MHz}$
Outcoupling ratio	κ_{OC}/κ	0.85
Atomic decay rate	γ	$2\pi \times 6.065 \text{ MHz}$
Birefringent splitting	Δ_{biref}	$2\pi \times 500 \text{ MHz}$
Fiber-cavity mode-matching	μ_{fc}	0.873
Free-space mode-matching	μ_{fr}	0.978
Fock space truncation	N_{ph}	3

Table A.1: Parameters used in the master-equation simulations.

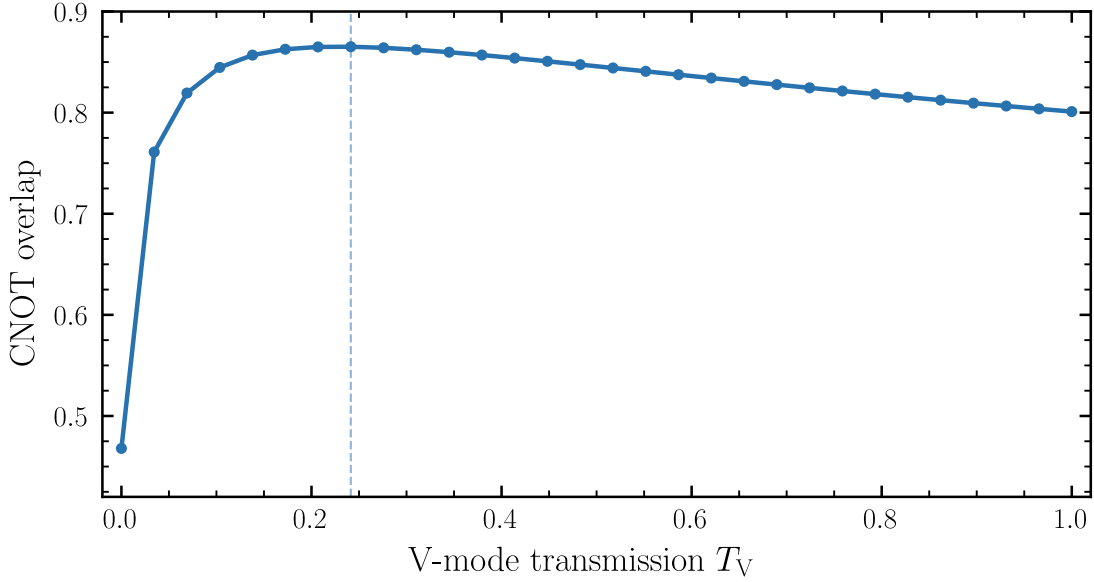


Figure A.1: Simulated CNOT gate overlap as a function of the V-mode cavity transmission T_V , obtained from a master-equation simulation of the atom-photon gate protocol. The dashed line marks the optimal transmission $T_V^* \approx 0.24$

A.2 Brewster Window Transmission Scan

To determine the optimal number of Brewster windows for the V-mode attenuation (cf. section 4.1), the gate fidelity was computed as a function of the V-mode transmission $T_V \in [0, 1]$.

For each value of T_V , the simulation was run in the CNOT basis: weak coherent pulses with $|+\rangle$ and $|-\rangle$ input polarizations were reflected from the atom-cavity system for both atomic qubit states $|0\rangle$ and $|1\rangle$. In the simulation, the V-mode transmission enters as a prefactor $\sqrt{T_V}$ on the V-mode drive amplitude, effectively modeling the attenuation introduced by the Brewster window array prior to the cavity.

From the four resulting output fields, the 4×4 CNOT truth table was constructed by computing the detection probabilities in the $|\pm\rangle$ output basis for each input-atom combination. The columns of the truth table were then normalized to unit probability. The overlap was evaluated as the column-averaged overlap between the simulated and ideal CNOT truth tables:

$$\text{Overlap} = \frac{1}{4} \sum_{j=1}^4 |\langle U_j | V_j \rangle|^2, \quad (\text{A.8})$$

where $|U_j\rangle$ and $|V_j\rangle$ are the j -th columns of the ideal and simulated truth tables, respectively.

The scan shown in Figure A.1 reveals a clear optimum at $T_V \approx 0.24$, corresponding to a V-mode power attenuation of approximately 76 %. Given the measured single-window V-mode transmission of $(77.40 \pm 0.13) \%$ (section 5.1.2), the naïve estimate 0.7738^n predicts an optimum between 5 and 6 Brewster windows ($0.7740^5 \approx 0.277$ and $0.7740^6 \approx 0.215$). However, the directly measured multi-window transmissions of $(26.80 \pm 0.06) \%$ for 6 windows and $(22.47 \pm 0.04) \%$ for 7 windows bracket T_V^* , indicating that 6 to 7 Brewster windows realise the optimal V-mode attenuation in practice.

A.3 Mean Photon Number Scan

While the atom-photon gate is designed to operate in the single-photon regime, the use of weak coherent pulses introduces a non-zero probability of multi-photon events. This section characterizes how the gate fidelity depends on the mean photon number $\bar{n}$ of the input pulses.

The mean photon number was scanned over the range $\bar{n} \in [10^{-3}, 2]$ on a logarithmic scale. For each value of $\bar{n}$, the coherent pulse amplitude was computed from the pulse normalization as

$$\alpha = \sqrt{\frac{\bar{n}}{\int_0^T |\varepsilon_{\text{ref}}(t)|^2 dt}}, \quad (\text{A.9})$$

where $\varepsilon_{\text{ref}}(t)$ is the unit-amplitude pulse envelope. The CNOT truth table was then simulated as described above and the fidelity was evaluated.

Three fidelity models were compared:

1. **Simulation only:** The CNOT truth table is computed directly from the master-equation simulation for the given $\bar{n}$, including dark-count mixing. The fidelity is then weighted by the probability p_{atom} of the atom remaining in its initial qubit subspace after the photon pulse:

$$\mathcal{F}_{\text{sim}} = \mathcal{F}_{\text{CNOT}}(\bar{n}) \cdot p_{\text{atom}} + (1 - p_{\text{atom}}) \cdot \frac{1}{2}. \quad (\text{A.10})$$

2. **Analytical model:** The single-photon gate fidelity $\mathcal{F}_1$ is taken as a fixed parameter (obtained from the $\bar{n} \rightarrow 0$ limit of the simulation). The fidelity at finite $\bar{n}$ is then modeled as

$$\mathcal{F}_{\text{ana}}(\bar{n}) = \frac{1}{2} + \left(P_{\text{sig}} \mathcal{F}_1 + (1 - P_{\text{sig}}) \cdot \frac{1}{2} - \frac{1}{2} \right) e^{-(1-\eta)\bar{n}}, \quad (\text{A.11})$$

where $P_{\text{sig}} = \eta\bar{n}/(\eta\bar{n} + r_{\text{dc}})$ is the signal-to-total click ratio and the exponential factor accounts for multi-photon scattering events that decorrelate the gate operation.

3. **Combined (simulation + analytical):** The CNOT truth table from the simulation (including dark-count mixing) provides the low- $\bar{n}$ fidelity, which is then multiplied by the analytical multi-photon correction factor $e^{-(1-\eta)\bar{n}}$.

The detection parameters used were: overall detection efficiency $\eta = 0.9 \times 0.85 \times 0.97 \approx 0.742$ (combining fiber coupling, SNSPD detection efficiency, and optical path transmission) and dark count rate $r_{\text{dc}} = 3 \times 10^{-4}$ counts per time unit.

Include the resulting plot: Fidelity vs. mean photon number comparing all three models, with the trust region annotation if using photon_dim = 3. Reference the figure.

At very low photon numbers ($\bar{n} \lesssim 10^{-2}$), dark counts dominate and the fidelity approaches 0.5 (random guessing). As $\bar{n}$ increases, the signal-to-noise ratio improves and the fidelity rises towards the single-photon limit $\mathcal{F}_1$. For $\bar{n} \gtrsim 1$, multi-photon events begin to degrade the fidelity, as the master-equation simulation captures the nonlinear response of the atom-cavity system to multi-photon input states. The Fock space truncation at $N_{\text{ph}} = 3$ limits the quantitative reliability of the simulation to $\bar{n} \lesssim 2$; beyond this threshold, the truncated Hilbert space can no longer faithfully represent the coherent state.

Bibliography

- [1] Albert Einstein. “Zur Quantentheorie der Strahlung”. In: *Phys. Z.* 18 (1917), pp. 121–128.
- [2] D. J. Wineland, J. Dalibard, and C. Cohen-Tannoudji. “Sisyphus cooling of a bound atom”. In: *J. Opt. Soc. Am. B* 9.1 (Jan. 1992), pp. 32–42. DOI: 10.1364/JOSAB.9.000032. URL: <https://opg.optica.org/josab/abstract.cfm?URI=josab-9-1-32>.
- [3] E. L. Raab et al. “Trapping of Neutral Sodium Atoms with Radiation Pressure”. In: *Phys. Rev. Lett.* 59 (23 Dec. 1987), pp. 2631–2634. DOI: 10.1103/PhysRevLett.59.2631. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.59.2631>.
- [4] Norman F. Ramsey. “Experiments with Separated Oscillatory Fields and Hydrogen Masers”. In: *Nobel Lectures, Physics 1981–1990*. Nobel Lecture delivered December 8, 1989. Stockholm, Sweden: Nobel Foundation, Dec. 1989. URL: <https://www.nobelprize.org/uploads/2018/06/ramsey-lecture.pdf>.
- [5] *Press release: The 1989 Nobel Prize in Physics*. The Royal Swedish Academy of Sciences. 1989. URL: <https://www.nobelprize.org/prizes/physics/1989/press-release/>.
- [6] en. 2026. URL: <https://www.invent.org/inductees/dawon-kahng>.
- [7] Siegfried Hunklinger. *Festkörperphysik*. München: De Gruyter Oldenbourg, 2014. ISBN: 9783486858501. DOI: doi:10.1524/9783486858501. URL: <https://doi.org/10.1524/9783486858501>.
- [8] G.E. Moore. “Cramming More Components Onto Integrated Circuits”. In: *Proceedings of the IEEE* 86.1 (1998), pp. 82–85. DOI: 10.1109/JPR0C.1998.658762.
- [9] Richard P. Feynman. “There’s Plenty of Room at the Bottom”. In: *Journal of Microelectromechanical Systems* 1.1 (1992), pp. 60–66. DOI: 10.1109/84.128057.
- [10] Denis Mamaluy and Xujiao Gao. “The fundamental downscaling limit of field effect transistors”. In: *Applied Physics Letters* 106.19 (May 2015), p. 193503. ISSN: 0003-6951. DOI: 10.1063/1.4919871. eprint: https://pubs.aip.org/aip/apl/article-pdf/doi/10.1063/1.4919871/14319921/193503_1_online.pdf. URL: <https://doi.org/10.1063/1.4919871>.
- [11] Yuval Boger. *How quantum computing will transform logistics*. en. Jan. 2025. URL: <https://www.forbes.com/councils/forbesbusinessdevelopmentcouncil/2025/01/23/how-quantum-computing-will-transform-logistics/>.
- [12] Richard P. Feynman. “Simulating physics with computers”. In: *International Journal of Theoretical Physics* 21.6 (June 1982), pp. 467–488. ISSN: 1572-9575. DOI: 10.1007/BF02650179. URL: <https://doi.org/10.1007/BF02650179>.
- [13] Saleh Alrashed and Nasro Min-Allah. “Quantum computing research in medical sciences”. In: *Informatics in Medicine Unlocked* 52 (2025), p. 101606. ISSN: 2352-9148. DOI: <https://doi.org/10.1016/j.imu.2024.101606>. URL: <https://www.sciencedirect.com/science/article/pii/S2352914824001631>.
- [14] Thomas Chalopin et al. “Optical Superlattice for Engineering Hubbard Couplings in Quantum Simulation”. In: *Phys. Rev. Lett.* 134 (5 Feb. 2025), p. 053402. DOI: 10.1103/PhysRevLett.134.053402. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.134.053402>.

- [15] Paul Benioff. “The computer as a physical system: A microscopic quantum mechanical Hamiltonian model of computers as represented by Turing machines”. In: *Journal of Statistical Physics* 22.5 (May 1980), pp. 563–591. ISSN: 1572-9613. DOI: 10.1007/BF01011339. URL: <https://doi.org/10.1007/BF01011339>.
- [16] Peter W. Shor. “Polynomial-Time Algorithms for Prime Factorization and Discrete Logarithms on a Quantum Computer”. In: *SIAM Journal on Computing* 26.5 (1997), pp. 1484–1509. DOI: 10.1137/S0097539795293172. eprint: <https://doi.org/10.1137/S0097539795293172>. URL: <https://doi.org/10.1137/S0097539795293172>.
- [17] Charles H. Bennett and Gilles Brassard. “Quantum cryptography: Public key distribution and coin tossing”. In: *Theoretical Computer Science* 560 (2014). Theoretical Aspects of Quantum Cryptography celebrating 30 years of BB84, pp. 7–11. ISSN: 0304-3975. DOI: <https://doi.org/10.1016/j.tcs.2014.05.025>. URL: <https://www.sciencedirect.com/science/article/pii/S0304397514004241>.
- [18] Charles H. Bennett et al. “Teleporting an unknown quantum state via dual classical and Einstein-Podolsky-Rosen channels”. In: *Phys. Rev. Lett.* 70 (13 Mar. 1993), pp. 1895–1899. DOI: 10.1103/PhysRevLett.70.1895. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.70.1895>.
- [19] Nathalie P. de Leon et al. “Materials challenges and opportunities for quantum computing hardware”. In: *Science* 372.6539 (2021), eabb2823. DOI: 10.1126/science.abb2823. eprint: <https://www.science.org/doi/pdf/10.1126/science.abb2823>. URL: <https://www.science.org/doi/abs/10.1126/science.abb2823>.
- [20] Rajeev Acharya et al. “Quantum error correction below the surface code threshold”. In: *Nature* 638.8052 (Feb. 2025), pp. 920–926. ISSN: 1476-4687. DOI: 10.1038/s41586-024-08449-y. URL: <https://doi.org/10.1038/s41586-024-08449-y>.
- [21] L.-M. Duan and H. J. Kimble. “Scalable Photonic Quantum Computation through Cavity-Assisted Interactions”. In: *Phys. Rev. Lett.* 92 (12 Mar. 2004), p. 127902. DOI: 10.1103/PhysRevLett.92.127902. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.92.127902>.
- [22] H. J. Kimble. “The quantum internet”. In: *Nature* 453.7198 (June 2008), pp. 1023–1030. ISSN: 1476-4687. DOI: 10.1038/nature07127. URL: <https://doi.org/10.1038/nature07127>.
- [23] D. Copsey et al. “Toward a scalable, silicon-based quantum computing architecture”. In: *IEEE Journal of Selected Topics in Quantum Electronics* 9.6 (2003), pp. 1552–1569. DOI: 10.1109/JSTQE.2003.820922.
- [24] Gianvito Chiarella et al. “Source of Heralded Atom-Photon Entanglement for Quantum Networking”. In: *Phys. Rev. Lett.* 135 (24 Dec. 2025), p. 240802. DOI: 10.1103/5zk9-3rpv. URL: <https://link.aps.org/doi/10.1103/5zk9-3rpv>.
- [25] Manuel Brekenfeld et al. “A quantum network node with crossed optical fibre cavities”. In: *Nature Physics* 16.6 (June 2020), pp. 647–651. ISSN: 1745-2481. DOI: 10.1038/s41567-020-0855-3. URL: <https://doi.org/10.1038/s41567-020-0855-3>.
- [26] Andreas Reiserer and Gerhard Rempe. “Cavity-based quantum networks with single atoms and optical photons”. In: *Rev. Mod. Phys.* 87 (4 Dec. 2015), pp. 1379–1418. DOI: 10.1103/RevModPhys.87.1379. URL: <https://link.aps.org/doi/10.1103/RevModPhys.87.1379>.
- [27] E.T. Jaynes and F.W. Cummings. “Comparison of quantum and semiclassical radiation theories with application to the beam maser”. In: *Proceedings of the IEEE* 51.1 (1963), pp. 89–109. DOI: 10.1109/PROC.1963.1664.
- [28] Manuel K. L. Brekenfeld. “Ein photonischer Quantenspeicher mit einem Atom in gekreuzten optischen Faserresonatoren”. de. Technische Universität München, 2023, p. 184. URL: <https://mediatum.ub.tum.de/1695291>.

- [29] Manuel Uphoff et al. “Frequency splitting of polarization eigenmodes in microscopic FabryPerot cavities”. In: *New Journal of Physics* 17.1 (Jan. 2015), p. 013053. DOI: 10.1088/1367-2630/17/1/013053. URL: <https://doi.org/10.1088/1367-2630/17/1/013053>.
- [30] C. W. Gardiner and M. J. Collett. “Input and output in damped quantum systems: Quantum stochastic differential equations and the master equation”. In: *Phys. Rev. A* 31 (6 June 1985), pp. 3761–3774. DOI: 10.1103/PhysRevA.31.3761. URL: <https://link.aps.org/doi/10.1103/PhysRevA.31.3761>.
- [31] C. Y. Hu et al. “Giant optical Faraday rotation induced by a single-electron spin in a quantum dot: Applications to entangling remote spins via a single photon”. In: *Phys. Rev. B* 78 (8 Aug. 2008), p. 085307. DOI: 10.1103/PhysRevB.78.085307. URL: <https://link.aps.org/doi/10.1103/PhysRevB.78.085307>.
- [32] T. G. Tiecke et al. “Nanophotonic quantum phase switch with a single atom”. In: *Nature* 508.7495 (Apr. 2014), pp. 241–244. ISSN: 1476-4687. DOI: 10.1038/nature13188. URL: <https://doi.org/10.1038/nature13188>.
- [33] Dominik Niemietz. “Nondestructive detection of photonic qubits with single atoms in crossed fiber cavities”. en. Technische Universität München, 2021, p. 113. URL: <https://mediatum.ub.tum.de/1601857>.
- [34] Gianvito Chiarella. “Quantum-Network-ready Source of Heralded Atom-Photon Entanglement”. en. Technische Universität München, 2026, p. 107.
- [35] C J Foot. *Atomic Physics*. Oxford University Press, Nov. 2004. ISBN: 9780198506959. DOI: 10.1093/oso/9780198506959.001.0001. URL: <https://doi.org/10.1093/oso/9780198506959.001.0001>.
- [36] Daniel Steck. “Rubidium 87 D Line Data”. In: (May 2024), p. 32.
- [37] L. Allen and J.H. Eberly. *Optical Resonance and Two-Level Atoms*. Dover Books on Physics. Courier Corporation, 2012. ISBN: 9780486136172. URL: <https://books.google.de/books?id=36DDAgAAQBAJ>.
- [38] Norihito Kosugi et al. “Theory of damped Rabi oscillations”. In: *Phys. Rev. B* 72 (17 Nov. 2005), p. 172509. DOI: 10.1103/PhysRevB.72.172509. URL: <https://link.aps.org/doi/10.1103/PhysRevB.72.172509>.
- [39] URL: <https://www.thorlabs.com/brewster-windows>.
- [40] Neill Lambert et al. “QuTiP 5: The Quantum Toolbox in Python”. In: *Physics Reports* 1153 (2026), pp. 1–62. ISSN: 0370-1573. DOI: 10.1016/j.physrep.2025.10.001. URL: <https://www.sciencedirect.com/science/article/pii/S0370157325002704>.