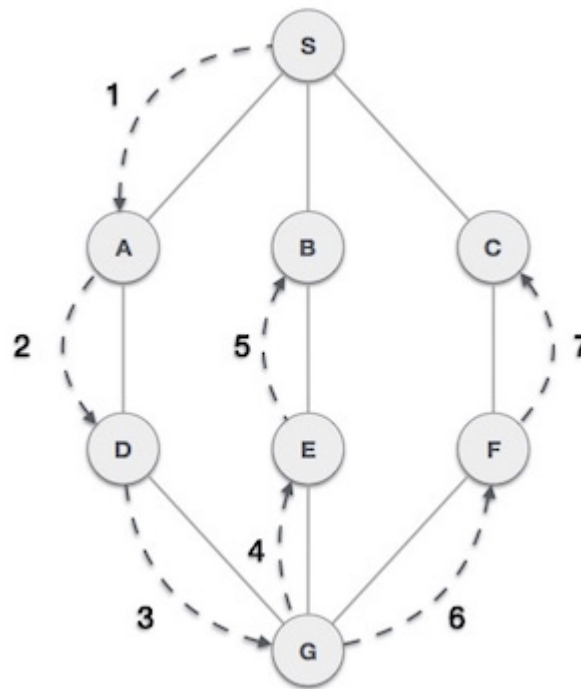


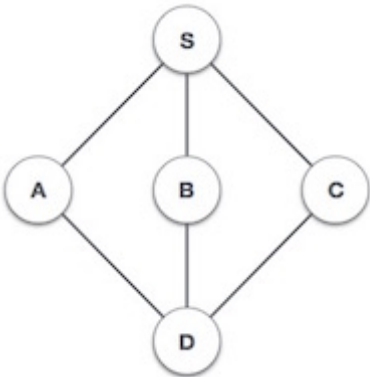

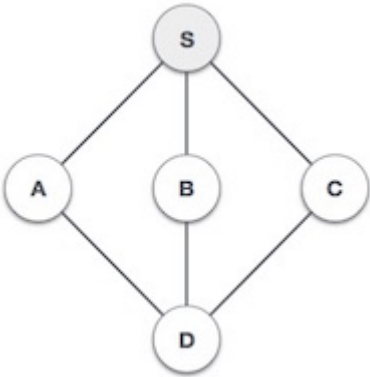
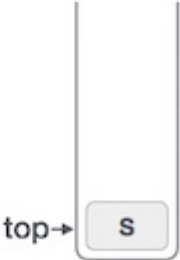
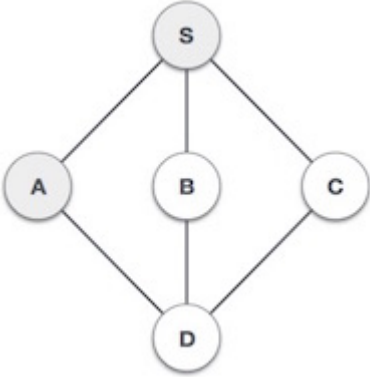
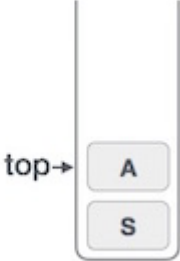
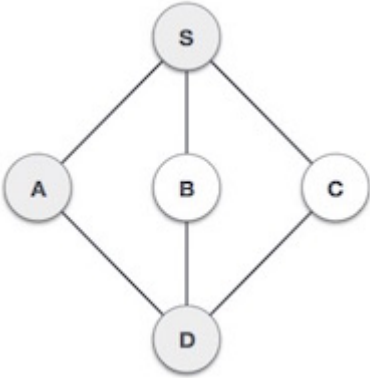

Data Structure - Depth First Traversal

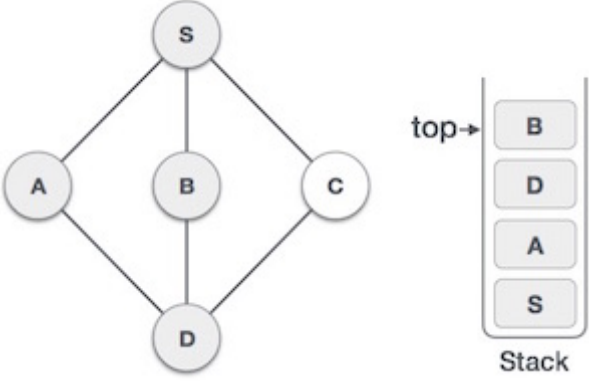
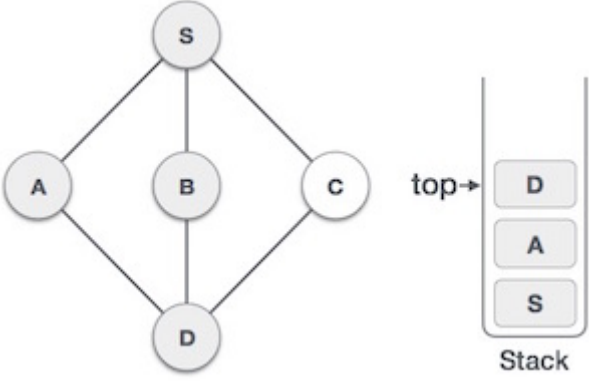
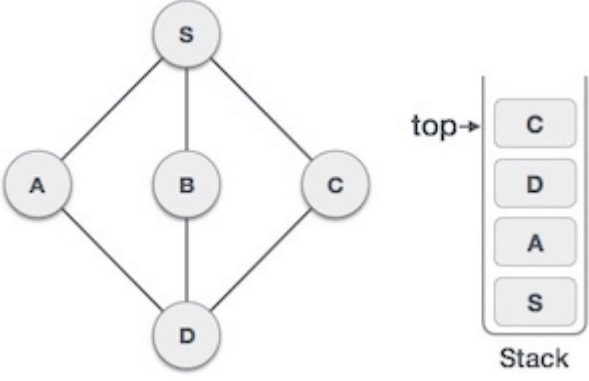
Depth First Search (DFS) algorithm traverses a graph in a depthward motion and uses a stack to remember to get the next vertex to start a search, when a dead end occurs in any iteration.



As in the example given above, DFS algorithm traverses from S to A to D to G to E to B first, then to F and lastly to C. It employs the following rules.

- **Rule 1** – Visit the adjacent unvisited vertex. Mark it as visited. Display it. Push it in a stack.
- **Rule 2** – If no adjacent vertex is found, pop up a vertex from the stack. (It will pop up all the vertices from the stack, which do not have adjacent vertices.)
- **Rule 3** – Repeat Rule 1 and Rule 2 until the stack is empty.

Step	Traversal	Description
1	  Stack	Initialize the stack.
2	  Stack	Mark S as visited and put it onto the stack. Explore any unvisited adjacent node from S . We have three nodes and we can pick any of them. For this example, we shall take the node in an alphabetical order.
3	  Stack	Mark A as visited and put it onto the stack. Explore any unvisited adjacent node from A. Both S and D are adjacent to A but we are concerned for unvisited nodes only.
4	  Stack	Visit D and mark it as visited and put onto the stack. Here, we have B and C nodes, which are adjacent to D and both are unvisited. However, we shall again choose in an alphabetical order.

5		<p>We choose B, mark it as visited and put onto the stack. Here B does not have any unvisited adjacent node. So, we pop B from the stack.</p>
6		<p>We check the stack top for return to the previous node and check if it has any unvisited nodes. Here, we find D to be on the top of the stack.</p>
7		<p>Only unvisited adjacent node is from D is C now. So we visit C, mark it as visited and put it onto the stack.</p>

As **C** does not have any unvisited adjacent node so we keep popping the stack until we find a node that has an unvisited adjacent node. In this case, there's none and we keep popping until the stack is empty.

To know about the implementation of this algorithm in C programming language, [click here](https://www.tutorialspoint.com/data_structures_algorithms/depth_first_traversal.htm).