


Workflow NAC_CLI-Login_2_ES-Table

This workflow leverages the Event Log in combination with an alarm definition to trigger execution. Upon activation, the workflow generates an End System Event using a synthetic MAC address to ensure compatibility with the existing framework.

To avoid conflicts with legitimate hardware addresses, the synthetic MAC address is prefixed with **FF:**. This convention ensures that all generated addresses remain clearly distinguishable from real MAC addresses and prevents potential collisions within the system. The rest of the MAC address is hashed against the username or the switch IP, depending on the configuration.

End System Table

The End System Table looks like

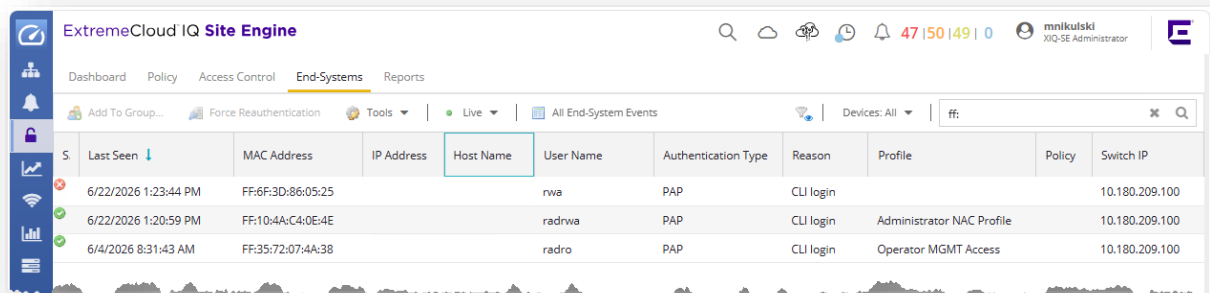


The screenshot displays the 'End-Systems' section of the ExtremeCloud IQ Site Engine. The interface includes a top navigation bar with 'Dashboard', 'Policy', 'Access Control', 'End-Systems', and 'Reports'. Below this, there's a sub-navigation bar with 'Add To Group...', 'Force Reauthentication', 'Tools', 'Live', and 'All End-System Events'. A search bar on the right shows 'ff:' and a search icon. The main table lists system events with columns: S, Last Seen, MAC Address, IP Address, Host Name, User Name, Authentication Type, Reason, Profile, Policy, and Switch IP. Three rows of data are visible, all showing 'CLI login' events with synthetic MAC addresses starting with 'FF:'.

S	Last Seen	MAC Address	IP Address	Host Name	User Name	Authentication Type	Reason	Profile	Policy	Switch IP
6/22/2026 1:23:44 PM	FF:6F:3D:86:05:25			rva	PAP	CLI login				10.180.209.100
6/22/2026 1:20:59 PM	FF:10:4A:C4:0E:4E			radrva	PAP	CLI login	Administrator NAC Profile			10.180.209.100
6/4/2026 8:31:43 AM	FF:35:72:07:4A:38			radro	PAP	CLI login	Operator MGMT Access			10.180.209.100

Setup

1. Import the workflow and configure the parameters for your use case.

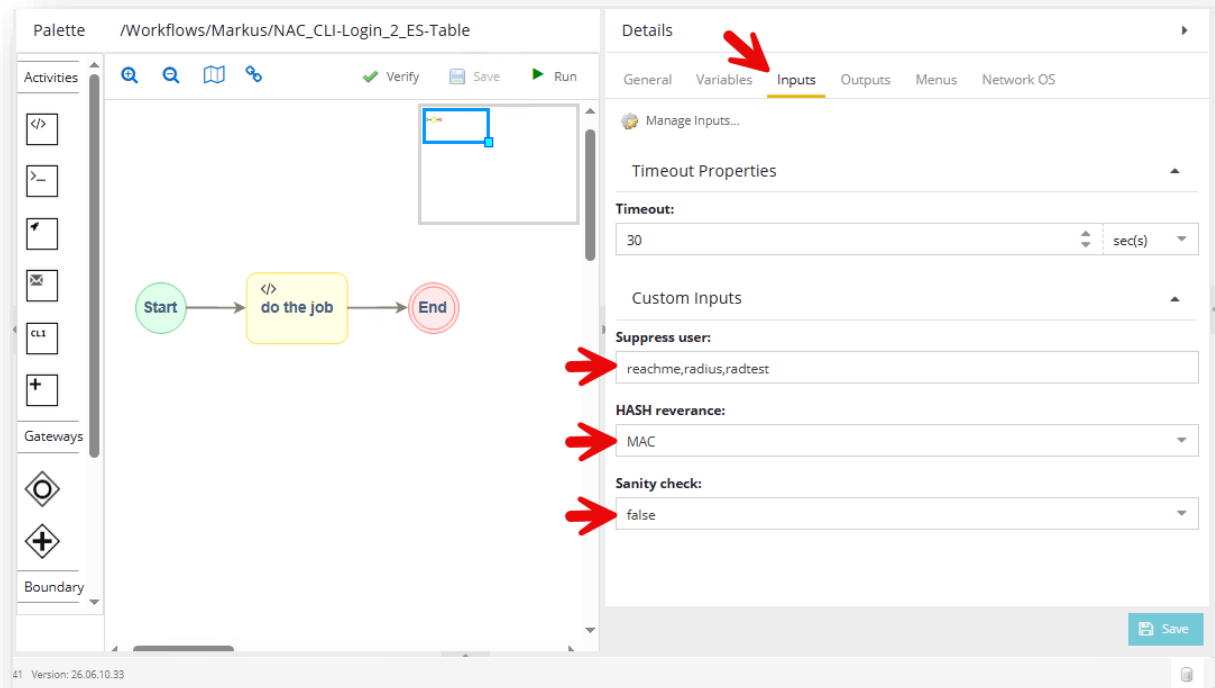

Parameter	Description
Suppress user	Prevents End System Table records from being created for test user accounts.
HASH reference	Defines what the hash is computed against, such as the incoming username or the switch IP address.
Sanity check	Performs a dry run when required. true — prevents any changes false — executes all changes

2. Configure the Alarm Config as shown below.

Configure the Alarm Config as shown below.

The image displays three overlapping screenshots of the 'Edit Custom Criteria Alarm Definition: CLI-Login' dialog box, illustrating the configuration steps for the alarm.

Top Screenshot (Criteria Tab):

- Severity:** Set from source
- Enabled:** ☒
- Custom Criteria:**
 - Match On:
 - Type: **Event**
 - Log: **nacApplianceEvent**
 - Information Phrase: **"anagement login to switch"**
- Additional Criteria:** Select Groups...

Middle Screenshot (Actions Tab):

- Severity:** Set from source
- Enabled:** ☒
- Actions:**
 - Run Task** [Workflow - NAC_CLI-Login_2_ES-Table(/Workflows/Markus)]

Bottom Screenshot (Other Options Tab):

- Severity:** Set from source
- Enabled:** ☒
- Clear Conditions:**
 - No Current Alarm (action only): ☒
 - Cleared by Alarms: ☐

Alarm Suppression (Visible in Middle Screenshot):

- ☐ Enable Alarm Action Limit
- Max Count: 5
- Reset Interval: 0

Buttons: Save, Cancel