


Hybrid实验

实验拓扑

- 1.按照图示配置 IP 地址
- 2.PC2 属于 Vlan10，PC3 属于 Vlan20，PC4 属于 Vlan30
- 3.要求通过配置接口类型为 Hybrid，实现 Vlan20 和 Vlan30 都可以访问 Vlan10，但是 Vlan20 和 Vlan30 之间不能互相访问

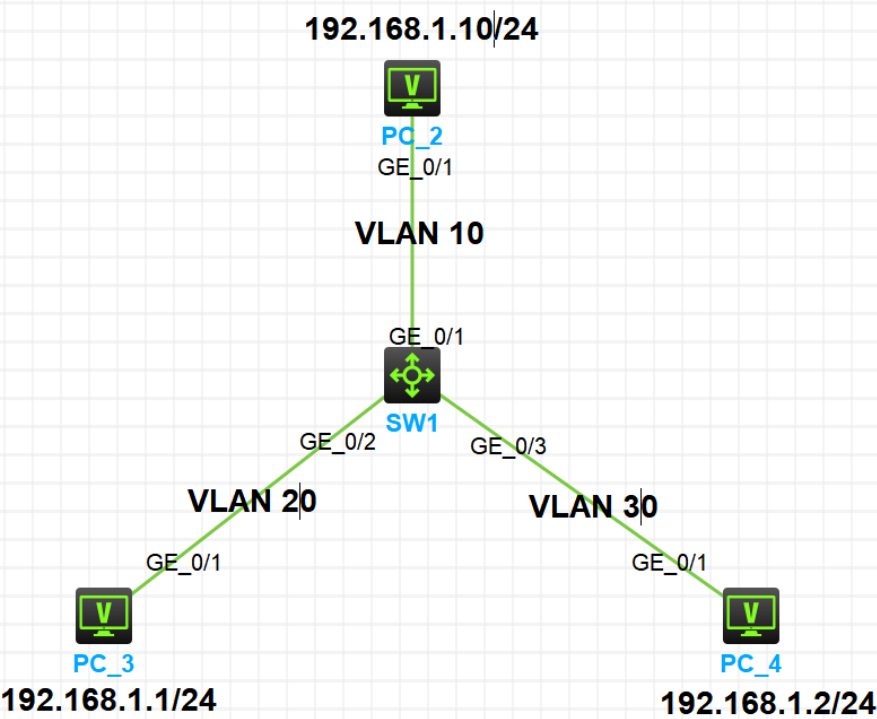

实验需求

- 1.按照图示配置 IP 地址
- 2.PC2 属于 Vlan10，PC3 属于 Vlan20，PC4 属于 Vlan30
- 3.要求通过配置接口类型为 Hybrid，实现 Vlan20 和 Vlan30 都可以访问 Vlan10，但是 Vlan20 和 Vlan30 之间不能互相访问

实验配置

```
[SW1]VLAN 10
[SW1-vlan10]VLAN 20
[SW1-vlan20]VLAN 30
```

```
[SW1]interface GigabitEthernet 1/0/1
[SW1-GigabitEthernet1/0/1]port link-type hybrid ^
[SW1-GigabitEthernet1/0/1]port hybrid pvid vlan 10
[SW1-GigabitEthernet1/0/1]port hybrid vlan 10 20 30 untagged
[SW1-GigabitEthernet1/0/1]interface GigabitEthernet 1/0/2
[SW1-GigabitEthernet1/0/2]port link-type hybrid
[SW1-GigabitEthernet1/0/2]port hybrid pvid vlan 20
[SW1-GigabitEthernet1/0/2]port hybrid vlan 10 20 untagged
[SW1-GigabitEthernet1/0/2]interface GigabitEthernet 1/0/3
[SW1-GigabitEthernet1/0/3]port link-type hybrid
[SW1-GigabitEthernet1/0/3]port hybrid pvid vlan 30
[SW1-GigabitEthernet1/0/3]port hybrid vlan 10 30 untagged
```

结果验证

1.VLAN查看

```
[SW1]display vlan brief
Brief information about all VLANs:
Supported Minimum VLAN ID: 1
Supported Maximum VLAN ID: 4094
Default VLAN ID: 1
```

VLAN ID	Name	Port
1	VLAN 0001	FGE1/0/53 FGE1/0/54 GE1/0/1 GE1/0/2 GE1/0/3 GE1/0/4 GE1/0/5 GE1/0/6 GE1/0/7 GE1/0/8 GE1/0/9 GE1/0/10 GE1/0/11 GE1/0/12 GE1/0/13 GE1/0/14 GE1/0/15 GE1/0/16 GE1/0/17 GE1/0/18 GE1/0/19 GE1/0/20 GE1/0/21 GE1/0/22 GE1/0/23 GE1/0/24 GE1/0/25 GE1/0/26 GE1/0/27 GE1/0/28 GE1/0/29 GE1/0/30 GE1/0/31 GE1/0/32 GE1/0/33 GE1/0/34 GE1/0/35 GE1/0/36 GE1/0/37 GE1/0/38 GE1/0/39 GE1/0/40 GE1/0/41 GE1/0/42 GE1/0/43 GE1/0/44 GE1/0/45 GE1/0/46 GE1/0/47 GE1/0/48 XGE1/0/49 XGE1/0/50 XGE1/0/51 XGE1/0/52
10	VLAN 0010	GE1/0/1 GE1/0/2 GE1/0/3
20	VLAN 0020	GE1/0/1 GE1/0/2
30	VLAN 0030	GE1/0/1 GE1/0/3

```
[SW1]display vlan all
VLAN ID: 1
VLAN type: Static
Route interface: Not configured
Description: VLAN 0001

Name: VLAN 0001
```

Tagged ports: None

Untagged ports:

FortyGigE1/0/53	FortyGigE1/0/54
GigabitEthernet1/0/1	GigabitEthernet1/0/2
GigabitEthernet1/0/3	GigabitEthernet1/0/4
GigabitEthernet1/0/5	GigabitEthernet1/0/6
GigabitEthernet1/0/7	GigabitEthernet1/0/8
GigabitEthernet1/0/9	GigabitEthernet1/0/10
GigabitEthernet1/0/11	GigabitEthernet1/0/12
GigabitEthernet1/0/13	GigabitEthernet1/0/14
GigabitEthernet1/0/15	GigabitEthernet1/0/16
GigabitEthernet1/0/17	GigabitEthernet1/0/18
GigabitEthernet1/0/19	GigabitEthernet1/0/20
GigabitEthernet1/0/21	GigabitEthernet1/0/22
GigabitEthernet1/0/23	GigabitEthernet1/0/24
GigabitEthernet1/0/25	GigabitEthernet1/0/26
GigabitEthernet1/0/27	GigabitEthernet1/0/28
GigabitEthernet1/0/29	GigabitEthernet1/0/30
GigabitEthernet1/0/31	GigabitEthernet1/0/32
GigabitEthernet1/0/33	GigabitEthernet1/0/34
GigabitEthernet1/0/35	GigabitEthernet1/0/36
GigabitEthernet1/0/37	GigabitEthernet1/0/38
GigabitEthernet1/0/39	GigabitEthernet1/0/40
GigabitEthernet1/0/41	GigabitEthernet1/0/42
GigabitEthernet1/0/43	GigabitEthernet1/0/44
GigabitEthernet1/0/45	GigabitEthernet1/0/46
GigabitEthernet1/0/47	GigabitEthernet1/0/48
Ten-GigabitEthernet1/0/49	
Ten-GigabitEthernet1/0/50	
Ten-GigabitEthernet1/0/51	
Ten-GigabitEthernet1/0/52	

VLAN ID: 10

VLAN type: Static

Route interface: Not configured

Description: VLAN 0010

Name: VLAN 0010

Tagged ports: None

Untagged ports:

GigabitEthernet1/0/1	GigabitEthernet1/0/2
GigabitEthernet1/0/3	

VLAN ID: 20

VLAN type: Static

Route interface: Not configured

Description: VLAN 0020

Name: VLAN 0020

Tagged ports: None

Untagged ports:

GigabitEthernet1/0/1	GigabitEthernet1/0/2
----------------------	----------------------

VLAN ID: 30

VLAN type: Static

```
Route interface: Not configured
Description: VLAN 0030
Name: VLAN 0030
Tagged ports:   None
Untagged ports:
    GigabitEthernet1/0/1      GigabitEthernet1/0/3
[SW1]display vlan
Total VLANs: 4
The VLANs include:
1(default), 10, 20, 30
```

2.连通性测试

```
<H3C>ping 192.168.1.1    //PC2
Ping 192.168.1.1 (192.168.1.1): 56 data bytes, press CTRL_C to break
56 bytes from 192.168.1.1: icmp_seq=0 ttl=255 time=0.756 ms
56 bytes from 192.168.1.1: icmp_seq=1 ttl=255 time=0.981 ms

<H3C>ping 192.168.1.2
Ping 192.168.1.2 (192.168.1.2): 56 data bytes, press CTRL_C to break
56 bytes from 192.168.1.2: icmp_seq=0 ttl=255 time=0.763 ms
56 bytes from 192.168.1.2: icmp_seq=1 ttl=255 time=0.780 ms
---

<H3C>ping 192.168.1.10    //PC3
Ping 192.168.1.10 (192.168.1.10): 56 data bytes, press CTRL_C to break
56 bytes from 192.168.1.10: icmp_seq=0 ttl=255 time=1.715 ms
56 bytes from 192.168.1.10: icmp_seq=1 ttl=255 time=0.977 ms

<H3C>ping 192.168.1.2
Ping 192.168.1.2 (192.168.1.2): 56 data bytes, press CTRL_C to break
Request time out
Request time out
---

<H3C>ping 192.168.1.10    //PC4
Ping 192.168.1.10 (192.168.1.10): 56 data bytes, press CTRL_C to break
56 bytes from 192.168.1.10: icmp_seq=0 ttl=255 time=1.801 ms
56 bytes from 192.168.1.10: icmp_seq=1 ttl=255 time=1.005 ms

<H3C>ping 192.168.1.1
Ping 192.168.1.1 (192.168.1.1): 56 data bytes, press CTRL_C to break
Request time out
Request time out
```