



4DS NEXUS · DISPATCH CONSOLE

BOLOLO SECURITY

Live operations, panic & CCTV
USER MANUAL — CONTROL ROOM

You sit between the client pin and the officer. This manual is the shift: how a panic looks, how to assign, what silent panic forbids, and how to close a ticket so the next operator is not blind.

- OWNER
- CONTROL ROOM
- INSTALLATION
- CLIENT
- OFFICER

PREPARED FOR

Bololo Security

AUDIENCE

Dispatcher / on-duty operator

DEVICE

Desktop — two screens if possible

PREPARED BY

4DS Solutions (Pty) Ltd

SIGN-IN

Control Panel · /login

ISSUED

5 September 2026 · v1.1

DOC 4DS-BOLOLO-UM-CR-01 · CONTROLLED OPERATIONAL COPY · CONFIDENTIAL

Use the numbered sections in order the first time. After that, jump to the screen you need.

01	Your seat in the room	03
02	Shift start	04
03	The board & the map	05
04	Panic path	06
05	Dispatch, CCTV & chat	07
06	Handover	08
07	Shift discipline	09

Each operator uses their own login. A shared dispatcher password destroys the audit trail.

YOU MUST

- See new panic / fire / medical in seconds
- Assign the nearest available officer
- Talk to client and unit — and log it
- Keep silent panics quiet on the phone

YOU MUST NOT

- Leave a critical unassigned
- Close “probably false” with no check
- Paste client addresses into group chats
- Work under someone else’s name

The system is a tool. Radio discipline and Bololo SOP still win.

DESK

Two screens if you can

Ops Board + Live Map. CCTV on the second screen when a site is live.

LOGIN

Your name on the header

Control Panel · /login. Never the previous operator’s session.

RADIO

SOP still wins

The app logs. The radio moves units. Use both.

1 Sign in	2 Ops Board	3 Map / GPS	4 Unread chat	5 Take handover
--------------	----------------	----------------	------------------	--------------------

1 Control Panel → your dispatcher email. Confirm **your** name is showing.

2 Count open incidents and officers on duty.

3 Live Map: pins in the right zones, GPS fresh.

4 Read handover: open jobs, waiting VIPs, cameras down.



Never start blind

Open panics left by the last operator are now yours until assigned or closed correctly.

Control Room — Bololo

Ops Board

Command Hub

Live Map

Dispatch

Incidents

CCTV

Comms

Officers

Fleet

1

PANIC OPEN

PANIC

NOMSA CLIENT

Umhlanga Rocks Dr · nearest unit O-24 · assign from Dispatch.

3

EN ROUTE

5

OFFICERS

RED

Panic / Fire / Medical / Intrusion

Life-safety until proven otherwise.

AMBER


Alarm / theft / in progress

Needs a unit, not a shrug.

BOARD

Command Hub

Priority picture of the whole shift.

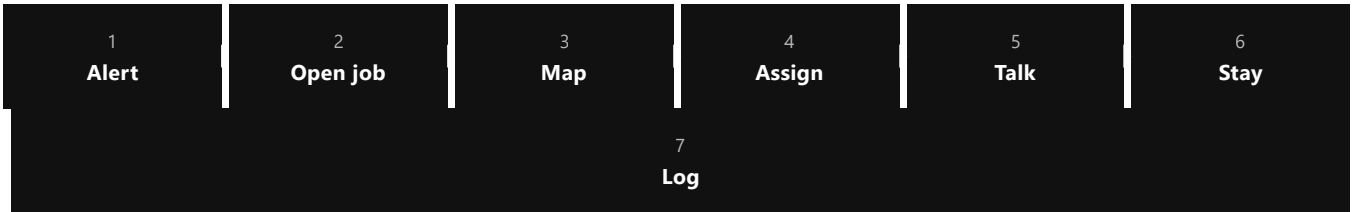

- 1** Incident hits Ops Board — open it immediately.
- 2** Read type, silent vs audible, name, address.
- 3** Live Map: client pin + nearest available officer.
- 4** Dispatch → assign (or Emergency notify only if SOP says all-call).
- 5** Call / chat the client only if it is safe — not on silent panic.
- 6** Stay until En route, then On scene. Write every step on the timeline.

S Silent panic

Do not phone the premises in a way that could expose the client. Dispatch, watch CCTV/map, follow Bololo SOP.

DISPATCH

Assign / reassign

If they do not Accept, give it to the next unit. Do not wait hoping.

CCTV

See then send

Acknowledge trigger, look, then dispatch or false per SOP.
No casual siren tests on occupied sites.

FLEET

Unit vs pin

The officer you assigned should match the vehicle on the map.

CHAT

Logged words

Client chat and internal chat are the record. Keep panic chat short.

5.1 Documents. Photos and PDFs go on the incident so night shift can see them.

Close-out

1	2	3	4	5	6
On scene	Outcome	Timeline	Evidence	Tell client	Resolve

PASS ON**Still open**

Panics, units on scene, CCTV sites dark, angry / VIP waiting.

MAP**Grey or empty**

Use incident list + radio. Do not freeze.

GPS**Officer missing**

Call them. Do not invent a position.

ASSIGN**Nobody free**

Escalate to supervisor / owner immediately.

- 1** Walk the incoming operator through every OPEN critical — name, unit, last timeline line.
- 2** Show cameras that are dark and any VIP / angry client still waiting.
- 3** Confirm they can see their own name on the header, then you sign out.

Platform faults → 4DS. SOP → Bololo supervisor. Quote “Bololo Security — Control Room”.

GOOD LOG

- Assigned O-24 14:02
- En route 14:04 · ETA 6 min
- On scene 14:11 · resident on site
- False alarm · wind on sensor · resolved

USELESS LOG

- “Told him on WhatsApp”
- Status still OPEN at 06:00
- No officer name
- Silent panic called on loudspeaker

**End of night**

No OPEN critical without a named next action. The morning owner scan depends on you.

APP SUPPORT**4DS Solutions**

www.4dsnexus.co.za · quote “Bololo Security
— Control Room”

OPERATIONS**Bololo Security**

Radio and supervisor for SOP. 4DS Solutions
only for platform faults.

DOCUMENT**5 September 2026 · v1.1**

Controlled copy. Do not issue to another
company or role.