


Anshu Sharma


Emp.Id- 1014772

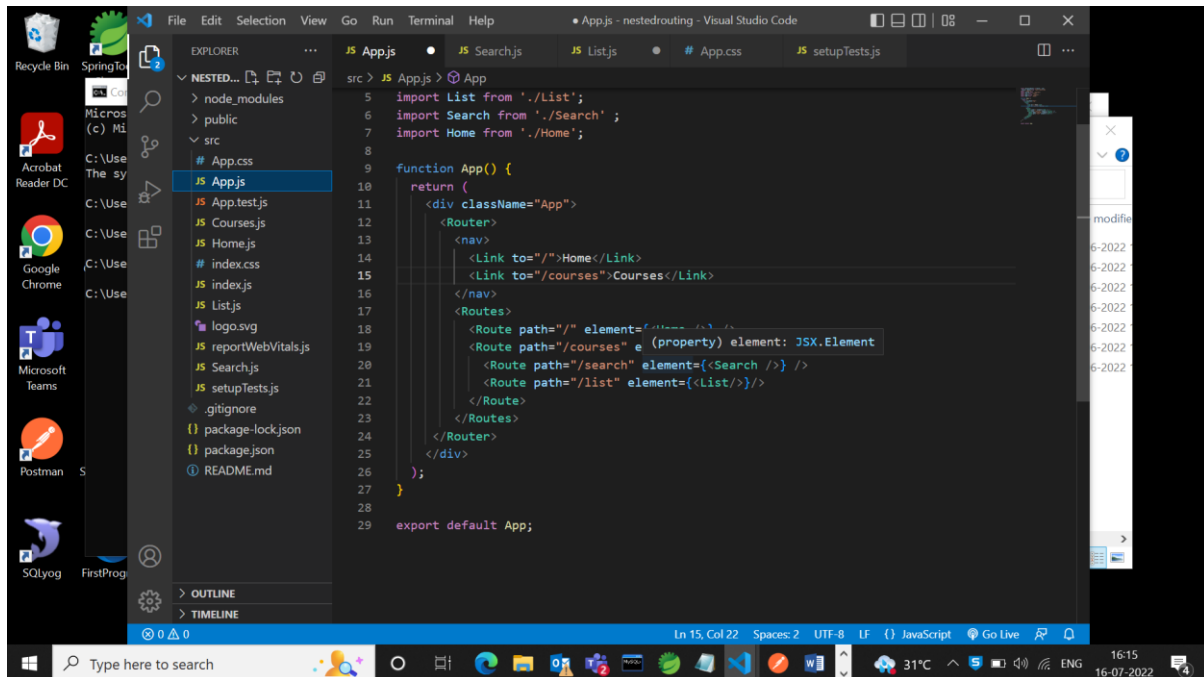

This screenshot shows the Visual Studio Code editor with the 'App.js' file open. The Explorer sidebar on the left shows the project structure, including 'node_modules', 'public', 'src', and various JavaScript files. The main editor area displays the following code:

```
src > JS Appjs > App
5 import List from './List';
6 import Search from './Search';
7 import Home from './Home';
8
9 function App() {
10   return (
11     <div className="App">
12       <Router>
13         <nav>
14           <Link to="/">Home</Link>
15           <Link to="/courses">Courses</Link>
16         </nav>
17         <Routes>
18           <Route path="/" element={Home} />
19           <Route path="/courses" element={List} />
20           <Route path="/search" element={Search} />
21           <Route path="/list" element={List} />
22         </Routes>
23       </Router>
24     </div>
25   );
26 }
27
28 export default App;
```

The status bar at the bottom indicates the file is at line 15, column 22, with 2 spaces, in UTF-8 encoding, using JavaScript syntax.

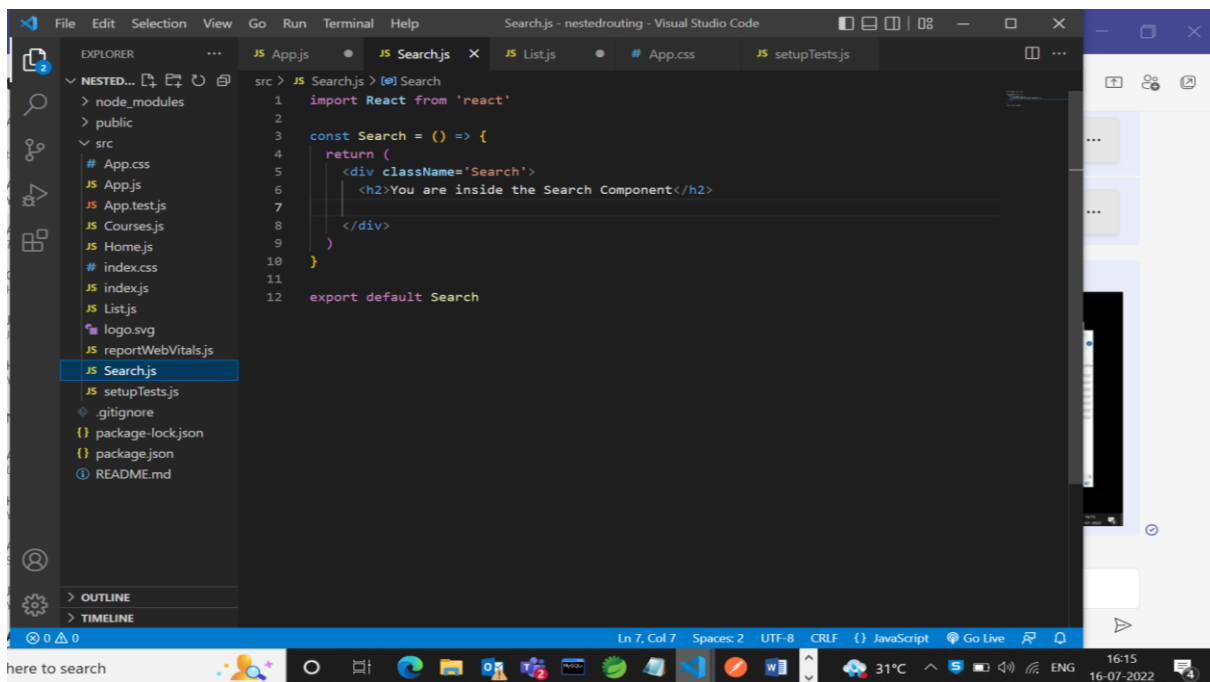

This screenshot shows the Visual Studio Code editor with the 'Search.js' file open. The Explorer sidebar on the left shows the project structure, with 'Search.js' selected. The main editor area displays the following code:

```
src > JS Searchjs > Search
1 import React from 'react'
2
3 const Search = () => {
4   return (
5     <div className="Search">
6       <h2>You are inside the Search Component</h2>
7     </div>
8   )
9 }
10
11 export default Search
```

The status bar at the bottom indicates the file is at line 7, column 7, with 2 spaces, in UTF-8 encoding, using CR/LF line endings, and JavaScript syntax.

