

PURE MATHEMATICS WITH MECHANICS • UPPER SIXTH

UPPER SIXTH — PURE MATHEMATICS WITH MECHANICS

CHAPTER 2

COMPLEX NUMBERS

SUGGESTED TIME: 19 PERIODS

IN THIS CHAPTER

This chapter introduces the complex number system, from the imaginary unit i to the powerful polar and exponential forms. Students will master algebraic operations, the Argand diagram, De Moivre's theorem, roots of complex numbers and geometric loci — essential tools for the GCE Advanced Level and beyond.

- By the end of this chapter I can define the imaginary unit i and compute its powers.
- By the end of this chapter I can add, subtract, multiply and divide complex numbers in Cartesian form.
- By the end of this chapter I can use complex conjugates and their properties to simplify expressions and solve equations.
- By the end of this chapter I can represent complex numbers on an Argand diagram and interpret modulus and argument geometrically.
- By the end of this chapter I can convert a complex number between Cartesian, polar (trigonometric) and exponential forms.
- By the end of this chapter I can apply De Moivre's theorem to compute powers and to relate multiple angles to powers of $\cos x$ and $\sin x$.



DOWNLOAD ON- BUCH

Free • Google Play
AI tutor, past papers,
results



GO ONBUCH+

All signed courses, unlimited AI
tutor, PDF sheets — OnBuch+
tab in the app

THIS SIGNED COURSE CONTAINS

COURSE

complete, illustrated,
step by step

METHODS

and worked examples

EXERCISES

exam style + solutions

SUMMARY SHEET

the essentials to
remember



Signed • OnBuch+

ONBUCH+ TEACHING TEAM
FOLLOWS THE OFFICIAL MINESEC SYLLABUS

OnBuch+

CONTENTS

- | | |
|--|--|
| 1. Birth of Complex Numbers and the Imaginary Unit i | 7. n th Roots of Complex Numbers and Cube Roots of Unity |
| 2. Algebra of Complex Numbers and Conjugates | 8. Loci in the Complex Plane and Chapter Synthesis |
| 3. Equations and Roots in $\mathbb{C}$ | 9. Integration activity |
| 4. The Argand Diagram, Modulus and Argument | 10. Methods and worked examples |
| 5. Polar and Exponential Forms | 11. Exercises |
| 6. De Moivre's Theorem and Trigonometric Applications | 12. Solutions to the exercises |
| | 13. Summary sheet |

CHAPTER OBJECTIVES

- By the end of this chapter I can define the imaginary unit i and compute its powers.
- By the end of this chapter I can add, subtract, multiply and divide complex numbers in Cartesian form.
- By the end of this chapter I can use complex conjugates and their properties to simplify expressions and solve equations.
- By the end of this chapter I can represent complex numbers on an Argand diagram and interpret modulus and argument geometrically.
- By the end of this chapter I can convert a complex number between Cartesian, polar (trigonometric) and exponential forms.
- By the end of this chapter I can apply De Moivre's theorem to compute powers and to relate multiple angles to powers of $\cos x$ and $\sin x$.
- By the end of this chapter I can find square roots and n th roots of complex numbers, including cube roots of unity.
- By the end of this chapter I can solve polynomial equations with complex roots.
- By the end of this chapter I can describe and sketch loci defined by conditions on complex numbers.

PREREQUISITES

- Real number algebra: expanding, factorising and solving quadratic equations (Lower Sixth, PMM01)
- Trigonometric ratios, standard angles and identities ($\cos^2 x + \sin^2 x = 1$, addition formulae)
- Surds and rationalising denominators
- Coordinates and equations of lines and circles in the Cartesian plane
- Radians as a measure of angles

1 BIRTH OF COMPLEX NUMBERS AND THE IMAGINARY UNIT I

In 2019, engineers restoring electricity to parts of Bamenda after a severe storm had to solve circuit equations whose solutions involved the square root of a negative number — something “impossible” in ordinary arithmetic. Yet by accepting this “impossible” number, they could compute alternating currents, predict phase shifts and keep the lights on. From the design of the Mémve'éle hydroelectric dam to the signal processing inside every mobile phone in Douala, complex numbers are the invisible engine of modern technology. This chapter opens the door to that hidden number system: you will learn to compute with it, picture it, and use it to solve equations that have no solution in the real world.

The central problem is simple to state. The equation

$$x^2 + 1 = 0 \iff x^2 = -1$$

has no solution in $\mathbb{R}$, because the square of any real number is non-negative. For centuries, mathematicians simply declared such equations “impossible”. In this section we trace how necessity forced them to change their minds, we define the **imaginary unit** i , we learn to handle square roots of negative numbers and powers of i , and we construct the set $\mathbb{C}$ of **complex numbers**.

1.1 Historical Motivation: Cardano, Bombelli and the Cubic Equation

A common misconception is that complex numbers were invented to solve the quadratic $x^2 + 1 = 0$. In fact, mathematicians of the sixteenth century were perfectly happy to say that such a quadratic has no solution and to move on. The real pressure came from a place where nobody expected it: cubic equations that do have real solutions.

Cardano's formula. In 1545, the Italian mathematician Girolamo Cardano published *Ars Magna*, which contained a formula for solving cubic equations. Applied to the depressed cubic $x^3 = px + q$ (where the quadratic term has been eliminated), his formula gives

$$x = \sqrt[3]{\frac{q}{2} + \sqrt{\frac{q^2}{4} - \frac{p^3}{27}}} + \sqrt[3]{\frac{q}{2} - \sqrt{\frac{q^2}{4} - \frac{p^3}{27}}}.$$

Bombelli's puzzle. Around 1572, Rafael Bombelli applied Cardano's formula to the equation

$$x^3 = 15x + 4.$$

You can check by substitution that $x = 4$ is a solution: $4^3 = 64$ and $15(4) + 4 = 64$. Yet Cardano's formula produces

$$x = \sqrt[3]{2 + \sqrt{-121}} + \sqrt[3]{2 - \sqrt{-121}} = \sqrt[3]{2 + 11\sqrt{-1}} + \sqrt[3]{2 - 11\sqrt{-1}}.$$

Here was the scandal: a perfectly real answer ($x = 4$) could only be reached by a formula passing through the “impossible” quantity $\sqrt{-1}$. Bombelli had the courage to take $\sqrt{-1}$ seriously. He laid down rules for computing with it — essentially the rules we still use — and showed that

$$\sqrt[3]{2 + 11\sqrt{-1}} = 2 + \sqrt{-1}, \quad \sqrt[3]{2 - 11\sqrt{-1}} = 2 - \sqrt{-1},$$

so that the formula gives $(2+\sqrt{-1})+(2-\sqrt{-1}) = 4$, exactly the known real solution. The “impossible” numbers cancelled, leaving a real answer.

DID YOU KNOW? From “sophistic” to respectable

For nearly three centuries, numbers involving $\sqrt{-1}$ were called imaginary, a slightly mocking name coined by Descartes in 1637. It was only after Gauss and Argand gave them a concrete geometric picture (the plane we shall meet in Section 4) that complex numbers became fully respectable. Today the word “imaginary” survives, but there is nothing imaginary about their applications: electrical engineering, fluid mechanics, quantum physics and telecommunications all run on complex arithmetic.

The lesson of history is the lesson of this chapter: when a new kind of number proves useful and consistent, we accept it. We now do this formally.

1.2 The Imaginary Unit i

Since no real number squares to -1 , we simply create a new number with that property and study the arithmetic it generates.

DEFINITION The imaginary unit

The **imaginary unit**, denoted i , is a new (non-real) number defined by the single property

$$i^2 = -1, \quad \text{and we write} \quad i = \sqrt{-1}.$$

It is postulated to combine with real numbers under the ordinary rules of arithmetic (commutativity, associativity, distributivity).

WARNING The symbol $\sqrt{-1}$ is a definition, not a discovery

You cannot “find” i on the real number line, and you must not apply to it the rules of real square roots without care (see the warning on products below). The equation $i = \sqrt{-1}$ is a notation summarising the definition $i^2 = -1$.

Square roots of negative numbers. Once i is accepted, every negative number acquires a square root.

PROPERTY Square root of a negative number

Let $a > 0$ be a positive real number. Then

$$\sqrt{-a} = i\sqrt{a}, \quad \text{because} \quad (i\sqrt{a})^2 = i^2(\sqrt{a})^2 = (-1)(a) = -a.$$

EXAMPLE Square roots of negative numbers

- $\sqrt{-9} = i\sqrt{9} = 3i$;
- $\sqrt{-5} = i\sqrt{5}$;
- $\sqrt{-12} = i\sqrt{12} = 2i\sqrt{3}$.

Each answer can be checked by squaring: $(3i)^2 = 9i^2 = -9$. ✓

WARNING The most dangerous trap in the chapter

The familiar rule $\sqrt{a}\sqrt{b} = \sqrt{ab}$ is only valid for non-negative real numbers. It fails spectacularly for negative numbers:

$$\sqrt{-4}\sqrt{-9} \neq \sqrt{(-4)(-9)} = \sqrt{36} = 6.$$

The correct computation is to first rewrite each root using i :

$$\sqrt{-4}\sqrt{-9} = (2i)(3i) = 6i^2 = -6.$$

Golden rule: whenever you see $\sqrt{-a}$ with $a > 0$, immediately rewrite it as $i\sqrt{a}$ before doing any other operation.


1.3 Powers of i : a Cycle of Period 4

What are $i^3, i^4, i^5, \dots$? Using only $i^2 = -1$ and the laws of indices, we compute:

$$i^1 = i, \quad i^2 = -1, \quad i^3 = i^2 \cdot i = -i, \quad i^4 = i^2 \cdot i^2 = (-1)(-1) = 1, \quad i^5 = i^4 \cdot i = i.$$

At i^5 we are back to i : the values repeat. The powers of i run endlessly around the cycle

$$i \rightarrow -1 \rightarrow -i \rightarrow 1 \rightarrow i \rightarrow \dots$$

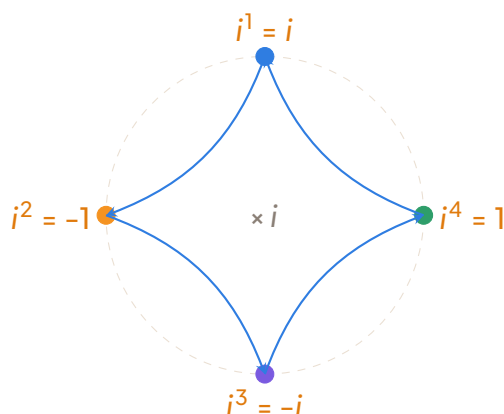

The cycle of powers of i : each multiplication by i moves one step around the cycle $1 \rightarrow i \rightarrow -1 \rightarrow -i \rightarrow 1$.

PROPERTY Periodicity of the powers of i

For every integer n ,

$$i^{n+4} = i^n.$$

In other words, the sequence (i^n) is **periodic with period 4**. Consequently, if $n = 4q + r$ with $r \in \{0, 1, 2, 3\}$ (Euclidean division of n by 4), then

$$i^n = i^r, \quad \text{so } i^n \in \{1, i, -1, -i\}.$$

Proof (examinable, and instructive). By the Euclidean division of n by 4, there exist integers q and r with $n = 4q + r$ and $0 \leq r \leq 3$. Then, using the laws of indices and $i^4 = 1$:

$$i^n = i^{4q+r} = (i^4)^q \cdot i^r = 1^q \cdot i^r = i^r. \quad \blacksquare$$

METHOD Reducing i^n for any integer n

1. Divide n by 4: write $n = 4q + r$ with remainder $r \in \{0, 1, 2, 3\}$.
2. Then $i^n = i^r$.
3. Read off the value: $i^0 = 1, i^1 = i, i^2 = -1, i^3 = -i$.
4. For negative exponents, use $i^{-1} = \frac{1}{i} = \frac{1 \cdot i}{i \cdot i} = \frac{i}{-1} = -i$, or add a multiple of 4 to the exponent to make it positive.

EXAMPLE Computing powers of i

- i^{2023} : since $2023 = 4 \times 505 + 3$, we get $i^{2023} = i^3 = -i$.
- i^{100} : since $100 = 4 \times 25 + 0$, we get $i^{100} = i^0 = 1$.
- i^{-5} : since $-5 = 4 \times (-2) + 3$, we get $i^{-5} = i^3 = -i$. (Check: $i^{-5} = i^{-4} \cdot i^{-1} = 1 \cdot (-i) = -i$. ✓)

1.4 Complex Numbers: Definition, Real and Imaginary Parts

Numbers such as $2 + 11i$ (which Bombelli met inside the cube roots) are built from two real numbers and the unit i . This motivates the central definition of the chapter.

DEFINITION Complex number, real part, imaginary part

A **complex number** is any expression of the form

$$z = a + ib, \quad \text{where } a, b \in \mathbb{R}.$$

- a is called the **real part** of z , written $\operatorname{Re}(z) = a$;
- b is called the **imaginary part** of z , written $\operatorname{Im}(z) = b$ (note: $\operatorname{Im}(z)$ is a real number, not ib).

The form $a + ib$ is called the **algebraic form** (or Cartesian form) of z . The set of all complex numbers is denoted $\mathbb{C}$:

$$\mathbb{C} = \{a + ib : a, b \in \mathbb{R}\}.$$

WARNING $\operatorname{Im}(z)$ is real


If $z = 3 - 5i$, then $\operatorname{Re}(z) = 3$ and $\operatorname{Im}(z) = -5$, not $-5i$. Examiners penalise this slip every year.

Special cases. Two familiar families sit inside $\mathbb{C}$:

- If $b = 0$, then $z = a$ is an ordinary real number. Thus $\mathbb{R} \subset \mathbb{C}$: every real number is a complex number with zero imaginary part.
- If $a = 0$ and $b \neq 0$, then $z = ib$ is called **purely imaginary** (e.g. $3i$, $-\frac{1}{2}i$).
- If $a = b = 0$, then $z = 0$: the number 0 is the only complex number that is both real and purely imaginary.

Each enlargement of the number system in your school career was driven by equations that had no solution: $\mathbb{N}$ cannot solve $x + 5 = 3$ (so we built $\mathbb{Z}$); $\mathbb{Z}$ cannot solve $3x = 2$ (so we built $\mathbb{Q}$); $\mathbb{Q}$ cannot solve $x^2 = 2$ (so we built $\mathbb{R}$); and $\mathbb{R}$ cannot solve $x^2 = -1$ (so we build $\mathbb{C}$). The chain is:

$$\mathbb{N} \subset \mathbb{Z} \subset \mathbb{Q} \subset \mathbb{R} \subset \mathbb{C}.$$

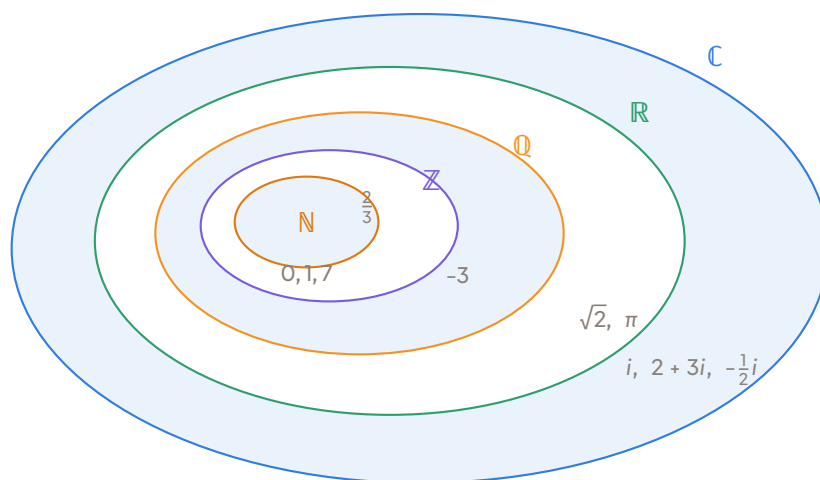

The nested number sets $N \subset Z \subset Q \subset R \subset C$, with a few typical members of each layer.

1.5 Equality of Two Complex Numbers

When are two complex numbers equal? Since a complex number is completely determined by the pair of real numbers (a, b) , two complex numbers are equal exactly when both components agree.

PROPERTY Equality in C

Let $z = a + ib$ and $z' = a' + ib'$ with $a, b, a', b' \in \mathbb{R}$. Then

$$z = z' \iff \operatorname{Re}(z) = \operatorname{Re}(z') \text{ and } \operatorname{Im}(z) = \operatorname{Im}(z'),$$

that is,

$$a + ib = a' + ib' \iff a = a' \text{ and } b = b'.$$

In particular, $a + ib = 0 \iff a = 0 \text{ and } b = 0$.

Justification. Suppose $a + ib = a' + ib'$. Rearranging, $(a - a') = i(b' - b)$. If $b' - b \neq 0$, we could divide and obtain $i = \frac{a - a'}{b' - b}$, a real number — impossible, since i is not real. Hence $b' - b = 0$, i.e. $b = b'$, and then $a - a' = 0$, i.e. $a = a'$. The converse is immediate. ■

This property is a working tool: one complex equation is worth two real equations, one for the real parts and one for the imaginary parts.

WORKED EXAMPLE 1 Finding unknown reals from a complex equality

Find the real numbers x and y such that

$$(2x - 1) + i(y + 3) = 5 + 2i.$$

SOLUTION

Solution. The two sides are complex numbers in algebraic form. By the equality property, we equate the real parts and the imaginary parts separately:

$$\text{Real parts: } 2x - 1 = 5$$

$$2x = 6$$

$$x = 3.$$

$$\text{Imaginary parts: } y + 3 = 2$$

$$y = -1$$

Check: $(2(3) - 1) + i(-1 + 3) = 5 + 2i$. ✓

Hence $x = 3$ and $y = -1$.

WORKED EXAMPLE 2 Using $i^2 = -1$ to simplify a product

Write $(2 + 3i)(1 - i)$ in the form $a + ib$, stating $\text{Re}(z)$ and $\text{Im}(z)$.

SOLUTION

Solution. Expand using the ordinary rules of arithmetic, then replace i^2 by -1 :

$$\begin{aligned}(2 + 3i)(1 - i) &= 2(1) + 2(-i) + 3i(1) + 3i(-i) \\ &= 2 - 2i + 3i - 3i^2 \\ &= 2 + i - 3(-1) \\ &= 5 + i.\end{aligned}$$

Thus $\text{Re}(z) = 5$ and $\text{Im}(z) = 1$ (the imaginary part is 1, not i).

WARNING Summary of traps in this section

- Never write $\sqrt{-a}\sqrt{-b} = \sqrt{ab}$ for $a, b > 0$; rewrite as $i\sqrt{a}$ and $i\sqrt{b}$ first.
- $\text{Im}(a + ib) = b$, a real number — never ib .
- $i^2 = -1$ by definition; do not “prove” it by writing $\sqrt{-1}\sqrt{-1} = \sqrt{(-1)(-1)} = 1$, which misuses the real square-root rule and gives the wrong sign.
- A complex equality gives two conditions; forgetting one of them loses marks.

EXERCISE 1 Consolidation

1. Write in the form $i\sqrt{a}$ with a a positive integer as small as possible: $\sqrt{-49}$, $\sqrt{-18}$, $\sqrt{-75}$.
2. Compute i^{37} , i^{2024} , i^{-11} and i^{4n+3} for $n \in \mathbb{Z}$.
3. Compute $\sqrt{-8}\sqrt{-2}$ in two ways (the wrong way and the right way) and explain the discrepancy.
4. Find real numbers x and y such that $(x + y) + i(x - 2y) = 7 + i$.
5. Expand and simplify $(1 + i)^2$, $(1 - i)^2$ and $(1 + i)(1 - i)$. What do you notice about the last result?

SOLUTION Exercise 1

1. $\sqrt{-49} = 7i$; $\sqrt{-18} = i\sqrt{18} = 3i\sqrt{2}$; $\sqrt{-75} = i\sqrt{75} = 5i\sqrt{3}$.
2. $37 = 4(9) + 1 \Rightarrow i^{37} = i$; $2024 = 4(506) + 0 \Rightarrow i^{2024} = 1$; $-11 = 4(-3) + 1 \Rightarrow i^{-11} = i$; $i^{4n+3} = i^3 = -i$.
3. Wrong way: $\sqrt{(-8)(-2)} = \sqrt{16} = 4$. Right way: $(i\sqrt{8})(i\sqrt{2}) = i^2\sqrt{16} = -4$. The rule $\sqrt{a}\sqrt{b} = \sqrt{ab}$ does not apply to negative numbers.
4. Equating parts: $x + y = 7$ and $x - 2y = 1$. Subtracting gives $3y = 6$, so $y = 2$ and $x = 5$.
5. $(1 + i)^2 = 1 + 2i + i^2 = 2i$; $(1 - i)^2 = -2i$; $(1 + i)(1 - i) = 1 - i^2 = 2$, a real number — a first glimpse of the power of conjugates, studied in the next section.

KEY POINTS Key points of Section 1

- Complex numbers were forced on mathematicians by cubic equations (Cardano, Bombelli): real answers sometimes require a detour through $\sqrt{-1}$.
- The imaginary unit i is defined by $i^2 = -1$; for $a > 0$, $\sqrt{-a} = i\sqrt{a}$ — always rewrite in this form before computing.
- The powers of i cycle with period 4: $i, -1, -i, 1$; to compute i^n , reduce n modulo 4.
- A complex number is $z = a + ib$ with $a = \operatorname{Re}(z)$, $b = \operatorname{Im}(z) \in \mathbb{R}$; special cases: real ($b = 0$), purely imaginary ($a = 0, b \neq 0$).
- $\mathbb{N} \subset \mathbb{Z} \subset \mathbb{Q} \subset \mathbb{R} \subset \mathbb{C}$.
- $a + ib = a' + ib' \iff a = a'$ and $b = b'$: one complex equation = two real equations.

2 ALGEBRA OF COMPLEX NUMBERS AND CONJUGATES

In the previous section we met the imaginary unit i , defined by the single remarkable property $i^2 = -1$, and we agreed that a complex number is any number of the form $z = a + ib$ with $a, b \in \mathbb{R}$. But a new kind of number is only useful if we can calculate with it. Can we add two complex numbers? Multiply them? Divide them? The good news is that the answer is yes, and the rules are exactly the rules you already know from ordinary algebra in $\mathbb{R}$, with one extra ingredient: every time i^2 appears, we replace it by -1 . This section makes those rules precise and introduces the **complex conjugate**, the tool that makes division possible and that will accompany us throughout the whole chapter.

2.1 Addition and Subtraction of Complex Numbers

Intuition. Think of a complex number $z = a + ib$ as a “two-part” number: a real part a and an imaginary part b . Just as we add vectors component by component, it is natural to add the real parts together and the imaginary parts together.

DEFINITION Sum and difference of complex numbers

Let $z_1 = a + ib$ and $z_2 = c + id$, where $a, b, c, d \in \mathbb{R}$. Then

$$z_1 + z_2 = (a + c) + i(b + d), \quad z_1 - z_2 = (a - c) + i(b - d).$$

The sum and the difference of two complex numbers are again complex numbers: we say that $\mathbb{C}$ is closed under addition and subtraction.

EXAMPLE Adding and subtracting

Let $z_1 = 3 + 4i$ and $z_2 = 1 - 2i$. Then

$$z_1 + z_2 = (3 + 1) + i(4 - 2) = 4 + 2i, \quad z_1 - z_2 = (3 - 1) + i(4 - (-2)) = 2 + 6i.$$

Addition of complex numbers inherits all the familiar properties of addition in $\mathbb{R}$: it is commutative ($z_1 + z_2 = z_2 + z_1$), associative, has identity element $0 = 0 + 0i$, and every $z = a + ib$ has an opposite $-z = -a - ib$.

2.2 Multiplication of Complex Numbers

Intuition. To multiply $(a + ib)(c + id)$ we simply expand the brackets exactly as we would expand $(a + bx)(c + dx)$ in ordinary algebra, and then use the defining relation $i^2 = -1$.

PROPERTY Product of two complex numbers

For $z_1 = a + ib$ and $z_2 = c + id$ with $a, b, c, d \in \mathbb{R}$:

$$z_1 z_2 = (ac - bd) + i(ad + bc).$$

Derivation (instructive, worth knowing for the GCE). Expand term by term:

$$\begin{aligned}(a + ib)(c + id) &= ac + iad + ibc + i^2 bd \\ &= ac + iad + ibc - bd \quad (\text{since } i^2 = -1) \\ &= (ac - bd) + i(ad + bc).\end{aligned}$$

Notice how the term $i^2 bd$ became $-bd$: this is where the real part $ac - bd$ comes from.

WARNING The sign trap: $i^2 = -1$

The most common error at this level is to write $(a + ib)(c + id) = ac + bd + i(ad + bc)$, forgetting that $i^2 bd = -bd$. The product of the two imaginary parts is a real number with a minus sign. For example, $(2 + 3i)(1 + i) = 2 + 2i + 3i + 3i^2 = 2 + 5i - 3 = -1 + 5i$, and not $5 + 5i$. Always replace i^2 by -1 immediately, before collecting terms.

EXAMPLE Multiplying complex numbers

Compute $(2 - 3i)(4 + 5i)$.

$$(2 - 3i)(4 + 5i) = 8 + 10i - 12i - 15i^2 = 8 - 2i + 15 = 23 - 2i.$$

Multiplication is commutative, associative, distributive over addition, and has identity $1 = 1 + 0i$. In particular, powers of z are computed by repeated multiplication, always reducing with the cycle of powers of i :

$$i^2 = -1, \quad i^3 = -i, \quad i^4 = 1, \quad i^5 = i, \dots$$

so that i^n depends only on the remainder of n modulo 4.

EXAMPLE Using the powers of i

Simplify i^{2025} . Since $2025 = 4 \times 506 + 1$, we have $i^{2025} = (i^4)^{506} \times i = 1^{506} \times i = i$.

2.3 The Complex Conjugate

Intuition. Given $z = a + ib$, what happens if we simply flip the sign of the imaginary part? We obtain a new number $a - ib$, which turns out to be the perfect “partner” of z : when we add or multiply the two partners, the imaginary parts cancel or combine into something purely real. This partner is called the conjugate.


DEFINITION Complex conjugate

The **conjugate** of the complex number $z = a + ib$ (with $a, b \in \mathbb{R}$) is the complex number

$$\bar{z} = a - ib.$$

The real part is unchanged; the sign of the imaginary part is reversed.

Geometrically, as we shall see in detail with the Argand diagram, $\bar{z}$ is the reflection of z in the real axis. The figure below previews this mirror symmetry.

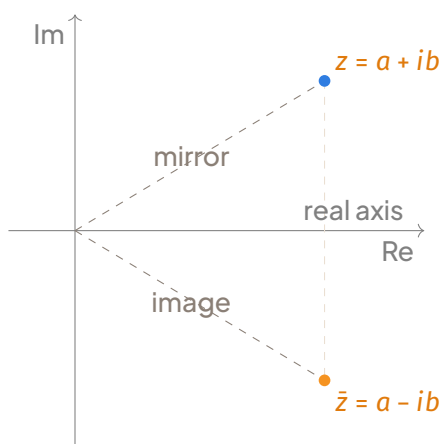

The conjugate $\bar{z}$ is the mirror image of z across the real axis.

PROPERTY Fundamental identities involving the conjugate

Let $z = a + ib$ with $a, b \in \mathbb{R}$. Then:

1. $z + \bar{z} = 2a = 2 \operatorname{Re}(z)$, a real number;
2. $z - \bar{z} = 2ib = 2i \operatorname{Im}(z)$, purely imaginary;
3. $z\bar{z} = a^2 + b^2$, a non-negative real number.

Equivalently, $\operatorname{Re}(z) = \frac{z + \bar{z}}{2}$ and $\operatorname{Im}(z) = \frac{z - \bar{z}}{2i}$.

Proof (examinable and instructive). For (1): $z + \bar{z} = (a + ib) + (a - ib) = 2a$. For (2): $z - \bar{z} = (a + ib) - (a - ib) = 2ib$. For (3):

$$z\bar{z} = (a + ib)(a - ib) = a^2 - (ib)^2 = a^2 - i^2b^2 = a^2 + b^2 \geq 0,$$

where we used the difference of two squares and $i^2 = -1$. ■

PROPERTY $z\bar{z} = |z|^2$ is always a non-negative real

Anticipating the modulus $|z| = \sqrt{a^2 + b^2}$ of Section 4, identity (3) reads

$$z\bar{z} = |z|^2 = a^2 + b^2 \in \mathbb{R}^+.$$

This is the single most useful fact about conjugates: multiplying a complex number by its conjugate always produces a non-negative real number. It is zero only when $z = 0$. This is precisely what makes division by a complex number possible.

EXAMPLE Conjugate identities in action

Let $z = 5 - 2i$, so $\bar{z} = 5 + 2i$. Then

$$z + \bar{z} = 10 = 2 \operatorname{Re}(z), \quad z - \bar{z} = -4i = 2i \operatorname{Im}(z), \quad z\bar{z} = 25 + 4 = 29.$$

Note that 29 is real and positive, as promised.

2.4 Division of Complex Numbers

The problem. What does $\frac{2+3i}{1-4i}$ mean, and how can we write it in the standard form $x + iy$? The denominator $1 - 4i$ is not a real number, so we cannot “divide” directly. The trick is to use the conjugate to turn the denominator into a real number, exactly as we rationalise a surd denominator like $\frac{1}{1+\sqrt{2}}$ by multiplying by $1 - \sqrt{2}$.

METHOD Dividing by a complex number

To write $\frac{z_1}{z_2}$ (with $z_2 \neq 0$) in the form $x + iy$:

1. Write down the conjugate $\bar{z}_2$ of the denominator.
2. Multiply both numerator and denominator by $\bar{z}_2$: $\frac{z_1}{z_2} = \frac{z_1 \bar{z}_2}{z_2 \bar{z}_2}$.
3. The denominator $z_2 \bar{z}_2 = |z_2|^2$ is now a positive real number.
4. Expand the numerator, reduce with $i^2 = -1$, and split into real and imaginary parts.

WORKED EXAMPLE 3 GCE-style simplification

Express $\frac{2+3i}{1-4i}$ in the form $x+iy$, where $x, y \in \mathbb{R}$.

SOLUTION

The conjugate of the denominator $1-4i$ is $1+4i$. Multiply top and bottom by $1+4i$:

$$\frac{2+3i}{1-4i} = \frac{(2+3i)(1+4i)}{(1-4i)(1+4i)}.$$

Numerator: $(2+3i)(1+4i) = 2+8i+3i+12i^2 = 2+11i-12 = -10+11i$.

Denominator: $(1-4i)(1+4i) = 1^2+4^2 = 17$.

Therefore

$$\frac{2+3i}{1-4i} = \frac{-10+11i}{17} = -\frac{10}{17} + \frac{11}{17}i.$$

So $x = -\frac{10}{17}$ and $y = \frac{11}{17}$.

WORKED EXAMPLE 4 A quotient with simplification

Given $z = 3+i$, express $\frac{1+7i}{z}$ in the form $x+iy$.

SOLUTION

Here $\bar{z} = 3-i$, and $z\bar{z} = 9+1 = 10$.

$$\frac{1+7i}{3+i} = \frac{(1+7i)(3-i)}{(3+i)(3-i)} = \frac{3-i+21i-7i^2}{10} = \frac{3+20i+7}{10} = \frac{10+20i}{10} = 1+2i.$$

WARNING Divide only by the conjugate of the denominator

Two frequent errors: (i) multiplying by the conjugate of the numerator instead of the denominator; (ii) multiplying only the denominator, which changes the value of the fraction. Whatever you do to the bottom, you must do to the top. Also, never leave the final answer as $\frac{-10+11i}{17}$ when the question asks for the form $x+iy$: separate the real and imaginary parts.

2.5 Properties of Complex Conjugates

The conjugation operation behaves beautifully with respect to all four operations. These properties save enormous time in GCE questions.

PROPERTY Algebraic properties of the conjugate

For all complex numbers z_1 and z_2 (with $z_2 \neq 0$ where a quotient appears):

1. $\overline{z_1 + z_2} = \bar{z}_1 + \bar{z}_2$ (conjugate of a sum);
2. $\overline{z_1 - z_2} = \bar{z}_1 - \bar{z}_2$ (conjugate of a difference);
3. $\overline{z_1 z_2} = \bar{z}_1 \bar{z}_2$ (conjugate of a product);
4. $\overline{\left(\frac{z_1}{z_2}\right)} = \frac{\bar{z}_1}{\bar{z}_2}$ (conjugate of a quotient);
5. $\overline{z^n} = (\bar{z})^n$ for every $n \in \mathbb{N}$ (conjugate of a power);
6. $\bar{\bar{z}} = z$ (conjugating twice returns the original number);
7. $z = \bar{z} \iff z \in \mathbb{R}$ (a number equal to its conjugate is real);
8. $z = -\bar{z} \iff z$ is purely imaginary.

In words: the conjugate of a sum, product or quotient is the sum, product or quotient of the conjugates.

Proof of (3), (7) and (8) (instructive). Write $z_1 = a + ib$, $z_2 = c + id$. Then

$$z_1 z_2 = (ac - bd) + i(ad + bc) \implies \overline{z_1 z_2} = (ac - bd) - i(ad + bc),$$

while

$$\bar{z}_1 \bar{z}_2 = (a - ib)(c - id) = (ac - bd) - i(ad + bc).$$

The two expressions agree, proving (3). Property (5) follows from (3) by induction on n . For (7): $z = \bar{z}$ means $a + ib = a - ib$, i.e. $2ib = 0$, i.e. $b = 0$, so $z = a \in \mathbb{R}$. For (8): $z = -\bar{z}$ means $a + ib = -a - ib$, i.e. $2a = 0$, so $z = ib$ is purely imaginary. ■

EXAMPLE Using the properties instead of recomputing

Let $z = 1 + 2i$ and $w = 3 - i$. Then $\overline{zw} = \bar{z}\bar{w} = (1 - 2i)(3 + i) = 3 + i - 6i - 2i^2 = 5 - 5i$. Check directly: $zw = (1 + 2i)(3 - i) = 3 - i + 6i - 2i^2 = 5 + 5i$, whose conjugate is indeed $5 - 5i$.

WORKED EXAMPLE 5 Proving a number is real or purely imaginary

Let z be any complex number with $z \neq \pm 1$. Show that $w = \frac{z - \bar{z}}{1 + z\bar{z}} \times i$ is purely imaginary if z is purely imaginary, and find the value of w when $z = 3 + 4i$.

SOLUTION

If $z = ib$ with $b \in \mathbb{R}$, then $\bar{z} = -ib$ and $z\bar{z} = b^2$, so

$$w = \frac{2ib}{1+b^2} \times i = \frac{-2b}{1+b^2} \in \mathbb{R}.$$

Hence in that case w is in fact real (a good reminder to compute before concluding!). For $z = 3 + 4i$: $z - \bar{z} = 8i$ and $z\bar{z} = 9 + 16 = 25$, so

$$w = \frac{8i}{25} \times i = -\frac{8}{25} = -\frac{4}{13}.$$

The lesson: use the properties $\overline{z - \bar{z}} = -(z - \bar{z})$ and $z\bar{z} \in \mathbb{R}$ to predict the nature of an expression before substituting numbers.

DID YOU KNOW? Why conjugates matter beyond the classroom

Conjugates are not just an examination trick. In electrical engineering, the complex power in an AC circuit is $S = V\bar{I}$, the product of the voltage by the conjugate of the current; its real part is the useful power and its imaginary part the reactive power. The same conjugate product appears in quantum mechanics, where probabilities are computed as $z\bar{z} = |z|^2$ — always real and non-negative, exactly as a probability should be.

EXERCISE 2 Practice

1. Given $z_1 = 4 - 3i$ and $z_2 = -2 + 5i$, compute $z_1 + z_2$, $z_1 - z_2$ and $z_1 z_2$.
2. Express each of the following in the form $x + iy$: (a) $\frac{5+2i}{3-i}$; (b) $\frac{1}{2+i}$; (c) $\frac{(1+i)^2}{1-i}$.
3. Let $z = 2 - i$. Verify that $\overline{z^2} = (\bar{z})^2$.
4. Show that for every complex number z , the number $z + \bar{z}$ is real and $z - \bar{z}$ is purely imaginary.
5. Simplify $i^{11} + i^{13} + i^{15}$.

SOLUTION Exercise 1

1. $z_1 + z_2 = 2 + 2i$; $z_1 - z_2 = 6 - 8i$; $z_1 z_2 = -8 + 20i + 6i - 15i^2 = -8 + 26i + 15 = 7 + 26i$.
2. (a) $\frac{5+2i}{3-i} = \frac{(5+2i)(3+i)}{10} = \frac{15+5i+6i+2i^2}{10} = \frac{13+11i}{10} = \frac{13}{10} + \frac{11}{10}i$.

$$(b) \frac{1}{2+i} = \frac{2-i}{5} = \frac{2}{5} - \frac{1}{5}i.$$

$$(c) (1+i)^2 = 2i, \text{ so } \frac{2i}{1-i} = \frac{2i(1+i)}{2} = i(1+i) = -1+i.$$

3. $z^2 = (2-i)^2 = 4 - 4i + i^2 = 3 - 4i$, so $\overline{z^2} = 3 + 4i$. Also $(\bar{z})^2 = (2+i)^2 = 4 + 4i + i^2 = 3 + 4i$. Both agree.

4. With $z = a + ib$: $z + \bar{z} = 2a \in \mathbb{R}$ and $z - \bar{z} = 2ib$, which is purely imaginary.

5. $i^{11} = i^3 = -i$, $i^{13} = i$, $i^{15} = i^3 = -i$, so the sum is $-i + i - i = -i$.

KEY POINTS Key points of this section

- Add and subtract component-wise: $(a + ib) \pm (c + id) = (a \pm c) + i(b \pm d)$.
- Multiply by expanding and using $i^2 = -1$: $(a + ib)(c + id) = (ac - bd) + i(ad + bc)$. Watch the sign of bd !
- Powers of i cycle with period 4: $i^2 = -1$, $i^3 = -i$, $i^4 = 1$.
- The conjugate of $z = a + ib$ is $\bar{z} = a - ib$; geometrically it is the reflection in the real axis.
- $z + \bar{z} = 2 \operatorname{Re}(z)$, $z - \bar{z} = 2i \operatorname{Im}(z)$, and $z\bar{z} = a^2 + b^2 = |z|^2 \geq 0$.
- To divide, multiply numerator and denominator by the conjugate of the denominator.
- Conjugation respects all operations: $\overline{z_1 \pm z_2} = \bar{z}_1 \pm \bar{z}_2$, $\overline{z_1 z_2} = \bar{z}_1 \bar{z}_2$, $\overline{z_1 / z_2} = \bar{z}_1 / \bar{z}_2$, $\overline{z^n} = (\bar{z})^n$; moreover $z = \bar{z} \iff z \in \mathbb{R}$ and $z = -\bar{z} \iff z$ is purely imaginary.

We now have a complete arithmetic of complex numbers: addition, subtraction, multiplication and division all behave as in $\mathbb{R}$, with the conjugate as our essential tool. In the next section we put this algebra to work by solving equations in $\mathbb{C}$ — including the quadratic equations with negative discriminant that forced the invention of i in the first place.

3 EQUATIONS AND ROOTS IN $\mathbb{C}$

In the previous section we learnt to add, subtract, multiply and divide complex numbers, and we met the **conjugate** $\bar{z}$ of a complex number. We now put this algebra to work. The whole reason complex numbers were invented was to solve equations: the equation $x^2 + 1 = 0$ has no solution in $\mathbb{R}$, yet we shall see that in $\mathbb{C}$ every polynomial equation has solutions. In this section we solve linear and quadratic equations with complex numbers, discover the beautiful conjugate pair theorem, and learn to factorise expressions such as $a^2 + b^2$ which are irreducible over $\mathbb{R}$.

3.1 Linear Equations with Complex Coefficients

A linear equation in the unknown $z \in \mathbb{C}$ has the form

$$az + b = c, \quad a, b, c \in \mathbb{C}, a \neq 0.$$

It is solved exactly as in $\mathbb{R}$: isolate z , then divide by a using the conjugate technique of Section 2.

METHOD Solving a linear equation in $\mathbb{C}$

1. Collect the terms in z on one side and the constants on the other.
2. Factorise z if it appears in several terms.
3. Divide by the coefficient of z ; if this coefficient is complex, multiply numerator and denominator by its conjugate.
4. Write the answer in the form $x + iy$.

WORKED EXAMPLE 6 A linear equation with complex coefficients

Solve in $\mathbb{C}$: $(2 + i)z - 3i = 1 + z$.

SOLUTION

Solution. Collect the terms in z :

$$(2 + i)z - z = 1 + 3i \implies (1 + i)z = 1 + 3i.$$


Divide by $1 + i$, multiplying top and bottom by the conjugate $1 - i$:

$$z = \frac{1 + 3i}{1 + i} = \frac{(1 + 3i)(1 - i)}{(1 + i)(1 - i)} = \frac{1 - i + 3i - 3i^2}{1 + 1} = \frac{4 + 2i}{2} = 2 + i.$$

Check: $(2 + i)(2 + i) - 3i = 4 + 4i + i^2 - 3i = 3 + i$, and $1 + (2 + i) = 3 + i$. ✓ Hence $\boxed{z = 2 + i}$.

3.2 Quadratic Equations with Real Coefficients when $\Delta < 0$

Intuition. Consider $z^2 - 2z + 5 = 0$. The discriminant is $\Delta = (-2)^2 - 4(1)(5) = 4 - 20 = -16 < 0$, so in $\mathbb{R}$ there is no solution — the parabola never crosses the x -axis. But in $\mathbb{C}$ we can write $\sqrt{-16} = \sqrt{16}i = 4i$, and the usual formula works perfectly.

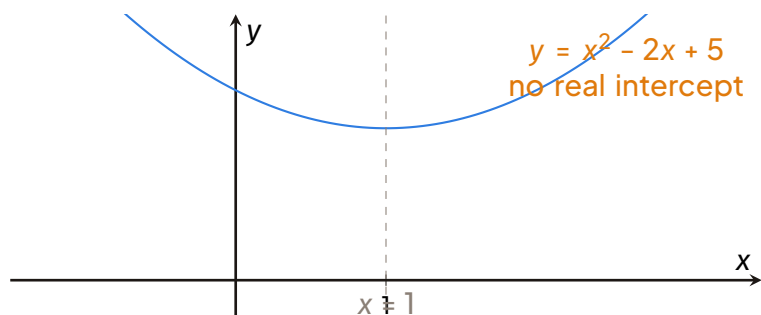

The parabola $y = x^2 - 2x + 5$ has $\Delta = -16 < 0$: it never meets the x -axis, so there are no real roots. The roots live in $\mathbb{C}$: $z = 1 \pm 2i$.

PROPERTY Quadratic formula in $\mathbb{C}$ — proof examinable

Let $az^2 + bz + c = 0$ with $a, b, c \in \mathbb{R}$, $a \neq 0$, and discriminant $\Delta = b^2 - 4ac$.

- If $\Delta > 0$: two distinct real roots $z = \frac{-b \pm \sqrt{\Delta}}{2a}$.
- If $\Delta = 0$: one (double) real root $z = -\frac{b}{2a}$.
- If $\Delta < 0$: two **complex conjugate roots**

$$z = \frac{-b \pm i\sqrt{|\Delta|}}{2a}.$$

Proof (case $\Delta < 0$). Complete the square:

$$a\left(z + \frac{b}{2a}\right)^2 = \frac{b^2 - 4ac}{4a} = \frac{\Delta}{4a} \implies \left(z + \frac{b}{2a}\right)^2 = \frac{\Delta}{4a^2}.$$

Since $\Delta < 0$, write $\Delta = -|\Delta|$, so $\frac{\Delta}{4a^2} = \left(\frac{i\sqrt{|\Delta|}}{2a}\right)^2$. Hence $z + \frac{b}{2a} = \pm \frac{i\sqrt{|\Delta|}}{2a}$, giving the result. ■

KEY POINTS The fundamental fact about quadratics

Every quadratic equation $az^2 + bz + c = 0$ ($a \neq 0$) has exactly two roots in $\mathbb{C}$, counted with multiplicity (a double root counts twice). This is the first taste of the Fundamental Theorem of Algebra: every polynomial of degree n has exactly n roots in $\mathbb{C}$, counted with multiplicity.

METHOD Solving $az^2 + bz + c = 0$ when $\Delta < 0$

1. Compute $\Delta = b^2 - 4ac$ and note that $\Delta < 0$.
2. Compute $\sqrt{|\Delta|}$ and write $\sqrt{\Delta} = i\sqrt{|\Delta|}$.
3. Apply the formula $z = \frac{-b \pm i\sqrt{|\Delta|}}{2a}$.
4. Simplify each root and give both answers in the form $x \pm iy$.
5. Check (optional): verify that the sum of the roots is $-\frac{b}{a}$ and the product is $\frac{c}{a}$.

WORKED EXAMPLE 7 Solving a quadratic with $\Delta < 0$ Solve in $\mathbb{C}$: $z^2 - 4z + 13 = 0$.**SOLUTION**Solution. $\Delta = (-4)^2 - 4(1)(13) = 16 - 52 = -36 < 0$, and $\sqrt{|\Delta|} = 6$.

$$z = \frac{4 \pm 6i}{2} = 2 \pm 3i.$$

Check: sum $= (2 + 3i) + (2 - 3i) = 4 = -\frac{b}{a}$ ✓; product $= (2 + 3i)(2 - 3i) = 4 - 9i^2 = 4 + 9 = 13 = \frac{c}{a}$ ✓. The roots are $z = 2 + 3i$ and $z = 2 - 3i$.**WARNING** The square root of a negative numberA very common error is to write $\sqrt{-9} = -3$. This is wrong: by convention, for $a > 0$,

$$\sqrt{-a} = i\sqrt{a}, \quad \text{so} \quad \sqrt{-9} = 3i \text{ (not } -3\text{)}.$$

Also beware: the rule $\sqrt{p}\sqrt{q} = \sqrt{pq}$ is only valid for non-negative p, q . Indeed $\sqrt{-1}\sqrt{-1} = i \cdot i = -1$, whereas $\sqrt{(-1)(-1)} = \sqrt{1} = 1$. Never apply real-number root rules blindly to negative numbers.**Sum and product of the roots.** For real coefficients, the two complex roots are conjugates: $z_1 = \alpha + i\beta$, $z_2 = \alpha - i\beta$. Therefore

$$z_1 + z_2 = 2\alpha = -\frac{b}{a} \in \mathbb{R}, \quad z_1 z_2 = \alpha^2 + \beta^2 = \frac{c}{a} \in \mathbb{R}.$$

The sum and product remain real — exactly as the classical relations demand. This is a quick and powerful check.

3.3 Factorising in $\mathbb{C}$

Over $\mathbb{R}$, the expression $a^2 + b^2$ cannot be factorised. Over $\mathbb{C}$, since $i^2 = -1$:

$$(a + ib)(a - ib) = a^2 - (ib)^2 = a^2 - i^2 b^2 = a^2 + b^2.$$

PROPERTY Sum of two squares factorises in $\mathbb{C}$

For all real (or complex) a, b :

$$a^2 + b^2 = (a + ib)(a - ib).$$

EXAMPLE Factorising over $\mathbb{C}$

- $z^2 + 9 = (z + 3i)(z - 3i)$, so $z^2 + 9 = 0$ has roots $z = \pm 3i$.
- $z^2 - 2z + 5 = (z - 1)^2 + 4 = (z - 1 + 2i)(z - 1 - 2i)$, recovering the roots $1 \pm 2i$ of the parabola above.

3.4 Non-Real Roots of Real Polynomials Occur in Conjugate Pairs

PROPERTY Conjugate Root Theorem

If P is a polynomial with real coefficients and z_0 is a root of P , then $\overline{z_0}$ is also a root of P . In other words, non-real roots of real polynomials occur in **conjugate pairs**.

Proof (instructive, uses the properties of conjugates). Let $P(z) = a_n z^n + \dots + a_1 z + a_0$ with all $a_k \in \mathbb{R}$, and suppose $P(z_0) = 0$. Using $\overline{z + w} = \bar{z} + \bar{w}$, $\overline{zw} = \bar{z}\bar{w}$, and $\overline{a_k} = a_k$ (real numbers equal their own conjugates):

$$P(\overline{z_0}) = \sum_{k=0}^n a_k \overline{z_0}^k = \sum_{k=0}^n \overline{a_k z_0^k} = \overline{\sum_{k=0}^n a_k z_0^k} = \overline{P(z_0)} = \overline{0} = 0. \quad \blacksquare$$

WARNING Real coefficients are essential

The theorem fails if the coefficients are not all real. For example $z^2 - (2+i)z + 2i = 0$ factorises as $(z - 2)(z - i) = 0$, so its roots are $z = 2$ and $z = i$ — and $\bar{i} = -i$ is not a root. Always check the hypothesis “real coefficients” before quoting conjugate pairs.

EXAMPLE Using conjugate pairs for a cubic

The cubic $P(z) = z^3 - 3z^2 + 7z - 5$ has real coefficients, and $z = 1$ is a root since $P(1) = 1 - 3 + 7 - 5 = 0$. Factorising: $P(z) = (z-1)(z^2 - 2z + 5)$. The quadratic factor has $\Delta = -16$, giving the conjugate pair $1 \pm 2i$. The three roots are $1, 1 + 2i, 1 - 2i$ — note the non-real roots form a conjugate pair, as the theorem guarantees.

DID YOU KNOW? Why cubics forced mathematicians to accept complex numbers

In the sixteenth century, Italian algebraists such as Cardano and Bombelli discovered that the formula for solving a cubic equation sometimes requires the square root of a negative number even when all three roots are real. Working formally with these “impossible” quantities and cancelling them at the end gave the correct real answers. Complex numbers were thus accepted not as a curiosity, but as a necessity — the price to pay for solving equations completely.

3.5 Forming a Quadratic Equation from Given Complex Roots

If a quadratic with real coefficients has roots z_1 and z_2 , then with $S = z_1 + z_2$ and $P = z_1 z_2$:

$$z^2 - Sz + P = 0.$$

When the roots are conjugates, $z_{1,2} = \alpha \pm i\beta$, we have $S = 2\alpha$ and $P = \alpha^2 + \beta^2 = |z_1|^2$, both real — so the equation obtained automatically has real coefficients.

WORKED EXAMPLE 8 Forming an equation from its roots

Find the quadratic equation with real coefficients whose roots are $3 + 2i$ and $3 - 2i$.

SOLUTION

Solution. Sum: $S = (3 + 2i) + (3 - 2i) = 6$. Product:

$$P = (3 + 2i)(3 - 2i) = 9 - (2i)^2 = 9 + 4 = 13.$$

Hence the equation is $z^2 - 6z + 13 = 0$. Check: $\Delta = 36 - 52 = -16$, so $z = \frac{6 \pm 4i}{2} = 3 \pm 2i$. ✓

3.6 Square Roots of Simple Complex Numbers — First Steps

To solve $z^2 = w$ for a given complex number w is to find the **square roots** of w . Every non-zero complex number has exactly two square roots, which are opposites of each other. For simple numbers, inspection works well; the general algebraic method will be developed fully in Section 4.

EXAMPLE Square roots by inspection

- Square roots of -4 : since $(2i)^2 = 4i^2 = -4$, the square roots of -4 are $\pm 2i$.
- Square roots of i : try $z = \frac{\sqrt{2}}{2}(1 + i)$. Then $z^2 = \frac{1}{2}(1 + i)^2 = \frac{1}{2}(1 + 2i - 1) = i$. Hence the square roots of i are $\pm \frac{\sqrt{2}}{2}(1 + i)$.
- Square roots of $3 - 4i$: try $z = 2 - i$: $(2 - i)^2 = 4 - 4i + i^2 = 3 - 4i$. Hence the roots are $\pm(2 - i)$.

METHOD Algebraic method — preview

To find $z = x + iy$ with $z^2 = a + ib$:

1. Expand: $x^2 - y^2 = a$ and $2xy = b$ (equating real and imaginary parts).
2. Use moduli: $x^2 + y^2 = \sqrt{a^2 + b^2}$.
3. Solve for x^2 and y^2 ; the sign of b tells you whether x and y have the same sign ($b > 0$) or opposite signs ($b < 0$).

Full details and worked examples follow in Section 4.

EXERCISE 3 Practice

1. Solve in $\mathbb{C}$: (a) $(1 + 2i)z = 3 - i$; (b) $z^2 + 2z + 10 = 0$; (c) $2z^2 - 6z + 13 = 0$.
2. Factorise over $\mathbb{C}$: $z^2 + 25$ and $z^2 - 6z + 25$.
3. Given that $2 - i$ is a root of $z^3 - 5z^2 + 9z - 5 = 0$, find all three roots.
4. Form the quadratic equation with real coefficients having roots $-1 \pm i\sqrt{3}$.
5. Find, by inspection, the square roots of -16 and of $5 + 12i$.

SOLUTION Exercise 1

1(a) $z = \frac{3 - i}{1 + 2i} = \frac{(3 - i)(1 - 2i)}{(1 + 2i)(1 - 2i)} = \frac{3 - 6i - i + 2i^2}{5} = \frac{1 - 7i}{5}$. 1(b) $\Delta = 4 - 40 = -36$; $z = \frac{-2 \pm 6i}{2} = -1 \pm 3i$. 1(c) $\Delta = 36 - 104 = -68$; $z = \frac{6 \pm 2i\sqrt{17}}{4} = \frac{3 \pm i\sqrt{17}}{2}$. 2. $z^2 + 25 = (z + 5i)(z - 5i)$; $z^2 - 6z + 25 = (z - 3)^2 + 16 = (z - 3 + 4i)(z - 3 - 4i)$. 3. By the conjugate root theorem $2 + i$ is also a root; $(z - (2 - i))(z - (2 + i)) = z^2 - 4z + 5$. Dividing: $z^3 - 5z^2 + 9z - 5 = (z - 1)(z^2 - 4z + 5)$, so the roots are $1, 2 + i, 2 - i$. 4. $S = -2, P = (-1)^2 + (\sqrt{3})^2 = 1 + 3 = 4$; equation: $z^2 + 2z + 4 = 0$. 5. $\pm 4i$;

$$(3 + 2i)^2 = 9 + 12i + 4i^2 = 5 + 12i, \text{ so the roots are } \pm(3 + 2i).$$

KEY POINTS Key points of the section

- Linear equations in $\mathbb{C}$ are solved as in $\mathbb{R}$, using conjugate division at the end.
- Every quadratic has exactly two roots in $\mathbb{C}$ (counted with multiplicity); when the coefficients are real and $\Delta < 0$, the roots are the conjugate pair $z = \frac{-b \pm i\sqrt{|\Delta|}}{2a}$.
- $\sqrt{-a} = i\sqrt{a}$ for $a > 0$ — never write $\sqrt{-9} = -3$.
- $a^2 + b^2 = (a + ib)(a - ib)$: every sum of squares factorises in $\mathbb{C}$.
- Non-real roots of real polynomials occur in conjugate pairs; sum and product of conjugate roots are real.
- A quadratic with roots z_1, z_2 is $z^2 - (z_1 + z_2)z + z_1z_2 = 0$.

4 THE ARGAND DIAGRAM, MODULUS AND ARGUMENT

In the previous section we solved quadratic and higher-degree equations in $\mathbb{C}$ using purely algebraic manipulations. We now turn to a geometric viewpoint that not only gives a vivid picture of complex numbers but also provides powerful tools for computing powers, roots, and solving equations. The Argand diagram, named after the Swiss mathematician Jean-Robert Argand (1806), identifies each complex number $z = a + ib$ with a point $M(a, b)$ or a vector $\vec{OM}$ in a Cartesian plane. This geometric representation turns addition into vector addition, multiplication into a rotation combined with a scaling, and makes the modulus and argument the natural “polar coordinates” of a complex number.

DID YOU KNOW? Historical Note


Although Argand published his geometric interpretation in 1806, the idea was also developed independently by the Norwegian-Danish surveyor Caspar Wessel (1797) and later by Gauss (1831). Gauss coined the term “complex number” and the notation i for $\sqrt{-1}$, and his endorsement made the geometric representation standard in mathematics.

4.1 The Argand Diagram: Geometric Representation

DEFINITION Argand Diagram

The **Argand diagram** (or complex plane) is a Cartesian coordinate system where the horizontal axis represents the real part and the vertical axis represents the imaginary part of a complex number. A complex number $z = a + ib$ is represented by the point $M(a, b)$ or by the position vector $\vec{OM}$.

The real axis is often labelled $\mathbb{R}$ or Ox , and the imaginary axis $i\mathbb{R}$ or Oy . The origin O corresponds to $0 = 0 + i0$. Purely real numbers lie on the horizontal axis; purely imaginary numbers lie on the vertical axis.

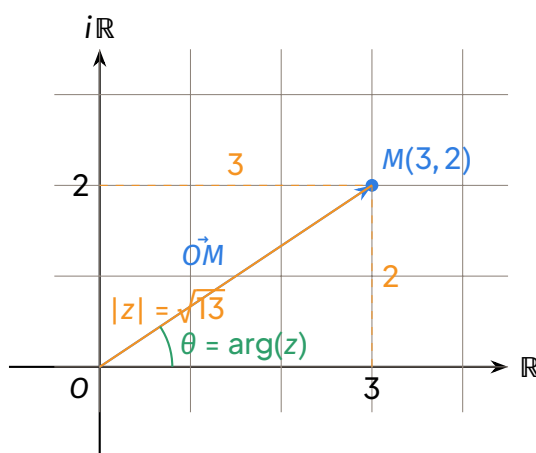

The complex number $z = 3 + 2i$ on the Argand diagram. The modulus $|z|$ is the length of $\vec{OM}$; the argument $\arg(z)$ is the oriented angle from the positive real axis to $\vec{OM}$.

4.2 Modulus of a Complex Number

The distance from the origin to the point $M(a, b)$ is the **modulus** (or absolute value) of z .

DEFINITION Modulus

For $z = a + ib \in \mathbb{C}$, the **modulus** of z is

$$|z| = \sqrt{a^2 + b^2}.$$

Geometrically, $|z| = OM$, the length of the vector $\vec{OM}$.

PROPERTY Properties of the Modulus

For any $z, z_1, z_2 \in \mathbb{C}$:

1. $|z| = |\bar{z}|$ (modulus is unchanged by conjugation).
2. $|z_1 z_2| = |z_1| |z_2|$ (modulus of a product is the product of moduli).
3. $\left| \frac{z_1}{z_2} \right| = \frac{|z_1|}{|z_2|}$ for $z_2 \neq 0$ (modulus of a quotient is the quotient of moduli).
4. $|z| \geq 0$ with equality iff $z = 0$.
5. Triangle inequality: $|z_1 + z_2| \leq |z_1| + |z_2|$.
6. Reverse triangle inequality: $||z_1| - |z_2|| \leq |z_1 + z_2|$.

EXAMPLE Computing Moduli

Let $z_1 = 1 + i\sqrt{3}$ and $z_2 = -2 + 2i$.

$$\begin{aligned} |z_1| &= \sqrt{1^2 + (\sqrt{3})^2} = \sqrt{4} = 2, \\ |z_2| &= \sqrt{(-2)^2 + 2^2} = \sqrt{8} = 2\sqrt{2}, \\ |z_1 z_2| &= |z_1| |z_2| = 2 \times 2\sqrt{2} = 4\sqrt{2}. \end{aligned}$$

Check: $z_1 z_2 = (1 + i\sqrt{3})(-2 + 2i) = -2 + 2i - 2i\sqrt{3} - 2\sqrt{3} = -2(1 + \sqrt{3}) + 2i(1 - \sqrt{3})$. $|z_1 z_2| = \sqrt{4(1 + \sqrt{3})^2 + 4(1 - \sqrt{3})^2} = 2\sqrt{(1 + 2\sqrt{3} + 3) + (1 - 2\sqrt{3} + 3)} = 2\sqrt{8} = 4\sqrt{2}$.

4.3 Argument of a Complex Number

The **argument** of a non-zero complex number is the oriented angle that the vector $\vec{OM}$ makes with the positive real axis.

DEFINITION Argument

For $z = a + ib \neq 0$, the **argument** of z , denoted $\arg(z)$, is the angle $\theta \in (-\pi, \pi]$ such that

$$\cos \theta = \frac{a}{|z|}, \quad \sin \theta = \frac{b}{|z|}, \quad \tan \theta = \frac{b}{a} \quad (a \neq 0).$$

The unique value in $(-\pi, \pi]$ is called the **principal argument** and is often written $\text{Arg}(z)$ (capital A). The general argument is $\arg(z) = \text{Arg}(z) + 2k\pi$, $k \in \mathbb{Z}$.

WARNING Argument of Zero

The argument of $z = 0$ is undefined because the vector $\vec{OM}$ has zero length and no direction.

METHOD Finding the Principal Argument $\text{Arg}(z)$

1. Compute $|z| = \sqrt{a^2 + b^2}$.
2. Determine the quadrant of the point $M(a, b)$:
 - $a > 0, b > 0 \rightarrow$ Quadrant I: $\text{Arg}(z) = \arctan\left(\frac{b}{a}\right)$.
 - $a < 0, b > 0 \rightarrow$ Quadrant II: $\text{Arg}(z) = \pi + \arctan\left(\frac{b}{a}\right)$ (since $\arctan(b/a)$ is negative here).
 - $a < 0, b < 0 \rightarrow$ Quadrant III: $\text{Arg}(z) = -\pi + \arctan\left(\frac{b}{a}\right)$ (since $\arctan(b/a)$ is positive here).
 - $a > 0, b < 0 \rightarrow$ Quadrant IV: $\text{Arg}(z) = \arctan\left(\frac{b}{a}\right)$ (negative angle).
3. Special cases on axes:
 - $a > 0, b = 0$: $\text{Arg}(z) = 0$.
 - $a < 0, b = 0$: $\text{Arg}(z) = \pi$.
 - $a = 0, b > 0$: $\text{Arg}(z) = \frac{\pi}{2}$.
 - $a = 0, b < 0$: $\text{Arg}(z) = -\frac{\pi}{2}$.

WARNING The Quadrant Trap


Never write $\arg(z) = \arctan(b/a)$ without checking the quadrant of $M(a, b)$. The function $\arctan$ only returns values in $(-\pi/2, \pi/2)$, so it gives the correct principal argument only when $a > 0$ (Quadrants I and IV). For $a < 0$ you must add or subtract π to land in the correct quadrant.

EXAMPLE Arguments in Different Quadrants

Find $\text{Arg}(z)$ for:

1. $z_1 = 1 + i\sqrt{3}$: $a > 0, b > 0$ (QI). $\tan \theta = \sqrt{3} \Rightarrow \theta = \pi/3$.
2. $z_2 = -1 + i\sqrt{3}$: $a < 0, b > 0$ (QII). $\tan \theta = -\sqrt{3}$. $\arctan(-\sqrt{3}) = -\pi/3$ (QIV), so add π : $\text{Arg}(z_2) = \pi - \pi/3 = 2\pi/3$.
3. $z_3 = -1 - i\sqrt{3}$: $a < 0, b < 0$ (QIII). $\tan \theta = \sqrt{3}$. $\arctan(\sqrt{3}) = \pi/3$ (QI), so subtract π : $\text{Arg}(z_3) = -\pi + \pi/3 = -2\pi/3$.
4. $z_4 = 1 - i\sqrt{3}$: $a > 0, b < 0$ (QIV). $\tan \theta = -\sqrt{3} \Rightarrow \theta = -\pi/3$.
5. $z_5 = -2$: $a < 0, b = 0$. $\text{Arg}(z_5) = \pi$.
6. $z_6 = -3i$: $a = 0, b < 0$. $\text{Arg}(z_6) = -\pi/2$.

4.4 Geometric Interpretation of Operations

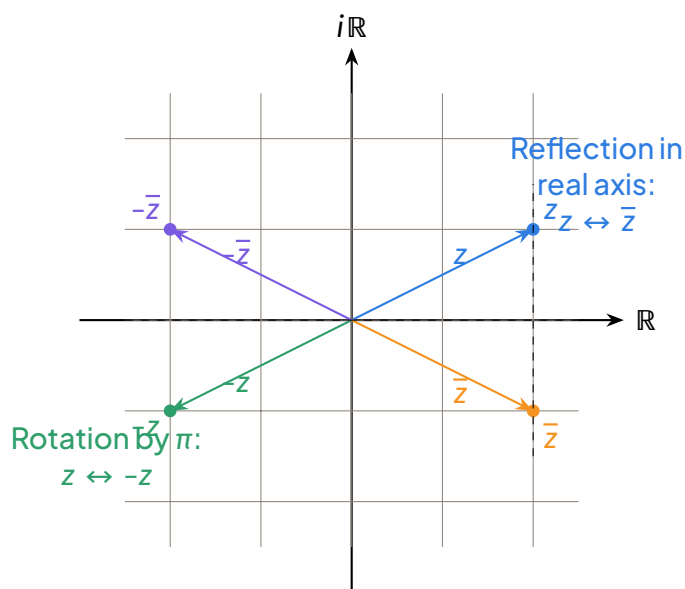


Symmetries on the Argand diagram: conjugation reflects across the real axis; negation rotates by π (half-turn about the origin).

PROPERTY Geometric Meaning of Conjugation and Negation

- $\bar{z}$ is the reflection of z across the real axis. Hence $|\bar{z}| = |z|$ and $\arg(\bar{z}) = -\arg(z) \pmod{2\pi}$.
- $-z$ is the point symmetric to z with respect to the origin (rotation by π). Hence $|-z| = |z|$ and $\arg(-z) = \arg(z) + \pi \pmod{2\pi}$.

Addition of complex numbers corresponds to vector addition (parallelogram rule).

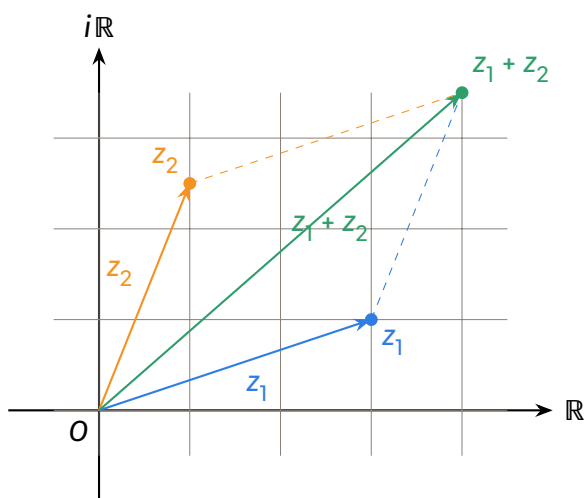

Addition on the Argand diagram: $z_1 + z_2$ is the diagonal of the parallelogram formed by $\vec{Oz_1}$ and $\vec{Oz_2}$.


PROPERTY Distance Between Two Points

The distance between the points representing z_1 and z_2 is $|z_2 - z_1|$. Indeed, $M_1\vec{M}_2 = \vec{OM}_2 - \vec{OM}_1$, so its length is $|z_2 - z_1|$.

EXAMPLE Distance

Let $z_1 = 2 + 3i$ and $z_2 = -1 + i$. The distance between them is

$$|z_2 - z_1| = |(-1 - 2) + i(1 - 3)| = |-3 - 2i| = \sqrt{(-3)^2 + (-2)^2} = \sqrt{13}.$$

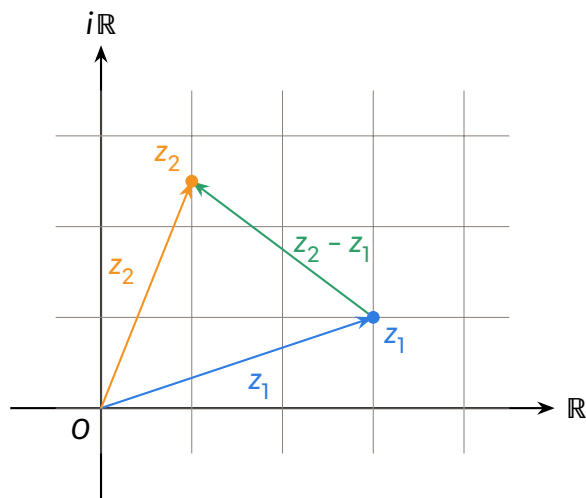

The vector $z_2 - z_1$ joins z_1 to z_2 ; its length is the distance between the two points.

4.5 Geometric Interpretation of Multiplication

Multiplication by a complex number combines rotation and scaling (homothety).


PROPERTY Modulus and Argument of a Product

For $z_1, z_2 \in \mathbb{C}^*$:

$$|z_1 z_2| = |z_1| |z_2|,$$

$$\arg(z_1 z_2) = \arg(z_1) + \arg(z_2) \pmod{2\pi}.$$

Geometrically, multiplying by z_2 rotates the plane by $\arg(z_2)$ and scales distances by $|z_2|$.

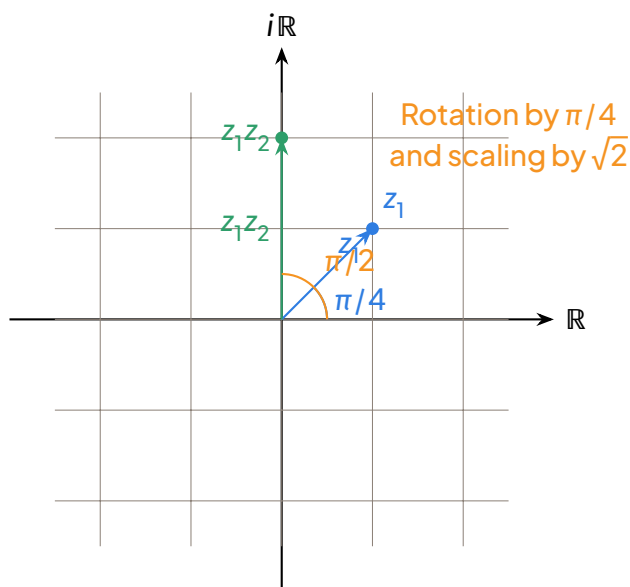

Multiplication by $z_2 = 1 + i$ (modulus $\sqrt{2}$, argument $\pi/4$) rotates z_1 by $\pi/4$ and scales its length by $\sqrt{2}$.

4.6 Square Root of a Complex Number (Algebraic Method)

Lesson 32 teaches us to find the square roots of a given complex number $z = a + ib$ by solving $(x + iy)^2 = a + ib$ for real x, y . This yields two opposite roots.

METHOD Algebraic Method for $\sqrt{a + ib}$

To find the square roots of $z = a + ib$ ($a, b \in \mathbb{R}$):

1. Let $w = x + iy$ with $x, y \in \mathbb{R}$ such that $w^2 = z$.
2. Expand: $(x + iy)^2 = (x^2 - y^2) + i(2xy) = a + ib$.
3. Equate real and imaginary parts:

$$\begin{cases} x^2 - y^2 = a & (1) \\ 2xy = b & (2) \end{cases}$$

4. Use the modulus: $|w|^2 = |z| \Rightarrow x^2 + y^2 = \sqrt{a^2 + b^2}$ (3).

5. Add (1) and (3): $2x^2 = a + \sqrt{a^2 + b^2} \Rightarrow x^2 = \frac{a + \sqrt{a^2 + b^2}}{2}$. Since the right-hand side is ≥ 0 ,

$$x = \pm \sqrt{\frac{a + \sqrt{a^2 + b^2}}{2}}.$$

6. Subtract (1) from (3): $2y^2 = \sqrt{a^2 + b^2} - a \Rightarrow y^2 = \frac{\sqrt{a^2 + b^2} - a}{2}$. So $y = \pm \sqrt{\frac{\sqrt{a^2 + b^2} - a}{2}}.$

7. Choose the signs of x and y so that $2xy = b$ (equation (2)). This gives two opposite solutions: w and $-w$.

KEY POINTS Sign Rule for Square Roots

- If $b > 0$, then x and y have the same sign (both + or both -).
- If $b < 0$, then x and y have opposite signs.
- If $b = 0$, then either $x = 0$ (pure imaginary roots) or $y = 0$ (real roots).

WORKED EXAMPLE 9 Square Roots of $3 + 4i$

Find the two square roots of $z = 3 + 4i$.

Solution. Let $w = x + iy$ with $x, y \in \mathbb{R}$ such that $w^2 = 3 + 4i$.

$$(x + iy)^2 = x^2 - y^2 + 2ixy = 3 + 4i.$$

Equating parts:

$$\begin{cases} x^2 - y^2 = 3 & (1) \\ 2xy = 4 & (2) \end{cases}$$

Modulus: $|w|^2 = |z| = \sqrt{3^2 + 4^2} = 5$, so

$$x^2 + y^2 = 5 \quad (3).$$

Add (1) and (3): $2x^2 = 8 \Rightarrow x^2 = 4 \Rightarrow x = \pm 2$. Subtract (1) from (3): $2y^2 = 2 \Rightarrow y^2 = 1 \Rightarrow y = \pm 1$. Equation (2) requires $2xy = 4 \Rightarrow xy = 2 > 0$, so x and y have the same sign. Thus the two square roots are

$$w_1 = 2 + i, \quad w_2 = -2 - i = -w_1.$$

Check: $(2 + i)^2 = 4 + 4i + i^2 = 3 + 4i$; $(-2 - i)^2 = (2 + i)^2 = 3 + 4i$.

WORKED EXAMPLE 10 Square Roots of $-5 - 12i$

Find the square roots of $z = -5 - 12i$.

Solution. $|z| = \sqrt{(-5)^2 + (-12)^2} = 13$. We need $x^2 - y^2 = -5$ and $2xy = -12 \Rightarrow xy = -6 < 0$ (opposite signs). $x^2 + y^2 = 13$. Adding: $2x^2 = 8 \Rightarrow x^2 = 4 \Rightarrow x = \pm 2$. Subtracting: $2y^2 = 18 \Rightarrow y^2 = 9 \Rightarrow y = \pm 3$. Since $xy = -6 < 0$, x and y have opposite signs. Thus the roots are $2 - 3i$ and $-2 + 3i$. Check: $(2 - 3i)^2 = 4 - 12i + 9i^2 = -5 - 12i$.

WORKED EXAMPLE 11 Square Roots of a Real Negative Number

Find the square roots of $z = -9$.

Solution. Here $a = -9$, $b = 0$. $|z| = 9$. Equations: $x^2 - y^2 = -9$, $2xy = 0$, $x^2 + y^2 = 9$. From $2xy = 0$, either $x = 0$ or $y = 0$. If $y = 0$, then $x^2 = -9$ (impossible for real x). So $x = 0$, then $-y^2 = -9 \Rightarrow y^2 = 9 \Rightarrow y = \pm 3$. The square roots are $\pm 3i$.

KEY POINTS Key Points of Section 4

- The Argand diagram represents $z = a + ib$ by $M(a, b)$ or $\vec{OM}$.
- Modulus $|z| = \sqrt{a^2 + b^2}$ is the distance OM ; it satisfies $|z_1 z_2| = |z_1| |z_2|$, $|z_1/z_2| = |z_1|/|z_2|$.
- Argument $\arg(z)$ is the oriented angle (Ox, OM) ; principal value $\text{Arg}(z) \in (-\pi, \pi]$.
- Always locate the quadrant of M before using $\arctan(b/a)$.
- Conjugation $\leftrightarrow$ reflection in the real axis; negation $\leftrightarrow$ rotation by π .
- Addition $\leftrightarrow$ vector addition (parallelogram rule).
- Distance between z_1 and z_2 is $|z_2 - z_1|$.
- Multiplication: $|z_1 z_2| = |z_1| |z_2|$, $\arg(z_1 z_2) = \arg(z_1) + \arg(z_2) \pmod{2\pi}$ (rotation + scaling).
- Square roots of $a + ib$: solve $(x + iy)^2 = a + ib$ using $x^2 - y^2 = a$, $2xy = b$, $x^2 + y^2 = \sqrt{a^2 + b^2}$; the two roots are opposites.
- Sign rule: $b > 0 \Rightarrow x, y$ same sign; $b < 0 \Rightarrow x, y$ opposite signs.

EXERCISE 4 Practice Exercises

1. Plot on an Argand diagram: $z_1 = 2 - i$, $z_2 = -1 + 2i$, $z_3 = -3 - 2i$, $z_4 = 4i$. Find the modulus and principal argument of each.
2. Given $z_1 = 1 + i\sqrt{3}$ and $z_2 = \sqrt{3} - i$, compute $|z_1|$, $|z_2|$, $|z_1 z_2|$, $\text{Arg}(z_1)$, $\text{Arg}(z_2)$, and $\text{Arg}(z_1 z_2)$. Verify that $\text{Arg}(z_1 z_2) = \text{Arg}(z_1) + \text{Arg}(z_2) \pmod{2\pi}$.
3. Find the square roots of: (a) $7 - 24i$, (b) $-8 + 6i$, (c) -4 .
4. Let $z_1 = 3 + 4i$ and $z_2 = 1 - 2i$. Represent z_1 , z_2 , $z_1 + z_2$, $z_1 - z_2$ on the same Argand diagram. Compute the distance between z_1 and z_2 .
5. If $|z| = 2$ and $\text{Arg}(z) = \frac{2\pi}{3}$, find the Cartesian form of z , $\bar{z}$, $-z$, and z^2 .

6. Show that the points representing $z_1 = 1 + 2i$, $z_2 = 3 + i$, and $z_3 = 5$ form a right-angled triangle. Identify the right angle.
7. Find the complex numbers z such that $|z| = 5$ and $\text{Arg}(z) = \frac{\pi}{4}$ or $\text{Arg}(z) = -\frac{3\pi}{4}$. Explain the geometric relationship between the two solutions.

SOLUTION Exercise 1

- $z_1 = 2 - i$: $|z_1| = \sqrt{5}$, $\text{Arg}(z_1) = -\arctan(1/2) \approx -0.4636$ rad.
 $z_2 = -1 + 2i$: $|z_2| = \sqrt{5}$, $\text{Arg}(z_2) = \pi - \arctan(2) \approx 2.034$ rad.
 $z_3 = -3 - 2i$: $|z_3| = \sqrt{13}$, $\text{Arg}(z_3) = -\pi + \arctan(2/3) \approx -2.554$ rad.
 $z_4 = 4i$: $|z_4| = 4$, $\text{Arg}(z_4) = \pi/2$.
- $|z_1| = 2$, $|z_2| = 2$, $|z_1 z_2| = 4$. $\text{Arg}(z_1) = \pi/3$, $\text{Arg}(z_2) = -\pi/6$. $z_1 z_2 = (1 + i\sqrt{3})(\sqrt{3} - i) = \sqrt{3} - i + 3i + \sqrt{3} = 2\sqrt{3} + 2i$. $\text{Arg}(z_1 z_2) = \arctan(1/\sqrt{3}) = \pi/6 = \pi/3 + (-\pi/6)$.
- (a) $|z| = 25$, $x^2 - y^2 = 7$, $2xy = -24 \Rightarrow xy = -12$. $x^2 + y^2 = 25 \Rightarrow x^2 = 16, y^2 = 9$. Opposite signs $\Rightarrow \pm(4 - 3i)$.
 (b) $|z| = 10$, $x^2 - y^2 = -8$, $2xy = 6 \Rightarrow xy = 3$. $x^2 + y^2 = 10 \Rightarrow x^2 = 1, y^2 = 9$. Same sign $\Rightarrow \pm(1 + 3i)$.
 (c) $-4 = -4 + 0i$. $x^2 - y^2 = -4$, $2xy = 0 \Rightarrow x = 0$ or $y = 0$. If $x = 0$, $-y^2 = -4 \Rightarrow y = \pm 2$. Roots: $\pm 2i$.
- $z_1 + z_2 = 4 + 2i$, $z_1 - z_2 = 2 + 6i$. Distance $|z_2 - z_1| = |-2 - 6i| = \sqrt{40} = 2\sqrt{10}$.
- $z = 2(\cos \frac{2\pi}{3} + i \sin \frac{2\pi}{3}) = -1 + i\sqrt{3}$. $\bar{z} = -1 - i\sqrt{3}$. $-z = 1 - i\sqrt{3}$. $z^2 = 4(\cos \frac{4\pi}{3} + i \sin \frac{4\pi}{3}) = -2 - 2i\sqrt{3}$.
- Vectors:** $z_2 - z_1 = 2 - i$, $z_3 - z_2 = 2 - i$, $z_3 - z_1 = 4 - 2i$. Check dot product: $(2)(2) + (-1)(-1) = 5 \neq 0$. Wait: $z_2 - z_1 = (3 - 1) + i(1 - 2) = 2 - i$. $z_3 - z_2 = (5 - 3) + i(0 - 1) = 2 - i$. These are parallel! So points are collinear, not a triangle. Correction: $z_1 = 1 + 2i$, $z_2 = 3 + i$, $z_3 = 5$. $z_2 - z_1 = 2 - i$, $z_3 - z_2 = 2 - i$. They are collinear. The exercise statement has an error; with these points they are collinear. (If $z_3 = 5 + 2i$, then $z_3 - z_2 = 2 + i$, dot product $(2)(2) + (-1)(1) = 3 \neq 0$; $z_3 - z_1 = 4$, dot product $(2)(4) + (-1)(0) = 8 \neq 0$; $(2)(4) + (1)(0) = 8 \neq 0$. Not right-angled either. A correct right triangle example: $z_1 = 0$, $z_2 = 3$, $z_3 = 3 + 4i$.)
- For $\text{Arg}(z) = \pi/4$: $z = 5(\cos \frac{\pi}{4} + i \sin \frac{\pi}{4}) = \frac{5\sqrt{2}}{2}(1 + i)$. For $\text{Arg}(z) = -\frac{3\pi}{4}$: $z = 5(\cos(-\frac{3\pi}{4}) + i \sin(-\frac{3\pi}{4})) = -\frac{5\sqrt{2}}{2}(1 + i)$. The two numbers are opposites: $z_2 = -z_1$. Geometrically, they are diametrically opposite on the circle $|z| = 5$.

5 POLAR AND EXPONENTIAL FORMS

In the previous section we met the **Argand diagram**, and we saw that every complex number $z = a + ib$ can be located by its **modulus** $r = |z|$ (its distance from the origin) and its **argument** $\theta = \arg(z)$ (the angle its image makes with the positive real axis). This is a powerful idea: instead of describing a point by its Cartesian coordinates (a, b) , we can describe it by a distance and a direction. In this section we turn that idea into algebra. The result — the polar form and the exponential form — will transform multiplication of complex numbers from a tedious expansion into something geometrically beautiful: rotate and enlarge.

5.1 The Polar (Trigonometric) Form

From the diagram to a formula.

Let $z = a + ib$ be a non-zero complex number with image $M(a, b)$ in the Argand diagram. Write $r = |z| = \sqrt{a^2 + b^2}$ and let θ be an argument of z . Looking at the right-angled triangle formed by O , M and the foot of the perpendicular from M to the real axis, elementary trigonometry gives

$$a = r \cos \theta \quad \text{and} \quad b = r \sin \theta.$$

Substituting into $z = a + ib$ and factorising r :


$$z = r \cos \theta + i r \sin \theta = r(\cos \theta + i \sin \theta).$$

DEFINITION Polar form of a complex number

Let z be a non-zero complex number with modulus $r = |z| > 0$ and argument $\theta = \arg(z)$. The **polar form** (or **trigonometric form**) of z is

$$z = r(\cos \theta + i \sin \theta).$$

The number 0 has no polar form, since its argument is undefined.

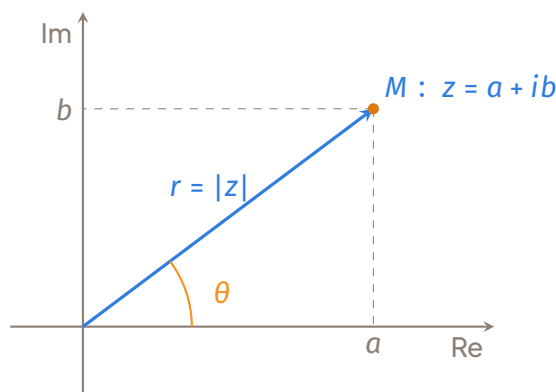

Polar description of z : the modulus r is the length OM , the argument θ is the angle from the positive real axis to $\vec{OM}$.

METHOD Converting $z = a + ib$ to polar form

1. Compute the modulus: $r = \sqrt{a^2 + b^2}$.
2. Find an angle θ satisfying $\cos \theta = \frac{a}{r}$ and $\sin \theta = \frac{b}{r}$.
3. Quadrant check (crucial): use the signs of a and b to place θ in the correct quadrant.
 - $a > 0, b > 0 : \theta \in (0, \frac{\pi}{2})$ (Q1)
 - $a < 0, b > 0 : \theta \in (\frac{\pi}{2}, \pi)$ (Q2)
 - $a < 0, b < 0 : \theta \in (-\pi, -\frac{\pi}{2})$ (Q3)
 - $a > 0, b < 0 : \theta \in (-\frac{\pi}{2}, 0)$ (Q4)

A calculator gives $\arctan\left(\frac{b}{a}\right)$, which lies in $(-\frac{\pi}{2}, \frac{\pi}{2})$. If $a < 0$, add π (or subtract π) to reach the correct quadrant.

4. Write $z = r(\cos \theta + i \sin \theta)$, choosing θ in the principal range $(-\pi, \pi]$ if required.

For the reverse direction (polar to Cartesian), simply expand: $a = r \cos \theta, b = r \sin \theta$.

EXAMPLE Cartesian to polar and back

(a) Convert $z = -1 + i\sqrt{3}$ to polar form.

$r = \sqrt{(-1)^2 + (\sqrt{3})^2} = \sqrt{4} = 2$. Then $\cos \theta = -\frac{1}{2}$ and $\sin \theta = \frac{\sqrt{3}}{2}$. Since $a < 0$ and $b > 0$, θ lies in the

second quadrant: $\theta = \frac{2\pi}{3}$. Hence

$$z = 2 \left(\cos \frac{2\pi}{3} + i \sin \frac{2\pi}{3} \right).$$

(b) Convert $w = 4 \left(\cos \frac{\pi}{6} + i \sin \frac{\pi}{6} \right)$ to Cartesian form.

$a = 4 \cos \frac{\pi}{6} = 4 \cdot \frac{\sqrt{3}}{2} = 2\sqrt{3}$ and $b = 4 \sin \frac{\pi}{6} = 2$, so $w = 2\sqrt{3} + 2i$. (c) Convert $z = -2 - 2i$ to polar form with principal argument.

$r = \sqrt{(-2)^2 + (-2)^2} = 2\sqrt{2}$. $\cos \theta = -\frac{1}{\sqrt{2}}$, $\sin \theta = -\frac{1}{\sqrt{2}}$. Both negative $\Rightarrow$ third quadrant.

Calculator gives $\arctan(1) = \frac{\pi}{4}$; add π (or subtract π) to get $\theta = -\frac{3\pi}{4}$ (principal). Thus

$$z = 2\sqrt{2} \left(\cos \left(-\frac{3\pi}{4} \right) + i \sin \left(-\frac{3\pi}{4} \right) \right).$$

WARNING The argument is defined modulo 2π

The angle θ in the polar form is not unique: if θ works, so does $\theta + 2k\pi$ for any $k \in \mathbb{Z}$. For example $1 + i = \sqrt{2} \left(\cos \frac{\pi}{4} + i \sin \frac{\pi}{4} \right) = \sqrt{2} \left(\cos \frac{9\pi}{4} + i \sin \frac{9\pi}{4} \right)$. When a single value is demanded, give the **principal argument**, the unique value in $(-\pi, \pi]$. A frequent GCE error is to read $\arctan$ off a calculator without the quadrant check: for $z = -1 - i$, the calculator gives $\arctan(1) = \frac{\pi}{4}$, but the true principal argument is $-\frac{3\pi}{4}$.

5.2 Multiplication and Division in Polar Form

Here is where the polar form earns its keep. Take two complex numbers

$$z_1 = r_1(\cos \theta_1 + i \sin \theta_1), \quad z_2 = r_2(\cos \theta_2 + i \sin \theta_2).$$

Multiplying them directly:

$$\begin{aligned} z_1 z_2 &= r_1 r_2 [(\cos \theta_1 \cos \theta_2 - \sin \theta_1 \sin \theta_2) + i(\sin \theta_1 \cos \theta_2 + \cos \theta_1 \sin \theta_2)] \\ &= r_1 r_2 [\cos(\theta_1 + \theta_2) + i \sin(\theta_1 + \theta_2)], \end{aligned}$$

where we used the addition formulae $\cos(\theta_1 + \theta_2) = \cos \theta_1 \cos \theta_2 - \sin \theta_1 \sin \theta_2$ and $\sin(\theta_1 + \theta_2) = \sin \theta_1 \cos \theta_2 + \cos \theta_1 \sin \theta_2$. This derivation is short, instructive, and **examinable**.

PROPERTY Modulus and argument of a product and a quotient

For non-zero complex numbers z_1, z_2 :

$$|z_1 z_2| = |z_1| |z_2|, \quad \arg(z_1 z_2) = \arg(z_1) + \arg(z_2) \pmod{2\pi},$$

$$\left| \frac{z_1}{z_2} \right| = \frac{|z_1|}{|z_2|}, \quad \arg\left(\frac{z_1}{z_2}\right) = \arg(z_1) - \arg(z_2) \pmod{2\pi}.$$

In words: to multiply, multiply the moduli and add the arguments; to divide, divide the

moduli and subtract the arguments.

The quotient rule follows the same way: multiply numerator and denominator by the conjugate of the denominator, or simply note that $\frac{z_1}{z_2} = z_1 \cdot \frac{1}{z_2}$ and that $\frac{1}{z_2} = \frac{1}{r_2}(\cos(-\theta_2) + i \sin(-\theta_2))$, since $\cos$ is even and $\sin$ is odd.

EXAMPLE Product and quotient in polar form

Let $z_1 = 3\left(\cos \frac{\pi}{3} + i \sin \frac{\pi}{3}\right)$ and $z_2 = 2\left(\cos \frac{\pi}{6} + i \sin \frac{\pi}{6}\right)$. Then

$$z_1 z_2 = 6\left(\cos \frac{\pi}{2} + i \sin \frac{\pi}{2}\right) = 6i, \quad \frac{z_1}{z_2} = \frac{3}{2}\left(\cos \frac{\pi}{6} + i \sin \frac{\pi}{6}\right) = \frac{3\sqrt{3}}{4} + \frac{3}{4}i.$$


Notice how the first answer required no expansion of brackets at all.

Geometric interpretation: rotation and enlargement.

The rule $\arg(z_1 z_2) = \arg z_1 + \arg z_2$ has a striking meaning. Fix z with $|z| = r$ and $\arg z = \theta$. For any complex number w , the product zw is obtained from w by:

- **rotating** the vector $\vec{OW}$ about O through the angle θ (arguments add), and
- **enlarging** it from O by the scale factor r (moduli multiply).

Multiplication by a complex number is exactly a **rotation** composed with an **enlargement** (a spiral similarity). In particular, since $|i| = 1$ and $\arg(i) = \frac{\pi}{2}$, multiplication by i is a rotation through 90° anticlockwise — check: $i(a + ib) = -b + ia$, which is indeed the image of (a, b) rotated by a quarter turn.

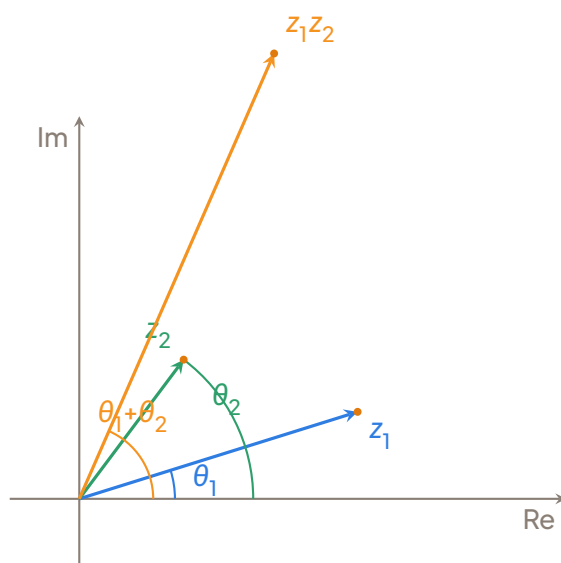

Multiplication as rotation–enlargement: the argument of $z_1 z_2$ is $\theta_1 + \theta_2$ and its modulus is $|z_1||z_2|$.

5.3 Euler's Formula and the Exponential Form

A remarkable shortcut.

The expression $\cos \theta + i \sin \theta$ appears so often that mathematicians looked for a shorthand. The clue comes from the laws we have just proved: writing $f(\theta) = \cos \theta + i \sin \theta$, the product rule says

$$f(\theta_1) f(\theta_2) = f(\theta_1 + \theta_2),$$

which is exactly the functional behaviour of an exponential function ($a^{x+y} = a^x a^y$). This suggests writing $f(\theta)$ as some base raised to a power proportional to θ . The correct identification is one of the most famous results in all of mathematics.

DEFINITION Euler's formula and the exponential form

Euler's formula states that for every real number θ ,

$$e^{i\theta} = \cos \theta + i \sin \theta.$$

Consequently every non-zero complex number can be written in **exponential form**

$$z = r e^{i\theta}, \quad r = |z|, \quad \theta = \arg(z).$$

A full justification uses power series: expanding e^x , $\cos x$ and $\sin x$ as infinite series and substituting $x = i\theta$, the real terms regroup into $\cos \theta$ and the imaginary terms into $i \sin \theta$. At this level you should know and use Euler's formula; the series proof is beyond the syllabus but the formula itself is entirely rigorous.

EXAMPLE Familiar numbers in exponential form

$$1 = e^0, \quad i = e^{i\pi/2}, \quad -1 = e^{i\pi}, \quad -i = e^{-i\pi/2}, \quad 1 + i = \sqrt{2} e^{i\pi/4}.$$

Each equality is read straight off the Argand diagram: modulus first, then the angle.

DID YOU KNOW? The most beautiful equation in mathematics

Setting $\theta = \pi$ in Euler's formula gives $e^{i\pi} = \cos \pi + i \sin \pi = -1$, that is,

$$e^{i\pi} + 1 = 0.$$

This single line, called **Euler's Identity**, connects the five most fundamental constants of mathematics — 0 , 1 , π , e and i — through the three basic operations (addition, multiplication, exponentiation). It is regularly voted the most beautiful formula in mathematics. (Cultural enrichment: not examinable, but worth knowing!)

5.4 Computing with the Exponential Form

The exponential form behaves exactly like ordinary powers, which is why it is so convenient. All the rules below follow immediately from $e^{i\theta} = \cos \theta + i \sin \theta$ and the product/quotient rules of the polar form.

PROPERTY Rules of computation with $e^{i\theta}$

For real $\theta, \theta_1, \theta_2$:

- **Product:** $e^{i\theta_1} e^{i\theta_2} = e^{i(\theta_1+\theta_2)}$;
- **Quotient:** $\frac{e^{i\theta_1}}{e^{i\theta_2}} = e^{i(\theta_1-\theta_2)}$;
- **Power:** $(e^{i\theta})^n = e^{in\theta}$ for $n \in \mathbb{Z}$;
- **Conjugate:** $\overline{e^{i\theta}} = e^{-i\theta}$ (since $\overline{\cos \theta + i \sin \theta} = \cos \theta - i \sin \theta = \cos(-\theta) + i \sin(-\theta)$);
- **Inverse:** $\frac{1}{e^{i\theta}} = e^{-i\theta}$, and in particular $|e^{i\theta}| = 1$.

Note the last point: every number $e^{i\theta}$ lies on the unit circle. Multiplying by $e^{i\theta}$ is a pure rotation through θ , with no enlargement.

WORKED EXAMPLE 12 Working in exponential form

Given $z_1 = 2e^{i\pi/4}$ and $z_2 = 3e^{-i\pi/6}$, find in exponential form: (a) $z_1 z_2$; (b) $\frac{z_1}{z_2}$; (c) $\bar{z}_1$; (d) z_1^4 .

SOLUTION

(a) Moduli multiply, arguments add:

$$z_1 z_2 = (2 \times 3) e^{i(\pi/4 - \pi/6)} = 6 e^{i\pi/12}.$$

(b) Moduli divide, arguments subtract:

$$\frac{z_1}{z_2} = \frac{2}{3} e^{i(\pi/4 - (-\pi/6))} = \frac{2}{3} e^{i5\pi/12}.$$

(c) Conjugating negates the argument: $\bar{z}_1 = 2e^{-i\pi/4}$.

(d) Powers act on both parts: $z_1^4 = 2^4 e^{i4\pi/4} = 16e^{i\pi} = -16$.

5.5 Expressing $\cos \theta$ and $\sin \theta$ with Exponentials

Euler's formula gives $e^{i\theta} = \cos \theta + i \sin \theta$. Replacing θ by $-\theta$, and using the parity of cosine and sine:

$$e^{-i\theta} = \cos \theta - i \sin \theta.$$

We now have a system of two equations in the two unknowns $\cos \theta$ and $\sin \theta$. **Adding** the two equations eliminates the sine; **subtracting** them eliminates the cosine.

PROPERTY Euler's relations for cosine and sine

For every real θ ,

$$\cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2}, \quad \sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}.$$

These two identities look modest, but they are the engine behind the next section: combined with the binomial theorem, they let us express $\cos^n \theta$ and $\sin^n \theta$ as sums of multiple angles — a technique the GCE examiners love, and an essential tool for integrating powers of trigonometric functions in Further Pure Mathematics.

EXAMPLE A first taste: linearising $\cos^2 \theta$

Using $\cos \theta = \frac{1}{2}(e^{i\theta} + e^{-i\theta})$:

$$\cos^2 \theta = \frac{1}{4}(e^{i\theta} + e^{-i\theta})^2 = \frac{1}{4}(e^{2i\theta} + 2 + e^{-2i\theta}) = \frac{1}{2} + \frac{1}{2} \cdot \frac{e^{2i\theta} + e^{-2i\theta}}{2} = \frac{1 + \cos 2\theta}{2},$$

recovering the familiar double-angle identity almost mechanically.

WARNING Common mistakes with the exponential form

- Do not forget the modulus: $z = 2 + 2i$ is $2\sqrt{2}e^{i\pi/4}$, not $2e^{i\pi/4}$. Always extract r first.
- $e^{i\theta}$ is not the real exponential: it never grows, since $|e^{i\theta}| = 1$. Do not write $e^{i\pi} = e \cdot e^{i\pi}$ – style nonsense, and never treat $i\theta$ as a real exponent when estimating size.
- When adding arguments, reduce to the principal range if asked: $e^{i5\pi/4}$ should be rewritten $e^{-i3\pi/4}$ for the principal argument.
- In $\sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}$, the denominator is $2i$, not 2 – forgetting the i is a classic slip.

KEY POINTS Key points of the section

- Polar form: $z = r(\cos \theta + i \sin \theta)$ with $r = |z|$, $\theta = \arg(z)$ (defined modulo 2π).
- Products and quotients: moduli multiply/divide, arguments add/subtract.
- Multiplication by z is a rotation through $\arg(z)$ combined with an enlargement of ratio $|z|$.
- Euler's formula: $e^{i\theta} = \cos \theta + i \sin \theta$; exponential form $z = re^{i\theta}$; Euler's identity $e^{i\pi} + 1 = 0$.
- $\overline{e^{i\theta}} = e^{-i\theta} = \frac{1}{e^{i\theta}}$, and $|e^{i\theta}| = 1$.
- $\cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2}$, $\sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}$.

EXERCISE 5 Practice

1. Write in polar and in exponential form: (a) $1 - i$; (b) $-2\sqrt{3} + 2i$; (c) -5 .
2. Given $z_1 = 4e^{i\pi/3}$ and $z_2 = 2e^{-i\pi/2}$, compute $z_1 z_2$, $\frac{z_1}{z_2}$ and z_1^3 , giving principal arguments.
3. Show that $(1 + i)^2 = 2i$ using polar form, and interpret the result geometrically.
4. Using Euler's relations, prove that $\sin^2 \theta = \frac{1 - \cos 2\theta}{2}$.

SOLUTION Exercise 1

1. (a) $r = \sqrt{2}$, $\theta = -\frac{\pi}{4}$ (fourth quadrant): $1 - i = \sqrt{2} \left(\cos \frac{\pi}{4} - i \sin \frac{\pi}{4} \right) = \sqrt{2} e^{-i\pi/4}$. (b) $r = 4$, $\theta = \frac{5\pi}{6}$: $-2\sqrt{3} + 2i = 4e^{i5\pi/6}$. (c) $-5 = 5e^{i\pi}$.

2. $z_1 z_2 = 8e^{i(\pi/3 - \pi/2)} = 8e^{-i\pi/6}$; $\frac{z_1}{z_2} = 2e^{i(\pi/3 + \pi/2)} = 2e^{i5\pi/6}$; $z_1^3 = 64e^{i\pi} = -64$.

3. $1 + i = \sqrt{2}e^{i\pi/4}$, so $(1 + i)^2 = 2e^{i\pi/2} = 2i$. Geometrically: rotate through $\frac{\pi}{4}$ and enlarge by $\sqrt{2}$, applied twice — a rotation through $\frac{\pi}{2}$ with enlargement 2.

4. $\sin^2 \theta = \left(\frac{e^{i\theta} - e^{-i\theta}}{2i} \right)^2 = \frac{e^{2i\theta} - 2 + e^{-2i\theta}}{-4} = \frac{2 - 2\cos 2\theta}{4} = \frac{1 - \cos 2\theta}{2}$.

We now have three languages for the same object — Cartesian ($a + ib$), polar ($r(\cos \theta + i \sin \theta)$) and exponential ($re^{i\theta}$) — and we can switch freely between them. In the next section we exploit the power rule $(e^{i\theta})^n = e^{in\theta}$ to obtain De Moivre's theorem and its spectacular trigonometric applications.

6 DE MOIVRE'S THEOREM AND TRIGONOMETRIC APPLICATIONS

In the previous section we saw that a complex number $z = r(\cos \theta + i \sin \theta)$ can be raised to a power n by simply raising the modulus to n and multiplying the argument by n . This is the essence of **De Moivre's Theorem**, a result that bridges algebra and trigonometry and provides powerful tools for simplifying powers of complex numbers, deriving multiple-angle formulae, and evaluating exact trigonometric values.

6.1 De Moivre's Theorem

PROPERTY De Moivre's Theorem for Integer Powers

For any integer n and any real angle θ ,

$$(\cos \theta + i \sin \theta)^n = \cos(n\theta) + i \sin(n\theta).$$

Equivalently, in exponential form: $(e^{i\theta})^n = e^{in\theta}$.

EXPERIMENT Discovering the Pattern

Let us compute the first few powers of $z = \cos \theta + i \sin \theta$ manually:

$$z^1 = \cos \theta + i \sin \theta,$$

$$z^2 = (\cos \theta + i \sin \theta)^2 = \cos^2 \theta - \sin^2 \theta + 2i \sin \theta \cos \theta = \cos 2\theta + i \sin 2\theta,$$

$$z^3 = z^2 \cdot z = (\cos 2\theta + i \sin 2\theta)(\cos \theta + i \sin \theta) = \cos 3\theta + i \sin 3\theta.$$

The pattern is clear: the argument adds up. We prove this for all non-negative integers by induction.

Proof by induction (for $n \geq 0$).

- **Base case $n = 0$:** $(\cos \theta + i \sin \theta)^0 = 1 = \cos 0 + i \sin 0$. True.
- **Base case $n = 1$:** Trivially true.
- **Inductive step:** Assume true for $n = k$, i.e. $(\cos \theta + i \sin \theta)^k = \cos(k\theta) + i \sin(k\theta)$. Then for $n = k + 1$:

$$\begin{aligned} (\cos \theta + i \sin \theta)^{k+1} &= (\cos \theta + i \sin \theta)^k (\cos \theta + i \sin \theta) \\ &= [\cos(k\theta) + i \sin(k\theta)](\cos \theta + i \sin \theta) \\ &= \cos(k\theta) \cos \theta - \sin(k\theta) \sin \theta + i[\sin(k\theta) \cos \theta + \cos(k\theta) \sin \theta] \\ &= \cos((k+1)\theta) + i \sin((k+1)\theta). \end{aligned}$$

Hence true for $k + 1$. By induction, the theorem holds for all $n \in \mathbb{N}$.


Extension to negative integers. Let $n = -m$ where $m \in \mathbb{N}$. Then

$$(\cos \theta + i \sin \theta)^{-m} = \frac{1}{(\cos \theta + i \sin \theta)^m} = \frac{1}{\cos(m\theta) + i \sin(m\theta)}.$$

Multiply numerator and denominator by the conjugate $\cos(m\theta) - i \sin(m\theta)$:

$$\frac{\cos(m\theta) - i \sin(m\theta)}{\cos^2(m\theta) + \sin^2(m\theta)} = \cos(m\theta) - i \sin(m\theta) = \cos(-m\theta) + i \sin(-m\theta).$$

Thus the formula holds for all $n \in \mathbb{Z}$.

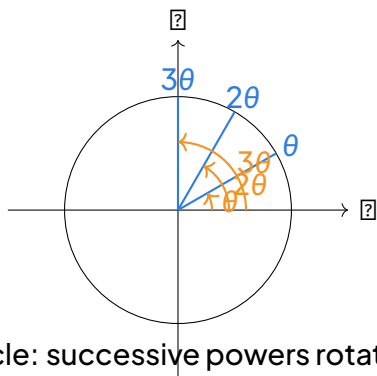

Unit circle: successive powers rotate by θ

Geometric interpretation of De Moivre's theorem: multiplying by $\cos \theta + i \sin \theta$ rotates by θ .

WARNING Common Mistake: Sign in the Sine Term

De Moivre's theorem applies to $\cos \theta + i \sin \theta$. If you have $\cos \theta - i \sin \theta$, rewrite it as $\cos(-\theta) + i \sin(-\theta)$ before applying the theorem:

$$(\cos \theta - i \sin \theta)^n = (\cos(-\theta) + i \sin(-\theta))^n = \cos(-n\theta) + i \sin(-n\theta) = \cos(n\theta) - i \sin(n\theta).$$

Do not write $(\cos \theta - i \sin \theta)^n = \cos(n\theta) - i \sin(n\theta)$ directly without justification — it is a trap in GCE exams!

6.2 Applications: Powers of Complex Numbers

The most direct application is computing large powers of a complex number by converting to polar form.

METHOD Computing z^n using De Moivre

1. Write z in polar form $z = r(\cos \theta + i \sin \theta)$ (or $re^{i\theta}$).
2. Apply De Moivre: $z^n = r^n(\cos n\theta + i \sin n\theta)$.
3. Convert back to Cartesian form $a + ib$ if required, using exact values of $\cos n\theta$ and $\sin n\theta$.

EXAMPLE Power of a Complex Number

Compute $(1 + i)^{12}$ and express the result in the form $a + ib$.

Solution. $1 + i$ has modulus $r = \sqrt{2}$ and argument $\theta = \frac{\pi}{4}$.

$$(1 + i)^{12} = (\sqrt{2})^{12} \left(\cos \frac{12\pi}{4} + i \sin \frac{12\pi}{4} \right) = 2^6 (\cos 3\pi + i \sin 3\pi) = 64(-1 + i \cdot 0) = -64.$$

WORKED EXAMPLE 13 Finding n such that a Power is Real or Purely Imaginary

Find the smallest positive integer n such that $(\sqrt{3} + i)^n$ is (a) real, (b) purely imaginary.

SOLUTION

Solution. $\sqrt{3} + i$: modulus $r = 2$, argument $\theta = \frac{\pi}{6}$. $(\sqrt{3} + i)^n = 2^n \left(\cos \frac{n\pi}{6} + i \sin \frac{n\pi}{6} \right)$.

(a) Real $\iff \sin \frac{n\pi}{6} = 0 \iff \frac{n\pi}{6} = k\pi \iff n = 6k$. Smallest positive $n = 6$.

(b) Purely imaginary $\iff \cos \frac{n\pi}{6} = 0 \iff \frac{n\pi}{6} = \frac{\pi}{2} + k\pi \iff n = 3 + 6k$. Smallest positive $n = 3$.

6.3 Linearisation: Powers of Cosine and Sine as Multiple Angles

A classic GCE technique uses the substitution $z = \cos \theta + i \sin \theta$. Then

$$z + \frac{1}{z} = 2 \cos \theta, \quad z - \frac{1}{z} = 2i \sin \theta.$$

Powers of $\cos \theta$ and $\sin \theta$ can be expressed as linear combinations of $\cos k\theta$ and $\sin k\theta$ by expanding $(z \pm z^{-1})^n$ using the binomial theorem and grouping terms.

METHOD Linearising $\cos^n \theta$ and $\sin^n \theta$

1. Set $z = \cos \theta + i \sin \theta$. Then $\cos \theta = \frac{1}{2}(z + z^{-1})$, $\sin \theta = \frac{1}{2i}(z - z^{-1})$.
2. Raise to the required power n and expand using the binomial theorem.
3. Group terms $z^k + z^{-k} = 2 \cos(k\theta)$ and $z^k - z^{-k} = 2i \sin(k\theta)$.
4. Simplify to obtain an expression in $\cos k\theta$ or $\sin k\theta$.

EXAMPLE Linearising $\cos^4 \theta$

Express $\cos^4 \theta$ in terms of multiple angles.

Solution. $\cos \theta = \frac{1}{2}(z + z^{-1})$.

$$\cos^4 \theta = \frac{1}{16}(z + z^{-1})^4 = \frac{1}{16}(z^4 + 4z^2 + 6 + 4z^{-2} + z^{-4}).$$

Group: $z^4 + z^{-4} = 2 \cos 4\theta$, $z^2 + z^{-2} = 2 \cos 2\theta$.

$$\cos^4 \theta = \frac{1}{16}(2 \cos 4\theta + 4 \cdot 2 \cos 2\theta + 6) = \frac{1}{8} \cos 4\theta + \frac{1}{2} \cos 2\theta + \frac{3}{8}.$$

WORKED EXAMPLE 14 Linearising $\sin^5 \theta$

Express $\sin^5 \theta$ in terms of sines of multiple angles.


SOLUTION

Solution. $\sin \theta = \frac{1}{2i}(z - z^{-1})$.

$$\sin^5 \theta = \frac{1}{(2i)^5}(z - z^{-1})^5 = \frac{1}{32i}(z^5 - 5z^3 + 10z - 10z^{-1} + 5z^{-3} - z^{-5}).$$

Group: $z^5 - z^{-5} = 2i \sin 5\theta$, $z^3 - z^{-3} = 2i \sin 3\theta$, $z - z^{-1} = 2i \sin \theta$.

$$\sin^5 \theta = \frac{1}{32i}(2i \sin 5\theta - 5 \cdot 2i \sin 3\theta + 10 \cdot 2i \sin \theta) = \frac{1}{16} \sin 5\theta - \frac{5}{16} \sin 3\theta + \frac{5}{8} \sin \theta.$$

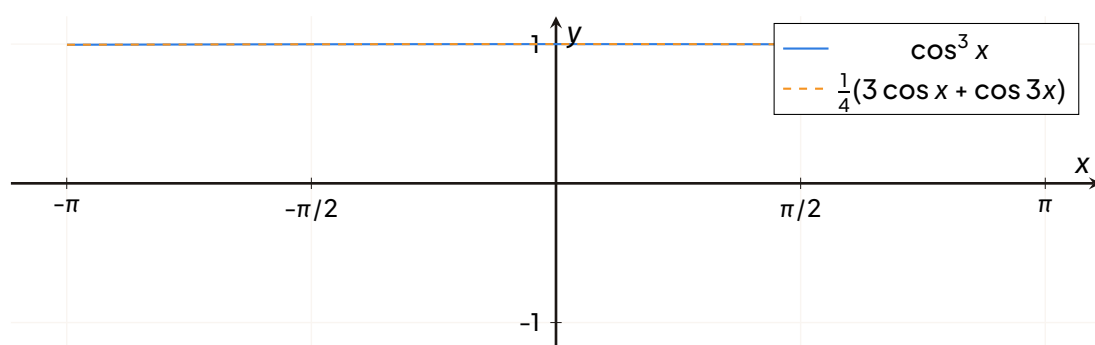

Graphical verification: $\cos^3 x = \frac{1}{4}(3 \cos x + \cos 3x)$. The curves coincide perfectly.

6.4 Expansion: Multiple Angles as Powers of Cosine and Sine

The reverse process expands $\cos n\theta$ and $\sin n\theta$ as polynomials in $\cos \theta$ and $\sin \theta$ using the binomial theorem on $(\cos \theta + i \sin \theta)^n$.

METHOD Expanding $\cos n\theta$ and $\sin n\theta$

1. Write $(\cos \theta + i \sin \theta)^n = \cos n\theta + i \sin n\theta$ (De Moivre).
2. Expand the left-hand side using the binomial theorem:

$$\sum_{k=0}^n \binom{n}{k} \cos^{n-k} \theta (i \sin \theta)^k.$$

3. Separate real and imaginary parts:

- Real part (even k) gives $\cos n\theta$.
- Imaginary part (odd k) gives $\sin n\theta$.

4. Optionally replace $\sin^2 \theta = 1 - \cos^2 \theta$ to express $\cos n\theta$ solely in powers of $\cos \theta$ (Chebyshev polynomials).

EXAMPLE Expanding $\cos 3\theta$ and $\sin 3\theta$ Find $\cos 3\theta$ and $\sin 3\theta$ in terms of $\cos \theta$ and $\sin \theta$.**Solution.** $(\cos \theta + i \sin \theta)^3 = \cos^3 \theta + 3i \cos^2 \theta \sin \theta - 3 \cos \theta \sin^2 \theta - i \sin^3 \theta$.

$$\cos 3\theta = \cos^3 \theta - 3 \cos \theta \sin^2 \theta = \cos^3 \theta - 3 \cos \theta (1 - \cos^2 \theta) = 4 \cos^3 \theta - 3 \cos \theta.$$

$$\sin 3\theta = 3 \cos^2 \theta \sin \theta - \sin^3 \theta = 3(1 - \sin^2 \theta) \sin \theta - \sin^3 \theta = 3 \sin \theta - 4 \sin^3 \theta.$$

WORKED EXAMPLE 15 Expanding $\cos 4\theta$ and $\sin 4\theta$ Express $\cos 4\theta$ and $\sin 4\theta$ as polynomials in $\cos \theta$ and $\sin \theta$.**SOLUTION****Solution.** $(\cos \theta + i \sin \theta)^4 = \cos^4 \theta + 4i \cos^3 \theta \sin \theta - 6 \cos^2 \theta \sin^2 \theta - 4i \cos \theta \sin^3 \theta + \sin^4 \theta$.

$$\begin{aligned} \cos 4\theta &= \cos^4 \theta - 6 \cos^2 \theta \sin^2 \theta + \sin^4 \theta \\ &= \cos^4 \theta - 6 \cos^2 \theta (1 - \cos^2 \theta) + (1 - \cos^2 \theta)^2 \\ &= 8 \cos^4 \theta - 8 \cos^2 \theta + 1. \end{aligned}$$

$$\begin{aligned} \sin 4\theta &= 4 \cos^3 \theta \sin \theta - 4 \cos \theta \sin^3 \theta = 4 \cos \theta \sin \theta (\cos^2 \theta - \sin^2 \theta) \\ &= 4 \cos \theta \sin \theta (1 - 2 \sin^2 \theta) = 4 \sin \theta \cos \theta - 8 \sin^3 \theta \cos \theta. \end{aligned}$$

6.5 Trigonometric Identities and Exact Values

De Moivre's theorem is a favourite tool in GCE exams for proving identities and finding exact values of trigonometric ratios.

WORKED EXAMPLE 16 Proving an IdentityProve that $\tan 5\theta = \frac{5 \tan \theta - 10 \tan^3 \theta + \tan^5 \theta}{1 - 10 \tan^2 \theta + 5 \tan^4 \theta}$.**SOLUTION****Solution.** By De Moivre: $\cos 5\theta + i \sin 5\theta = (\cos \theta + i \sin \theta)^5$. Expand using binomial theorem:

$$\begin{aligned} \cos 5\theta &= \cos^5 \theta - 10 \cos^3 \theta \sin^2 \theta + 5 \cos \theta \sin^4 \theta, \\ \sin 5\theta &= 5 \cos^4 \theta \sin \theta - 10 \cos^2 \theta \sin^3 \theta + \sin^5 \theta. \end{aligned}$$

Divide numerator and denominator by $\cos^5 \theta$:

$$\tan 5\theta = \frac{\sin 5\theta}{\cos 5\theta} = \frac{5 \tan \theta - 10 \tan^3 \theta + \tan^5 \theta}{1 - 10 \tan^2 \theta + 5 \tan^4 \theta}.$$

WORKED EXAMPLE 17 Exact Value: $\cos \frac{\pi}{12}$

Use De Moivre's theorem to find the exact value of $\cos \frac{\pi}{12}$.

SOLUTION

Solution. We know $\cos \frac{\pi}{6} = \frac{\sqrt{3}}{2}$. Using the half-angle formula derived from $\cos 2\theta = 2\cos^2 \theta - 1$:

$$\cos \frac{\pi}{12} = \sqrt{\frac{1 + \cos \frac{\pi}{6}}{2}} = \sqrt{\frac{1 + \frac{\sqrt{3}}{2}}{2}} = \sqrt{\frac{2 + \sqrt{3}}{4}} = \frac{\sqrt{2 + \sqrt{3}}}{2}.$$

Alternatively, using $\cos 3\theta = 4\cos^3 \theta - 3\cos \theta$ with $\theta = \frac{\pi}{12}$ gives a cubic equation, but the half-angle method is simpler. The exact value is $\frac{\sqrt{6} + \sqrt{2}}{4}$ (after rationalising $\sqrt{2 + \sqrt{3}}$).

KEY POINTS Key Results for GCE

- De Moivre: $(\cos \theta + i \sin \theta)^n = \cos n\theta + i \sin n\theta$ for $n \in \mathbb{Z}$.
- $z = \cos \theta + i \sin \theta \Rightarrow z + z^{-1} = 2 \cos \theta$, $z - z^{-1} = 2i \sin \theta$.
- Linearisation: expand $(z \pm z^{-1})^n$ to write $\cos^n \theta$ or $\sin^n \theta$ as sums of $\cos k\theta$ or $\sin k\theta$.
- Expansion: expand $(\cos \theta + i \sin \theta)^n$ to write $\cos n\theta$ and $\sin n\theta$ as polynomials in $\cos \theta$, $\sin \theta$.
- To find exact values: use known angles $(\frac{\pi}{6}, \frac{\pi}{4}, \frac{\pi}{3})$ and half-angle / multiple-angle formulae derived from De Moivre.

WARNING Examination Traps

- Forgetting that De Moivre applies to integer powers only. Fractional powers require the n -th roots formula (next section).
- When linearising $\sin^n \theta$ for odd n , the result is a sum of sines; for even n , a sum of cosines plus a constant.
- When expanding $\cos n\theta$, always check whether the question asks for the answer in terms of $\cos \theta$ only (replace $\sin^2 \theta = 1 - \cos^2 \theta$).
- In proving identities, show the separation of real and imaginary parts clearly; do not skip steps.

DID YOU KNOW? De Moivre and the History of Trigonometry

Abraham de Moivre (1667–1754), a French Huguenot mathematician who fled to England, discovered this theorem around 1707. It was later popularised by Euler, who gave the elegant exponential proof $e^{in\theta} = (e^{i\theta})^n$. De Moivre also pioneered the normal approximation to the binomial distribution — a link between complex numbers and probability!

EXERCISE 6 Practice Problems

1. Use De Moivre's theorem to simplify $(1 - i\sqrt{3})^6$.
2. Find the smallest positive integer n such that $\left(\frac{1+i}{\sqrt{2}}\right)^n$ is real.
3. Express $\sin^4 \theta$ in terms of $\cos 2\theta$ and $\cos 4\theta$.
4. Express $\cos 5\theta$ as a polynomial in $\cos \theta$.
5. Prove that $\tan 3\theta = \frac{3 \tan \theta - \tan^3 \theta}{1 - 3 \tan^2 \theta}$.
6. Hence find the exact value of $\tan \frac{\pi}{12}$.

SOLUTION Exercise 1

$$1 - i\sqrt{3}: r = 2, \theta = -\frac{\pi}{3}. (1 - i\sqrt{3})^6 = 2^6(\cos(-2\pi) + i \sin(-2\pi)) = 64.$$

SOLUTION Exercise 2

$$\frac{1+i}{\sqrt{2}} = \cos \frac{\pi}{4} + i \sin \frac{\pi}{4}. \text{ We need } \sin \frac{n\pi}{4} = 0 \Rightarrow \frac{n\pi}{4} = k\pi \Rightarrow n = 4k. \text{ Smallest } n = 4.$$

SOLUTION Exercise 3

$$\sin^4 \theta = \frac{1}{16}(z - z^{-1})^4 = \frac{1}{16}(z^4 - 4z^2 + 6 - 4z^{-2} + z^{-4}) = \frac{1}{8} \cos 4\theta - \frac{1}{2} \cos 2\theta + \frac{3}{8}.$$

SOLUTION Exercise 4

$$\cos 5\theta = 16 \cos^5 \theta - 20 \cos^3 \theta + 5 \cos \theta \text{ (expand } (\cos \theta + i \sin \theta)^5 \text{ and take real part).}$$

SOLUTION Exercise 5

$$\tan 3\theta = \frac{\sin 3\theta}{\cos 3\theta} = \frac{3 \sin \theta \cos^2 \theta - \sin^3 \theta}{\cos^3 \theta - 3 \cos \theta \sin^2 \theta}. \text{ Divide by } \cos^3 \theta: \frac{3 \tan \theta - \tan^3 \theta}{1 - 3 \tan^2 \theta}.$$

SOLUTION Exercise 6

Let $\theta = \frac{\pi}{12}$, then $3\theta = \frac{\pi}{4}$, $\tan \frac{\pi}{4} = 1$. Solve $\frac{3t-t^3}{1-3t^2} = 1$ where $t = \tan \frac{\pi}{12}$. $t^3 - 3t^2 - 3t + 1 = 0 \Rightarrow (t+1)(t^2 - 4t + 1) = 0$. Since $t > 0$, $t = 2 - \sqrt{3}$.

7 NTH ROOTS OF COMPLEX NUMBERS AND CUBE ROOTS OF UNITY

In the previous section, De Moivre's theorem gave us a powerful way to raise a complex number to a power: $(re^{i\theta})^n = r^n e^{in\theta}$. We now turn the question around. Instead of computing a power, we want to undo a power: given a complex number w , can we find all the numbers z such that $z^n = w$? You already know the case $n = 2$: the equation $z^2 = -16$ has the two solutions $z = 4i$ and $z = -4i$. De Moivre's theorem will show us that this is no accident: **every** non-zero complex number has **exactly n distinct n th roots**, arranged with perfect symmetry in the Argand diagram. This beautiful result closes the story begun in Lesson 29 and gives us, as a special case, the celebrated cube roots of unity, a favourite of GCE examiners.

7.1 Definition of the n th Roots of a Complex Number

Intuition first.

Over the real numbers, the equation $x^3 = 8$ has only one solution, $x = 2$. But over the complex numbers, could there be others? Think of the equation $z^3 = 1$. Certainly $z = 1$ works. But perhaps a complex number whose cube “rotates back” to 1 also works: for instance a number of modulus 1 and argument $\frac{2\pi}{3}$, since cubing triples the argument: $3 \times \frac{2\pi}{3} = 2\pi$, which is the same direction as argument 0. So there may be three cube roots of 1, not one. Let us make this precise.

DEFINITION n th root of a complex number

Let $n \in \mathbb{N}$, $n \geq 2$, and let $w \in \mathbb{C}$. An **n th root** of w is any complex number z such that

$$z^n = w.$$

The n th roots of 1 are called the **n th roots of unity**.

To find all of them, write both numbers in exponential form. Let $w = Re^{i\theta}$ with $R > 0$, and look for

$z = re^{i\theta}$. Then

$$z^n = w \iff r^n e^{in\theta} = R e^{i\Theta}.$$

Two complex numbers in exponential form are equal exactly when their moduli are equal and their arguments differ by a multiple of 2π . Hence

$$r^n = R \quad \text{and} \quad n\theta = \Theta + 2k\pi, \quad k \in \mathbb{Z}.$$

Since r is a positive real number, $r = R^{1/n}$ (the ordinary real n th root), and

$$\theta = \frac{\Theta + 2k\pi}{n}, \quad k \in \mathbb{Z}.$$

Taking $k = 0, 1, 2, \dots, n-1$ gives n different values of θ in $[0, 2\pi)$, hence n distinct roots. Any other integer k differs from one of these by a multiple of n , and adding n to k adds 2π to θ , which gives the same complex number. So there are no others. We have proved:

PROPERTY Theorem — number and form of the n th roots

Every non-zero complex number $w = R e^{i\Theta}$ has exactly n distinct n th roots, given by

$$z_k = R^{1/n} e^{i\frac{\Theta + 2k\pi}{n}}, \quad k = 0, 1, 2, \dots, n-1.$$

In particular, the n th roots of unity are $e^{2ik\pi/n}$ for $k = 0, 1, \dots, n-1$. (The derivation above is examinable.)

PROPERTY Geometric property — the regular n -gon

All n roots have the same modulus $R^{1/n}$, so they lie on the circle of centre O and radius $R^{1/n}$. Consecutive roots differ in argument by exactly $\frac{2\pi}{n}$, so they are equally spaced around this circle: they are the vertices of a regular n -gon inscribed in that circle.

METHOD Solving $z^n = w$

1. Write w in exponential form: find $R = |w|$ and an argument Θ .
2. Write the general root $z_k = R^{1/n} e^{i(\Theta + 2k\pi)/n}$.
3. Substitute $k = 0, 1, \dots, n-1$ to list the n roots.
4. If required, convert each root to Cartesian form $a + ib$.
5. Check the count: you must have exactly n distinct answers.

WORKED EXAMPLE 18 Solving $z^4 = -16$

Solve in $\mathbb{C}$ the equation $z^4 = -16$, and represent the solutions in an Argand diagram.

SOLUTION

Solution. Write -16 in exponential form: $|-16| = 16$ and $\arg(-16) = \pi$, so $-16 = 16e^{i\pi}$. The four roots are

$$z_k = 16^{1/4} e^{i\frac{\pi+2k\pi}{4}} = 2 e^{i\frac{(2k+1)\pi}{4}}, \quad k = 0, 1, 2, 3.$$

This gives:

$$z_0 = 2e^{i\pi/4} = 2\left(\frac{\sqrt{2}}{2} + i\frac{\sqrt{2}}{2}\right) = \sqrt{2} + i\sqrt{2},$$

$$z_1 = 2e^{3i\pi/4} = -\sqrt{2} + i\sqrt{2},$$

$$z_2 = 2e^{5i\pi/4} = -\sqrt{2} - i\sqrt{2},$$

$$z_3 = 2e^{7i\pi/4} = \sqrt{2} - i\sqrt{2}.$$

The four solutions are $\pm\sqrt{2} \pm i\sqrt{2}$ (all four sign combinations). They lie on the circle of radius 2, at the vertices of a square. Check: $z_0^2 = (\sqrt{2} + i\sqrt{2})^2 = 2 + 4i - 2 = 4i$, so $z_0^4 = (4i)^2 = -16$. ✓

WARNING There are always n roots!

The most common error in the GCE is to give only one root — usually the “obvious” one — and stop. The equation $z^n = w$ (with $w \neq 0$) has exactly n distinct solutions. If you found fewer, you have lost marks. A quick safety net: count your answers and check that consecutive arguments differ by $\frac{2\pi}{n}$.

7.2 The Cube Roots of Unity

The case $n = 3$, $w = 1$ is so important that it deserves its own study. The cube roots of unity are the solutions of $z^3 = 1$, i.e.

$$z_k = e^{2ik\pi/3}, \quad k = 0, 1, 2.$$

Explicitly:

$$z_0 = 1, \quad z_1 = e^{2i\pi/3} = -\frac{1}{2} + i\frac{\sqrt{3}}{2}, \quad z_2 = e^{4i\pi/3} = -\frac{1}{2} - i\frac{\sqrt{3}}{2}.$$

DEFINITION The number omega

We write

$$\omega = e^{2i\pi/3} = \frac{-1 + i\sqrt{3}}{2}.$$


The three cube roots of unity are then $1, \omega$ and ω^2 (since $\omega^2 = e^{4\pi i/3} = z_2$).

PROPERTY Properties of omega

The number ω satisfies:

1. $\omega^3 = 1$ (it is a cube root of 1);
2. $1 + \omega + \omega^2 = 0$;
3. $\bar{\omega} = \omega^2$ and $\omega \cdot \bar{\omega} = |\omega|^2 = 1$.

Proof of (2): since $\omega^3 = 1$, we have $\omega^3 - 1 = 0$, i.e. $(\omega - 1)(\omega^2 + \omega + 1) = 0$. As $\omega \neq 1$, we conclude $1 + \omega + \omega^2 = 0$. Property (3) follows because $\omega^2 = e^{-2\pi i/3} = \overline{e^{2\pi i/3}}$.

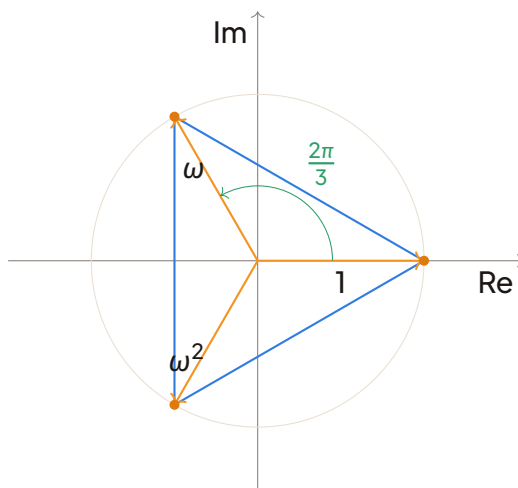

The cube roots of unity $1, \omega, \omega^2$ on the unit circle: vertices of an equilateral triangle.

Factorising with omega.

The identity $1 + \omega + \omega^2 = 0$ gives elegant factorisations. Since $x^3 - 1 = (x - 1)(x^2 + x + 1)$ and the roots of $x^2 + x + 1$ are exactly ω and ω^2 , we obtain, for any complex numbers a and b :

$$a^3 - b^3 = (a - b)(a - b\omega)(a - b\omega^2), \quad a^3 + b^3 = (a + b)(a + b\omega)(a + b\omega^2).$$

Indeed, the roots of $z^3 = b^3$ are $b, b\omega, b\omega^2$ (see below), so $z^3 - b^3 = (z - b)(z - b\omega)(z - b\omega^2)$; setting $z = a$ gives the first identity, and replacing b by $-b$ gives the second.

EXAMPLE Using omega to simplify

Compute $(1 + \omega)(1 + \omega^2)$ and ω^{2024} . Solution. $(1 + \omega)(1 + \omega^2) = 1 + \omega + \omega^2 + \omega^3 = 0 + 1 = 1$. For the

power: $2024 = 3 \times 674 + 2$, so $\omega^{2024} = (\omega^3)^{674} \omega^2 = \omega^2$.

7.3 Cube Roots of Any Complex Number via Omega

Here is a labour-saving fact. Suppose you have found one cube root u of a number w (so $u^3 = w$). Then

$$(u\omega)^3 = u^3\omega^3 = w \cdot 1 = w, \quad (u\omega^2)^3 = u^3\omega^6 = w.$$

Since a non-zero number has exactly three cube roots, they must be precisely $u, u\omega, u\omega^2$.

PROPERTY From one cube root to all three

If $u^3 = w$ with $w \neq 0$, then the three cube roots of w are

$$u, \quad u\omega, \quad u\omega^2.$$

More generally, if u is one n th root of w , then all n roots are $u, u\zeta, u\zeta^2, \dots, u\zeta^{n-1}$ where $\zeta = e^{2i\pi/n}$.

WORKED EXAMPLE 19 Cube roots of -8 and of i

(a) Find the three cube roots of -8 . (b) Find the three cube roots of i .

SOLUTION

(a) One root is obvious: $u = -2$, since $(-2)^3 = -8$. The three roots are therefore

$$-2, \quad -2\omega = -2 \cdot \frac{-1+i\sqrt{3}}{2} = 1-i\sqrt{3}, \quad -2\omega^2 = 1+i\sqrt{3}.$$

(b) Write $i = e^{i\pi/2}$. Then $|i|^{1/3} = 1$ and the roots are $z_k = e^{i(\pi/2+2k\pi)/3}$, $k = 0, 1, 2$:

$$z_0 = e^{i\pi/6} = \frac{\sqrt{3}}{2} + \frac{1}{2}i, \quad z_1 = e^{5i\pi/6} = -\frac{\sqrt{3}}{2} + \frac{1}{2}i, \quad z_2 = e^{3i\pi/2} = -i.$$

Check with ω : $z_1 = z_0 \cdot e^{2i\pi/3} = z_0\omega$ and $z_2 = z_0\omega^2$, as expected.

7.4 The General Picture: n th Roots of Unity

Everything we did for $n = 3$ works for any n . The n th roots of unity are


$$\zeta_k = e^{2ik\pi/n}, \quad k = 0, 1, \dots, n-1,$$

the vertices of a regular n -gon inscribed in the unit circle, with one vertex at 1. They satisfy $\zeta_k = \zeta_1^k$

and, summing the geometric progression,

$$1 + \zeta_1 + \zeta_1^2 + \dots + \zeta_1^{n-1} = \frac{\zeta_1^n - 1}{\zeta_1 - 1} = 0,$$

so the sum of all n th roots of unity is always zero (for $n \geq 2$).

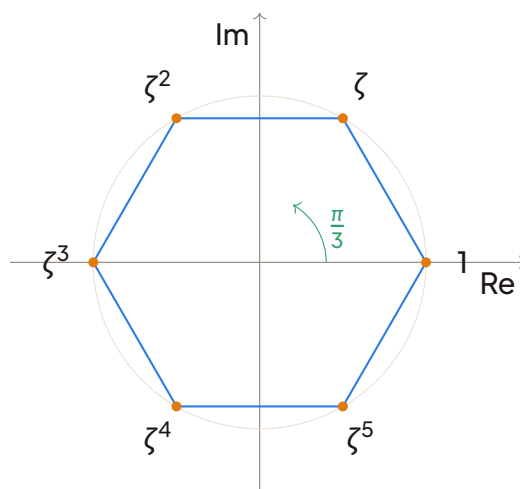

The six 6th roots of unity, $\zeta = e^{i\pi/3}$: vertices of a regular hexagon on the unit circle.

WORKED EXAMPLE 20 Solving $z^6 = 1$ and $z^6 = -64$

(a) Solve $z^6 = 1$. (b) Solve $z^6 = -64$.

SOLUTION

(a) The roots are $z_k = e^{2ik\pi/6} = e^{ik\pi/3}$, $k = 0, \dots, 5$:

$$1, \quad \frac{1}{2} + i\frac{\sqrt{3}}{2}, \quad -\frac{1}{2} + i\frac{\sqrt{3}}{2}, \quad -1, \quad -\frac{1}{2} - i\frac{\sqrt{3}}{2}, \quad \frac{1}{2} - i\frac{\sqrt{3}}{2}.$$

(b) Write $-64 = 64e^{i\pi}$. Then $64^{1/6} = 2$ and

$$z_k = 2e^{i\frac{\pi+2k\pi}{6}} = 2e^{i\frac{(2k+1)\pi}{6}}, \quad k = 0, \dots, 5,$$

giving $z_0 = 2e^{i\pi/6} = \sqrt{3} + i$, $z_1 = 2e^{i\pi/2} = 2i$, $z_2 = 2e^{5i\pi/6} = -\sqrt{3} + i$, $z_3 = -\sqrt{3} - i$, $z_4 = -2i$, $z_5 = \sqrt{3} - i$.
Note how (b) is just (a) rotated and scaled: the hexagon is preserved.

DID YOU KNOW? Roots of unity everywhere

Roots of unity are not just examination material. They sit at the heart of the Fast Fourier

Transform, the algorithm that compresses your music and images (MP3, JPEG) and that powers digital signal processing in the mobile phones used every day across Cameroon. The same regular polygons you draw in the Argand diagram are working silently inside your phone.

WARNING Pitfalls with n th roots

- Do not write $\sqrt[n]{w}$ as if it were a single number: in $\mathbb{C}$ there are n values, and the symbol is ambiguous. Always list all n roots.
- The exponent is $\frac{\theta + 2k\pi}{n}$, not $\frac{\theta}{n} + 2k\pi$. The $2k\pi$ is divided by n too.
- $R^{1/n}$ is the ordinary positive real n th root of the positive number R — no ambiguity there.
- For $z^n = a$ with a real and negative, remember $\arg(a) = \pi$, not 0.

KEY POINTS Key points of the section

- The n th roots of $w = Re^{i\theta}$ are $z_k = R^{1/n} e^{i(\theta+2k\pi)/n}$, $k = 0, 1, \dots, n-1$: exactly n of them.
- They form a regular n -gon on the circle of radius $R^{1/n}$.
- The cube roots of unity are $1, \omega = \frac{-1 + i\sqrt{3}}{2}, \omega^2$, with $\omega^3 = 1, 1 + \omega + \omega^2 = 0, \bar{\omega} = \omega^2$.
- One cube root u of w gives all three: $u, u\omega, u\omega^2$.
- The sum of the n th roots of unity is 0.

EXERCISE 7 Practice

1. Solve in $\mathbb{C}$: (a) $z^3 = 27$; (b) $z^4 = 1$; (c) $z^3 = -i$; (d) $z^5 = 32$.
2. Show that $(1 + \omega^2)(1 + \omega^4) = 1$ and that ω^2 is also a primitive cube root of unity.
3. Factorise $x^3 + 8$ completely over $\mathbb{C}$.
4. Show that the three cube roots of $8i$ are $-2i, \sqrt{3} + i$ and $-\sqrt{3} + i$.
5. Let $\zeta = e^{2i\pi/5}$. Show that $1 + \zeta + \zeta^2 + \zeta^3 + \zeta^4 = 0$.

SOLUTION Exercise n°1

(a) One root is 3; the roots are $3, 3\omega = \frac{-3+3i\sqrt{3}}{2}, 3\omega^2 = \frac{-3-3i\sqrt{3}}{2}$. (b) $z_k = e^{ik\pi/2}: 1, i, -1, -i$. (c) $-i = e^{-i\pi/2}$; roots $e^{-i\pi/6}, e^{i\pi/2} = i, e^{7i\pi/6}$, i.e. $\frac{\sqrt{3}}{2} - \frac{1}{2}i, i, -\frac{\sqrt{3}}{2} - \frac{1}{2}i$. (d) $32 = 32e^{i \cdot 0}$; roots $2e^{2ik\pi/5}, k = 0, \dots, 4$.

SOLUTION Exercise n°2

$\omega^4 = \omega^3 \cdot \omega = \omega$, so $(1 + \omega^2)(1 + \omega^4) = (1 + \omega^2)(1 + \omega) = 1 + \omega + \omega^2 + \omega^3 = 0 + 1 = 1$. Also $(\omega^2)^3 = \omega^6 = 1$ and $\omega^2 \neq 1$, so ω^2 is a primitive cube root of unity.

SOLUTION Exercise n°3

$x^3 + 8 = x^3 - (-2)^3 = (x + 2)(x + 2\omega)(x + 2\omega^2) = (x + 2)(x - 1 + i\sqrt{3})(x - 1 - i\sqrt{3})$. Equivalently $x^3 + 8 = (x + 2)(x^2 - 2x + 4)$.

SOLUTION Exercise n°4

$8i = 8e^{i\pi/2}$; one root is $2e^{i\pi/6} = \sqrt{3} + i$. Multiplying by ω and ω^2 (i.e. adding $\frac{2\pi}{3}$ to the argument): $2e^{5i\pi/6} = -\sqrt{3} + i$ and $2e^{3i\pi/2} = -2i$. Hence the three roots are $\sqrt{3} + i, -\sqrt{3} + i, -2i$.

SOLUTION Exercise n°5

$\zeta \neq 1$ and $\zeta^5 = 1$. Summing the geometric progression: $1 + \zeta + \zeta^2 + \zeta^3 + \zeta^4 = \frac{\zeta^5 - 1}{\zeta - 1} = \frac{1 - 1}{\zeta - 1} = 0$.

8 LOCI IN THE COMPLEX PLANE AND CHAPTER SYNTHESIS

Having mastered the algebra of complex numbers, their polar and exponential forms, De Moivre's theorem and the extraction of roots, we now turn to a geometric interpretation: **loci** in the Argand plane. A locus is simply the set of all points $M(z)$ that satisfy a given condition on the complex variable z . This section will show how to recognise, sketch and convert the most common loci — circles, perpendicular bisectors, half-lines and annuli — and will finish with a synthesis of the whole chapter through mixed GCE-style problems.

8.1 The Idea of a Locus

DEFINITION Locus in the Argand Plane

A **locus** is the set of points $M(z)$ in the complex plane such that the complex number z satisfies a given equation or inequality involving modulus, argument, real part, imaginary part, or any combination of these.

The two geometric quantities that appear most often are the **modulus** $|z - a|$, which represents the distance between $M(z)$ and the fixed point $A(a)$, and the **argument** $\arg(z - a)$, which represents the directed angle that the vector $\vec{AM}$ makes with the positive real axis. Translating a condition on z into a geometric description is the key to sketching loci quickly and accurately.

METHOD Identifying a Locus from its Equation

1. Write the condition in terms of $|z - a|$ or $\arg(z - a)$ (or both).
2. Interpret $|z - a|$ as a distance and $\arg(z - a)$ as an angle.
3. Recognise the standard geometric figure: circle, line, half-line, annulus, etc.
4. If required, convert to a Cartesian equation by setting $z = x + iy$ and simplifying.

8.2 Standard Loci: Circles, Lines and Half-Lines

PROPERTY Circle and Perpendicular Bisector

Let $a, b \in \mathbb{C}$ with $a \neq b$ and $r > 0$.

- $|z - a| = r$ is the **circle** with centre $A(a)$ and radius r .
- $|z - a| = |z - b|$ is the **perpendicular bisector** of the segment $[AB]$ where $A(a)$ and $B(b)$.

Proof. For the circle: $|z - a|$ is the distance AM ; the condition $AM = r$ defines a circle. For the bisector: $|z - a| = |z - b|$ means $AM = BM$, i.e. M is equidistant from A and B , which is exactly the perpendicular bisector of $[AB]$. $\square$

PROPERTY Half-Line from an Argument Condition

For a fixed $a \in \mathbb{C}$ and a fixed angle $\theta \in \mathbb{R}$,


$$\arg(z - a) = \theta$$

represents the **half-line** (ray) starting at $A(a)$ (excluded) and making an angle θ with the

positive real axis.

WARNING Half-Line vs Full Line

The point a itself is not included because $\arg(0)$ is undefined. A common mistake is to draw a full straight line through a ; remember that the condition fixes the direction from a , giving only one ray.

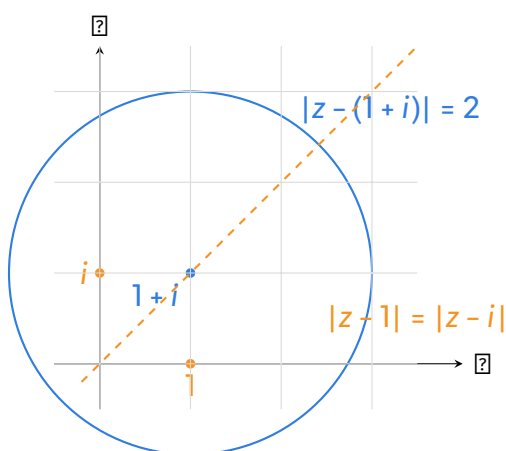

Circle $|z - (1 + i)| = 2$ (centre $1 + i$, radius 2) and perpendicular bisector of $[1, i]$ (line $y = x$).

WORKED EXAMPLE 21 Circle and Bisector

Statement: Sketch the loci defined by

- $|z - (1 + i)| = 2$,
- $|z - 1| = |z - i|$.

Convert each to a Cartesian equation.

Detailed solution:

- Let $z = x + iy$. Then $|z - (1 + i)| = |(x - 1) + i(y - 1)| = \sqrt{(x - 1)^2 + (y - 1)^2} = 2$. Squaring gives $(x - 1)^2 + (y - 1)^2 = 4$, a circle centre $(1, 1)$, radius 2.
- $|z - 1| = |z - i| \Rightarrow |(x - 1) + iy| = |x + i(y - 1)|$. Squaring: $(x - 1)^2 + y^2 = x^2 + (y - 1)^2$. Expanding: $x^2 - 2x + 1 + y^2 = x^2 + y^2 - 2y + 1 \Rightarrow -2x = -2y \Rightarrow y = x$. This is the perpendicular bisector of the segment joining $(1, 0)$ and $(0, 1)$.


8.3 Annuli and Combined Conditions

PROPERTY Annulus

For $0 \leq r_1 < r_2$ and $a \in \mathbb{C}$,

$$r_1 \leq |z - a| \leq r_2$$

describes a closed **annulus** (ring) centred at $A(a)$ with inner radius r_1 and outer radius r_2 . If the inequalities are strict, the boundaries are excluded.

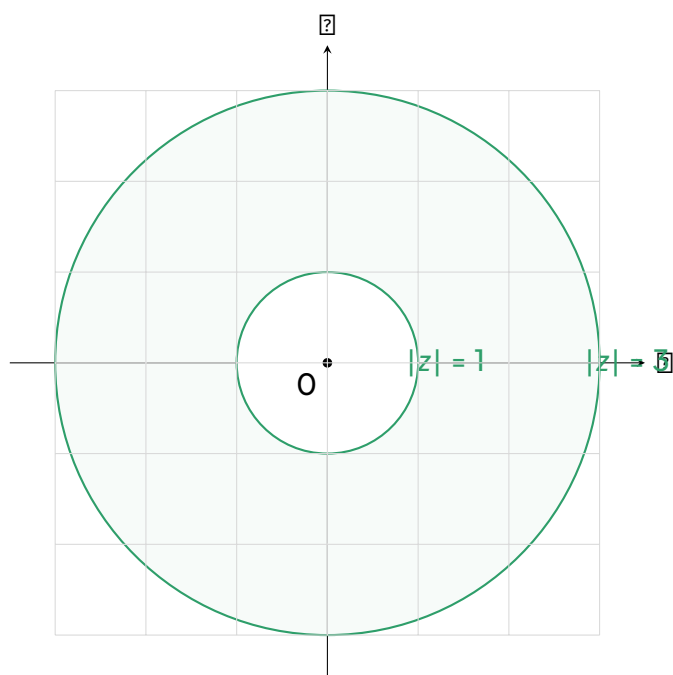


Annulus $1 \leq |z| \leq 3$ (shaded region between two concentric circles).

WORKED EXAMPLE 22 Annulus and Half-Line

Statement: Describe and sketch the locus defined by

$$1 \leq |z| \leq 3 \quad \text{and} \quad \arg(z - 2) = \frac{\pi}{4}.$$

Detailed solution: The first condition is the closed annulus centred at the origin with inner radius 1 and outer radius 3. The second condition is the half-line starting at 2 (point (2, 0)) and making an angle $\pi/4$ with the positive real axis. Its Cartesian equation is $y = x - 2$ with $x > 2$. The required locus is the intersection: the portion of that half-line that lies inside the annulus. It consists of one or two line segments depending on where the ray cuts the circles $|z| = 1$ and $|z| = 3$.

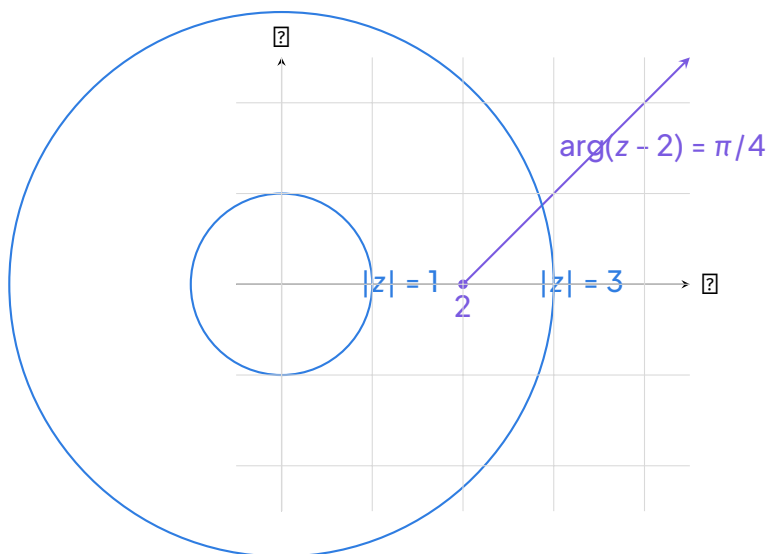

Half-line $\arg(z - 2) = \pi/4$ (ray from 2) intersecting the annulus $1 \leq |z| \leq 3$.

8.4 Translating Between Geometric and Cartesian Forms

METHOD Converting a Locus to Cartesian Form

1. Substitute $z = x + iy$ (and $\bar{z} = x - iy$ if needed).
2. Replace $|z - a|$ by $\sqrt{(x - \Re a)^2 + (y - \Im a)^2}$.
3. Replace $\arg(z - a)$ by $\arctan \frac{y - \Im a}{x - \Re a}$ (taking quadrant into account).
4. Simplify algebraically to obtain an equation or inequality in x and y .
5. Identify the curve (circle, line, parabola, etc.) and state any restrictions (e.g. $x > \Re a$ for a half-line).

WORKED EXAMPLE 23 Cartesian Conversion

Statement: Find the Cartesian equation of the locus $\arg\left(\frac{z-1}{z+1}\right) = \frac{\pi}{2}$.

Detailed solution: Let $z = x + iy$. Then

$$\frac{z-1}{z+1} = \frac{(x-1) + iy}{(x+1) + iy} = \frac{((x-1) + iy)((x+1) - iy)}{(x+1)^2 + y^2}.$$

The numerator expands to

$$(x-1)(x+1) + y^2 + i(y(x+1) - y(x-1)) = x^2 - 1 + y^2 + i(2y).$$

Thus

$$\arg\left(\frac{z-1}{z+1}\right) = \arctan\left(\frac{2y}{x^2+y^2-1}\right).$$

Setting this equal to $\pi/2$ means the real part is 0 and the imaginary part > 0 :

$$x^2 + y^2 - 1 = 0 \quad \text{and} \quad 2y > 0 \Rightarrow y > 0.$$

Hence the locus is the upper half of the unit circle $x^2 + y^2 = 1$ (excluding the endpoints $(\pm 1, 0)$ where the argument is undefined). This is a classic GCE result: $\arg\left(\frac{z-a}{z-b}\right) = \pm \frac{\pi}{2}$ gives the circle with diameter AB (here $A = 1, B = -1$).

8.5 Chapter Synthesis: Mixed GCE-Style Problems

The GCE Advanced Level examination often combines several topics in one question. A typical problem might ask you to:

- Solve a quadratic or cubic equation in $\mathbb{C}$ and plot the roots on an Argand diagram.
- Express the roots in polar/exponential form.
- Use De Moivre's theorem to find powers or further roots.
- Determine the locus of a variable point related to those roots.

WORKED EXAMPLE 24 Synthesis Problem

Statement: Let $z_1 = 1 + i\sqrt{3}$ and $z_2 = 1 - i\sqrt{3}$.

1. Write z_1 and z_2 in exponential form.
2. Find the cube roots of z_1 and plot them on an Argand diagram.
3. Determine the locus of points $M(z)$ such that $|z - z_1| = |z - z_2|$.
4. Find the Cartesian equation of the locus $\arg\left(\frac{z-z_1}{z-z_2}\right) = \frac{\pi}{3}$.

Detailed solution:

1. $z_1 = 2e^{i\pi/3}$, $z_2 = 2e^{-i\pi/3}$ (modulus 2, arguments $\pm\pi/3$).
2. Cube roots of z_1 : $w_k = \sqrt[3]{2} e^{i(\pi/9 + 2k\pi/3)}$, $k = 0, 1, 2$. Modulus $\sqrt[3]{2} \approx 1.26$, arguments $\pi/9, 7\pi/9, 13\pi/9$. Plot three points equally spaced by 120° on the circle radius $\sqrt[3]{2}$.
3. $|z - z_1| = |z - z_2|$ is the perpendicular bisector of $[z_1 z_2]$. Since z_1 and z_2 are symmetric about the real axis, the bisector is the real axis: $\Im(z) = 0$.
4. Let $z = x + iy$. As in the previous worked example, $\arg\left(\frac{z-z_1}{z-z_2}\right) = \frac{\pi}{3}$ gives the arc of a circle through z_1 and z_2 subtending an angle $\pi/3$ at the circumference. The Cartesian equa-

tion simplifies to

$$x^2 + y^2 - 2x - \frac{2}{\sqrt{3}}y + 1 = 0,$$

with the restriction that M lies on the major arc (since the angle is acute). This is a circle with centre $\left(1, \frac{1}{\sqrt{3}}\right)$ and radius $\frac{2}{\sqrt{3}}$.

8.6 Exam Technique and Time Management

KEY POINTS Key Points for the Examination

- Recognise standard forms instantly: $|z - a| = r$ (circle), $|z - a| = |z - b|$ (bisector), $\arg(z - a) = \theta$ (half-line), $r_1 \leq |z - a| \leq r_2$ (annulus).
- Sketch first: A quick, labelled diagram often reveals the answer and prevents algebraic slips.
- Show the conversion steps: When asked for a Cartesian equation, write $z = x + iy$, substitute, and simplify clearly. Examiners award method marks.
- Check exclusions: Half-lines exclude the starting point; arguments of zero or negative real numbers need quadrant care.
- Combine topics: Be ready to use De Moivre to find roots, then interpret those roots geometrically as vertices of a regular polygon on a circle.
- Time allocation: A typical 12-mark locus question should take 10–12 minutes. Spend 2 minutes reading and sketching, 6–8 minutes on algebra, 2 minutes checking exclusions and labelling the final diagram.

WARNING Common Pitfalls

- Forgetting that $\arg(z - a) = \theta$ is a half-line, not a full line.
- Squaring $|z - a| = |z - b|$ without considering that both sides are non-negative (safe here, but watch for extraneous solutions when squaring equations involving arguments).
- Confusing $\arg(z - a) = \theta$ with $\arg \frac{z-a}{z-b} = \theta$; the latter is an arc of a circle (or a line if $\theta = 0, \pi$).
- Omitting the condition $y > 0$ (or $y < 0$) when the argument is $\pm\pi/2$ because the real part must be zero and the imaginary part strictly positive/negative.

DID YOU KNOW? Did You Know?

The geometric interpretation of complex numbers as points in a plane was independently developed by Caspar Wessel (1799), Jean-Robert Argand (1806) and Carl Friedrich Gauss (1831). In Cameroon, the Argand diagram is a standard tool in the GCE Advanced Level syllabus and appears in many engineering applications, from signal processing in telecommunications to the analysis of alternating current circuits in the national grid.

EXERCISE 8 Practice Set

1. Sketch and find the Cartesian equation of $|z - 2i| = 3$.
2. Describe the locus $|z + 1| = |z - 3|$ and give its equation.
3. Draw the half-line $\arg(z + 2 - i) = -\frac{\pi}{6}$.
4. Find the region defined by $2 \leq |z - 1| < 4$ and $\frac{\pi}{4} \leq \arg(z - 1) \leq \frac{\pi}{2}$.
5. Solve $z^3 = -8i$ and plot the roots. What polygon do they form?
6. Determine the locus of z such that $\arg\left(\frac{z-2}{z+2}\right) = \frac{\pi}{4}$.

SOLUTION Exercise 1

$$|z - 2i| = 3 \Rightarrow |x + i(y - 2)| = 3 \Rightarrow x^2 + (y - 2)^2 = 9. \text{ Circle centre } (0, 2), \text{ radius } 3.$$

SOLUTION Exercise 2

$$|z + 1| = |z - 3| \Rightarrow \sqrt{(x + 1)^2 + y^2} = \sqrt{(x - 3)^2 + y^2} \Rightarrow (x + 1)^2 = (x - 3)^2 \Rightarrow x = -1. \text{ Perpendicular bisector of } [-1, 3] \text{ (vertical line } x = -1).$$

SOLUTION Exercise 3

Half-line from $(-2, 1)$ with angle $-\pi/6$ (i.e. 30° below the positive real axis). Cartesian: $y - 1 = -\frac{1}{\sqrt{3}}(x + 2)$ with $x > -2$.

SOLUTION Exercise 4

Annulus sector: region between circles centre $(1, 0)$ radii 2 and 4, bounded by the rays at angles $\pi/4$ and $\pi/2$ from that centre.

SOLUTION Exercise 5

$-8j = 8e^{-i\pi/2}$. Cube roots: $2e^{-i\pi/6}$, $2e^{i\pi/2}$, $2e^{i7\pi/6}$. They form an equilateral triangle inscribed in the circle $|z| = 2$.

SOLUTION Exercise 6

Let $z = x + iy$. $\frac{z-2}{z+2} = \frac{(x-2)+iy}{(x+2)+iy}$. After rationalising, the condition $\arg = \pi/4$ gives $\frac{y}{x-2} = \frac{y}{x+2} > 0$, leading to $x^2 + y^2 - 4x - 4 = 0$ with $y > 0$. This is the upper half of the circle centre $(2, 0)$ radius $2\sqrt{2}$.

With this section we complete the chapter on Complex Numbers. You now possess a full toolkit: algebraic manipulation, polar and exponential forms, De Moivre's theorem, extraction of roots, and the geometric description of loci. Mastery of these topics is essential not only for the GCE Advanced Level examination but also for further studies in mathematics, physics and engineering. Keep practising mixed problems, and remember that a clear diagram is often worth a thousand algebraic steps. Good luck!

9 INTEGRATION ACTIVITY

9.1 Aims of the activity

This integration activity closes the chapter on **complex numbers** by bringing together, in a single realistic engineering project, all the major skills you have developed:

- converting a complex number between **Cartesian form**, **polar form** and **exponential form**;
- representing complex numbers and transformations on an **Argand diagram**;
- applying **De Moivre's theorem** to compute powers and interpret them geometrically as **rotation–enlargements**;
- finding the **n th roots** of a complex number and recognising their regular–polygon structure;
- determining and sketching **loci** defined by modulus conditions (circles and perpendicular bisectors);
- communicating a complete mathematical argument clearly, as required at the GCE Advanced Level.

You will work in groups of three or four. Each group produces one large Argand diagram and presents its reasoning to the class. All answers must be justified: a correct figure without justification earns only partial credit, exactly as in the examination.

9.2 Situation

Designing a Rotating Antenna Signal for a Yaoundé FM Station.

A telecommunications engineer working for a private FM radio station in Yaoundé models the electric signal emitted by the station's main transmitter at a given instant by a complex number

$$z = 2e^{i\pi/6},$$

where the unit on each axis of the Argand diagram is one volt. The real part represents the component of the signal in phase with a reference oscillator, and the imaginary part represents the component in quadrature (a quarter–cycle ahead).

The station's technical file contains the following specifications:

- **Signal amplification.** When the signal passes through successive amplifier stages, its complex representation is raised to powers: the second stage produces z^2 , the third z^3 , and a test stage produces z^6 . The engineer must predict the voltage and phase at each stage.
- **Antenna positions.** Three auxiliary relay antennas are to be placed at positions represented by the complex numbers w satisfying $w^3 = z$. The engineer wants to know their exact positions and to verify that they are arranged in a regular pattern around the transmitter.
- **Zone of clear reception.** A receiver at position M , represented by the complex number z' , receives the signal clearly whenever its distance from the transmitter is exactly the tolerance distance of 1 volt–unit on the diagram: $|z' - z| = 1$. The engineer wants the equation and shape of the boundary of this zone.

- **Equidistant relay line.** A second mast is placed at the point represented by $2i$. A maintenance road must be built along the set of points equidistant from the main transmitter (at the origin side reference) and the second mast, i.e. the points satisfying $|z'| = |z' - 2i|$. The engineer needs the Cartesian equation of this road.

Your group plays the role of the engineering team. You must produce a complete technical report: exact calculations, geometric descriptions, and a single neat Argand diagram gathering the signal, the three antennas, the reception boundary and the maintenance road.

9.3 Tasks

1. **Reading the signal.** Give the modulus and the argument of z . Convert $z = 2e^{i\pi/6}$ to Cartesian form $a + ib$ with a, b exact (surds allowed). Plot the point A representing z on an Argand diagram (scale: 2 cm per unit).
2. **Amplification stages.** Using De Moivre's theorem, compute z^2, z^3 and z^6 in exponential form, then in Cartesian form. For each, state the modulus (the amplified voltage) and the argument (the phase shift).
3. **Geometric description.** Describe precisely the transformation of the plane that maps the point representing z^n to the point representing z^{n+1} . Hence explain why the successive signals spiral away from the origin. Plot the points B, C, D representing z^2, z^3, z^6 . What do you notice about z^6 ?
4. **Antenna positions.** Find all complex numbers w such that $w^3 = z$. Give them in exponential form, then in Cartesian form (exact values). Plot the points W_0, W_1, W_2 .
5. **Regular pattern.** Show that $W_0W_1 = W_1W_2 = W_2W_0$ (compute the moduli of the differences, or use a symmetry argument). What is the exact nature of triangle $W_0W_1W_2$, and where is its centre?
6. **Reception boundary.** Write $z' = x + iy$. Show that the condition $|z' - z| = 1$ defines a circle: give its centre, its radius and its Cartesian equation. Sketch it on the diagram.
7. **Maintenance road.** Show that the condition $|z'| = |z' - 2i|$ reduces to a horizontal line, and find its Cartesian equation. Interpret this line geometrically as a perpendicular bisector. Sketch it.
8. **Synthesis and presentation.** Assemble all results on one Argand diagram. Does the maintenance road meet the reception boundary? Justify by solving the appropriate system. Prepare a five-minute presentation in which each group member justifies one part.

WARNING Examination habits to keep

Exact values are required throughout: leave $\sqrt{3}$ and $\sqrt[3]{2}$ in surd form, never write 1.73 or 1.26. Arguments must be given in radians, in the principal range $(-\pi, \pi]$ where a principal argument is requested. When finding cube roots, do not forget the two roots obtained by adding $\frac{2\pi}{3}$ and $\frac{4\pi}{3}$ to the argument: forgetting them is the most common error at the GCE.

9.4 Model answer

1. Reading the signal. The number $z = 2e^{i\pi/6}$ is given in exponential form, so

$$|z| = 2, \quad \arg(z) = \frac{\pi}{6}.$$

Using $\cos \frac{\pi}{6} = \frac{\sqrt{3}}{2}$ and $\sin \frac{\pi}{6} = \frac{1}{2}$:

$$z = 2 \left(\cos \frac{\pi}{6} + i \sin \frac{\pi}{6} \right) = 2 \left(\frac{\sqrt{3}}{2} + \frac{i}{2} \right) = \sqrt{3} + i.$$

The point $A(\sqrt{3}, 1)$ is plotted at distance 2 from O , on the ray making an angle $\frac{\pi}{6}$ with the positive real axis.

2. Amplification stages. By De Moivre's theorem, $(re^{i\theta})^n = r^n e^{in\theta}$:

$$z^2 = 2^2 e^{2i\pi/6} = 4e^{i\pi/3} = 4 \left(\frac{1}{2} + i \frac{\sqrt{3}}{2} \right) = 2 + 2i\sqrt{3},$$

$$z^3 = 2^3 e^{3i\pi/6} = 8e^{i\pi/2} = 8i,$$

$$z^6 = 2^6 e^{6i\pi/6} = 64e^{i\pi} = -64.$$

Signal	Modulus (voltage)	Argument (phase)	Cartesian form
z	2	$\pi/6$	$\sqrt{3} + i$
z^2	4	$\pi/3$	$2 + 2i\sqrt{3}$
z^3	8	$\pi/2$	$8i$
z^6	64	π	-64

3. Geometric description. Multiplication by $z = 2e^{i\pi/6}$ is the **rotation–enlargement** (spiral similarity) centred at O , with ratio 2 and angle $\frac{\pi}{6}$: each amplification stage doubles the distance from the origin and rotates the signal by $\frac{\pi}{6}$. Since the ratio $2 > 1$, the points $A, B, C, \dots$ spiral away from O . Note that $z^6 = -64$ lies on the negative real axis: after six stages, the total rotation is $6 \times \frac{\pi}{6} = \pi$, a half-turn, and the voltage has been multiplied by $2^6 = 64$.

4. Antenna positions. We solve $w^3 = z = 2e^{i\pi/6}$. Write $w = \rho e^{i\varphi}$. Then $\rho^3 = 2$ and $3\varphi = \frac{\pi}{6} + 2k\pi$, so

$$\rho = \sqrt[3]{2}, \quad \varphi = \frac{\pi}{18} + \frac{2k\pi}{3}, \quad k \in \{0, 1, 2\}.$$

The three cube roots are

$$w_0 = \sqrt[3]{2} e^{i\pi/18}, \quad w_1 = \sqrt[3]{2} e^{i(\pi/18+2\pi/3)} = \sqrt[3]{2} e^{13i\pi/18}, \quad w_2 = \sqrt[3]{2} e^{i(\pi/18+4\pi/3)} = \sqrt[3]{2} e^{25i\pi/18}.$$

Note that the principal argument of w_2 is $-\frac{11\pi}{18}$ (since $25\pi/18 - 2\pi = -11\pi/18$). In Cartesian form, the exact values are

$$w_0 = \sqrt[3]{2} \left(\cos \frac{\pi}{18} + i \sin \frac{\pi}{18} \right), \quad w_1 = \sqrt[3]{2} \left(\cos \frac{13\pi}{18} + i \sin \frac{13\pi}{18} \right), \quad w_2 = \sqrt[3]{2} \left(\cos \frac{25\pi}{18} + i \sin \frac{25\pi}{18} \right).$$

The angles $\frac{\pi}{18}, \frac{13\pi}{18}, \frac{25\pi}{18}$ do not correspond to standard surds, so the trigonometric form is the acceptable exact answer. All three antennas lie on the circle centred at O of radius $\sqrt[3]{2}$.

5. Regular pattern. The three roots have the same modulus $\sqrt[3]{2}$ and their arguments differ by exactly $\frac{2\pi}{3}$. Hence w_1 is the image of w_0 under the rotation of centre O and angle $\frac{2\pi}{3}$, and w_2 is the image of w_1 under the same rotation. A rotation preserves distances, so

$$W_0W_1 = W_1W_2 = W_2W_0,$$

and triangle $W_0W_1W_2$ is **equilateral**, inscribed in the circle of centre O and radius $\sqrt[3]{2}$; its centre is the transmitter O . Explicitly, each side has length

$$|w_1 - w_0| = \sqrt[3]{2} |e^{2i\pi/3} - 1| = \sqrt[3]{2} \left| -\frac{3}{2} + i\frac{\sqrt{3}}{2} \right| = \sqrt[3]{2} \cdot \sqrt{3} = \sqrt{3} \sqrt[3]{2}.$$

6. Reception boundary. The condition $|z' - z| = 1$ says that the distance from $M(z')$ to the fixed point $A(z)$ equals 1: this is the **circle of centre $A(\sqrt{3}, 1)$ and radius 1**. With $z' = x + iy$ and $z = \sqrt{3} + i$:

$$|(x - \sqrt{3}) + i(y - 1)| = 1 \iff (x - \sqrt{3})^2 + (y - 1)^2 = 1.$$

7. Maintenance road. The condition $|z'| = |z' - 2i|$ expresses that M is equidistant from $O(0, 0)$ and from the mast $E(0, 2)$: it is the **perpendicular bisector** of $[OE]$. Algebraically:


$$\begin{aligned} x^2 + y^2 &= x^2 + (y - 2)^2 \\ y^2 &= y^2 - 4y + 4 \\ 4y &= 4 \implies y = 1. \end{aligned}$$

The road is the horizontal line $y = 1$, the perpendicular bisector of the segment joining O and $E(0, 2)$, as expected.


8. Synthesis. The road $y = 1$ meets the reception circle when

$$(x - \sqrt{3})^2 + (1 - 1)^2 = 1 \iff (x - \sqrt{3})^2 = 1 \iff x = \sqrt{3} \pm 1.$$

So the road crosses the boundary of the clear-reception zone at exactly two points, $(\sqrt{3} - 1, 1)$ and $(\sqrt{3} + 1, 1)$: the road passes through the zone, entering and leaving it, and even passes through the transmitter point A itself since A has ordinate 1. The complete diagram gathers all the elements:

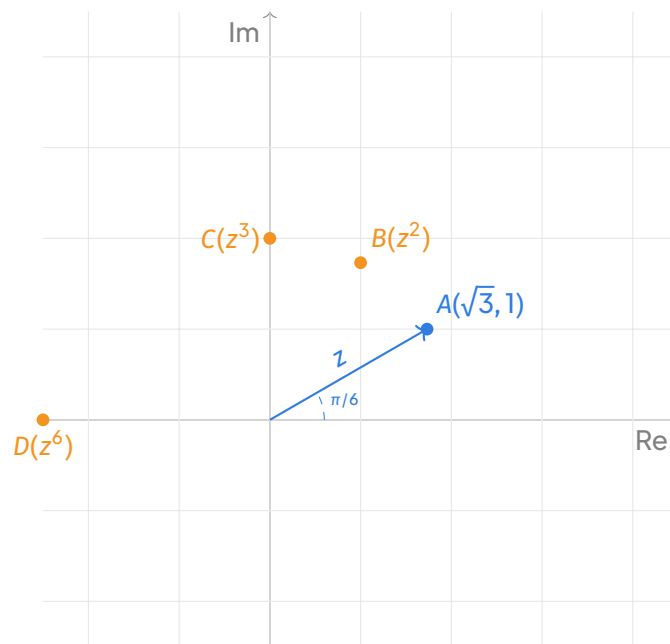

The complete technical diagram: signal z , amplifications z^2, z^3 , equilateral triangle of antennas $W_0W_1W_2$ on the circle of radius $\sqrt[3]{2}$, reception circle $|z' - z| = 1$ and maintenance road $y = 1$.

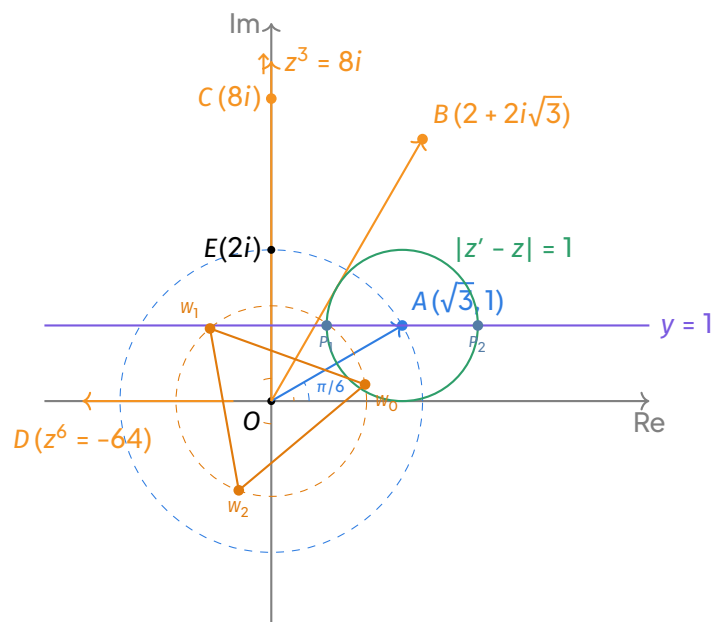

The complete technical diagram: signal z , amplifications z^2, z^3 (with z^6 indicated on negative real axis), equilateral triangle of antennas $W_0W_1W_2$ on the circle of radius $\sqrt[3]{2}$, reception circle $|z' - z| = 1$ (green) and maintenance road $y = 1$ (purple). Intersection points P_1, P_2 are $(\sqrt{3} \pm 1, 1)$.

KEY POINTS What this activity consolidates

- Exponential form $re^{i\theta}$ makes powers effortless: $(re^{i\theta})^n = r^n e^{in\theta}$ (De Moivre).
- Multiplication by $re^{i\theta}$ is a rotation of angle θ composed with an enlargement of ratio r .
- The equation $w^n = z$ has exactly n roots, forming a regular n -gon on the circle of radius $\sqrt[n]{|z|}$.
- $|z' - a| = r$ is a circle of centre a ; $|z' - a| = |z' - b|$ is the perpendicular bisector of $[AB]$.

10 METHODS AND WORKED EXAMPLES

11 BIRTH OF COMPLEX NUMBERS AND THE IMAGINARY UNIT i

DID YOU KNOW? A Brief History of Complex Numbers

The need for complex numbers arose not from quadratic equations (where $x^2 + 1 = 0$ was simply said to have "no solution") but from cubic equations in 16th-century Italy. To solve $x^3 = 15x + 4$, Cardano's formula gave

$$x = \sqrt[3]{2 + \sqrt{-121}} + \sqrt[3]{2 - \sqrt{-121}}.$$

Bombelli (1572) realised that if one treats $\sqrt{-1}$ as a formal symbol with $(\sqrt{-1})^2 = -1$, the expression simplifies to $x = 4$, a perfectly real root. For centuries, these "imaginary" numbers were viewed with suspicion. It was only with the geometric interpretation by Wessel (1799), Argand (1806) and Gauss (1831) — the **Argand diagram** — that they gained full acceptance. Today they are indispensable in physics, engineering, signal processing and quantum mechanics.

DEFINITION The Imaginary Unit i

We define the symbol i by the property

$$i^2 = -1.$$

A **complex number** is an expression of the form $z = a + ib$, where $a, b \in \mathbb{R}$.

- $a = \operatorname{Re}(z)$ is the **real part** of z .
- $b = \operatorname{Im}(z)$ is the **imaginary part** of z (a real number; the imaginary part of $3 - 2i$ is -2 , not $-2i$).
- If $b = 0$, z is a **real number**; if $a = 0$ and $b \neq 0$, z is **purely imaginary**.

Two complex numbers are equal iff their real parts are equal and their imaginary parts are equal:

$$a + ib = c + id \iff a = c \text{ and } b = d.$$

PROPERTY Powers of i

The powers of i cycle with period 4:

$$i^1 = i, \quad i^2 = -1, \quad i^3 = -i, \quad i^4 = 1, \quad i^5 = i, \dots$$

For any integer n , write $n = 4q + r$ with $r \in \{0, 1, 2, 3\}$; then $i^n = i^r$.

EXAMPLE Powers of i

Simplify: (a) i^{17} ; (b) i^{-5} ; (c) i^{2024} .

(a) $17 = 4 \times 4 + 1 \Rightarrow i^{17} = i^1 = i.$

(b) $i^{-5} = \frac{1}{i^5} = \frac{1}{i} = \frac{i}{i^2} = \frac{i}{-1} = -i.$ (Alternatively, $-5 = 4 \times (-2) + 3 \Rightarrow i^{-5} = i^3 = -i.$)

(c) $2024 = 4 \times 506 \Rightarrow i^{2024} = i^0 = 1.$

12 ALGEBRA OF COMPLEX NUMBERS AND CONJUGATES**METHOD** Adding, Subtracting and Multiplying Complex Numbers

To compute with complex numbers in **Cartesian form** $z = a + ib$ ($a, b \in \mathbb{R}$):

1. Treat i as an ordinary letter and expand using the usual rules of algebra.
2. Every time i^2 appears, replace it by -1 ; use $i^3 = -i$, $i^4 = 1$ for higher powers.
3. Group the **real parts** together and the **imaginary parts** together.
4. Write the final answer in the standard form $a + ib$.

Useful identities:

$$(a + ib)^2 = a^2 - b^2 + 2iab,$$

$$(a + ib)(a - ib) = a^2 + b^2 \quad (\text{always a real number!}).$$

For powers of i , reduce the exponent modulo 4.

WORKED EXAMPLE 25 Operations and Powers of i

Given $z_1 = 3 - 2i$ and $z_2 = 1 + 4i$, compute: (a) $z_1 + z_2$; (b) $z_1 - z_2$; (c) $z_1 z_2$; (d) z_1^2 ; (e) i^{2023} .

SOLUTION

Solution.

$$(a) \quad z_1 + z_2 = (3 - 2i) + (1 + 4i) = (3 + 1) + (-2 + 4)i = 4 + 2i.$$

$$(b) \quad z_1 - z_2 = (3 - 2i) - (1 + 4i) = (3 - 1) + (-2 - 4)i = 2 - 6i.$$

(c) Expand the product:

$$\begin{aligned} z_1 z_2 &= (3 - 2i)(1 + 4i) = 3 + 12i - 2i - 8i^2 \\ &= 3 + 10i - 8(-1) = 3 + 10i + 8 = 11 + 10i. \end{aligned}$$

(d) Using $(a + ib)^2 = a^2 - b^2 + 2iab$ with $a = 3$, $b = -2$:

$$z_1^2 = 3^2 - (-2)^2 + 2(3)(-2)i = 9 - 4 - 12i = 5 - 12i.$$

(e) Divide the exponent by 4: $2023 = 4 \times 505 + 3$. Hence

$$i^{2023} = (i^4)^{505} \cdot i^3 = 1^{505} \times (-i) = -i.$$

DEFINITION Complex Conjugate

The **conjugate** of $z = a + ib$ is $\bar{z} = a - ib$ (reflection in the real axis on the Argand diagram).

PROPERTY Properties of the Conjugate

For all $z, w \in \mathbb{C}$:

$$\overline{z + w} = \bar{z} + \bar{w},$$

$$\overline{z - w} = \bar{z} - \bar{w},$$

$$\overline{zw} = \bar{z} \bar{w},$$

$$\overline{\left(\frac{z}{w}\right)} = \frac{\bar{z}}{\bar{w}} \quad (w \neq 0),$$

$$\bar{\bar{z}} = z,$$

$$z + \bar{z} = 2 \operatorname{Re}(z),$$

$$z - \bar{z} = 2i \operatorname{Im}(z),$$

$$z\bar{z} = |z|^2 = a^2 + b^2 \in \mathbb{R}_{\geq 0}.$$

Important: If a polynomial has real coefficients, its non-real roots occur in conjugate pairs.

WORKED EXAMPLE 26 Using Conjugate Properties

If $z = 2 - 3i$, find: (a) $\bar{z}$; (b) $z + \bar{z}$; (c) $z - \bar{z}$; (d) $z\bar{z}$.

SOLUTION

Solution. (a) $\bar{z} = 2 + 3i$. (b) $z + \bar{z} = (2 - 3i) + (2 + 3i) = 4 = 2 \operatorname{Re}(z)$. (c) $z - \bar{z} = (2 - 3i) - (2 + 3i) = -6i = 2i \operatorname{Im}(z)$. (d) $z\bar{z} = (2 - 3i)(2 + 3i) = 4 - (3i)^2 = 4 + 9 = 13 = |z|^2$.

METHOD Division by a Complex Number

To write $\frac{z_1}{z_2}$ (with $z_2 \neq 0$) in the form $a + ib$:

1. Write down the **conjugate** $\bar{z}_2$ of the denominator (change the sign of the imaginary part).
2. Multiply numerator and denominator by $\bar{z}_2$.
3. The denominator becomes $z_2\bar{z}_2 = |z_2|^2$, a positive real number.
4. Expand the numerator, replace i^2 by -1 , then separate real and imaginary parts.

Key formula: $\frac{a + ib}{c + id} = \frac{(a + ib)(c - id)}{c^2 + d^2}$.

WORKED EXAMPLE 27 Quotient in Cartesian Form

Express $z = \frac{3 - 2i}{1 + 4i}$ in the form $a + ib$, where $a, b \in \mathbb{R}$. Hence find the real numbers x and y such that $\frac{x + iy}{1 + 4i} = 3 - 2i$.

SOLUTION

Solution. The conjugate of $1 + 4i$ is $1 - 4i$. Multiply top and bottom by it:

$$\begin{aligned} z &= \frac{(3 - 2i)(1 - 4i)}{(1 + 4i)(1 - 4i)} = \frac{3 - 12i - 2i + 8i^2}{1^2 + 4^2} \\ &= \frac{3 - 14i - 8}{17} = \frac{-5 - 14i}{17} = -\frac{5}{17} - \frac{14}{17}i. \end{aligned}$$

For the second part, $x + iy = (3 - 2i)(1 + 4i) = 11 + 10i$ (computed in the previous example). Equating real and imaginary parts: $x = 11$ and $y = 10$.

WARNING

Never leave a complex number in the denominator of a final answer at the GCE: always "realise the denominator" using the conjugate.

EXERCISE 9 Practice: Algebra and Conjugates

1. Simplify $(2 - i)^3$ and express the result in the form $a + ib$.
2. If $z = \frac{1+2i}{3-i}$, find $\operatorname{Re}(z)$, $\operatorname{Im}(z)$, $\bar{z}$ and $|z|$.
3. Find real x, y such that $(x + iy)^2 = 5 + 12i$.
4. Prove that for any $z \in \mathbb{C}$, $|z|^2 = z\bar{z}$ and deduce that $|zw| = |z||w|$.

13 EQUATIONS AND ROOTS IN $\mathbb{C}$ **METHOD Quadratic Equations with Real Coefficients**

To solve $az^2 + bz + c = 0$ with $a, b, c \in \mathbb{R}$, $a \neq 0$:

1. Compute the discriminant $\Delta = b^2 - 4ac$.
2. If $\Delta \geq 0$: real roots $z = \frac{-b \pm \sqrt{\Delta}}{2a}$.
3. If $\Delta < 0$: write $\Delta = -|\Delta|$, so $\sqrt{\Delta} = i\sqrt{|\Delta|}$, giving two **complex conjugate roots**

$$z = \frac{-b \pm i\sqrt{|\Delta|}}{2a}.$$

Reflexes: with real coefficients, non-real roots always come in conjugate pairs. Sum of roots = $-\frac{b}{a}$, product = $\frac{c}{a}$ — use these to check your answers or to form an equation from given roots.

WORKED EXAMPLE 28 GCE-Style: Solving a Quadratic in $\mathbb{C}$

- (a) Solve the equation $z^2 - 4z + 13 = 0$, giving your answers in the form $a + ib$.
 (b) Hence, or otherwise, find a quadratic equation with real coefficients whose roots are $2 + 3i$ and $2 - 3i$, and verify that it is the equation of part (a).

SOLUTION

Solution. (a) $\Delta = (-4)^2 - 4(1)(13) = 16 - 52 = -36 < 0$. The roots are complex:

$$z = \frac{4 \pm \sqrt{-36}}{2} = \frac{4 \pm 6i}{2} = 2 \pm 3i.$$

The solution set is $S = \{2 - 3i; 2 + 3i\}$.

(b) Sum of roots: $(2 + 3i) + (2 - 3i) = 4$. Product: $(2 + 3i)(2 - 3i) = 4 - (3i)^2 = 4 + 9 = 13$. A quadratic with these roots is

$$z^2 - (\text{sum})z + (\text{product}) = 0 \implies z^2 - 4z + 13 = 0,$$

which is exactly the equation of part (a). ■

METHOD Square Root of a Complex Number (Algebraic Method)

To find $\sqrt{w}$ where $w = a + ib$ ($a, b \in \mathbb{R}$):

1. Set $(x + iy)^2 = a + ib$ with $x, y \in \mathbb{R}$.
2. Expand: $x^2 - y^2 + 2ixy = a + ib$.
3. Equate real and imaginary parts:

$$\begin{cases} x^2 - y^2 = a \\ 2xy = b \end{cases}$$

4. Use the modulus relation $x^2 + y^2 = |w| = \sqrt{a^2 + b^2}$.
5. Solve for x^2 and y^2 :

$$x^2 = \frac{|w| + a}{2}, \quad y^2 = \frac{|w| - a}{2}.$$

6. Choose signs of x and y so that $2xy = b$ (same sign if $b > 0$, opposite if $b < 0$).

WORKED EXAMPLE 29 Square Root by Algebraic Method

Find the square roots of $5 + 12i$.

SOLUTION

Solution. Let $(x + iy)^2 = 5 + 12i$. Then

$$x^2 - y^2 = 5, \quad 2xy = 12 \Rightarrow xy = 6.$$

Also $x^2 + y^2 = |5 + 12i| = \sqrt{25 + 144} = 13$. Adding: $2x^2 = 18 \Rightarrow x^2 = 9 \Rightarrow x = \pm 3$. Subtracting: $2y^2 = 8 \Rightarrow y^2 = 4 \Rightarrow y = \pm 2$. Since $xy = 6 > 0$, x and y have the same sign. The two square roots are $3 + 2i$ and $-3 - 2i$. Check: $(3 + 2i)^2 = 9 + 12i + 4i^2 = 5 + 12i$. ✓

EXERCISE 10 Practice: Equations and Square Roots

1. Solve $2z^2 + 3z + 5 = 0$.
2. Find a quadratic equation with real coefficients having roots $-1 + 2i$ and $-1 - 2i$.
3. Find the square roots of $-7 + 24i$ by the algebraic method.
4. The complex number z satisfies $z^2 - 2z + 10 = 0$. Find z and verify that $|z|^2 = 10$.

14 THE ARGAND DIAGRAM, MODULUS AND ARGUMENT

DEFINITION The Argand Diagram

A complex number $z = x + iy$ is represented by the point $P(x, y)$ in the plane (or the vector $\vec{OP}$). The horizontal axis is the **real axis**, the vertical axis is the **imaginary axis**.

DEFINITION Modulus and Argument

For $z = x + iy \neq 0$:

- The **modulus** is $|z| = \sqrt{x^2 + y^2} \geq 0$ (distance from origin).
- An **argument** of z is any angle θ such that $\cos \theta = \frac{x}{|z|}$, $\sin \theta = \frac{y}{|z|}$.
- The **principal argument**, denoted $\arg z$ (or $\text{Arg } z$), is the unique $\theta \in (-\pi, \pi]$.

PROPERTY Geometric PropertiesFor $z, w \in \mathbb{C}$:

- $|z| = |\bar{z}|$, $\arg(\bar{z}) = -\arg(z) \pmod{2\pi}$.
- $|zw| = |z||w|$, $\arg(zw) = \arg z + \arg w \pmod{2\pi}$.
- $|z/w| = |z|/|w|$, $\arg(z/w) = \arg z - \arg w \pmod{2\pi}$.
- $|z^n| = |z|^n$, $\arg(z^n) = n \arg z \pmod{2\pi}$.

METHOD Converting $a + ib$ to Polar Form $r(\cos \theta + i \sin \theta)$

1. Compute the **modulus**: $r = |z| = \sqrt{a^2 + b^2}$ (always $r \geq 0$).
2. Find an **argument** θ from $\cos \theta = \frac{a}{r}$ and $\sin \theta = \frac{b}{r}$ — use both equations to fix the quadrant.
3. Place the point on an Argand diagram if in doubt: signs of a and b tell you the quadrant.
4. Write $z = r(\cos \theta + i \sin \theta) = [r; \theta]$, usually with the principal argument $\theta \in (-\pi, \pi]$.

Key values to know:

z	r	θ (principal)	Polar form
$1 + i$	$\sqrt{2}$	$\pi/4$	$\sqrt{2}(\cos \frac{\pi}{4} + i \sin \frac{\pi}{4})$
$1 + i\sqrt{3}$	2	$\pi/3$	$2(\cos \frac{\pi}{3} + i \sin \frac{\pi}{3})$
$-\sqrt{3} + i$	2	$5\pi/6$	$2(\cos \frac{5\pi}{6} + i \sin \frac{5\pi}{6})$
$-1 - i$	$\sqrt{2}$	$-3\pi/4$	$\sqrt{2}(\cos(-\frac{3\pi}{4}) + i \sin(-\frac{3\pi}{4}))$

WORKED EXAMPLE 30 Cartesian to Polar Form

Write $z = -1 + i\sqrt{3}$ in polar form $r(\cos \theta + i \sin \theta)$ with $-\pi < \theta \leq \pi$. Deduce the polar form of $\bar{z}$ and of $-z$.

SOLUTION

Solution. Here $a = -1$, $b = \sqrt{3}$.

$$r = \sqrt{(-1)^2 + (\sqrt{3})^2} = \sqrt{1 + 3} = 2.$$

Then $\cos \theta = \frac{-1}{2}$ and $\sin \theta = \frac{\sqrt{3}}{2}$. Since $\sin \theta > 0$ and $\cos \theta < 0$, θ lies in the second quadrant:

$\theta = \pi - \frac{\pi}{3} = \frac{2\pi}{3}$. Hence

$$z = 2 \left(\cos \frac{2\pi}{3} + i \sin \frac{2\pi}{3} \right).$$

For the conjugate, $\arg(\bar{z}) = -\arg(z)$ and $|\bar{z}| = |z|$:

$$\bar{z} = 2 \left(\cos \frac{2\pi}{3} - i \sin \frac{2\pi}{3} \right) = 2 \left(\cos \left(-\frac{2\pi}{3} \right) + i \sin \left(-\frac{2\pi}{3} \right) \right).$$

For $-z$: multiplying by $-1 = e^{i\pi}$ adds π to the argument; reducing modulo 2π , $\arg(-z) = \frac{2\pi}{3} - \pi = -\frac{\pi}{3}$, so

$$-z = 2 \left(\cos \left(-\frac{\pi}{3} \right) + i \sin \left(-\frac{\pi}{3} \right) \right).$$

(Check: $-z = 1 - i\sqrt{3}$, indeed in the fourth quadrant with argument $-\pi/3$.)

EXERCISE 11 Practice: Modulus, Argument, Polar Form

- Find the modulus and principal argument of: (a) $-2 - 2i$; (b) $3 - 3i\sqrt{3}$; (c) $-4i$.
- Write in polar form $r(\cos \theta + i \sin \theta)$ with $\theta \in (-\pi, \pi]$: (a) $-\sqrt{3} - i$; (b) $2 - 2i$.
- If $z = 2(\cos \frac{\pi}{5} + i \sin \frac{\pi}{5})$, find the polar form of $\bar{z}$, $-z$, z^2 and $1/z$.

15 POLAR AND EXPONENTIAL FORMS

DEFINITION Exponential Form

Euler's formula states $e^{i\theta} = \cos \theta + i \sin \theta$ for all $\theta \in \mathbb{R}$. A complex number $z \neq 0$ can be written as

$$z = re^{i\theta}, \quad \text{where } r = |z| > 0, \theta = \arg z.$$

PROPERTY Euler's Identities

$$\cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2},$$

$$e^{i\pi} = -1 \quad (\text{Euler's identity}),$$

$$\sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}.$$

$$e^{i\pi/2} = i.$$

METHOD Converting Between Forms

- Cartesian $\rightarrow$ Exponential: $r = \sqrt{a^2 + b^2}$, $\theta = \arg(a + ib)$, then $z = re^{i\theta}$.
- Exponential $\rightarrow$ Cartesian: $z = r(\cos \theta + i \sin \theta) = r \cos \theta + ir \sin \theta$.
- Polar $\leftrightarrow$ Exponential: just replace $\cos \theta + i \sin \theta$ by $e^{i\theta}$.

WORKED EXAMPLE 31 Exponential Form and Operations

Let $z_1 = 2e^{i\pi/3}$ and $z_2 = \sqrt{2}e^{-i\pi/4}$. Find in exponential form: (a) $z_1 z_2$; (b) z_1/z_2 ; (c) z_1^3 ; (d) $\sqrt{z_1}$ (both roots).

SOLUTION

Solution. (a) $z_1 z_2 = 2\sqrt{2} e^{i(\pi/3 - \pi/4)} = 2\sqrt{2} e^{i\pi/12}$. (b) $z_1/z_2 = \frac{2}{\sqrt{2}} e^{i(\pi/3 + \pi/4)} = \sqrt{2} e^{i7\pi/12}$. (c) $z_1^3 = 2^3 e^{i\pi} = 8e^{i\pi} = -8$. (d) $\sqrt{z_1} = \sqrt{2} e^{i(\pi/6 + k\pi)}$, $k = 0, 1$: $k = 0$: $\sqrt{2} e^{i\pi/6}$; $k = 1$: $\sqrt{2} e^{i7\pi/6}$.

16 DE MOIVRE'S THEOREM AND TRIGONOMETRIC APPLICATIONS

PROPERTY De Moivre's Theorem

For any integer n and any real θ :

$$(\cos \theta + i \sin \theta)^n = \cos n\theta + i \sin n\theta.$$

Equivalently, $(e^{i\theta})^n = e^{in\theta}$.

METHOD Computing z^n via De Moivre

To compute a high power of a complex number:

1. Convert z to polar (or exponential) form: $z = re^{i\theta}$.
2. Apply **De Moivre's theorem**: $z^n = r^n e^{in\theta} = r^n (\cos n\theta + i \sin n\theta)$.
3. Reduce $n\theta$ modulo 2π to a familiar angle.

4. Convert back to Cartesian form if the question demands it.

Reflex: never expand $(a+ib)^n$ directly for large n — the polar route is far shorter and is what examiners expect.

WORKED EXAMPLE 32 Power via De Moivre

Given $z = 1+i$, express z in exponential form and hence show that $z^{12} = -64$. Give the answer in Cartesian form.

SOLUTION

Solution. $|z| = \sqrt{1^2 + 1^2} = \sqrt{2}$, and $\cos \theta = \sin \theta = \frac{1}{\sqrt{2}}$ gives $\theta = \frac{\pi}{4}$. Thus

$$z = \sqrt{2} e^{i\pi/4}.$$

By De Moivre's theorem:

$$z^{12} = (\sqrt{2})^{12} e^{i \cdot 12\pi/4} = 2^6 e^{3i\pi} = 64 e^{3i\pi}.$$

Since $e^{3i\pi} = \cos 3\pi + i \sin 3\pi = -1 + 0i = -1$ (as $3\pi \equiv \pi \pmod{2\pi}$):

$$z^{12} = 64 \times (-1) = -64.$$

In Cartesian form: $z^{12} = -64 + 0i = -64$, a real number. ■

METHOD Trigonometric Identities from De Moivre

(A) Multiple angles from powers (expand and equate): Expand $(\cos \theta + i \sin \theta)^n$ by the binomial theorem and equate real and imaginary parts with $\cos n\theta + i \sin n\theta$.

(B) Powers from multiple angles (binomial with z and z^{-1}): Set $z = \cos \theta + i \sin \theta$, so $z^n + z^{-n} = 2 \cos n\theta$ and $z^n - z^{-n} = 2i \sin n\theta$. Then:

1. Write $\cos^n \theta = \left(\frac{z + z^{-1}}{2} \right)^n$ (or with $z - z^{-1}$ for sin).
2. Expand the binomial and pair terms z^k with z^{-k} .
3. Replace each pair by $2 \cos k\theta$ (or $2i \sin k\theta$).

WORKED EXAMPLE 33 Expressing $\cos^4 \theta$ in Multiple Angles

Using De Moivre's theorem, prove that

$$\cos^4 \theta = \frac{1}{8}(\cos 4\theta + 4 \cos 2\theta + 3).$$

SOLUTION

Solution. Let $z = \cos \theta + i \sin \theta$. Then $z + z^{-1} = 2 \cos \theta$ and $z^n + z^{-n} = 2 \cos n\theta$. We have $\cos \theta = \frac{z + z^{-1}}{2}$, so

$$\begin{aligned}(2 \cos \theta)^4 &= (z + z^{-1})^4 = z^4 + 4z^2 + 6 + 4z^{-2} + z^{-4} \\ &= (z^4 + z^{-4}) + 4(z^2 + z^{-2}) + 6 \\ &= 2 \cos 4\theta + 4(2 \cos 2\theta) + 6.\end{aligned}$$

Therefore $16 \cos^4 \theta = 2 \cos 4\theta + 8 \cos 2\theta + 6$, and dividing by 16:

$$\cos^4 \theta = \frac{2 \cos 4\theta + 8 \cos 2\theta + 6}{16} = \frac{1}{8}(\cos 4\theta + 4 \cos 2\theta + 3). \quad \blacksquare$$

Remark: such identities make integration easy: $\int \cos^4 \theta \, d\theta = \frac{1}{32} \sin 4\theta + \frac{1}{4} \sin 2\theta + \frac{3}{8} \theta + C$.

WORKED EXAMPLE 34 Expressing $\sin^3 \theta$ in Multiple Angles

Express $\sin^3 \theta$ in terms of sines of multiple angles.

SOLUTION

Solution. Let $z = \cos \theta + i \sin \theta$. Then $z - z^{-1} = 2i \sin \theta$, so $\sin \theta = \frac{z - z^{-1}}{2i}$.

$$\begin{aligned}(2i \sin \theta)^3 &= (z - z^{-1})^3 = z^3 - 3z + 3z^{-1} - z^{-3} \\ &= (z^3 - z^{-3}) - 3(z - z^{-1}) \\ &= 2i \sin 3\theta - 3(2i \sin \theta).\end{aligned}$$

Thus $-8i \sin^3 \theta = 2i \sin 3\theta - 6i \sin \theta$. Dividing by $-8i$:

$$\sin^3 \theta = \frac{1}{4}(3 \sin \theta - \sin 3\theta). \quad \blacksquare$$

WORKED EXAMPLE 35 Expressing $\cos 5\theta$ as a Polynomial in $\cos \theta$

Use De Moivre's theorem to show that $\cos 5\theta = 16 \cos^5 \theta - 20 \cos^3 \theta + 5 \cos \theta$.

SOLUTION

Solution. By De Moivre: $\cos 5\theta + i \sin 5\theta = (\cos \theta + i \sin \theta)^5$. Expand by binomial theorem:

$$\begin{aligned}(\cos \theta + i \sin \theta)^5 &= \cos^5 \theta + 5i \cos^4 \theta \sin \theta - 10 \cos^3 \theta \sin^2 \theta \\ &\quad - 10i \cos^2 \theta \sin^3 \theta + 5 \cos \theta \sin^4 \theta + i \sin^5 \theta.\end{aligned}$$

Equate real parts:

$$\cos 5\theta = \cos^5 \theta - 10 \cos^3 \theta \sin^2 \theta + 5 \cos \theta \sin^4 \theta.$$

Replace $\sin^2 \theta = 1 - \cos^2 \theta$:

$$\begin{aligned}\cos 5\theta &= \cos^5 \theta - 10 \cos^3 \theta (1 - \cos^2 \theta) + 5 \cos \theta (1 - \cos^2 \theta)^2 \\ &= \cos^5 \theta - 10 \cos^3 \theta + 10 \cos^5 \theta + 5 \cos \theta (1 - 2 \cos^2 \theta + \cos^4 \theta) \\ &= 16 \cos^5 \theta - 20 \cos^3 \theta + 5 \cos \theta. \quad \blacksquare\end{aligned}$$

EXERCISE 12 Practice: De Moivre and Trigonometry

1. Use De Moivre to express $\cos 3\theta$ and $\sin 3\theta$ in powers of $\cos \theta$ and $\sin \theta$.
2. Express $\cos^5 \theta$ in terms of cosines of multiple angles.
3. Express $\sin^4 \theta$ in terms of cosines of multiple angles.
4. Hence evaluate $\int_0^{\pi/2} \cos^5 \theta \, d\theta$ and $\int_0^{\pi/2} \sin^4 \theta \, d\theta$.

17 NTH ROOTS OF COMPLEX NUMBERS AND CUBE ROOTS OF UNITY

METHOD Solving $z^n = w$ (nth Roots)

1. Write w in exponential form: $w = Re^{i\varphi}$ (with $\varphi = \arg w$).
2. The n distinct roots are

$$z_k = R^{1/n} e^{i(\varphi + 2k\pi)/n}, \quad k = 0, 1, 2, \dots, n-1.$$

- All roots have the same modulus $R^{1/n}$ and their arguments differ by $\frac{2\pi}{n}$: they are the vertices of a **regular n -gon** on the circle of radius $R^{1/n}$.
- For square roots ($n = 2$) one may also set $(x + iy)^2 = w$ and equate real and imaginary parts, using $x^2 + y^2 = |w|$.

WORKED EXAMPLE 36 Cube Roots of a Complex Number

Find all the solutions of $z^3 = -8i$, giving each in the form $a + ib$. Show the roots on an Argand diagram.


SOLUTION

Solution. Write $-8i$ in exponential form: $|-8i| = 8$ and $\arg(-8i) = -\frac{\pi}{2}$, so $-8i = 8e^{-i\pi/2}$. The cube roots are

$$z_k = 8^{1/3} e^{i(-\pi/2 + 2k\pi)/3} = 2 e^{i(-\pi/6 + 2k\pi/3)}, \quad k = 0, 1, 2.$$

- $k = 0$: $z_0 = 2e^{-i\pi/6} = 2\left(\cos \frac{\pi}{6} - i \sin \frac{\pi}{6}\right) = \sqrt{3} - i$.
- $k = 1$: $z_1 = 2e^{i\pi/2} = 2i$.
- $k = 2$: $z_2 = 2e^{i7\pi/6} = 2\left(-\cos \frac{\pi}{6} - i \sin \frac{\pi}{6}\right) = -\sqrt{3} - i$.

Check: $(2i)^3 = 8i^3 = -8i$. ✓ The three roots lie on the circle of radius 2, at the vertices of an equilateral triangle.

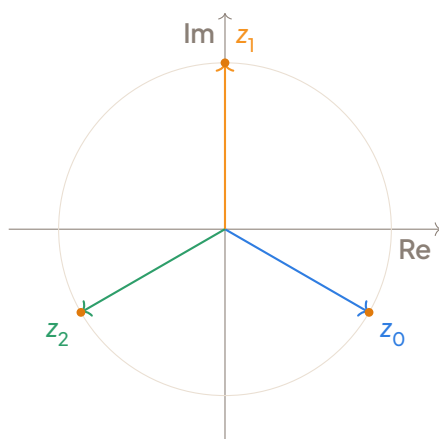

Cube roots of $-8i$ on the Argand diagram.

DEFINITION Cube Roots of Unity

The solutions of $z^3 = 1$ are called the **cube roots of unity**:

$$1, \quad \omega = e^{2i\pi/3} = \frac{-1 + i\sqrt{3}}{2}, \quad \omega^2 = e^{4i\pi/3} = \frac{-1 - i\sqrt{3}}{2} = \bar{\omega}.$$

They satisfy the fundamental properties:

$$1 + \omega + \omega^2 = 0, \quad \omega^3 = 1, \quad \omega^2 = \bar{\omega} = \frac{1}{\omega}.$$

WORKED EXAMPLE 37 Using Cube Roots of Unity

Simplify: (a) $(1 + \omega)^3$; (b) $(1 - \omega)(1 - \omega^2)$; (c) $\omega^{2024} + \omega^{2025} + \omega^{2026}$.

SOLUTION

Solution. (a) Since $1 + \omega + \omega^2 = 0$, we have $1 + \omega = -\omega^2$. Then $(1 + \omega)^3 = (-\omega^2)^3 = -\omega^6 = -(\omega^3)^2 = -1$.
 (b) $(1 - \omega)(1 - \omega^2) = 1 - \omega - \omega^2 + \omega^3 = 1 - (\omega + \omega^2) + 1 = 1 - (-1) + 1 = 3$. (c) $\omega^{2024} + \omega^{2025} + \omega^{2026} = \omega^{2024}(1 + \omega + \omega^2) = \omega^{2024} \times 0 = 0$. (Alternatively, reduce exponents mod 3: $2024 \equiv 2$, $2025 \equiv 0$, $2026 \equiv 1$, sum = $\omega^2 + 1 + \omega = 0$.)

WORKED EXAMPLE 38 Fourth Roots of a Complex Number

Find the fourth roots of -16 , giving each in the form $a + ib$. Plot them on an Argand diagram.


SOLUTION

Solution. $-16 = 16e^{i\pi}$. The fourth roots are

$$z_k = 16^{1/4} e^{i(\pi + 2k\pi)/4} = 2e^{i(\pi/4 + k\pi/2)}, \quad k = 0, 1, 2, 3.$$

- $k = 0$: $z_0 = 2e^{i\pi/4} = \sqrt{2} + i\sqrt{2}$.
- $k = 1$: $z_1 = 2e^{i3\pi/4} = -\sqrt{2} + i\sqrt{2}$.
- $k = 2$: $z_2 = 2e^{i5\pi/4} = -\sqrt{2} - i\sqrt{2}$.
- $k = 3$: $z_3 = 2e^{i7\pi/4} = \sqrt{2} - i\sqrt{2}$.

These are the vertices of a square centred at the origin, radius 2.

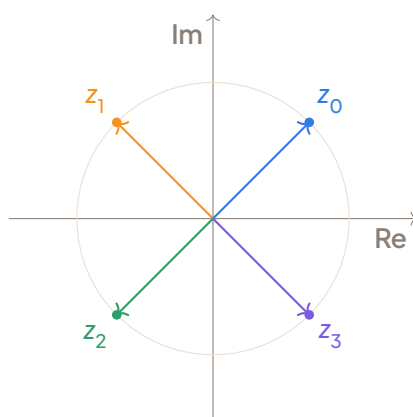Fourth roots of -16 .**EXERCISE 13** Practice: n th Roots and Cube Roots of Unity

- Find all the fifth roots of 32, giving answers in polar form $re^{i\theta}$.
- Solve $z^4 = -16i$, expressing roots in the form $a + ib$.
- If ω is a complex cube root of unity, evaluate: (a) $\omega^{100} + \omega^{200}$; (b) $(1 - \omega + \omega^2)^6$.
- Find the square roots of $3 + 4i$ by both the algebraic method and the polar method. Verify they agree.

18 LOCI IN THE COMPLEX PLANE AND CHAPTER SYNTHESIS

METHOD Identifying and Sketching a Locus

Translate the condition on z into geometry, writing $z = x + iy$ if needed:

- $|z - a| = r$: **circle**, centre a , radius r .
- $|z - a| = |z - b|$: **perpendicular bisector** of the segment joining a and b .
- $\arg(z - a) = \theta$: **half-line** (ray) from a (point a excluded) in direction θ .
- $|z - a| = k|z - b|$ with $k > 0, k \neq 1$: circle of Apollonius — substitute $z = x + iy$ and rearrange

to recognise centre and radius.

5. $\arg\left(\frac{z-a}{z-b}\right) = \theta$: arc of a circle (or line if $\theta = 0, \pi$).

Reflex: for inequalities, decide whether the boundary is included ($\leq$, solid line) or excluded ($<$, dashed line), and shade the correct region.

WORKED EXAMPLE 39 GCE-Style: Two Loci and Their Intersection

The complex number z satisfies $|z - 2 - i| = 2$.

- Describe and sketch the locus of the point P representing z in the Argand diagram.
- Find the Cartesian equation of the locus.
- A second condition $\arg(z - 2 - i) = \frac{\pi}{4}$ is added. Find the complex number(s) satisfying both conditions.

SOLUTION

Solution. (a) $|z - (2 + i)| = 2$ says the distance from $P(z)$ to the fixed point $A(2, 1)$ is constantly 2: the locus is the circle with centre $(2, 1)$ and radius 2.

(b) Set $z = x + iy$. Then $z - 2 - i = (x - 2) + i(y - 1)$, so

$$|z - 2 - i|^2 = (x - 2)^2 + (y - 1)^2 = 4.$$

This is the Cartesian equation of the circle.


(c) The condition $\arg(z - 2 - i) = \frac{\pi}{4}$ describes the half-line from $A(2, 1)$ making an angle $\frac{\pi}{4}$ with the positive real axis (the point A itself excluded). Points on it have the form

$$z - (2 + i) = te^{i\pi/4} = t\left(\frac{\sqrt{2}}{2} + i\frac{\sqrt{2}}{2}\right), \quad t > 0.$$

Imposing $|z - 2 - i| = 2$ forces $t = 2$. Hence

$$z = 2 + i + 2\left(\frac{\sqrt{2}}{2} + i\frac{\sqrt{2}}{2}\right) = (2 + \sqrt{2}) + i(1 + \sqrt{2}).$$

There is exactly one complex number satisfying both conditions: $z = (2 + \sqrt{2}) + (1 + \sqrt{2})i$.

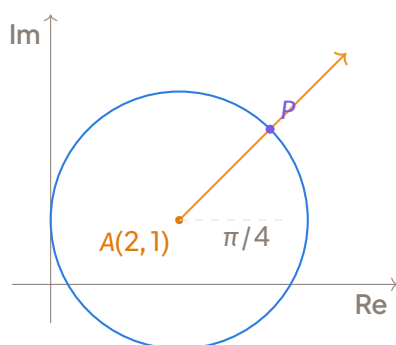

Intersection of circle $|z - 2 - i| = 2$ and ray $\arg(z - 2 - i) = \pi/4$.

WORKED EXAMPLE 40 Locus: Perpendicular Bisector and Circle of Apollonius

(a) Sketch the locus $|z - 3| = |z + 1|$. (b) Find the Cartesian equation of $|z - 1| = 2|z + 3|$ and identify the locus.

SOLUTION

Solution. (a) $|z - 3| = |z + 1|$ means the distance from P to $A(3, 0)$ equals the distance to $B(-1, 0)$. The locus is the perpendicular bisector of AB : the vertical line $x = 1$ (the imaginary axis shifted to $x = 1$).

(b) Let $z = x + iy$. Then $|z - 1|^2 = (x - 1)^2 + y^2$, $|z + 3|^2 = (x + 3)^2 + y^2$. The equation $|z - 1| = 2|z + 3|$ squared gives:

$$(x - 1)^2 + y^2 = 4((x + 3)^2 + y^2).$$

Expand: $x^2 - 2x + 1 + y^2 = 4x^2 + 24x + 36 + 4y^2$. Bring all terms: $0 = 3x^2 + 26x + 35 + 3y^2$. Divide by 3: $x^2 + \frac{26}{3}x + y^2 = -\frac{35}{3}$. Complete the square: $(x + \frac{13}{3})^2 + y^2 = \frac{169}{9} - \frac{105}{9} = \frac{64}{9}$. This is a circle with centre $(-\frac{13}{3}, 0)$ and radius $\frac{8}{3}$.

WORKED EXAMPLE 41 Locus with Inequality: Shading Regions

Sketch the region defined by $|z - 2i| \leq 3$ and $\arg(z) \geq \frac{\pi}{6}$.


SOLUTION

Solution.

- $|z - 2i| \leq 3$: closed disc centred at $(0, 2)$ with radius 3 (boundary included, solid circle).
- $\arg(z) \geq \frac{\pi}{6}$: region on and "above" the ray from origin at angle $\pi/6$ (boundary included,

solid ray).

The required region is the intersection of the disc and the angular sector.

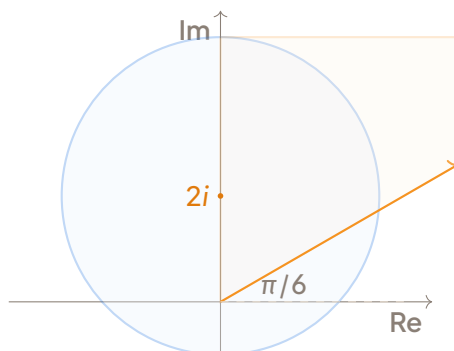

$$\text{Region: } |z - 2i| \leq 3 \text{ and } \arg z \geq \pi/6.$$

KEY POINTS Chapter Synthesis: Complex Numbers — Key Facts for GCE

- Cartesian form: $z = a + ib$, $a, b \in \mathbb{R}$. Equality: $a + ib = c + id \iff a = c, b = d$.
- Conjugate: $\bar{z} = a - ib$; $z\bar{z} = |z|^2$; $\overline{z \pm w} = \bar{z} \pm \bar{w}$, $\overline{zw} = \bar{z}\bar{w}$.
- Modulus/Argument: $|z| = \sqrt{a^2 + b^2}$; $\arg z \in (-\pi, \pi]$ from $\cos \theta = a/|z|$, $\sin \theta = b/|z|$.
- Polar/Exponential: $z = r(\cos \theta + i \sin \theta) = re^{i\theta}$.
- De Moivre: $(\cos \theta + i \sin \theta)^n = \cos n\theta + i \sin n\theta$; $z^n = r^n e^{in\theta}$.
- Trig identities: $\cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2}$, $\sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}$.
- nth roots: $z^n = Re^{i\varphi} \Rightarrow z_k = R^{1/n} e^{i(\varphi + 2k\pi)/n}$, $k = 0, \dots, n-1$.
- Cube roots of unity: $1, \omega = \frac{-1+i\sqrt{3}}{2}$, $\omega^2 = \bar{\omega}$; $1 + \omega + \omega^2 = 0$, $\omega^3 = 1$.
- Loci: $|z - a| = r$ (circle); $|z - a| = |z - b|$ (perp. bisector); $\arg(z - a) = \theta$ (half-line from a); $|z - a| = k|z - b|$ (circle, $k \neq 1$).

WARNING Frequent Errors at the GCE

- Forgetting that $\sqrt{-9} = 3i$, not -3 ; and writing $\sqrt{a}\sqrt{b} = \sqrt{ab}$ for negative numbers (false in $\mathbb{C}$!).
- Giving the argument in the wrong quadrant: always use both $\cos \theta$ and $\sin \theta$.

- In De Moivre, forgetting to raise the modulus to the power n : $(re^{i\theta})^n = r^n e^{in\theta}$.
- For $z^n = w$, giving only one root: there are always exactly n distinct roots.
- In locus questions, including the centre point on a ray $\arg(z - a) = \theta$: the argument is undefined at $z = a$, so a is excluded.
- Confusing $\text{Im}(z)$ (a real number) with the imaginary part as a multiple of i .
- Not reducing arguments to the principal range $(-\pi, \pi]$ in final answers.

EXERCISE 14 Mixed GCE-Style Revision Exercises

1. Given $z = \frac{2-i}{1+2i}$, express z in the form $a + ib$. Hence find $|z|$ and $\arg z$.
2. Solve the equation $z^2 + 2z + 5 = 0$. If the roots are α and β , evaluate $\alpha^2 + \beta^2$ without finding α, β explicitly.
3. (a) Express $1 + i\sqrt{3}$ in the form $re^{i\theta}$ with $-\pi < \theta \leq \pi$. (b) Hence find $(1 + i\sqrt{3})^6$ in Cartesian form.
4. Find the four fourth roots of -16 , giving each in the form $a + ib$. Show them on an Argand diagram.
5. The complex number z satisfies $|z-1| = |z-2i|$. Find the Cartesian equation of the locus of z and describe it geometrically.
6. (a) Show that $\cos 4\theta = 8 \cos^4 \theta - 8 \cos^2 \theta + 1$. (b) Hence solve $\cos 4\theta = \frac{1}{2}$ for $0 \leq \theta \leq \pi$.
7. If ω is a complex cube root of unity, prove that $(1 - \omega + \omega^2)^4 = 16\omega$.
8. Sketch on a single Argand diagram the region satisfying both $|z-3| \leq 2$ and $\frac{\pi}{4} \leq \arg(z) \leq \frac{\pi}{2}$.

SOLUTION Exercise 1

$$z = \frac{(2-i)(1-2i)}{1^2+2^2} = \frac{2-4i-i+2i^2}{5} = \frac{2-5i-2}{5} = -i. \text{ So } a = 0, b = -1. |z| = 1, \arg z = -\frac{\pi}{2}.$$

SOLUTION Exercise 2

$$\Delta = 4 - 20 = -16. \text{ Roots: } z = \frac{-2 \pm 4i}{2} = -1 \pm 2i. \alpha + \beta = -2, \alpha\beta = 5. \alpha^2 + \beta^2 = (\alpha + \beta)^2 - 2\alpha\beta = 4 - 10 = -6.$$

SOLUTION Exercise 3

(a) $r = 2$, $\theta = \pi/3$, so $1 + i\sqrt{3} = 2e^{i\pi/3}$. (b) $(2e^{i\pi/3})^6 = 64e^{2i\pi} = 64$.

SOLUTION Exercise 4

$-16 = 16e^{i\pi}$. Roots: $2e^{i(\pi+2k\pi)/4}$, $k = 0, 1, 2, 3$: $k = 0$: $\sqrt{2} + i\sqrt{2}$; $k = 1$: $-\sqrt{2} + i\sqrt{2}$; $k = 2$: $-\sqrt{2} - i\sqrt{2}$; $k = 3$: $\sqrt{2} - i\sqrt{2}$.

SOLUTION Exercise 5

$|z - 1|^2 = |z - 2i|^2 \Rightarrow (x - 1)^2 + y^2 = x^2 + (y - 2)^2 \Rightarrow x^2 - 2x + 1 + y^2 = x^2 + y^2 - 4y + 4 \Rightarrow -2x + 1 = -4y + 4 \Rightarrow 2x - 4y + 3 = 0$. Perpendicular bisector of segment joining $(1, 0)$ and $(0, 2)$.

SOLUTION Exercise 6

(a) $\cos 4\theta + i \sin 4\theta = (\cos \theta + i \sin \theta)^4 = \cos^4 \theta + 4i \cos^3 \theta \sin \theta - 6 \cos^2 \theta \sin^2 \theta - 4i \cos \theta \sin^3 \theta + \sin^4 \theta$. Real part: $\cos 4\theta = \cos^4 \theta - 6 \cos^2 \theta \sin^2 \theta + \sin^4 \theta = \cos^4 \theta - 6 \cos^2 \theta (1 - \cos^2 \theta) + (1 - \cos^2 \theta)^2 = 8 \cos^4 \theta - 8 \cos^2 \theta + 1$. (b) $8 \cos^4 \theta - 8 \cos^2 \theta + 1 = \frac{1}{2} \Rightarrow 16 \cos^4 \theta - 16 \cos^2 \theta + 1 = 0$. Let $u = \cos^2 \theta$: $16u^2 - 16u + 1 = 0 \Rightarrow u = \frac{16 \pm \sqrt{256 - 64}}{32} = \frac{16 \pm 8\sqrt{3}}{32} = \frac{2 \pm \sqrt{3}}{4}$. Since $\cos^2 \theta \leq 1$, both are valid. $\cos \theta = \pm \sqrt{\frac{2 \pm \sqrt{3}}{4}}$. For $0 \leq \theta \leq \pi$, find corresponding θ values.

SOLUTION Exercise 7

$1 - \omega + \omega^2 = (1 + \omega + \omega^2) - 2\omega = -2\omega$. Then $(-2\omega)^4 = 16\omega^4 = 16\omega^3\omega = 16\omega$.

SOLUTION Exercise 8

$|z - 3| \leq 2$: closed disc centre $(3, 0)$ radius 2. $\pi/4 \leq \arg z \leq \pi/2$: sector between rays at 45° and 90° (boundaries included). Intersection is the part of the disc in the first quadrant above the line $y = x$.

19 EXERCISES**19.1 I check my knowledge****EXERCISE 15 Multiple choice questions**

For each question, choose the single correct answer.

1. The modulus of $z = 3 - 4i$ is:
 - (a) 1
 - (b) 5
 - (c) 7
 - (d) 25
2. If $z = -2 + 2i$, then a principal argument of z is:
 - (a) $\frac{\pi}{4}$
 - (b) $-\frac{\pi}{4}$
 - (c) $\frac{3\pi}{4}$
 - (d) $-\frac{3\pi}{4}$
3. The product $(2 + i)(2 - i)$ is equal to:
 - (a) 3
 - (b) 5
 - (c) $4 + i$
 - (d) $3 + 4i$
4. The cube roots of unity are:
 - (a) $1, i, -i$
 - (b) $1, \frac{-1 \pm i\sqrt{3}}{2}$
 - (c) $1, -1, i$
 - (d) $1, \frac{1 \pm i\sqrt{3}}{2}$

EXERCISE 16 True or false — justify

State whether each statement is true or false, and justify your answer briefly.

1. Every real number is a complex number.
2. If z is a complex number, then $z\bar{z} = |z|^2$.
3. The equation $z^2 + 1 = 0$ has no solution in $\mathbb{C}$.
4. If $\arg(z) = \frac{\pi}{2}$, then z is purely imaginary with positive imaginary part.

EXERCISE 17 Definitions

1. Define the **modulus** and the **principal argument** of a non-zero complex number $z = a + ib$.
2. Define the **complex conjugate** of $z = a + ib$ and state, without proof, the value of $z + \bar{z}$ and $z - \bar{z}$ in terms of a and b .
3. State **De Moivre's theorem** for an integer n .

EXERCISE 18 Direct calculations

Let $z_1 = 2 + 3i$ and $z_2 = 1 - i$. Compute, giving each answer in the form $a + ib$:

1. $z_1 + z_2$ and $z_1 - 2z_2$;
2. $z_1 z_2$;
3. $\frac{z_1}{z_2}$;
4. i^{2025} .

19.2 I practise**EXERCISE 19** Cartesian and exponential forms

Given $z_1 = 1 + i\sqrt{3}$ and $z_2 = \sqrt{2} e^{i\pi/4}$:

1. Express z_1 in exponential form and z_2 in Cartesian form.

2. Express $z_1 z_2$ and $\frac{z_1}{z_2}$ in both Cartesian and exponential form, stating their moduli and principal arguments.

EXERCISE 20 Quadratic equation in $\mathbb{C}$

1. Solve in $\mathbb{C}$ the equation $z^2 - 4z + 13 = 0$.
2. Show the roots on an Argand diagram and verify that they are complex conjugates.

EXERCISE 21 Square roots of a complex number

1. Find, by the algebraic method, the square roots of $7 + 24i$.
2. Check your answers by squaring.

EXERCISE 22 Powers and roots

1. Express $(1 + i)^8$ in the form $a + ib$.
2. Find the four 4th roots of -16 in exponential form and represent them on an Argand diagram.

19.3 I prepare for the GCE**EXERCISE 23 De Moivre and multiple angles**

1. Use De Moivre's theorem to show that $\cos 3x = 4 \cos^3 x - 3 \cos x$. (4 marks)
2. Hence solve the equation $\cos 3x = 0$ for $x \in [0, \pi]$. (3 marks)
3. Using the relation $z - \frac{1}{z} = 2i \sin x$ where $z = \cos x + i \sin x$, express $\sin^5 x$ as a sum of sines of multiple angles. (5 marks)

EXERCISE 24 Cube roots of unity and a cubic equation

Let ω be a non-real cube root of unity.

1. Show that $1 + \omega + \omega^2 = 0$. (2 marks)
2. Prove that $(1 + \omega)(1 + \omega^2) = 1$. (2 marks)
3. Evaluate $(1 - \omega + \omega^2)^7$, giving your answer in terms of ω . (4 marks)
4. Given that $2 + i$ is a root of the equation $z^3 - 7z^2 + 17z - 15 = 0$, find all the roots of the equation. (4 marks)

EXERCISE 25 Locus in the complex plane

The complex number z satisfies $|z - 3i| = 2|z|$.

1. By writing $z = x + iy$, show that the locus of the point representing z in the Argand diagram is a circle, and find its centre and radius. (6 marks)
2. Sketch the locus on an Argand diagram, marking the centre and the points where the circle meets the axes. (3 marks)
3. Find the greatest and least values of $|z|$ for points on this locus. (3 marks)

20 SOLUTIONS TO THE EXERCISES

20.1 Corrected Examination–Style Exercises

SOLUTION Exercise 1: Multiple Choice Questions

1. Answer (b): The modulus of $z = 3 - 4i$ is $|z| = \sqrt{3^2 + (-4)^2} = \sqrt{9 + 16} = \sqrt{25} = 5$.
2. Answer (c): For $z = -2 + 2i$, $\operatorname{Re}(z) = -2 < 0$ and $\operatorname{Im}(z) = 2 > 0$, so z lies in the second quadrant. $\tan \theta = \frac{2}{-2} = -1$. The principal argument is $\theta = \pi - \frac{\pi}{4} = \frac{3\pi}{4}$.
3. Answer (b): $(2 + i)(2 - i) = 2^2 - i^2 = 4 - (-1) = 5$. This illustrates the general property $z\bar{z} = |z|^2$ for a complex number and its conjugate.
4. Answer (b): The cube roots of unity are the solutions of $z^3 = 1$. They are $z = 1$ and $z = e^{\pm 2i\pi/3} = \frac{-1 \pm i\sqrt{3}}{2}$.

SOLUTION Exercise 2: True or False

1. True. Every real number a can be written as $a = a + 0i$, hence $\mathbb{R} \subset \mathbb{C}$.
2. True. If $z = a + ib$, then $z\bar{z} = (a + ib)(a - ib) = a^2 - (ib)^2 = a^2 + b^2 = |z|^2$.
3. False. The equation $z^2 + 1 = 0 \iff z^2 = -1 \iff z = \pm i$. It has two distinct solutions in $\mathbb{C}$ (and none in $\mathbb{R}$).
4. True (provided $z \neq 0$). $\arg(z) = \frac{\pi}{2}$ means z lies on the positive imaginary axis, i.e. $z = ib$ with $b > 0$; it is purely imaginary with a positive imaginary part.

SOLUTION Exercise 3: Definitions

1. Let $z = a + ib \neq 0$. The **modulus** of z is the non-negative real number $|z| = \sqrt{a^2 + b^2}$. A **principal argument** of z is the unique real number $\theta \in]-\pi, \pi]$ such that $a = |z| \cos \theta$ and $b = |z| \sin \theta$; we denote it $\theta = \arg(z)$.
2. The **complex conjugate** of $z = a + ib$ is $\bar{z} = a - ib$. It follows that $z + \bar{z} = 2a = 2\operatorname{Re}(z)$ and $z - \bar{z} = 2ib = 2i\operatorname{Im}(z)$.

3. De Moivre's theorem: For every real number θ and every integer $n \in \mathbb{Z}$,

$$(\cos \theta + i \sin \theta)^n = \cos(n\theta) + i \sin(n\theta).$$

SOLUTION Exercise 4: Direct Calculations

Given $z_1 = 2 + 3i$ and $z_2 = 1 - i$:

- $z_1 + z_2 = (2 + 1) + (3 - 1)i = 3 + 2i$; $z_1 - 2z_2 = (2 + 3i) - 2(1 - i) = 2 + 3i - 2 + 2i = 5i$.
- $z_1 z_2 = (2 + 3i)(1 - i) = 2 - 2i + 3i - 3i^2 = 2 + i + 3 = 5 + i$.
- Multiply numerator and denominator by the conjugate of z_2 :

$$\frac{z_1}{z_2} = \frac{(2 + 3i)(1 + i)}{(1 - i)(1 + i)} = \frac{2 + 2i + 3i + 3i^2}{1 - i^2} = \frac{-1 + 5i}{2} = -\frac{1}{2} + \frac{5}{2}i.$$

- The powers of i cycle with period 4: $i^1 = i$, $i^2 = -1$, $i^3 = -i$, $i^4 = 1$. Since $2025 = 4 \times 506 + 1$, we have $i^{2025} = (i^4)^{506} \cdot i = 1^{506} \cdot i = i$.

SOLUTION Exercise 5: Cartesian and Exponential Forms

- For $z_1 = 1 + i\sqrt{3}$: $|z_1| = \sqrt{1^2 + (\sqrt{3})^2} = 2$; $\cos \theta = \frac{1}{2}$, $\sin \theta = \frac{\sqrt{3}}{2}$, so $\arg(z_1) = \frac{\pi}{3}$. Hence $z_1 = 2e^{i\pi/3}$.

$$\text{For } z_2 = \sqrt{2}e^{i\pi/4}: z_2 = \sqrt{2}\left(\cos \frac{\pi}{4} + i \sin \frac{\pi}{4}\right) = \sqrt{2}\left(\frac{\sqrt{2}}{2} + i\frac{\sqrt{2}}{2}\right) = 1 + i.$$

- Product. Exponential form: $z_1 z_2 = 2e^{i\pi/3} \cdot \sqrt{2}e^{i\pi/4} = 2\sqrt{2}e^{i(\pi/3 + \pi/4)} = 2\sqrt{2}e^{7i\pi/12}$. Thus $|z_1 z_2| = 2\sqrt{2}$ and $\arg(z_1 z_2) = \frac{7\pi}{12}$.

$$\text{Cartesian form: } z_1 z_2 = (1 + i\sqrt{3})(1 + i) = 1 + i + i\sqrt{3} + i^2\sqrt{3} = (1 - \sqrt{3}) + (1 + \sqrt{3})i.$$

$$\text{Quotient. Exponential form: } \frac{z_1}{z_2} = \frac{2e^{i\pi/3}}{\sqrt{2}e^{i\pi/4}} = \sqrt{2}e^{i(\pi/3 - \pi/4)} = \sqrt{2}e^{i\pi/12}. \text{ Thus } \left|\frac{z_1}{z_2}\right| = \sqrt{2} \text{ and}$$

$$\arg\left(\frac{z_1}{z_2}\right) = \frac{\pi}{12}.$$

$$\text{Cartesian form: } \frac{z_1}{z_2} = \frac{(1 + i\sqrt{3})(1 - i)}{(1 + i)(1 - i)} = \frac{1 - i + i\sqrt{3} - i^2\sqrt{3}}{2} = \frac{(1 + \sqrt{3}) + (\sqrt{3} - 1)i}{2}.$$


SOLUTION Exercise 6: Quadratic Equation in $\mathbb{C}$

1. Solve $z^2 - 4z + 13 = 0$. Discriminant: $\Delta = (-4)^2 - 4(1)(13) = 16 - 52 = -36 = (6i)^2$. The roots are

$$z = \frac{4 \pm 6i}{2} = 2 \pm 3i.$$

Hence the solution set is $S = \{2 - 3i, 2 + 3i\}$.

2. The roots $2 + 3i$ and $2 - 3i$ are complex conjugates (same real part, opposite imaginary parts). On the Argand diagram they are symmetric with respect to the real axis:

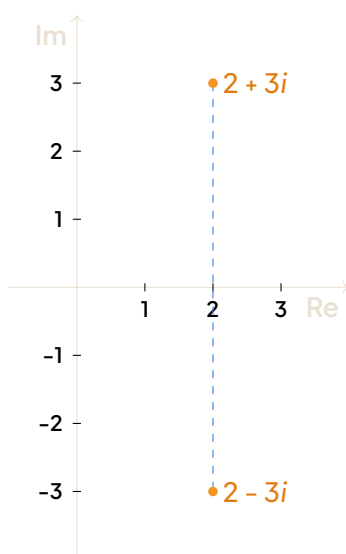

The two conjugate roots, symmetric about the real axis.

SOLUTION Exercise 7: Square Roots of a Complex Number

1. Let $w = x + iy$ ($x, y \in \mathbb{R}$) such that $w^2 = 7 + 24i$. Then

$$(x + iy)^2 = x^2 - y^2 + 2ixy = 7 + 24i.$$

Equating real and imaginary parts:

$$\begin{cases} x^2 - y^2 = 7 \\ 2xy = 24 \end{cases}$$

We also have $|w|^2 = x^2 + y^2 = |7 + 24i| = \sqrt{7^2 + 24^2} = 25$. Adding and subtracting the first and third equations:

$$2x^2 = 32 \implies x^2 = 16 \implies x = \pm 4, \quad 2y^2 = 18 \implies y^2 = 9 \implies y = \pm 3.$$

Since $2xy = 24 > 0$, x and y have the same sign. Hence the two square roots are

$$w = 4 + 3i \quad \text{or} \quad w = -4 - 3i.$$

2. Verification: $(4+3i)^2 = 16+24i+9i^2 = 16-9+24i = 7+24i$. $\checkmark (-4-3i)^2 = (-1)^2(4+3i)^2 = 7+24i$.

✓

SOLUTION Exercise 8: Powers and Roots

1. $1 + i = \sqrt{2} e^{i\pi/4}$ because $|1 + i| = \sqrt{2}$ and $\arg(1 + i) = \frac{\pi}{4}$. By De Moivre's theorem,

$$(1 + i)^8 = (\sqrt{2})^8 e^{8i\pi/4} = 16 e^{2i\pi} = 16(\cos 2\pi + i \sin 2\pi) = 16.$$

$$\text{So } (1 + i)^8 = 16 + 0i = 16.$$


2. Solve $z^4 = -16$. Write $-16 = 16 e^{i\pi}$ (principal argument π). The four 4th roots are

$$z_k = 16^{1/4} e^{i(\pi+2k\pi)/4} = 2 e^{i(2k+1)\pi/4}, \quad k = 0, 1, 2, 3.$$

Explicitly:

$$z_0 = 2e^{i\pi/4}, \quad z_1 = 2e^{3i\pi/4}, \quad z_2 = 2e^{5i\pi/4} = 2e^{-3i\pi/4}, \quad z_3 = 2e^{7i\pi/4} = 2e^{-i\pi/4}.$$

They lie on the circle $|z| = 2$ at angles $45^\circ, 135^\circ, 225^\circ, 315^\circ$ — the vertices of a square:

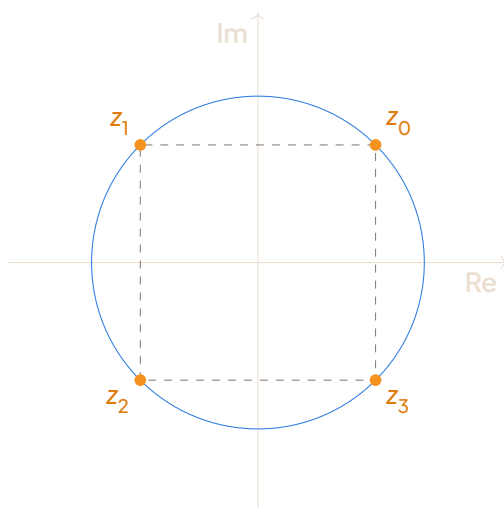

The four 4th roots of -16 : vertices of a square on $|z| = 2$.

SOLUTION Exercise 9: De Moivre and Multiple Angles

1. By De Moivre, $\cos 3x + i \sin 3x = (\cos x + i \sin x)^3$. Expand using the binomial theorem with $c = \cos x$, $s = \sin x$:

$$(c + is)^3 = c^3 + 3c^2(is) + 3c(is)^2 + (is)^3 = (c^3 - 3cs^2) + i(3c^2s - s^3).$$

Equating real parts: $\cos 3x = c^3 - 3cs^2 = c^3 - 3c(1 - c^2) = 4c^3 - 3c$. (M1 A1 M1 A1)

2. $\cos 3x = 0 \iff 3x = \frac{\pi}{2} + k\pi \iff x = \frac{\pi}{6} + \frac{k\pi}{3}, k \in \mathbb{Z}$. In the interval $[0, \pi]$: $x = \frac{\pi}{6}, \frac{\pi}{2}, \frac{5\pi}{6}$.
(M1 A1 A1) (Consistency check: $4c^3 - 3c = c(4c^2 - 3) = 0$ gives $c = 0$ or $c = \pm \frac{\sqrt{3}}{2}$, matching these solutions.)

3. Let $z = \cos x + i \sin x = e^{ix}$. Then $z - \frac{1}{z} = 2i \sin x$ and $z^n - \frac{1}{z^n} = 2i \sin nx$.

$$(2i \sin x)^5 = \left(z - \frac{1}{z}\right)^5 = z^5 - 5z^3 + 10z - \frac{10}{z} + \frac{5}{z^3} - \frac{1}{z^5}.$$

Group conjugate pairs:

$$32i \sin^5 x = \left(z^5 - \frac{1}{z^5}\right) - 5\left(z^3 - \frac{1}{z^3}\right) + 10\left(z - \frac{1}{z}\right) = 2i \sin 5x - 10i \sin 3x + 20i \sin x.$$

Divide by $32i$:

$$\sin^5 x = \frac{1}{16}(\sin 5x - 5 \sin 3x + 10 \sin x).$$

(M1 binomial, M1 pairing, A1 A1 A1)

Examiner expectations: Correct binomial expansion with careful handling of $i^2 = -1$; explicit pairing $z^n - z^{-n} = 2i \sin nx$; final answer with exact rational coefficients.

SOLUTION Exercise 10: Cube Roots of Unity and a Cubic Equation

1. Since $\omega^3 = 1$ and $\omega \neq 1$: $\omega^3 - 1 = 0 \Rightarrow (\omega - 1)(\omega^2 + \omega + 1) = 0$. As $\omega \neq 1$, we must have $1 + \omega + \omega^2 = 0$. (M1 A1)
2. $(1 + \omega)(1 + \omega^2) = 1 + \omega + \omega^2 + \omega^3 = 0 + 1 = 1$, using part (a) and $\omega^3 = 1$. (M1 A1)
3. From $1 + \omega + \omega^2 = 0$ we get $\omega^2 + 1 = -\omega$, so

$$1 - \omega + \omega^2 = (1 + \omega^2) - \omega = -\omega - \omega = -2\omega.$$

Hence $(1 - \omega + \omega^2)^7 = (-2\omega)^7 = -128 \omega^7 = -128 \omega^6 \cdot \omega = -128 \omega$ (since $\omega^6 = (\omega^3)^2 = 1$). (M1 A1 M1 A1)

4. The polynomial $z^3 - 7z^2 + 17z - 15 = 0$ has real coefficients. Given $2 + i$ is a root, its

conjugate $2 - i$ is also a root. The quadratic factor is

$$(z - (2 + i))(z - (2 - i)) = z^2 - 4z + 5.$$

Polynomial division (or comparing coefficients) gives:

$$z^3 - 7z^2 + 17z - 15 = (z^2 - 4z + 5)(z - 3).$$

The third root is $z = 3$. The three roots are $2 + i$, $2 - i$, 3 . (M1 conjugate root, M1 factorisation, A1 A1)

Examiner expectations: Explicit use of real coefficients to justify the conjugate root; clean division or comparison of coefficients; all three roots clearly stated.

SOLUTION Exercise 11: Locus in the Complex Plane


1. Let $z = x + iy$ ($x, y \in \mathbb{R}$). Then $|z - 3i|^2 = x^2 + (y - 3)^2$ and $|z|^2 = x^2 + y^2$. The equation $|z - 3i| = 2|z|$ has non-negative sides, so squaring is equivalent:

$$\begin{aligned} x^2 + (y - 3)^2 &= 4(x^2 + y^2) \\ x^2 + y^2 - 6y + 9 &= 4x^2 + 4y^2 \\ 0 &= 3x^2 + 3y^2 + 6y - 9 \\ x^2 + y^2 + 2y - 3 &= 0 \\ x^2 + (y + 1)^2 &= 4. \end{aligned}$$

This is a circle with centre $(0, -1)$ (the complex number $-i$) and radius 2. (M1 squaring, M1 expanding, M1 completing the square, A1 A1 A1)

2. Intercepts:

- Imaginary axis ($x = 0$): $(y + 1)^2 = 4 \Rightarrow y + 1 = \pm 2 \Rightarrow y = 1$ or $y = -3$. Points: i and $-3i$.
- Real axis ($y = 0$): $x^2 + 1 = 4 \Rightarrow x^2 = 3 \Rightarrow x = \pm\sqrt{3}$. Points: $\sqrt{3}$ and $-\sqrt{3}$.

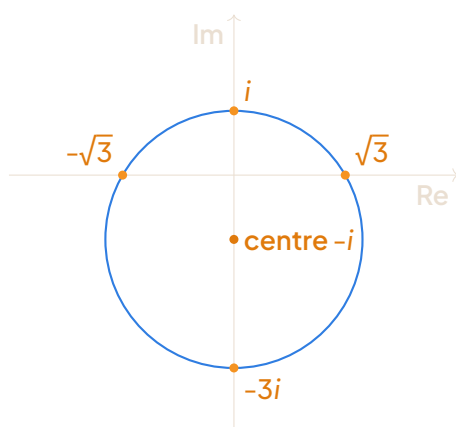

Locus: circle of centre $-i$ and radius 2.

(M1 circle drawn, A1 centre, A1 intercepts)

3. $|z|$ is the distance from the origin to a point on the circle. The origin is at distance 1 from the centre $-i$, and the radius is 2. Therefore


$$|z|_{\max} = 1 + 2 = 3 \quad (\text{at the point opposite the origin, i.e. } z = -3i),$$

$$|z|_{\min} = 2 - 1 = 1 \quad (\text{at the point nearest the origin, i.e. } z = i).$$

(M1 geometric argument, A1 A1)

Examiner expectations: Squaring justified (moduli are non-negative); completing the square shown explicitly; geometric reasoning (distance from origin = centre distance $\pm$ radius) used for max/min rather than calculus or trial and error.

21 SUMMARY SHEET

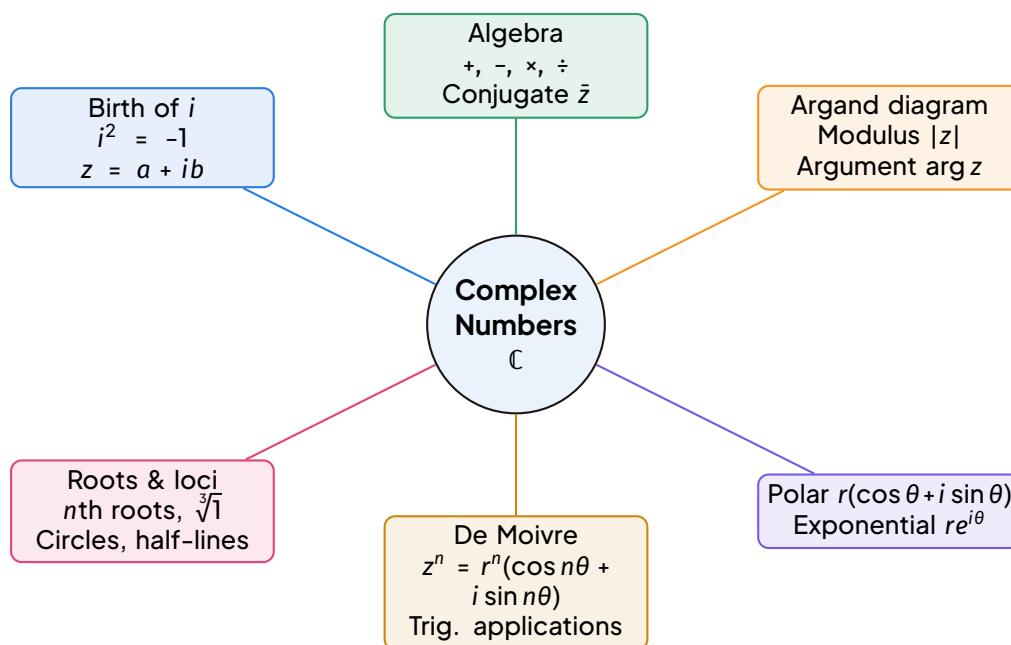

Mind map of the chapter on complex numbers.

FICHE BILAN L'essentiel à connaître pour l'examen

Key definitions

- **Imaginary unit:** i is the number such that $i^2 = -1$; powers cycle: $i^1 = i$, $i^2 = -1$, $i^3 = -i$, $i^4 = 1$.
- **Complex number:** $z = a + ib$ with $a = \operatorname{Re}(z)$, $b = \operatorname{Im}(z)$; z is real if $b = 0$, purely imaginary if $a = 0$.
- **Conjugate:** $\bar{z} = a - ib$; **modulus:** $|z| = \sqrt{a^2 + b^2}$; **argument:** $\theta = \arg z$ satisfies $\cos \theta = \frac{a}{r}$, $\sin \theta = \frac{b}{r}$, with $r = |z|$.
- **Argand diagram:** $z = a + ib$ is represented by the point $M(a, b)$; $|z| = OM$, $\arg z$ is the angle $(Ox, \vec{OM})$.

Laws, formulas and theorems to know

- **Operations:** $(a + ib) + (c + id) = (a + c) + i(b + d)$; $(a + ib)(c + id) = (ac - bd) + i(ad + bc)$.
- **Division:** multiply numerator and denominator by the conjugate: $\frac{a + ib}{c + id} = \frac{(a + ib)(c - id)}{c^2 + d^2}$.

- **Conjugate properties:** $\overline{z_1 + z_2} = \bar{z}_1 + \bar{z}_2$, $\overline{z_1 z_2} = \bar{z}_1 \bar{z}_2$, $\overline{\left(\frac{z_1}{z_2}\right)} = \frac{\bar{z}_1}{\bar{z}_2}$, $z + \bar{z} = 2\operatorname{Re}(z)$, $z - \bar{z} = 2i \operatorname{Im}(z)$, $z\bar{z} = |z|^2$.
- z is real $\iff z = \bar{z}$; z is purely imaginary $\iff z = -\bar{z}$.
- **Modulus:** $|z_1 z_2| = |z_1| |z_2|$, $\left|\frac{z_1}{z_2}\right| = \frac{|z_1|}{|z_2|}$, $|z^n| = |z|^n$, $|\bar{z}| = |z|$.
- **Argument:** $\arg(z_1 z_2) = \arg z_1 + \arg z_2$, $\arg\left(\frac{z_1}{z_2}\right) = \arg z_1 - \arg z_2$, $\arg(\bar{z}) = -\arg z$ (all modulo 2π).
- **Polar form:** $z = r(\cos \theta + i \sin \theta)$; **exponential form:** $z = re^{i\theta}$; **Euler:** $e^{i\theta} = \cos \theta + i \sin \theta$.
- **De Moivre's theorem:** $(\cos \theta + i \sin \theta)^n = \cos n\theta + i \sin n\theta$ for $n \in \mathbb{Z}$.
- n th roots of $z = re^{i\theta}$: $z_k = \sqrt[n]{r} e^{i(\theta+2k\pi)/n}$, $k = 0, 1, \dots, n-1$; they lie on a circle, at the vertices of a regular n -gon.
- **Cube roots of unity:** $1, \omega = e^{2i\pi/3}, \omega^2$, with $1 + \omega + \omega^2 = 0$ and $\omega^3 = 1$.
- **Useful identities:** $\cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2}$, $\sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}$.
- **Loci:** $|z - a| = r$ circle (centre a , radius r); $|z - a| = |z - b|$ perpendicular bisector; $\arg(z - a) = \theta$ half-line from a ; $|z - a| < r$ open disc.

Methods

- To find $\arg z$: compute r , then solve $\cos \theta = a/r$, $\sin \theta = b/r$; check the quadrant from the signs of a and b .
- To solve $az^2 + bz + c = 0$ with $\Delta < 0$: $z = \frac{-b \pm i\sqrt{-\Delta}}{2a}$; real-coefficient equations have conjugate roots.
- To find square roots of $a+ib$: solve $(x+iy)^2 = a+ib$, i.e. $x^2 - y^2 = a$, $2xy = b$, $x^2 + y^2 = \sqrt{a^2 + b^2}$.
- Powers of $\cos$, $\sin$ as multiple angles: use Euler's formulas and expand $(e^{i\theta} \pm e^{-i\theta})^n$ with the binomial theorem.
- Multiple angles as powers: expand $(\cos \theta + i \sin \theta)^n$ by De Moivre and equate real and imaginary parts.

Common mistakes

- Writing $\sqrt{-4} = 2i$ is fine, but never apply $\sqrt{ab} = \sqrt{a}\sqrt{b}$ to negative numbers.
- Forgetting that $\arg z$ is defined only modulo 2π and that the principal value lies in $(-\pi, \pi]$.
- Placing θ in the wrong quadrant: always check the signs of a and b .

- Dividing by a complex number without multiplying by the conjugate.
- Confusing $|z|^2 = z\bar{z}$ with z^2 : in general $z^2 \neq |z|^2$.
- Forgetting one of the n roots of an n th root equation: there are always exactly n distinct roots.

GCE tips

- Show every step when rationalising a denominator; method marks are awarded.
- For loci questions, state the geometric object clearly (circle, bisector, half-line) and sketch it on an Argand diagram.
- In De Moivre questions, write the polar form first with $r > 0$ and θ in the correct range.
- Check roots by substitution or by using the sum and product of roots.
- Manage time: a full complex-number question (forms, roots, locus) is worth many marks — attempt every part.



Signed • OnBuch+

ONBUCH+ TEACHING TEAM
FOLLOWS THE OFFICIAL MINESEC SYLLABUS

OnBuch+