

WSA First Time Setup Wizard:

Setup is very straight-forward, just head onto **System Administration** menu and select **wizard**:

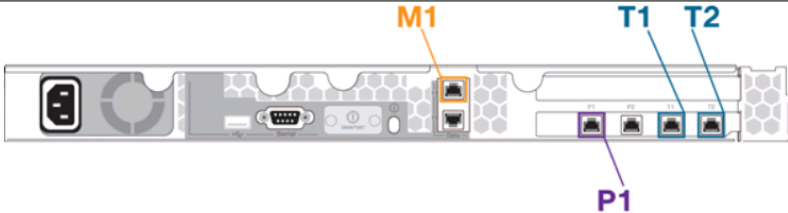
In the WSA GUI, navigate to **System Administration>System Setup>System Setup Wizard** and start the wizard. Be sure to do this **AFTER** you have loaded the license, or it won't let you run the wizard. Enter hostname, DNS and NTP server details afterward click **Next**.

1. Start	2. Network	3. Security	4. Review
System Settings			
Default System Hostname: (?) WSA.cisco.com e.g. proxy.company.com			
DNS Server(s): ☐ Use the Internet's Root DNS Servers ☒ Use these DNS Servers: 8.8.8.8 1.1.1.1 (optional) (optional)			
NTP Server: 7.7.7.7			
Time Zone: Region: GMT Offset v Country: GMT v Time Zone / GMT Offset: GMT v			
Appliance Mode			
Appliance Mode of Operation ☒ Standard This appliance will be used for on-premise policy enforcement (Standard Web Security Appliance installation). ☐ Cloud Web Security Connector This appliance will be used primarily to direct traffic to Cisco Cloud Web Security for cloud policy enforcement and threat defense (Cloud Web Security Connector installation).			
< Prev Cancel		Next >	

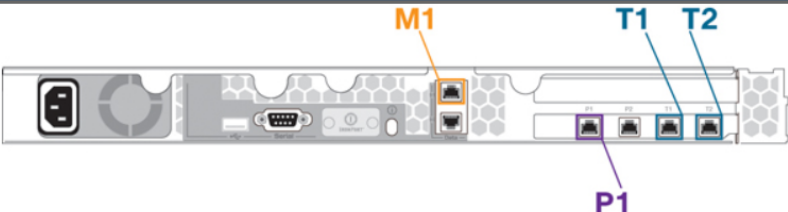
Put **Upstream proxy** details if any, in most cases nothing just simply click **Next**.

1. Start	2. Network	3. Security	4. Review
Cisco S000V Web Security Virtual Appliance			
Network Context			
☐ Is there another web proxy in your network? After completing the System Setup Wizard, you will have the option to define additional upstream proxies.			
Proxy Group Name: Address: e.g. 10.1.1.1, 2001:420:80:1::5, example.com Port: 8128			
If another web proxy is present, the Cisco Web Security Appliance is recommended to be placed downstream of the existing proxy (closer to the client), as illustrated below:			
<pre>graph LR Clients[CLIENTS] --> WSA[IRONPORT S-SERIES] WSA --> Proxy[ANOTHER WEB PROXY] Proxy --> Firewall[FIREWALL] Firewall --> Internet[INTERNET]</pre>			
< Prev Cancel		Next >	

Interface configuration, I'm going to leave everything at the defaults and click **Next**.

1. Start	2. Network	3. Security	4. Review
Network Interfaces and Wiring			
			
Note: M1: This interface is used to manage the appliance. Optionally, it may also handle web traffic. P1: This interface may be used to handle web traffic.			
Interfaces			
Ethernet Port:	M1 ☐ Use M1 port for management only P1 (Optional if M1 used for data)		
IPv4 Address / Netmask:	192.168.1.100/24 If multiple interfaces are configured, they must be assigned IP addresses on different subnets.		
IPv6 Address / Netmask:			
Hostname:	WSA.cisco.com (e.g. wsa.example.com)		
< Prev Next >			

I'm going to leave everything at the defaults and click **Next**.

1. Start	2. Network	3. Security	4. Review
Layer 4 Traffic Monitor Wiring			
			
Note: T1, T2 : These interfaces are used for the L4 Traffic Monitor. In addition, web proxy interfaces (M1, P1 or P2) may be used for L4TM blocking.			
Interfaces			
Wiring Type:	☒ Duplex TAP: T1 (In/Out) ☐ Simplex TAP: T1 (In) and T2 (Out)		
< Prev Next >			

On this screen, Configure static routes if wish. If you do not wish to configure them, click **next**:

1. Start	2. Network	3. Security	4. Review
----------	-------------------	-------------	-----------

IPv4 Routes for Management and Data Traffic (Interface M1: 192.168.1.100)

Default Gateway:
This will be the default route for external traffic as well as internal traffic with no static route below.

Static Routes Table

Optionally, add static routes for Management access to the Cisco Web Security Appliance as well as Data traffic. Depending on the appliance functions you enable, these routes will be used for monitoring by the Secure Web Proxy and optional blocking by the L4 Traffic Monitor.

Name	Internal Network	Internal Gateway	
			🗑
<i>Identifying name for route</i>	<i>IPv4 Address (such as 10.1.1.10) or CIDR (such as 10.1.1.0/24)</i>	<i>IPv4 Address</i>	
			Add Route

< Prev
Cancel
Next >

On the next screen, you can configure the WSA for WCCP if you wish:

1. Start	2. Network	3. Security	4. Review
----------	-------------------	-------------	-----------

Transparent Connection Settings

For the Cisco Web Security Appliance to accept transparent connections, it must be connected via a Layer 4 switch or WCCP router.

Transparent Redirection Device:

☒ **Layer 4 Switch or No Device**
If no transparent redirection device is connected, only explicit forward requests can be proxied.

☐ **WCCP v2 Router**

☐ Enable standard service ID: 0 web_cache (port 80)

Router Addresses:
Separate multiple addresses with commas or whitespace.

☐ Enable router security for this service

Passphrase:

Confirm Passphrase:
Must be 7 or less characters.

Additional WCCP services and advanced options can be configured after completing the System Setup Wizard.

< Prev
Cancel
Next >

Create an administrator password on the next screen, enter an email to send alerts to or an email list, the SMTP relay information, and if you would like to participate in SensorBase which helps increase Cisco's Security Intelligence:

1. Start	2. Network	3. Security	4. Review
----------	-------------------	-------------	-----------

Administrative Settings

Administrator Passphrase:	☐ Generate a passphrase: Generate ☒ Enter a passphrase of your choice Passphrase: Retype Passphrase:
Email system alerts to:	test@cisco.com e.g. admin@company.com
Send Email via SMTP Relay Host (optional): ?	Port: ? i.e., smtp.example.com, 10.0.0.3 optional
AutoSupport:	☒ Send system alerts and weekly status reports to Cisco Customer Support

SensorBase Network Participation

Network Participation:	☒ Allow Cisco to gather anonymous statistics on HTTP requests and report them to Cisco in order to identify and stop web-based threats. Participation Level: ☐ Limited - Summary URL information. ☒ Standard - Full URL information. (Recommended) Learn what information is shared...
------------------------	--

« Prev
Cancel
Next »

On the next screen, configure the default action for the global policy, the action for suspect malware addresses, enable/disable acceptable use controls, reputation filtering, and data security filtering:

1. Start	2. Network	3. Security	4. Review
----------	------------	--------------------	-----------

Security Settings

Global Policy Default Action: ?	☒ Monitor all traffic ☐ Block all traffic If block all traffic is selected, the Global Access Policy will be initially configured to block all proxied protocols (HTTP, HTTPS, FTP over HTTP, and native FTP).
L4 Traffic Monitor:	Action for Suspect Malware Addresses ☒ Monitor only ☐ Block
Acceptable Use Controls: ?	☒ Enable The Global Access Policy will be initially configured to monitor all pre-defined categories.
Reputation Filtering:	☒ Enable The Global Access Policy will be initially configured to use Web Reputation Filtering and Adaptive Scanning.
Malware and Spyware Scanning:	☒ Enable Webroot ☒ Enable Sophos The Global Access Policy and Outbound Malware Scanning Policy will be initially configured to apply the actions configured below. Action for Detected Malware: ☒ Monitor only ☐ Block
Cisco Data Security Filtering:	☒ Enable The Global Cisco Data Security Policy will be initially configured to block uploads based on Web Reputation (if enabled) and monitor all other uploads.

« Prev
Cancel
Next »

On the last screen, review the configuration and click **Install this Configuration:**

1. Start	2. Network	3. Security	4. Review
----------	------------	-------------	------------------

Review Your Configuration

[Printable Page](#)

Please review your configuration. If you need to make changes, click the Previous button to return to the previous page.

Network Settings Edit	
Default System Hostname:	WSA.cisco.com
DNS Servers:	8.8.8.8, 192.168.114.2
Network Time Protocol (NTP):	7.7.7.7
Time Zone:	Etc/GMT
Network Context	
Upstream proxy:	No upstream proxy
Interfaces Edit	
Management (M1)	
IPv4 Address:	192.168.114.135/24
Hostname:	mgmt.WSA.cisco.com
Use M1 port for management only:	No
L4 Traffic Monitor:	
Wiring Type:	Duplex TAP: T1 (In/Out)
Routes Edit	
Default IPv4 Gateway:	192.168.114.2
Static IPv4 Routes:	No static routes have been defined.
Transparent Connection Settings Edit	
Transparent Redirection Device Type:	Layer 4 Switch or No Device
Administrative Settings Edit	
Administrator Passphrase:	(hidden)
Email System Alerts To:	test@cisco.com
Internal SMTP Relay Hosts:	No internal relay host is defined
AutoSupport:	Yes
SensorBase Network Participation:	Yes

Security Settings Edit	
Global Policy Default Action:	Monitor
L4 Traffic Monitor:	Monitor
Acceptable Use Controls:	Enabled
Reputation Filtering:	Enabled
Cisco DVS Engine:	Webroot: Enabled McAfee: Disabled Sophos: Enabled
Cisco Data Security Filtering:	Enabled

[< Previous](#) [Cancel](#) [Install This Configuration](#)

You will be logged out of the WSA and have to log back in with your new credentials.