


Cisco ESA System Setup Wizard:

on the **System Administration** tab, click **System Setup Wizard** in the list of links.

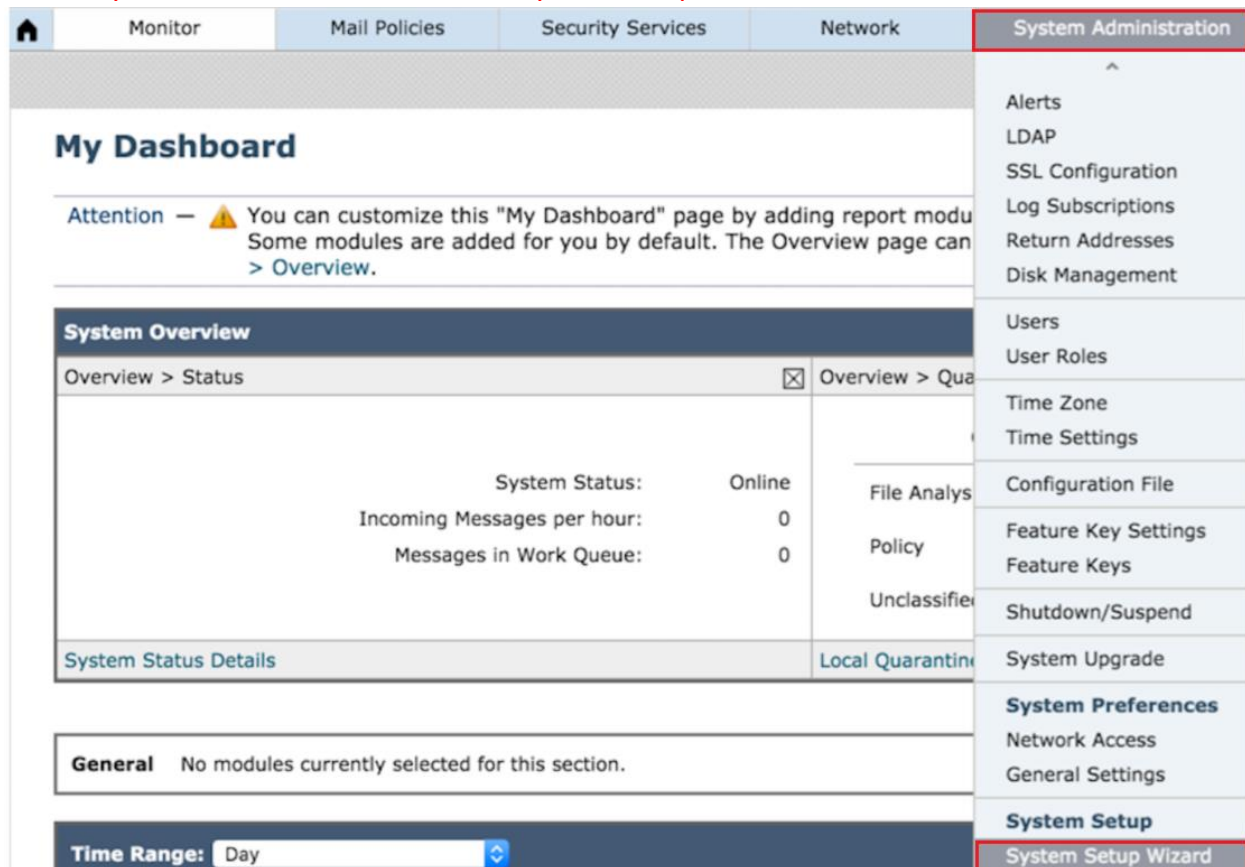

Define the fully-qualified hostname for the Email Security appliance Setting the Hostname,
Enter the email address to which to send the alerts. Configuring System Alerts,
Enter the address to which to send the default scheduled reports. Configuring Report Delivery
Set time zone on the Cisco Email Security Appliance so that timestamps in message headers and
log files are correct.

Set the password for the admin account.

To participate in the SenderBase Network, check the box next to “Allow Cisco IronPort to gather
and report limited data on email to SenderBase in order to identify and stop email-based
threats”

The Auto Support feature (enabled by default) keeps the Cisco Customer Support team aware
of issues with your appliance so that we can provide better support to you.

Click **Next** to Continue.

1. Start	2. System	3. Network	4. Security	5. Review
----------	------------------	------------	-------------	-----------

System Configuration

Before you enter your System and Network settings:

- Choose a configuration that best matches your network infrastructure
- Determine network and IP address assignments
- Gather information about your system setup

System Settings

Default System Hostname:
example: ironport-C000V.example.com

Email System Alerts To:
example: admin@company.com

Deliver Scheduled Reports To:
example: admin@company.com. Leave blank to only archive reports on-box.

Time Zone: Region:
Country:
Time Zone / GMT Offset

NTP Server:

Administrator Passphrase: ☐ Generate a passphrase:

☒ Enter a passphrase of your choice
Passphrase:
Retype Passphrase:

SenderBase Network Participation: ☒ Allow Cisco IronPort to gather and report limited data on email to SenderBase in order to identify and stop email-based threats.
[Learn what information is shared...](#)

AutoSupport: ☒ Send system alerts and weekly status reports to Cisco IronPort Customer Support

Define the default router (gateway) and configure the DNS settings, and then set up the appliance to receive and or relay email by configuring the Data 1, Data 2, and Management interfaces.

Type the IP address of the default router (gateway) on your network. You can use an IPv4 address, an IPv6 address, or both.

Configure the DNS (Domain Name Service) settings.

To use an interface, mark the “Enable” checkbox and then specify an IP address, network mask, and fully qualified hostname.

Mark the checkbox for Accept Incoming Mail to configure the interface to accept mail. Enter the name of the domain for which to accept mail. Enter the Destination. This is the SMTP Route or name of the machine(s) where you would like to route email for the domains specified.

When configuring your interfaces to relay mail, you define the systems allowed to relay email through the appliance.

Click **Next** to Continue.

Network Configuration	
IPv4 Gateway:	192.168.1.1
IPv6 Gateway:	
DNS:	☐ Use the Internet's Root DNS Servers ☒ Use the specified DNS Servers:
	DNS Server IP Address: 192.168.1.50
	DNS Server IP Address:

Interfaces										
You must configure the Management interface and 1 interface must be configured to accept mail from the Internet.										
☐ Enable Data 1 Interface	This interface is typically configured to accept mail.									
☐ Enable Data 2 Interface	This interface is typically configured to relay mail.									
☒ Enable Management Interface	This interface is typically configured for system administration.									
IPv4 Address / Netmask:	192.168.1.100/24									
IPv6 Address / Netmask:										
Fully Qualified Hostname:	esa.abc.com Fully qualified hostname for this appliance									
Accept Incoming Mail:	☒ Accept mail on this interface <table border="1"> <thead> <tr> <th>Domain ?</th> <th>Destination</th> <th></th> </tr> </thead> <tbody> <tr> <td> abc.com </td> <td> 192.168.1. 200 </td> <td> Add Row </td> </tr> <tr> <td>example: mail.company.com or 10.1.1.1</td> <td>i.e. An Exchange or Notes server</td> <td> X </td> </tr> </tbody> </table>	Domain ?	Destination		abc.com	192.168.1. 200	Add Row	example: mail.company.com or 10.1.1.1	i.e. An Exchange or Notes server	X
Domain ?	Destination									
abc.com	192.168.1. 200	Add Row								
example: mail.company.com or 10.1.1.1	i.e. An Exchange or Notes server	X								
Relay Outgoing Mail:	☐ Relay mail on this interface									

« Previous Cancel

Configure anti-spam and anti-virus settings. Check the boxes next to the security features you wish to utilize on your Cisco Email Security Appliance. Click **Next** to Continue.

1. Start	2. System	3. Network	4. Security	5. Review						
Message Security Your Cisco IronPort appliance uses message security to protect your email infrastructure from security threats. The security solutions are applied in the order depicted below. Each module reduces the overall volume of email sent to your infrastructure.										
<table border="1"> <thead> <tr> <th colspan="2">Anti-Spam</th> </tr> </thead> <tbody> <tr> <td>SenderBase Reputation Filtering</td> <td> SenderBase Reputation Filtering provides a "first line of defense" against incoming spam by restricting access to your email infrastructure based on senders' trustworthiness as determined by their SenderBase Reputation Score (SBRSS). More about SBRSS... ☒ Enable SenderBase Reputation Filtering </td> </tr> <tr> <td>Anti-Spam Scanning</td> <td> Select the anti-spam engine to use for the default incoming mail policy: ☐ None ☒ IronPort Anti-Spam ☒ Enable IronPort Spam Quarantine. This setting will quarantine positive and suspect spam. </td> </tr> </tbody> </table>					Anti-Spam		SenderBase Reputation Filtering	SenderBase Reputation Filtering provides a "first line of defense" against incoming spam by restricting access to your email infrastructure based on senders' trustworthiness as determined by their SenderBase Reputation Score (SBRSS). More about SBRSS... ☒ Enable SenderBase Reputation Filtering	Anti-Spam Scanning	Select the anti-spam engine to use for the default incoming mail policy: ☐ None ☒ IronPort Anti-Spam ☒ Enable IronPort Spam Quarantine. This setting will quarantine positive and suspect spam.
Anti-Spam										
SenderBase Reputation Filtering	SenderBase Reputation Filtering provides a "first line of defense" against incoming spam by restricting access to your email infrastructure based on senders' trustworthiness as determined by their SenderBase Reputation Score (SBRSS). More about SBRSS... ☒ Enable SenderBase Reputation Filtering									
Anti-Spam Scanning	Select the anti-spam engine to use for the default incoming mail policy: ☐ None ☒ IronPort Anti-Spam ☒ Enable IronPort Spam Quarantine. This setting will quarantine positive and suspect spam.									
<table border="1"> <thead> <tr> <th colspan="2">Anti-Virus and Malware</th> </tr> </thead> <tbody> <tr> <td>Anti-Virus Scanning:</td> <td> Select the anti-virus engine to use for the default incoming and outgoing mail policy: ☐ None ☒ Sophos </td> </tr> <tr> <td>Outbreak Filters</td> <td> Outbreak Filter quarantine suspicious messages even before traditional anti-virus security services have provided a signature file. More about Outbreak Filters... ☒ Enable Outbreak Filters </td> </tr> </tbody> </table>					Anti-Virus and Malware		Anti-Virus Scanning:	Select the anti-virus engine to use for the default incoming and outgoing mail policy: ☐ None ☒ Sophos	Outbreak Filters	Outbreak Filter quarantine suspicious messages even before traditional anti-virus security services have provided a signature file. More about Outbreak Filters... ☒ Enable Outbreak Filters
Anti-Virus and Malware										
Anti-Virus Scanning:	Select the anti-virus engine to use for the default incoming and outgoing mail policy: ☐ None ☒ Sophos									
Outbreak Filters	Outbreak Filter quarantine suspicious messages even before traditional anti-virus security services have provided a signature file. More about Outbreak Filters... ☒ Enable Outbreak Filters									

« Previous Cancel

A summary of the configuration information is displayed. You can edit the System Settings, Network Integration, and Message Security information by clicking the Previous button. Once you are satisfied with the information displayed click **Install This Configuration**.

1. Start	2. System	3. Network	4. Security	5. Review
----------	-----------	------------	-------------	------------------

Review Your Configuration

[Printable Page](#)

Please review your configuration. If you need to make changes, click the edit link to return to the page you'd like to edit.

System Settings		Edit
Default System Hostname:	esa.abc.com	
Email System Alerts To:	admin@abc.com	
Deliver Scheduled Reports To:	admin@abc.com	
Time Zone:	Etc/GMT	
NTP Server:	time.sco.cisco.com	
Admin Passphrase:	(hidden)	
SenderBase Network Participation:	Enabled	
AutoSupport:	Enabled	

Network Integration			Edit
IPv4 Gateway:	192.168.1.1		
IPv6 Gateway:			
DNS:	192.168.1.50		
Interfaces			
Management Port			
IPv4 Address / Netmask:	192.168.1.100/24		
Fully Qualified Hostname:	esa.abc.com		
Accept Incoming Mail:	Domain	Destination	
	abc.com	192.168.1.100	


Message Security		Edit
SenderBase Reputation Filtering:	Enabled	
Default Incoming Mail Anti-Spam Engine:	IronPort Anti-Spam (Quarantine Enabled)	
Default Incoming and Outgoing Mail Anti-Virus Engine(s):	Sophos Anti-Virus	
Outbreak Filters:	Enabled	

[« Previous](#) [Cancel](#)



[Install This Configuration](#)

A confirmation dialog is displayed. Click Install to **install** the new configuration.

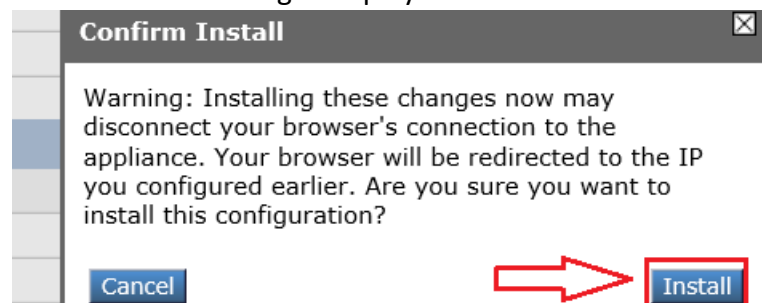

If the System Setup Wizard properly installs the configuration on the Email Security appliance, the Active Directory Wizard appears. If you are running an Active Directory server on your network, use the Active Directory Wizard to configure an LDAP server profile for the Active Directory server and assign a listener for recipient validation. If you are not using Active Directory or want to configure it later, click Skip this Step.

1. Start		2. Test	
Active Directory Wizard			
Active Directory Settings			
Enter a profile name:			
		<i>Provide a name that will be used to create your LDAP profile</i>	
Enter the hostname of your Active Directory server:			
		<i>(Examples: example.com, 1.1.1.1, example.com:389, 1.1.1.1:389)</i>	
Enter credentials so the IronPort appliance can connect:		Username:	
		<i>(Example: DOMAIN\user)</i>	
		Passphrase:	
Cancel		Next »	

After you successfully configure your appliance to work with your Active Directory Wizard, or skip the process, the System Setup Next Steps page appears. Click the links on the System Setup Next Steps page to proceed with the configuration of your appliances.

	Monitor	Mail Policies	Security Services	Network	System Administration
System Setup Next Steps					
The Cisco IronPort appliance should now be configured to work within your network infrastructure. See below for additional tasks and					
Data Loss Prevention					
Find out what sensitive information is leaving your network. The Data Loss Prevention (DLP) Assessment Wizard allows you to easily apply popular DLP policies to your outgoing mail so you can determine your risk exposure.					
Start Wizard...					
Reports					
The Cisco IronPort appliance can generate, deliver, and archive periodic reports on email security for your organization.					
Manage Reports					