



Test Content Routes:

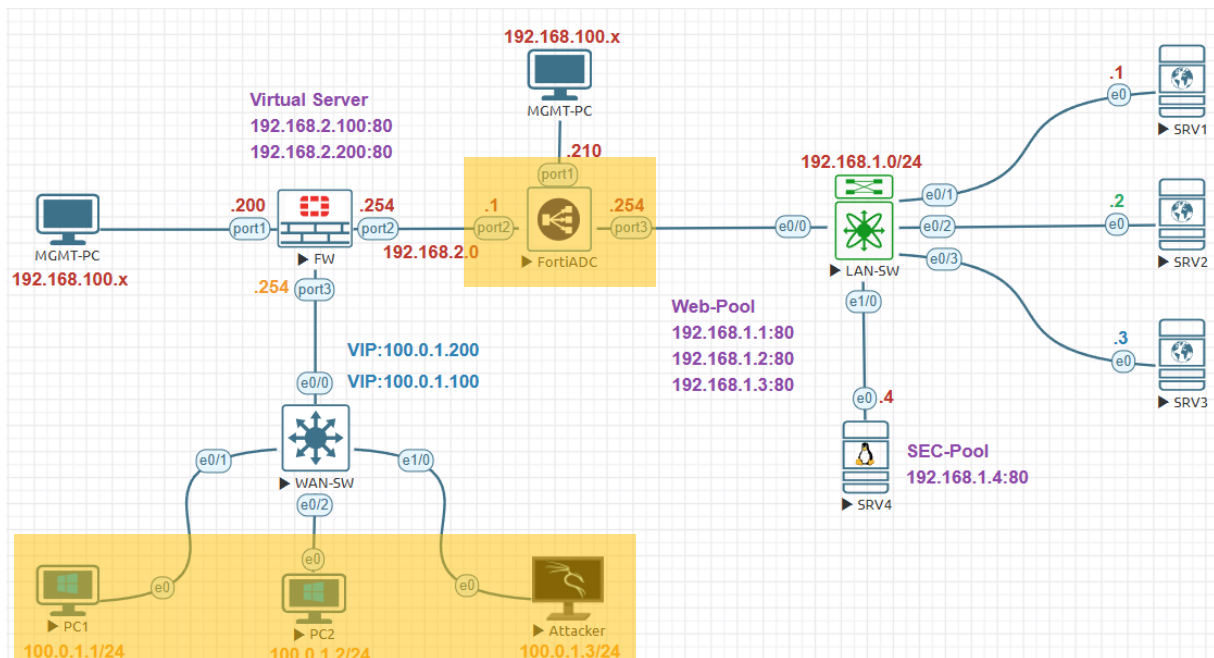


Management Subnet	192.168.100.0/24
FortiGate Management IP	192.168.100.200
FortiADC Management IP	192.168.100.210
Internal Servers Subnet	192.168.1.0/24
FortiADC External Subnet	192.168.2.0/24
FortiGate Firewall External	100.0.1.0/24
FortiADC Internal IP Address	192.168.1.254
FortiADC External IP Address	192.168.2.1
FortiGate Firewall Internal IP	192.168.2.254
FortiGate Firewall External IP	100.0.1.254
SRV1 IP Address	192.168.1.1
SRV2 IP Address	192.168.1.2
SRV3 IP Address	192.168.1.3
SRV3 IP Address	192.168.1.4
Virtual Sever-1	192.168.2.100
Virtual Sever-2	192.168.2.200
FortiGate VIP-1	100.0.1.100
FortiGate VIP-2	100.0.1.200
External PC1 IP Address	100.0.1.1
External PC2 IP Address	100.0.1.2
External PC3 IP Address	100.0.1.3

Return to the External Kali Linux, and then select the browser tab that is connected to the resources at types the virtual server IP address <http://100.0.1.100/rs.html>

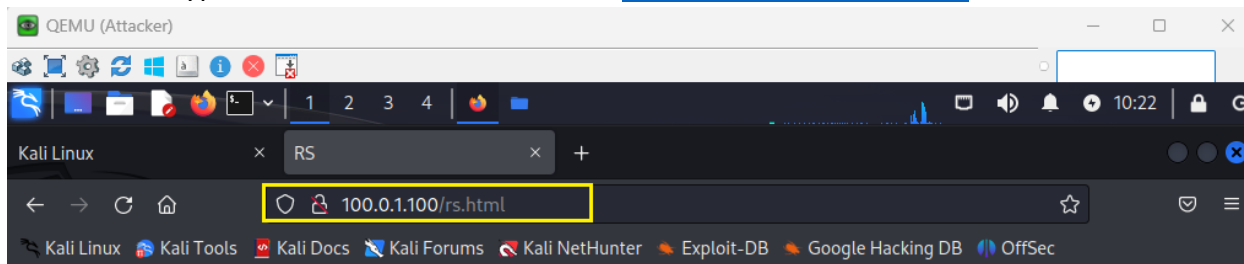


This Test Resources which is only available in SRV3.


Press **Ctrl+Shift+R** to refresh the browser page several times. Now it works! Traffic is redirected by the content route only to **SRV3**.

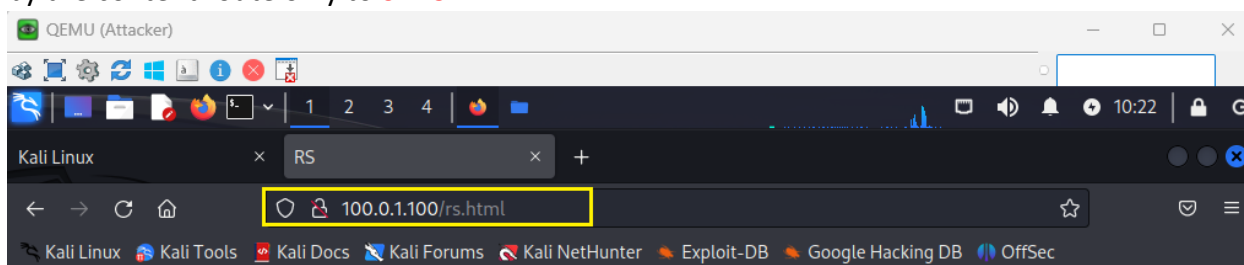

This Test Resources which is only available in SRV3.



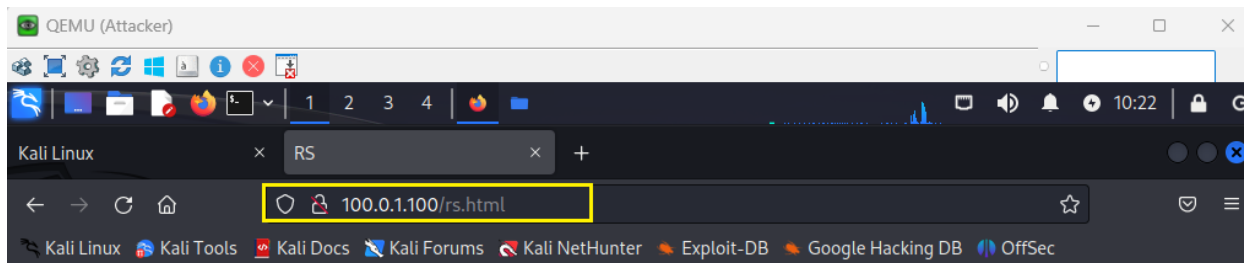


This Test Resources which is only available in SRV3.

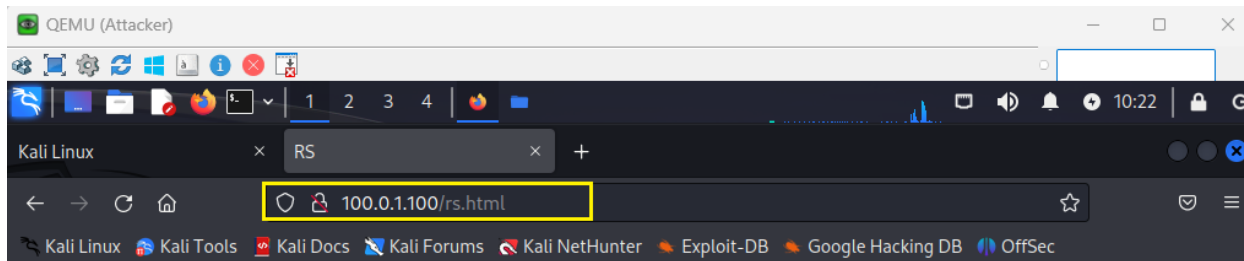

This Test Resources which is only available in SRV3.

Open a new browser tab and connect to the virtual server at <http://100.0.1.100>. The FortiADC is still balancing the connections among the three servers.

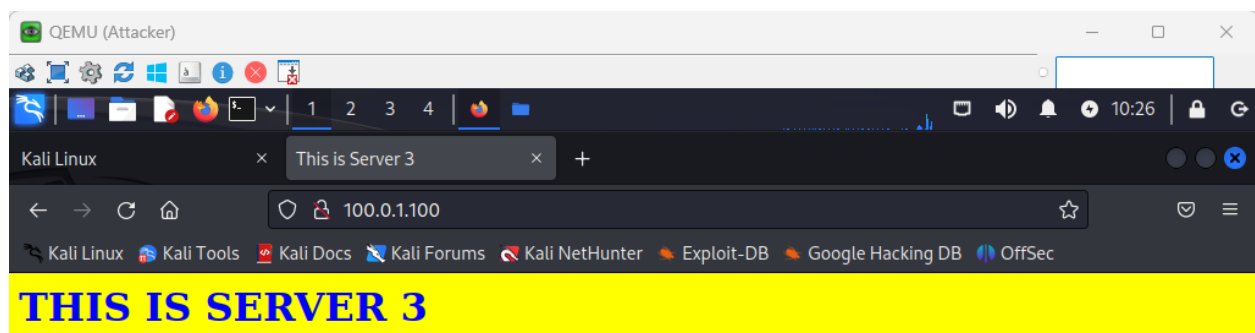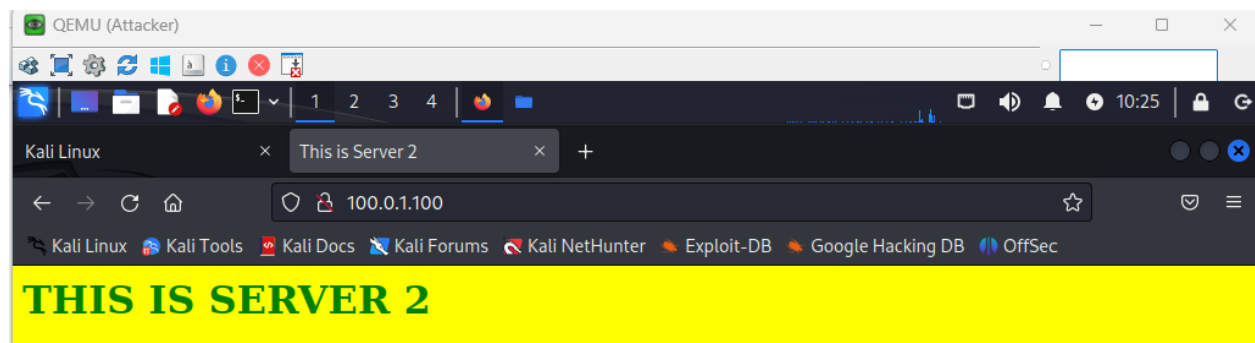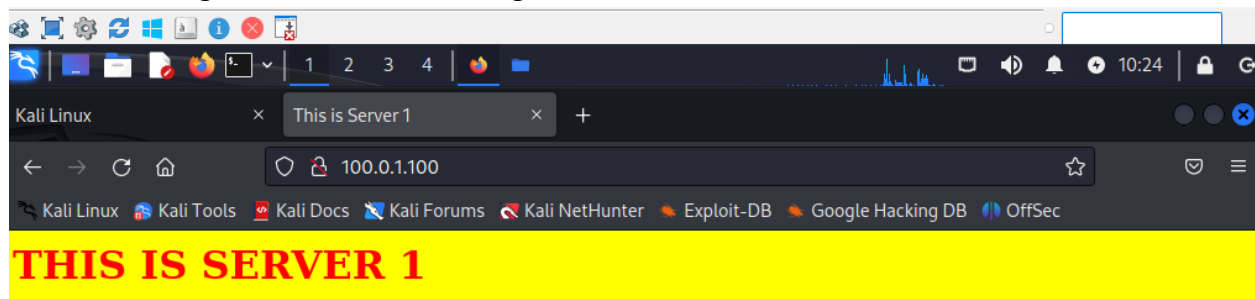


Test Error Page:

Log in to SRV3 as **root** using the password **root** and then run the following command:

```
root@SRV3:/var/www/html# service apache2 stop
```

Return to the Kali web browser and connect to the resources at: <http://100.0.1.100/rs.html>

Press **CTRL+SHIFT+R** several times to refresh the browser. The customized error message displays.

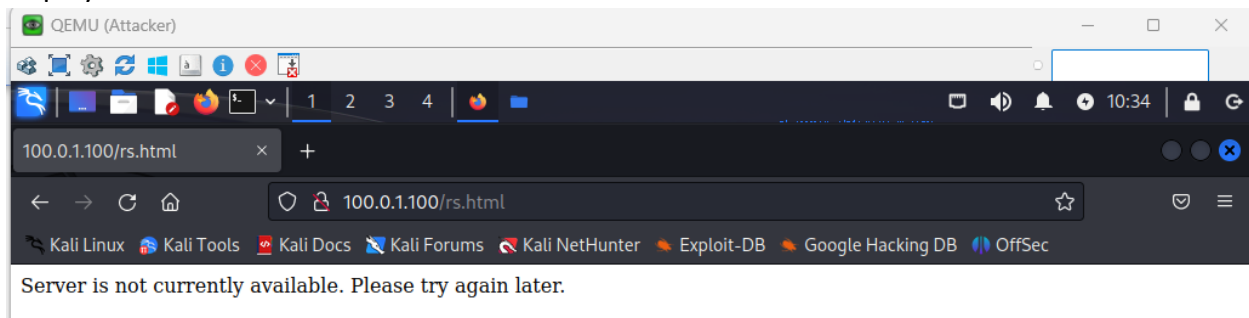


At the SRV3 command prompt, activate the web server using the following command:

```
root@SRV3:/var/www/html# service apache2 start
```

Return to the Kali web browser and connect to the resources at: <http://100.0.1.100/rs.html>

The resource page displays correctly.

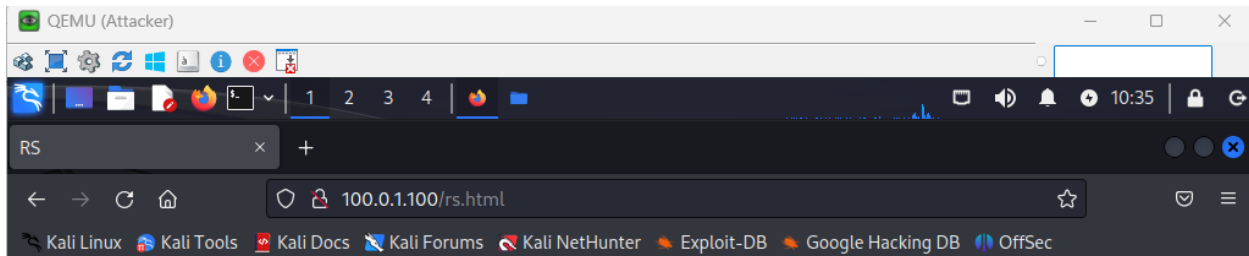

This Test Resources which is only available in SRV3.