# Quectel Antenna Selector · TELEC Certification

## User Guide

App version v3.25.1
Data revision Rev26.10 (2026-10-29)
2026-10-31


Look up specifications for **330 Quectel antennas** and their **TELEC certifications** with **81 modules**. Filter by module, type, size and more on a phone, tablet or computer. Once installed, it works **without a network connection**.

**Web address** `https://magicgrandpa8.github.io/Quectel-Antenna-Selector/`


**Quectel Antenna Agent**: the button to the right of the page title "Antenna selection & TELEC certification" opens the Quectel Antenna Agent website (network required).

## 01 Filters

Japan Market = Yes

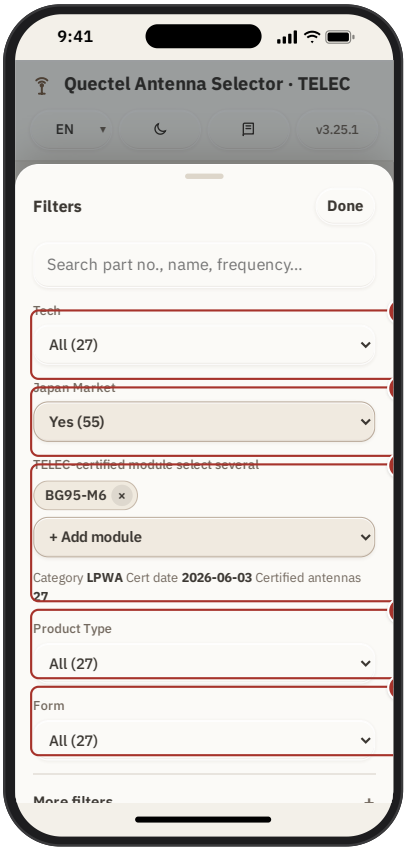


Tech = GNSS

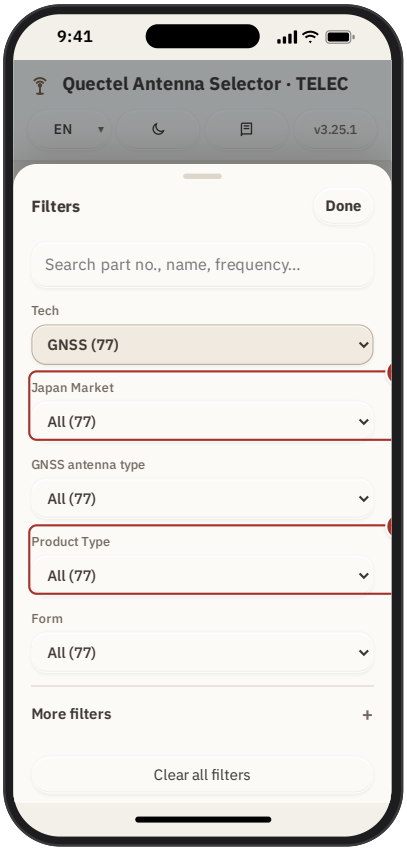



1. **Tech**: the technology, e.g. 4G, 5G, GNSS, Wi-Fi, LPWA/ISM, Combo.
2. **Japan Market**: Yes = marked "Compatible with Japan Market" in the Excel; No = all others.
3. **TELEC-certified module**: appears only when Japan Market is Yes. Lists only antennas certified with the selected module and shows its category, cert date and number of certified antennas. You can select several modules to list only antennas certified with all of them.
4. **GNSS antenna type**: appears only when Tech is GNSS. Choose Passive, Active or Dipole.
5. **Product Type**: External Antenna or Embedded Antenna.
6. **Form**: the antenna form factor, e.g. Rubber, Low Profile, PCB Chip, FPC + Cable, Ceramic Patch.


The number in brackets is how many antennas match your other selections. Choose **All** to clear a menu. Changing Japan Market from Yes clears the TELEC module; changing Tech from GNSS clears the GNSS antenna type. On a phone, tap the Filter button at the bottom of the screen to open these menus.

## 02 Antenna details

**Certified antenna**

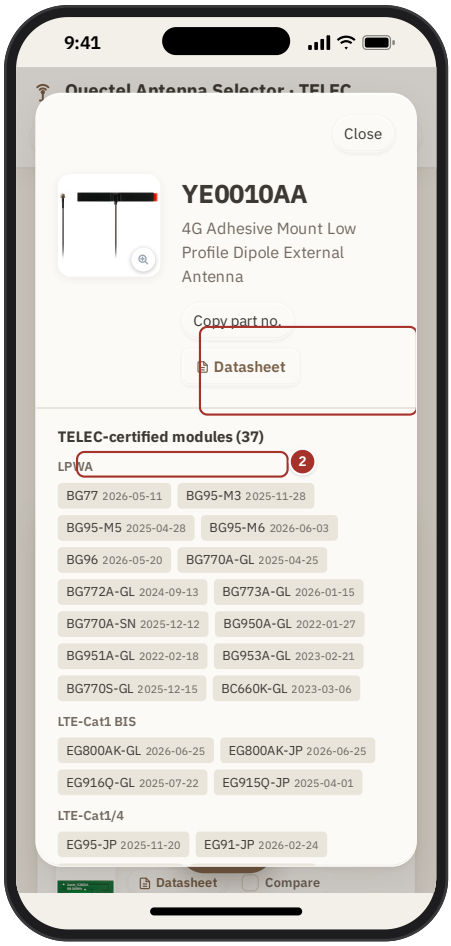


**Active GNSS antenna**

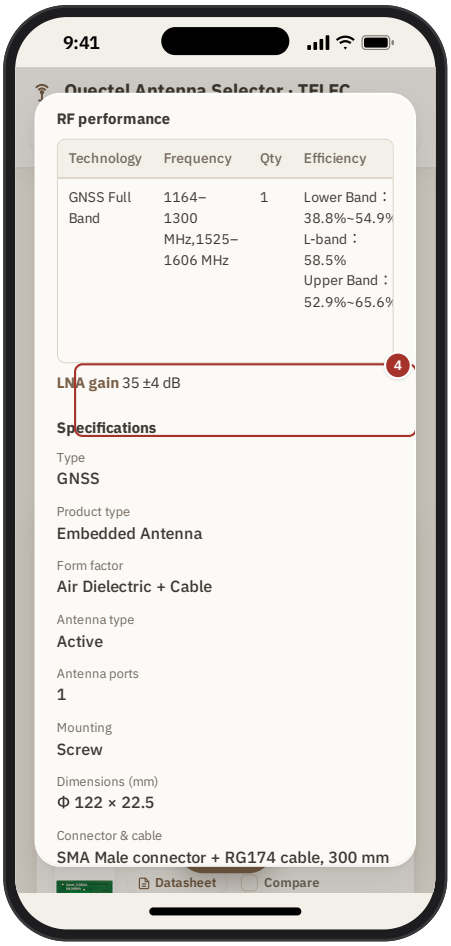


1. **Copy part no.** and **Datasheet** (opens in a new tab to view or download; needs a network connection). Tap the product photo to enlarge it.
2. **TELEC-certified modules**, grouped by category with cert dates. The module you selected is highlighted.
3. **RF performance**: efficiency, peak gain, pattern, polarization. Active GNSS antennas also show their **LNA gain**.
4. **Connector & cable**: for IPEX MHF connectors and RG174 cables, the connector, cable type and length are described together (IPEX also shows the cable diameter).

### Labels in the list

| Label | Meaning |
|---|---|
| TELEC ×10 | Certified with 10 modules. A bold outline means it includes the module you selected. |
| JP OK | Marked "Compatible with Japan Market" in the Excel source. Set **Japan Market** to Yes to list only these. |
| Datasheet | Opens the datasheet in a new tab. |
| LNA gain | Shown only for active GNSS antennas (with a built-in LNA), in the list and the details. |
| **Connector & cable** | IPEX MHF connectors or RG174 / RG174LL cables, e.g. "SMA Male connector + RG174 cable, 108 mm long" or "IPEX MHF4L connector + RF1.13 cable (Φ1.13 mm), 201 mm long". Antennas with two cables list each one. |

## 03 Install as an app & use offline




| Device | How to install |
|---|---|
| **iPhone / iPad** | Open in **Safari** (required) → Share → **Add to Home Screen** → Add |
| **Android** | Open in Chrome → tap **Install app** at the top, or menu ⋮ → Install app |
| **Windows / Mac** | Open in Edge or Chrome → **Install app** or the install icon in the address bar. Pin it to the taskbar if you like. |

> **Opened from LINE, Teams or email?** In-app browsers can't install apps. Tap **Install app**, then **Open web page** to switch to your browser, or **Copy link** and paste it into Safari or Chrome.

**Offline use:** after installing, open the app **once while online**. From then on it works with no network. An "Offline" badge appears at the top when you're disconnected.

If an iPhone app isn't opened for several weeks, iOS may clear its offline data. Opening it once online restores it.

## 04 FAQ

**How do I compare antennas?**
Tap Compare on up to 6 antennas in the list, then tap Compare at the bottom of the screen. Rows that differ are highlighted, you can switch to Differences only, and the common TELEC-certified modules are listed.

**No results, or 0 antennas?**
Too many filters may be active. Tap × on the filter tags, or use Clear all filters.

**The datasheet won't open?**
Datasheets are hosted on OneDrive and can be viewed or downloaded without signing in, but need a network connection. A few parts have no datasheet, so no button is shown.

**"No antenna is certified with this module yet"?**
The Excel certification table has no certified antenna for that module.

**The data looks out of date?**
Go online, tap the version number at the top right, then tap Force update in Version info.

**Notes**

- Data comes from the "Quectel Antenna Product and TELEC Certification" Excel, updated quarterly. The Excel file is the authoritative source.
- LNA gain, cable type and cable length come from the Excel. Cable length is in mm. IPEX cable diameter follows the cable type (e.g. RF1.13 = Φ1.13 mm); RG174 diameter isn't listed.