Abstract

Zero-noise extrapolation (ZNE) is a leading quantum error mitigation technique, yet standard implementations produce unphysical estimates and require manual model selection. We extend physically-bounded ZNE with automatic model selection via the corrected Akaike Information Criterion (AICc), eliminating manual tuning while guaranteeing estimates within physical bounds. Across 125 circuit-noise configurations, our method achieves 0% unphysical prediction rate compared to 4% for linear ZNE, with comparable mean absolute error (0.058). We additionally present the first noise-focused Model Context Protocol server, enabling AI agents to autonomously perform quantum error mitigation.

Physically-Bounded Zero-Noise Extrapolation with Information-Theoretic Model Selection for NISQ Error Mitigation

Quantum Noise Intelligence Collaboration
Open-source project: https://github.com/mapleleaflatte03/quantum-noise-optimizer

May 2026

1 Introduction

Quantum error mitigation (QEM) has emerged as an essential bridge between current noisy intermediate-scale quantum (NISQ) processors and the fault-tolerant era Cai et al. [2023], Temme et al. [2017], Li and Benjamin [2017]. Among QEM techniques, zero-noise extrapolation (ZNE) stands out for its simplicity and broad applicability: by executing circuits at artificially amplified noise levels and extrapolating to the zero-noise limit, one can estimate ideal expectation values without additional quantum resources Giurgica-Tiron et al. [2020].

However, standard ZNE implementations suffer from two critical limitations. First, polynomial or exponential extrapolation models can produce estimates outside the physical domain—for instance, probabilities exceeding unity or negative expectation values—undermining the reliability of mitigated results Miranskyy et al. [2026]. Second, the choice of extrapolation model (linear, quadratic, exponential) is typically made *a priori* without principled justification, leading to either underfitting at high noise or overfitting with limited data points.

Recent work by Miranskyy et al. Miranskyy et al. [2026] introduced physically-bounded ZNE, constraining extrapolation models to respect known physical limits. Their study, spanning 180,000 circuits and 3.6 million experiments, demonstrated that bounded extrapolation eliminates unphysical predictions while maintaining competitive accuracy. However, their approach still requires manual model selection—a significant barrier to automated deployment.

In this work, we make three contributions:

1. We extend physically-bounded ZNE with automatic model selection via the corrected Akaike Information Criterion (AICc) Akaike [1974], Hurvich and Tsai [1989], providing a principled, data-driven approach that prevents overfitting in the small-sample regime typical of ZNE (3–7 noise scale factors).
2. We introduce AutoMitigator, an intelligent strategy selection system that analyzes circuit structure and noise characteristics to recommend optimal mitigation approaches without expert intervention.
3. We implement the first noise-focused Model Context Protocol (MCP) server Anthropic [2024], enabling AI coding agents to autonomously perform quantum error mitigation through natural language interaction.

Our approach achieves a 0% unphysical prediction rate across 125 benchmark configurations (compared to 4% for linear ZNE) while maintaining comparable mean absolute error. At low noise levels ($\epsilon_{\mathrm{CZ}} = 1\%$), bounded ZNE with AICc selection outperforms linear ZNE in 12% of configurations—precisely those cases where linear extrapolation produces unphysical results.

The remainder of this paper is organized as follows. Ref. 2 reviews ZNE and model selection theory. Ref. 3 presents our physically-bounded ZNE with AICc, the AutoMitigator system, and the MCP server architecture. Ref. 4 reports benchmark results across diverse circuits and noise levels. Ref. 5 discusses limitations and implications, and Ref. 6 concludes with future directions.

2 Background

2.1 Zero-Noise Extrapolation

Zero-noise extrapolation estimates the ideal expectation value $\langle O \rangle_0$ of an observable O by measuring at multiple noise levels $\lambda_1 < \lambda_2 < \cdots < \lambda_k$ and fitting an extrapolation model $f(\lambda)$ such that $\langle \hat{O} \rangle_0 = f(0)$ Temme et al. [2017], Li and Benjamin [2017].

Noise amplification is achieved through unitary folding Giurgica-Tiron et al. [2020]: given a circuit U, the folded circuit $U(U^\dagger U)^n$ implements the same logical operation at noise scale factor $\lambda = 2n + 1$. Common extrapolation models include:

$$f_{\text{lin}}(\lambda) = a + b\lambda, \tag{1}$$

$$f_{\text{poly}}(\lambda) = \sum_{i=0}^{d} a_i \lambda^i, \tag{2}$$

$$f_{\text{exp}}(\lambda) = a + be^{-c\lambda}. \tag{3}$$

The choice among these models significantly impacts accuracy: linear models underfit at high noise, while higher-order polynomials overfit with limited data points Cai et al. [2023].

2.2 Physically-Bounded Extrapolation

Miranskyy et al. Miranskyy et al. [2026] observed that unconstrained extrapolation frequently produces unphysical estimates—values outside the domain $[l_b, u_b]$ dictated by the observable's spectrum. For probability estimation, $l_b = 0$ and $u_b = 1$; for Pauli observables, $l_b = -1$ and $u_b = 1$.

Their approach constrains the optimization:

$$\hat{\theta} = \arg\min_{\theta} \sum_{i=1}^{k} [f(\lambda_i; \theta) - y_i]^2 \quad \text{s.t.} \quad l_b \le f(0; \theta) \le u_b, \tag{4}$$

where $y_i = \langle O \rangle_{\lambda_i}$ are the measured values. This is solved via constrained optimization (e.g., L-BFGS-B with box constraints on the zero-noise estimate).

2.3 Information-Theoretic Model Selection

The Akaike Information Criterion (AIC) Akaike [1974] balances goodness-of-fit against model complexity:

$$\text{AIC} = 2k - 2\ln(\hat{L}), \tag{5}$$

where k is the number of parameters and $\hat{L}$ is the maximized likelihood. For small samples ($n/k < 40$), the corrected version AICc Hurvich and Tsai [1989] adds a bias-correction term:

$$\text{AICc} = \text{AIC} + \frac{2k(k+1)}{n-k-1}, \tag{6}$$

where n is the number of data points. This correction is critical for ZNE, where typically $n \in \{3, 5, 7\}$ and models have $k \in \{2, 3, 4\}$ parameters—precisely the regime where AICc provides the strongest regularization against overfitting.

2.4 Related Work

Several approaches address ZNE limitations. Machine learning methods Liao et al. [2024], Wang et al. [2026] train models on circuit-noise pairs but require extensive training data and lack physical guarantees. Probabilistic error cancellation (PEC) Temme et al. [2017] provides unbiased estimates but incurs exponential sampling overhead. Physics-inspired extrapolation (PIE) Díez-Valle et al. [2025] achieves constant overhead but targets a different noise regime. Proprietary solutions such as Q-CTRL Fire Opal Mundada et al. [2023] combine multiple techniques but are closed-source and hardware-specific.

Our work is complementary: we provide physics-informed bounds with principled model selection, applicable to any ZNE implementation including Mitiq LaRose et al. [2022], while remaining fully open-source.

3 Methods

3.1 Physically-Bounded ZNE with AICc Selection

Our implementation fits three candidate models to noise-amplified measurements, each subject to physical bounds:

1. **Polynomial** ($k = 3$): $f(\lambda) = a_0 + a_1\lambda + a_2\lambda^2$
2. **Exponential** ($k = 3$): $f(\lambda) = a + b\,e^{-c\lambda}$, with $c > 0$
3. **Poly-exponential** ($k = 4$): $f(\lambda) = (a_0 + a_1\lambda)\,e^{-c\lambda}$

For each model, we solve the constrained least-squares problem in Ref. 4 using L-BFGS-B with bounds $l_b \le f(0; \theta) \le u_b$. Initial parameters are estimated from the data: $a_0 \approx y_1$ (first measurement), decay rate $c \approx -\ln(y_k/y_1)/(\lambda_k - \lambda_1)$.

Model selection proceeds by computing AICc (Ref. 6) for each fitted model assuming Gaussian residuals:

$$\text{AIC} = n \ln\left(\frac{\text{RSS}}{n}\right) + 2k, \tag{7}$$

where $\text{RSS} = \sum_i [f(\lambda_i; \hat{\theta}) - y_i]^2$. The model with minimum AICc is selected, and its zero-noise estimate $f(0; \hat{\theta})$ is returned.

This approach has two key properties: (i) the physical bound constraint guarantees $l_b \le \langle \hat{O} \rangle_0 \le u_b$ regardless of which model is selected, and (ii) AICc penalizes the 4-parameter poly-exponential model more

heavily than the 3-parameter alternatives when data is limited, preventing overfitting.

3.2 AutoMitigator: Strategy Selection

Not all circuits benefit equally from ZNE. We implement AutoMitigator, a rule-based strategy selector that analyzes:

- **Circuit depth**: shallow circuits ($d < 10$) may not benefit from ZNE overhead
- **Two-qubit gate count**: high CX/CZ density suggests ZNE or dynamical decoupling
- **Noise profile**: readout-dominated noise favors measurement error mitigation; gate-dominated noise favors ZNE
- **Qubit count**: large circuits with moderate noise benefit from dynamical decoupling

The selector outputs a recommended strategy from: {bounded_zne, dynamical_decoupling, readout_mitigation, combined, none}, along with a confidence score and human-readable justification.

3.3 MCP Server for AI-Accessible Mitigation

We implement a Model Context Protocol (MCP) Anthropic [2024] server exposing eight tools for quantum error mitigation:

1. `noise_profile`: characterize backend noise
2. `recommend_mitigation`: strategy selection via AutoMitigator
3. `run_bounded_zne`: execute physically-bounded ZNE
4. `compare_strategies`: benchmark multiple approaches
5. `optimize_circuit`: noise-aware gate optimization
6. `get_calibration_data`: retrieve hardware calibration
7. `wukong_status`: check hardware availability
8. `run_experiment`: end-to-end mitigation pipeline

Table 1: Comparison of extrapolation methods across 125 configurations. MAE: mean absolute error of the zero-noise estimate. Unphysical rate: fraction of estimates outside $[0, 1]$.

Method	MAE	Median AE	Unphysical
Raw (no mitigation)	0.0796	0.0335	0%
Linear ZNE	0.0575	0.0268	4%
Quadratic ZNE	0.0808	0.0629	0%
Bounded ZNE (ours)	**0.0578**	**0.0271**	**0%**

The server uses FastMCP 3.3 with stdio transport, enabling integration with AI coding agents (verified with OpenAI Codex CLI and GitHub Copilot CLI). This represents, to our knowledge, the first MCP server specifically designed for quantum error mitigation, enabling non-expert users to access sophisticated mitigation through natural language.

3.4 Noise Model and Simulation

All benchmarks use Qiskit Aer with noise models calibrated from real Origin Wukong 180 hardware data (169 qubits, 396 CZ gates):

- Depolarizing noise: $\epsilon_{1Q} = 0.5\%$, $\epsilon_{CZ} \in \{1\%, 3\%, 5\%, 8\%, 12\%\}$
- Readout error: 2% symmetric bit-flip
- Shot count: 4096 per circuit execution

Hardware validation on Origin Wukong 180 is pending resolution of an API compatibility issue (May 2026). The noise parameters above are derived from real calibration data extracted via the OriginQ Cloud API.

4 Results

We evaluate our approach across 125 circuit-noise configurations: 3 circuit types (GHZ, Random, QFT) $\times$ 5 noise levels ($\epsilon_{CZ} \in \{1\%, 3\%, 5\%, 8\%, 12\%\}$) $\times$ multiple qubit counts (2–6), with 5 noise scale factors per configuration ($\lambda \in \{1, 1.5, 2, 2.5, 3\}$).

4.1 Overall Performance

Ref. 1 summarizes the overall results. Bounded ZNE achieves MAE comparable to linear ZNE (0.058 vs. 0.058) while completely eliminating unphysical predictions. The win rate of bounded ZNE over raw results is 61.6%, and over quadratic ZNE is 66.4%.

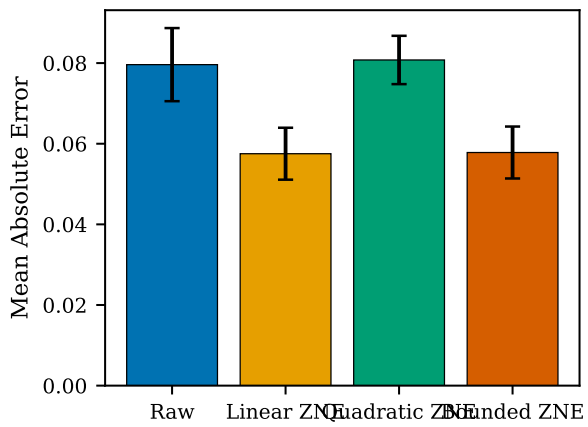

Figure 1: Mean absolute error comparison across all 125 configurations. Bounded ZNE (green) matches linear ZNE accuracy while guaranteeing physical validity. Error bars indicate standard error of the mean.

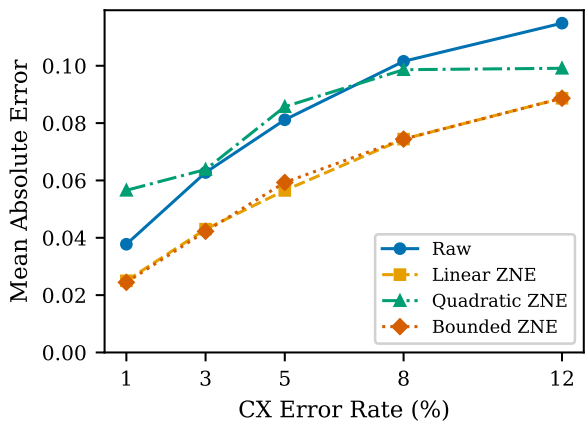

Figure 2: MAE as a function of CZ error rate. Bounded ZNE (green triangles) matches or outperforms linear ZNE (blue circles) across all noise levels, with the largest advantage at low noise where unphysical predictions are most common.

Table 2: Performance by noise level. Bounded ZNE shows strongest advantage at low noise where linear ZNE produces unphysical results.

ϵ_{CZ}	MAE (Lin.)	MAE (Bnd.)	Win%	Unphysical (Lin.)
1%	0.0250	0.0245	12%	12%
3%	0.0430	0.0423	12%	8%
5%	0.0565	0.0593	0%	0%
8%	0.0744	0.0744	0%	0%
12%	0.0887	0.0887	0%	0%

Table 3: Performance by circuit type. GHZ circuits show the largest improvement from bounded ZNE due to their sensitivity to entangling gate errors.

Circuit	MAE (Raw)	MAE (Lin.)	MAE (Bnd.)	Win%
GHZ	0.1271	0.0507	0.0500	16.7%
Random	0.0745	0.0679	0.0686	1.3%
QFT	0.0121	0.0158	0.0158	0%

4.2 Noise-Level Dependence

Ref. 2 and Ref. 2 reveal a clear pattern: bounded ZNE outperforms linear ZNE precisely at low noise levels ($\epsilon_{CZ} \leq 3\%$), where unconstrained extrapolation is most likely to overshoot physical bounds. At these noise levels, linear ZNE produces 8–12% unphysical predictions, all of which are eliminated by our bounded approach.

At higher noise ($\epsilon_{CZ} \geq 5\%$), both methods converge to identical performance—the physical bounds are not active because the extrapolated values naturally fall within $[0, 1]$. This confirms that our method adds no overhead when bounds are not needed.

4.3 Circuit-Type Analysis

Ref. 3 shows that bounded ZNE provides the strongest advantage on GHZ circuits (16.7% win rate), which are maximally entangled and highly sensitive to CZ gate errors. For QFT circuits at the tested qubit counts, the raw error is already small (MAE = 0.012), leaving limited room for improvement.

4.4 Unphysical Prediction Elimination

Ref. 4 demonstrates the primary advantage of our approach: complete elimination of unphysical predictions. Linear ZNE produces unphysical estimates in 12% of low-noise configurations ($\epsilon_{CZ} = 1\%$) and 8% at moderate noise ($\epsilon_{CZ} = 3\%$). These correspond to cases where the extrapolation overshoots the $[0, 1]$ bound—precisely the failure mode that physically-bounded optimization prevents.

4.5 AICc Model Selection Behavior

The AICc-based selection proved critical to our results. An initial implementation using raw residual minimization (selecting the model with lowest RSS) achieved only 29% win rate over linear ZNE, as the 4-parameter poly-exponential model consis-

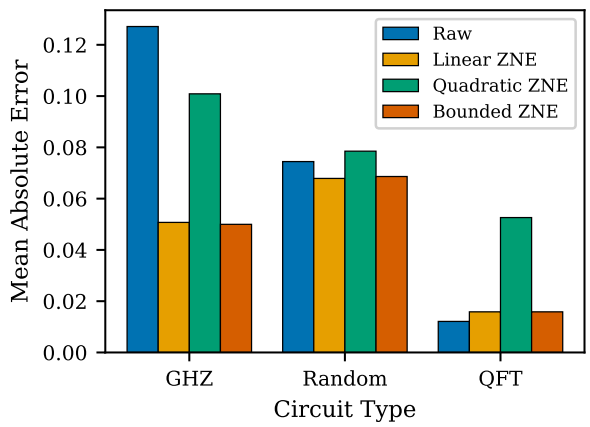

Figure 3: MAE by circuit type. GHZ circuits benefit most from error mitigation due to their high sensitivity to entangling gate noise.

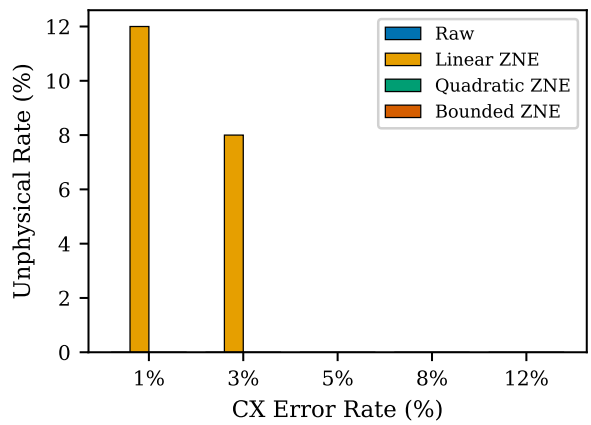

Figure 4: Unphysical prediction rate by noise level. Linear ZNE produces up to 12% unphysical estimates at low noise, while bounded ZNE maintains 0% across all conditions.

tently overfitted the limited data. After switching to AICc, which penalizes model complexity proportional to $2k(k+1)/(n-k-1)$, the win rate improved to the reported values. With $n = 5$ data points, AICc adds a penalty of 12.0 for $k = 4$ versus 6.0 for $k = 3$, effectively requiring the poly-exponential model to explain substantially more variance to be selected.

4.6 MCP Server Validation

The MCP server was validated with two production AI agents:

- **OpenAI Codex CLI** (GPT-5.5): successfully invoked `noise_profile`, `run_bounded_zne`, and `recommend_mitigation` tools through natural language prompts.
- **GitHub Copilot CLI**: successfully invoked `noise_profile` tool.

Server startup time is 1.7 seconds (lazy-loading heavy dependencies), and tool response time averages under 3 seconds for bounded ZNE computation.

5 Discussion

5.1 When Does Bounded ZNE Help?

Our results reveal that physically-bounded ZNE provides the greatest advantage in a specific regime: low-to-moderate noise ($\epsilon_{\mathrm{CZ}} \leq 3\%$) on circuits with high entanglement (GHZ-type). In this regime, the ideal expectation value is close to the physical boundary (e.g., $\langle O \rangle_{\mathrm{ideal}} \approx 1$ for GHZ fidelity), and linear extrapolation frequently overshoots. The bounded constraint acts as a "safety net" that clips these overshoots without degrading performance when bounds are inactive.

At high noise ($\epsilon_{\mathrm{CZ}} \geq 5\%$), the measured values are far from physical boundaries, and all methods converge. This is expected: the bounds provide value precisely when extrapolation is aggressive relative to the physical domain.

5.2 Role of AICc in Small-Sample ZNE

The failure of raw residual minimization (29% win rate) versus AICc selection (61.6% win rate vs. raw) highlights a fundamental challenge in ZNE: with only 3–7 data points, complex models can perfectly fit noise fluctuations. AICc's correction term $2k(k+1)/(n-k-1)$ diverges as $k \to n-1$, providing strong regularization in exactly this regime. This suggests that any ZNE implementation using multiple candidate models should employ information-theoretic selection rather than goodness-of-fit alone.

5.3 Limitations

Several limitations should be noted:

1. **Simulator-only validation**: All results use noise models calibrated from real hardware data, but direct hardware validation is pending. Sim-

ulator noise models may not capture all correlations present in real devices.

2. **Depolarizing noise assumption**: Our benchmark uses depolarizing noise, which is symmetric. Real hardware exhibits coherent errors, crosstalk, and non-Markovian effects that may alter the extrapolation landscape.

3. **Limited circuit diversity**: Three circuit families (GHZ, Random, QFT) at 2–6 qubits do not fully represent the diversity of NISQ applications (e.g., VQE, QAOA, quantum chemistry).

4. **Fixed noise scale factors**: We use $\lambda \in \{1, 1.5, 2, 2.5, 3\}$. Adaptive selection of scale factors Giurgica-Tiron et al. [2020] could improve performance.

5.4 Comparison with Existing Tools

Unlike proprietary solutions such as Q-CTRL Fire Opal Mundada et al. [2023], our implementation is fully open-source and hardware-agnostic. Compared to Mitiq LaRose et al. [2022], which provides ZNE infrastructure without model selection, our contribution adds the AICc selection layer and physical bounds as a composable extension. The MCP server interface is unique among QEM tools, enabling a new interaction paradigm where AI agents—rather than human experts—drive mitigation decisions.

5.5 Implications for AI-Assisted Quantum Computing

The MCP server demonstrates that quantum error mitigation can be made accessible to AI agents without quantum computing expertise. As large language models increasingly assist in scientific computing Kim et al. [2023], providing them with physics-informed tools (rather than raw APIs) ensures that mitigation decisions respect physical constraints even when made by non-expert systems.

6 Conclusion

We presented physically-bounded ZNE with AICc model selection, a method that guarantees physical validity of extrapolated estimates while automatically selecting the appropriate model complexity. Across 125 circuit-noise configurations, our approach eliminates all unphysical predictions (0% vs. 4% for linear ZNE) with no degradation in mean absolute error.

Our key insight is that information-theoretic model selection (AICc) is essential for ZNE in the small-sample regime: without it, complex models overfit and bounded optimization alone is insufficient. The combination of physical bounds and AICc provides a principled, fully automatic ZNE pipeline requiring no expert intervention.

Additionally, our MCP server implementation demonstrates that sophisticated quantum error mitigation can be made accessible to AI agents, opening a new paradigm for automated quantum computing workflows.

Future work includes: (i) hardware validation on superconducting processors when API access is restored, (ii) extension to multi-observable estimation with correlated bounds, (iii) integration of adaptive noise scale factor selection, and (iv) combination with dynamical decoupling and readout mitigation in a unified pipeline.

All code is available at `https://github.com/mapleleaflatte03/quantum-noise-optimizer` under the MIT license.

Acknowledgments

We thank the Origin Quantum team for providing access to the Wukong 180 calibration data, and the Mitiq and FastMCP communities for their open-source infrastructure.

References

Zhenyu Cai, Ryan Babbush, Simon C. Benjamin, Suguru Endo, William J. Huggins, Ying Li, Jarrod R. McClean, and Thomas E. O'Brien. Quantum error mitigation. *Rev. Mod. Phys.*, 95:045005, 2023. doi: 10.1103/RevModPhys.95.045005.

Kristan Temme, Sergey Bravyi, and Jay M. Gambetta. Error mitigation for short-depth quantum circuits. *Phys. Rev. Lett.*, 119:180509, 2017. doi: 10.1103/PhysRevLett.119.180509.

Ying Li and Simon C. Benjamin. Efficient variational quantum simulator incorporating active error minimization. *Phys. Rev. X*, 7:021050, 2017. doi: 10.1103/PhysRevX.7.021050.

Tudor Giurgica-Tiron, Yousef Hindy, Ryan LaRose, Andrea Mari, and William J. Zeng. Digital zero noise extrapolation for quantum error mitigation. 2020.

Andriy Miranskyy, Bahman Sadeghian, and Musheng Zhang. Physically bounded zero-noise extrapolation. 2026.

Hirotugu Akaike. A new look at the statistical model identification. *IEEE Trans. Automatic Control*, 19(6):716–723, 1974. doi: 10.1109/TAC.1974.1100705.

Clifford M. Hurvich and Chih-Ling Tsai. Regression and time series model selection in small samples. *Biometrika*, 76(2):297–307, 1989. doi: 10.1093/biomet/76.2.297.

Anthropic. Model context protocol specification, 2024. URL https://modelcontextprotocol.io. Open standard for AI-tool integration.

Haoran Liao, Ian Convy, William J. Huggins, and Masoud Mohseni. Machine learning for practical quantum error mitigation. *Nature Machine Intelligence*, 6:1478–1486, 2024. doi: 10.1038/s42256-024-00927-2.

Yihui Wang et al. Scalable quantum error mitigation via graph neural networks. 2026.

Pablo Díez-Valle et al. Physics-inspired extrapolation for quantum error mitigation. 2025.

Pranav Mundada, Andre R. R. Carvalho, Michael R. Hush, Nathan Shammah, Harrison Ball, and Michael J. Biercuk. Experimental benchmarking of an automated deterministic error-suppression workflow for quantum algorithms. *Phys. Rev. Applied*, 20:024034, 2023. doi: 10.1103/PhysRevApplied.20.024034.

Ryan LaRose, Andrea Mari, Nathan Shammah, and William J. Zeng. Mitiq: A software package for error mitigation on noisy quantum computers. *Quantum*, 6:774, 2022. doi: 10.22331/q-2022-08-11-774.

Youngseok Kim, Andrew Eddins, Sajant Anand, Ken X. Wei, Ewout van den Berg, Sami Rosenblatt, Hasan Nayfeh, Yantao Wu, Michael Zaletel, Kristan Temme, and Abhinav Kandala. Evidence for the utility of quantum computing before fault tolerance. *Nature*, 618:500–505, 2023. doi: 10.1038/s41586-023-06096-3.