TP4- Implement VTP

Marc-evy Misseke

Topology

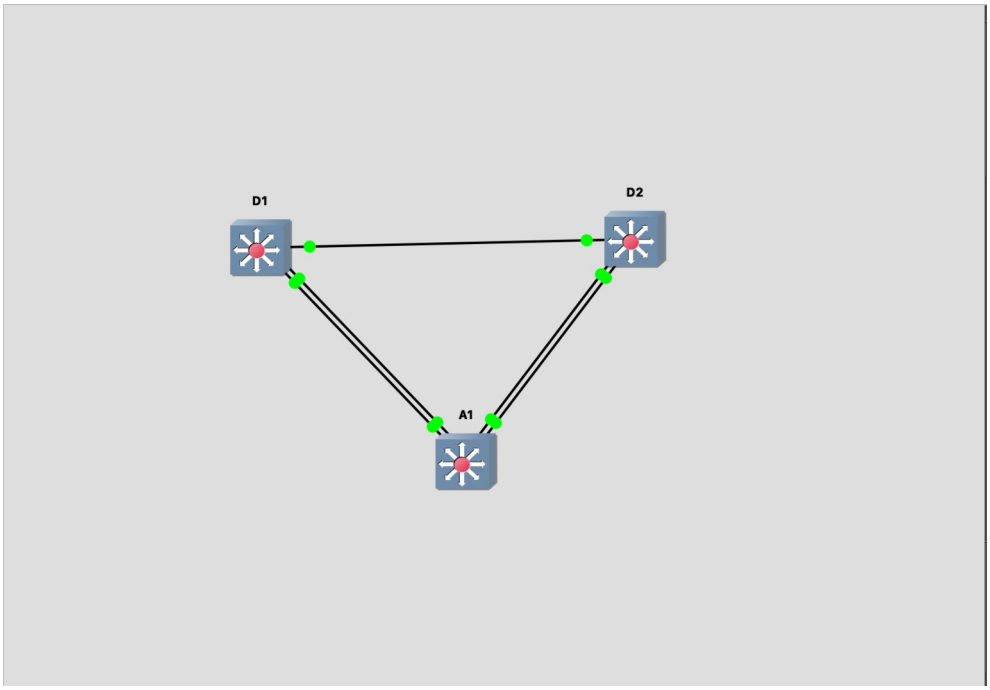

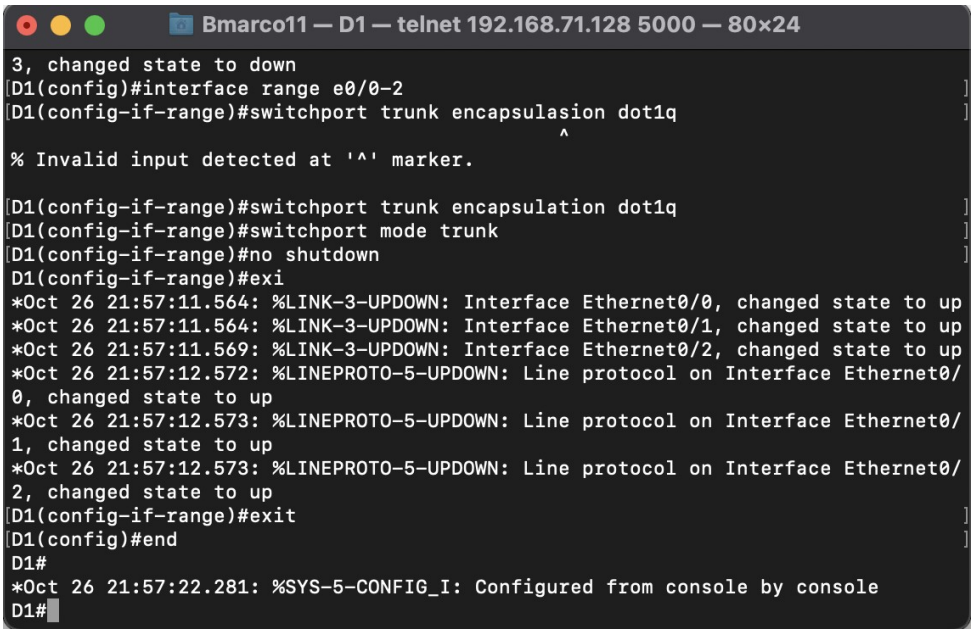

```
Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×24
3, changed state to down
D1(config)#interface range e0/0-2
D1(config-if-range)#switchport trunk encapsulasion dot1q
                                                       ^
% Invalid input detected at '^' marker.

D1(config-if-range)#switchport trunk encapsulation dot1q
D1(config-if-range)#switchport mode trunk
D1(config-if-range)#no shutdown
D1(config-if-range)#exi
*Oct 26 21:57:11.564: %LINK-3-UPDOWN: Interface Ethernet0/0, changed state to up
*Oct 26 21:57:11.564: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Oct 26 21:57:11.569: %LINK-3-UPDOWN: Interface Ethernet0/2, changed state to up
*Oct 26 21:57:12.572: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
0, changed state to up
*Oct 26 21:57:12.573: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to up
*Oct 26 21:57:12.573: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to up
D1(config-if-range)#exit
D1(config)#end
D1#
*Oct 26 21:57:22.281: %SYS-5-CONFIG_I: Configured from console by console
D1#
```

Bmarco11 — D2 — telnet 192.168.71.128 5001 — 80×22

```
*Oct 26 22:00:11.633: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet1/
3, changed state to down
D2(config-if-range)#exit
D2(config)#interface range e0/0, e1/0-1
D2(config-if-range)#switchport trunk encapsulation dot1q
D2(config-if-range)#switchport mode trunk
D2(config-if-range)#no shutdown
D2(config-if-range)#exit
D2(config)#
*Oct 26 22:02:05.362: %LINK-3-UPDOWN: Interface Ethernet0/0, changed state to up
*Oct 26 22:02:05.363: %LINK-3-UPDOWN: Interface Ethernet1/0, changed state to up
*Oct 26 22:02:05.363: %LINK-3-UPDOWN: Interface Ethernet1/1, changed state to up
*Oct 26 22:02:06.362: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
0, changed state to up
*Oct 26 22:02:06.365: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet1/
0, changed state to up
*Oct 26 22:02:06.365: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet1/
1, changed state to up
D2(config)#end
D2#
*Oct 26 22:02:19.234: %SYS-5-CONFIG_I: Configured from console by console
D2#
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×24

```
3, changed state to down
A1(config-if-range)#exit
A1(config)#interface range e0/1-2, e1/0-1
A1(config-if-range)#switchport trunk encapsulation dot1q
A1(config-if-range)#switchport mode trunk
A1(config-if-range)#no shutdown
A1(config-if-range)#exit
*Oct 26 22:08:19.097: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Oct 26 22:08:19.098: %LINK-3-UPDOWN: Interface Ethernet0/2, changed state to up
*Oct 26 22:08:19.098: %LINK-3-UPDOWN: Interface Ethernet1/0, changed state to up
*Oct 26 22:08:19.098: %LINK-3-UPDOWN: Interface Ethernet1/1, changed state to up
*Oct 26 22:08:20.100: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to up
*Oct 26 22:08:20.100: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to up
*Oct 26 22:08:20.100: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet1/
0, changed state to up
*Oct 26 22:08:20.100: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet1/
1, changed state to up
A1(config-if-range)#exit
A1(config)#end
A1#
*Oct 26 22:08:28.034: %SYS-5-CONFIG_I: Configured from console by console
A1#
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×24

```
2, changed state to up
D1(config-if-range)#exit
D1(config)#end
D1#
*Oct 26 21:57:22.281: %SYS-5-CONFIG_I: Configured from console by console
D1#show vtp status
VTP Version capable             : 1 to 3
VTP version running             : 1
VTP Domain Name                 :
VTP Pruning Mode                : Disabled
VTP Traps Generation            : Disabled
Device ID                       : aabb.cc80.0100
Configuration last modified by 0.0.0.0 at 0-0-00 00:00:00
Local updater ID is 0.0.0.0 (no valid interface found)

Feature VLAN:
--------------
VTP Operating Mode                : Server
Maximum VLANs supported locally   : 1005
Number of existing VLANs          : 5
Configuration Revision            : 0
MD5 digest                        : 0x57 0xCD 0x40 0x65 0x63 0x59 0x47 0xBD
                                    0x56 0x9D 0x4A 0x3E 0xA5 0x69 0x35 0xBC
D1#
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×24

```
Configuration last modified by 0.0.0.0 at 0-0-00 00:00:00
Local updater ID is 0.0.0.0 (no valid interface found)

Feature VLAN:
--------------
VTP Operating Mode                  : Server
Maximum VLANs supported locally     : 1005
Number of existing VLANs            : 5
Configuration Revision              : 0
MD5 digest                          : 0x57 0xCD 0x40 0x65 0x63 0x59 0x47 0xBD
                                      0x56 0x9D 0x4A 0x3E 0xA5 0x69 0x35 0xBC
D1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D1(config)#vtp domain ccnpv8
Changing VTP domain name from NULL to ccnpv8
D1(config)#vtp version 2
D1(config)#vtp mode server
Device mode already VTP Server for VLANS.
D1(config)#vtp password cisco123
Setting device VTP password to cisco123
D1(config)#end
D1#
*Oct 26 22:11:57.452: %SYS-5-CONFIG_I: Configured from console by console
D1#
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×31

```
D1#show vlan brief

VLAN Name                             Status    Ports
---- --------------------------------- --------- -------------------------------
1    default                          active    Et1/0, Et1/1, Et1/2, Et1/3
                                                Et2/0, Et2/1, Et2/2, Et2/3
                                                Et3/0, Et3/1, Et3/2, Et3/3
2    secondvlan                       active    Et0/3
1002 fddi-default                     act/unsup
1003 trcrf-default                    act/unsup
1004 fddinet-default                  act/unsup
1005 trbrf-default                    act/unsup
D1#show vtp status
VTP Version capable             : 1 to 3
VTP version running             : 2
VTP Domain Name                 : ccnpv8
VTP Pruning Mode                : Disabled
VTP Traps Generation            : Disabled
Device ID                       : aabb.cc80.0100
Configuration last modified by 0.0.0.0 at 10-26-25 22:13:03
Local updater ID is 0.0.0.0 (no valid interface found)

Feature VLAN:
--------------
VTP Operating Mode                  : Server
Maximum VLANs supported locally     : 1005
Number of existing VLANs            : 6
Configuration Revision              : 2
MD5 digest                          : 0x3F 0x34 0xC6 0x94 0x7D 0x44 0x1C 0x23
                                      0xB3 0x92 0xD5 0xCA 0x9E 0x64 0x13 0x60
D1#
```

Bmarco11 — D2 — telnet 192.168.71.128 5001 — 80×23

```
0, changed state to up
D2(config-if)#exit
D2(config)#end
D2#
*Oct 26 22:25:55.748: %SYS-5-CONFIG_I: Configured from console by console
D2#show vtp status | i VLANs|Revision
Maximum VLANs supported locally     : 1005
Number of existing VLANs            : 6
Configuration Revision              : 2
D2#show vlan brief

VLAN Name                             Status    Ports
---- --------------------------------- --------- -------------------------------
1    default                          active    Et0/1, Et0/2, Et0/3, Et1/2
                                                Et1/3, Et2/0, Et2/1, Et2/2
                                                Et2/3, Et3/0, Et3/1, Et3/2
                                                Et3/3
2    secondvlan                       active
1002 fddi-default                     act/unsup
1003 trcrf-default                    act/unsup
1004 fddinet-default                  act/unsup
1005 trbrf-default                    act/unsup
D2#
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×24

```
*Oct 26 22:26:36.035: %LINK-5-CHANGED: Interface Ethernet0/1, changed state to a
dministratively down
*Oct 26 22:26:37.038: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to down
A1(config-if)#exit
A1(config)#interface e0/1
A1(config-if)#no shutdown
A1(config-if)#exit
*Oct 26 22:26:53.405: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Oct 26 22:26:54.412: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to up
A1(config-if)#exit
A1(config)#end
A1#
*Oct 26 22:26:59.597: %SYS-5-CONFIG_I: Configured from console by console
A1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
A1(config)#no vlan 2
A1(config)#end
A1#
*Oct 26 22:28:57.048: %SYS-5-CONFIG_I: Configured from console by console
A1#show vtp status | i Revision
Configuration Revision             : 3
A1#
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×19

```
VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Et1/0, Et1/1, Et1/2, Et1/3
                                                Et2/0, Et2/1, Et2/2, Et2/3
                                                Et3/0, Et3/1, Et3/2, Et3/3
1002 fddi-default                     act/unsup
1003 trcrf-default                    act/unsup
1004 fddinet-default                  act/unsup
1005 trbrf-default                    act/unsup
2048 VLAN2048                         active
D1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D1(config)#vlan 2
D1(config-vlan)#name secondvlan2
D1(config-vlan)#end
D1#
*Oct 26 22:31:23.311: %SYS-5-CONFIG_I: Configured from console by console
D1#show vtp status | i Revision
Configuration Revision             : 4
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×24

```
A1(config-if)#no shutdown
A1(config-if)#exit
*Oct 26 22:26:53.405: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Oct 26 22:26:54.412: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to up
A1(config-if)#exit
A1(config)#end
A1#
*Oct 26 22:26:59.597: %SYS-5-CONFIG_I: Configured from console by console
A1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
A1(config)#no vlan 2
A1(config)#end
A1#
*Oct 26 22:28:57.048: %SYS-5-CONFIG_I: Configured from console by console
A1#show vtp status | i Revision
Configuration Revision             : 3
A1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
A1(config)#vtp mode client
Setting device to VTP Client mode for VLANS.
A1(config)#vlan 3
VTP VLAN configuration not allowed when device is in CLIENT mode.
A1(config)#
```

Bmarco11 — D2 — telnet 192.168.71.128 5001 — 80×23

```
                                                Et3/3
2    secondvlan                          active
1002 fddi-default                        act/unsup
1003 trcrf-default                       act/unsup
1004 fddinet-default                     act/unsup
1005 trbrf-default                       act/unsup
D2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D2(config)#vtp mode transparent
Setting device to VTP Transparent mode for VLANS.
D2(config)#vlan 3
D2(config-vlan)#name thirdvlan
D2(config-vlan)#end
D2#
*Oct 26 22:39:01.149: %SYS-5-CONFIG_I: Configured from console by console
D2#show vlan brief | i ThirdVLAN
D2#show vlan brief | i thirdvlan
3    thirdvlan                           active
D2#show vtp status | i domain|revision
D2#show vtp status | i Domain|Revision
VTP Domain Name                    : ccnpv8
Configuration Revision               : 0
D2#
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×19

```
*Oct 26 22:55:55.395: %LINK-5-CHANGED: Interface Ethernet0/1, changed state to a
dministratively down
*Oct 26 22:55:55.397: %LINK-5-CHANGED: Interface Ethernet0/2, changed state to a
dministratively down
*Oct 26 22:55:56.400: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to down
*Oct 26 22:55:56.401: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to down
D1(config-if-range)#exit
D1(config)#vlan 4
D1(config-vlan)#name fourthvlan
D1(config-vlan)#end
D1#
*Oct 26 22:56:33.190: %SYS-5-CONFIG_I: Configured from console by console
D1#show vtp status | i Revision
Configuration Revision               : 5
D1#show vlan brief | i fourthvlan
4    fourthvlan                          active
D1#
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×23

```
A1(config)#end
A1#
*Oct 26 22:26:59.597: %SYS-5-CONFIG_I: Configured from console by console
A1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
A1(config)#no vlan 2
A1(config)#end
A1#
*Oct 26 22:28:57.048: %SYS-5-CONFIG_I: Configured from console by console
A1#show vtp status | i Revision
Configuration Revision               : 3
A1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
A1(config)#vtp mode client
Setting device to VTP Client mode for VLANS.
A1(config)#vlan 3
VTP VLAN configuration not allowed when device is in CLIENT mode.
A1(config)#end
A1#
*Oct 26 22:38:15.528: %SYS-5-CONFIG_I: Configured from console by console
A1#show vtp status | i Revision
Configuration Revision               : 5
A1#
```

Bmarco11 — D2 — telnet 192.168.71.128 5001 — 80×23

```
*Oct 26 22:39:01.149: %SYS-5-CONFIG_I: Configured from console by console
D2#show vlan brief | i ThirdVLAN
D2#show vlan brief | i thirdvlan
3    thirdvlan                           active
D2#show vtp status | i domain|revision
D2#show vtp status | i Domain|Revision
VTP Domain Name                    : ccnpv8
Configuration Revision               : 0
D2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D2(config)#vlan 1111
D2(config-vlan)#name quadone
D2(config-vlan)#end
D2#
*Oct 26 22:41:37.352: %SYS-5-CONFIG_I: Configured from console by console
D2#show vlan brief | i quadone
1111 quadone                             active
D2#show vtp status | i Domain|Revision
VTP Domain Name                    : ccnpv8
Configuration Revision               : 0
D2#show vtp status | i Revision
Configuration Revision               : 0
D2#
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×23

```
A1(config)#vtp mode client
Setting device to VTP Client mode for VLANS.
A1(config)#vlan 3
VTP VLAN configuration not allowed when device is in CLIENT mode.
A1(config)#end
A1#
*Oct 26 22:38:15.528: %SYS-5-CONFIG_I: Configured from console by console
A1#show vtp status | i Revision
Configuration Revision             : 5
A1#show vlan brief

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Et0/0, Et0/3, Et1/2, Et1/3
                                                Et2/0, Et2/1, Et2/2, Et2/3
                                                Et3/0, Et3/1, Et3/2, Et3/3
2    secondvlan2                      active
4    fourthvlan                       active
1002 fddi-default                     act/unsup
1003 trcrf-default                    act/unsup
1004 fddinet-default                  act/unsup
1005 trbrf-default                    act/unsup
A1#
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×19

```
Device ID                        : aabb.cc80.0100

Feature VLAN:
--------------
VTP Operating Mode                : Server
Number of existing VLANs          : 7
Number of existing extended VLANs : 1
Maximum VLANs supported locally   : 4096
Configuration Revision            : 0
Primary ID                        : 0000.0000.0000
Primary Description               :
MD5 digest                        :


Feature MST:
--------------
VTP Operating Mode                : Transparent

 --More--
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×19

```
D1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D1(config)#end
D1#
*Oct 26 23:03:23.727: %SYS-5-CONFIG_I: Configured from console by console
D1#vtp primary vlan
This system is becoming primary server for feature vlan
No conflicting VTP3 devices found.
Do you want to continue? [confirm]
D1#
*Oct 26 23:03:55.501: %SW_VLAN-4-VTP_PRIMARY_SERVER_CHG: aabb.cc80.0100 has beco
me the primary server for the VLAN VTP feature
D1#show vtp status | i Primary
VTP Operating Mode                : Primary Server
Primary ID                        : aabb.cc80.0100
Primary Description               : D1
D1#show hardware | i Base
D1#show hardware | i base
D1#
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×23

```
VTP VLAN configuration not allowed when device is in CLIENT mode.
A1(config)#end
A1#
*Oct 26 22:38:15.528: %SYS-5-CONFIG_I: Configured from console by console
A1#show vtp status | i Revision
Configuration Revision            : 5
A1#show vlan brief

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Et0/0, Et0/3, Et1/2, Et1/3
                                                Et2/0, Et2/1, Et2/2, Et2/3
                                                Et3/0, Et3/1, Et3/2, Et3/3
2    secondvlan2                      active
4    fourthvlan                       active
1002 fddi-default                     act/unsup
1003 trcrf-default                    act/unsup
1004 fddinet-default                  act/unsup
1005 trbrf-default                    act/unsup
A1#show vtp status | i revision
A1#show vtp status | i Revision
Configuration Revision            : 5
A1#
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×19

```
D1(config)#vlan 10
D1(config-vlan)#name tenthvlan
D1(config-vlan)#exit
D1(config)#vlan 11
D1(config-vlan)#name eleventhvlan
D1(config-vlan)#exit
D1(config)#exit
D1#sho
*Oct 26 23:11:08.455: %SYS-5-CONFIG_I: Configured from console by console
D1#show vlan brief | i six|seven|eight|nin|ten|elev
6    sixthvlan                        active
7    seventhvlan                      active
8    eighthvlan                       active
9    ninthvlan                        active
10   tenthvlan                        active
11   eleventhvlan                     active
D1#show vtp status | i Revision
Configuration Revision            : 7
D1#
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×23

```
1005 trbrf-default                    act/unsup
A1#show vtp status | i revision
A1#show vtp status | i Revision
Configuration Revision            : 5
A1#
*Oct 26 23:10:14.349: %SW_VLAN-4-VTP_USER_NOTIFICATION: VTP protocol user notifi
cation: MD5 digest checksum mismatch on receipt of equal revision summary on tru
nk: Et1/1

*Oct 26 23:10:14.349: %SW_VLAN-4-VTP_USER_NOTIFICATION: VTP protocol user notifi
cation: MD5 digest checksum mismatch on receipt of equal revision summary on tru
nk: Et1/0

A1#show vtp status | i Revision
Configuration Revision            : 7
A1#show vlan brief | i six|seven|eight|nin|ten|elev
6    sixthvlan                        active
7    seventhvlan                      active
8    eighthvlan                       active
9    ninthvlan                        active
10   tenthvlan                        active
11   eleventhvlan                     active
A1#
```

Bmarco11 — D1 — telnet 192.168.71.128 5000 — 80×19

```
7    seventhvlan                      active
8    eighthvlan                       active
9    ninthvlan                        active
10   tenthvlan                        active
11   eleventhvlan                     active
D1#show vtp status | i Revision
Configuration Revision            : 7
D1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D1(config)#vlan 2600
D1(config-vlan)#name hackerpub
D1(config-vlan)#end
D1#
*Oct 26 23:16:01.070: %SYS-5-CONFIG_I: Configured from console by console
D1#show vtp status | i Revision
Configuration Revision            : 8
D1#show vlan brief | i hack
2600 hackerpub                        active
D1#
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×23

```
Configuration Revision            : 5
A1#
*Oct 26 23:10:14.349: %SW_VLAN-4-VTP_USER_NOTIFICATION: VTP protocol user notifi
cation: MD5 digest checksum mismatch on receipt of equal revision summary on tru
nk: Et1/1

*Oct 26 23:10:14.349: %SW_VLAN-4-VTP_USER_NOTIFICATION: VTP protocol user notifi
cation: MD5 digest checksum mismatch on receipt of equal revision summary on tru
nk: Et1/0

A1#show vtp status | i Revision
Configuration Revision            : 7
A1#show vlan brief | i six|seven|eight|nin|ten|elev
6    sixthvlan                        active
7    seventhvlan                      active
8    eighthvlan                       active
9    ninthvlan                        active
10   tenthvlan                        active
11   eleventhvlan                     active
A1#show vtp status | i Revision
Configuration Revision            : 8
A1#show vlan brief | i hack
A1#
```

Bmarco11 — A1 — telnet 192.168.71.128 5002 — 80×23

```
A1#show vlan brief | i hack
A1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
A1(config)#vtp version 3
A1(config)#end
A1#
*Oct 26 23:19:37.052: %SYS-5-CONFIG_I: Configured from console by console
A1#show vtp status | i version|Domain|Revision|Primary|Mode|Feature
VTP version running             : 3
VTP Domain Name                 : ccnpv8
VTP Pruning Mode                : Disabled
Feature VLAN:
VTP Operating Mode                : Client
Configuration Revision            : 8
Primary ID                        : aabb.cc80.0100
Primary Description               : D1
Feature MST:
VTP Operating Mode                : Transparent
Feature UNKNOWN:
VTP Operating Mode                : Transparent
A1#show vlan brief | i hack
2600 hackerpub                        active
A1#
```

Bmarco11 — D2 — telnet 192.168.71.128 5001 — 80×35

```
D2(config)#end
D2#
*Oct 26 23:19:03.639: %SYS-5-CONFIG_I: Configured from console by console
D2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D2(config)#end
D2#
*Oct 26 23:19:15.703: %SYS-5-CONFIG_I: Configured from console by console
D2#show vtp status | i version|Domain|Revision|Primary|Mode|Feature
VTP version running              : 3
VTP Domain Name                  : ccnpv8
VTP Pruning Mode                 : Disabled
Feature VLAN:
VTP Operating Mode                 : Transparent
Feature MST:
VTP Operating Mode                 : Transparent
Feature UNKNOWN:
VTP Operating Mode                 : Transparent
D2#show vlan brief | i hack
D2#show vlan brief

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Et0/1, Et0/2, Et0/3, Et1/2
                                                Et1/3, Et2/0, Et2/1, Et2/2
                                                Et2/3, Et3/0, Et3/1, Et3/2
                                                Et3/3
2    secondvlan2                      active
3    thirdvlan                        active
1002 fddi-default                     act/unsup
1003 trcrf-default                    act/unsup
1004 fddinet-default                  act/unsup
1005 trbrf-default                    act/unsup
1111 quadone                          active
D2#
```