


1. Menu management

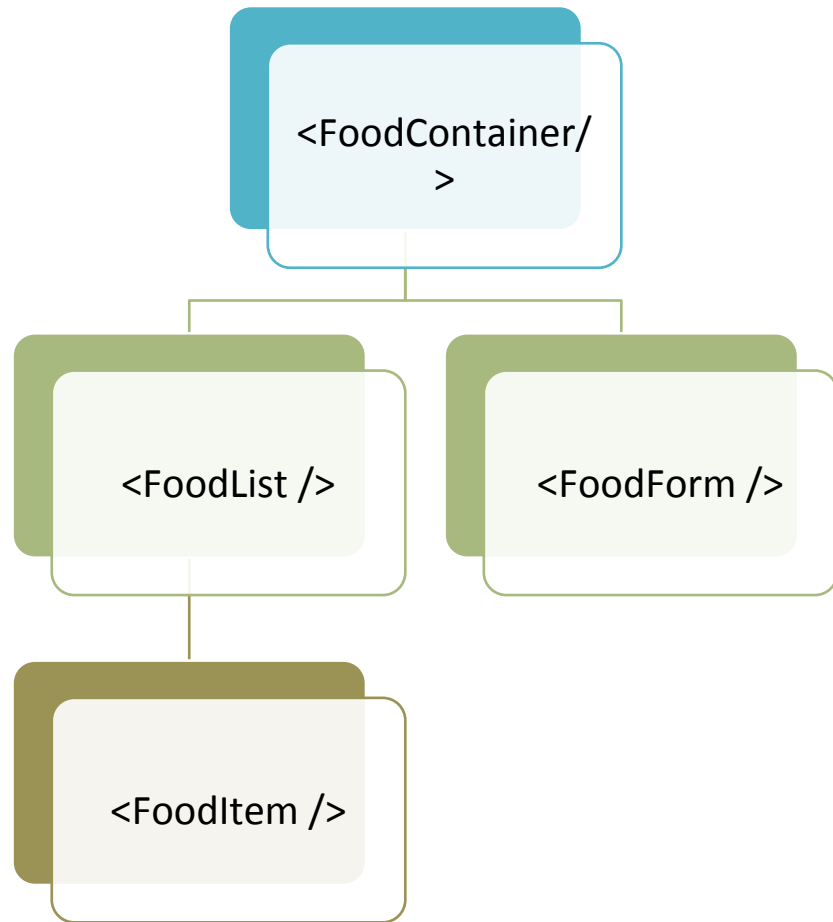

FoodList

FoodForm

Our Menu

- cake - 35 baht   }
- bread - 25 baht 
- milk - 15 baht  
- donut - 45 baht 
- cookie - 55 baht  


FoodItem

New Food

name :

price :

Best Seller : BestSeller 



Updating Arrays Object in

```
food = [  
  { name: "cake", price: 35, isBestSeller: true },  
  { name: "bread", price: 25, isBestSeller: false },  
  { name: "milk", price: 15, isBestSeller: true },  
  { name: "donut", price: 45, isBestSeller: false },  
  { name: "cookie", price: 55, isBestSeller: true },  
];
```

Import

```
const FoodContainer = () => {
  const [food, setFood] = useState(

);

  const deleteItem = (index) => {  }

  const addItem = (item) => {  }

  return (<div>
    <h3>Our Menu</h3>
    <FoodList                />
    <FoodForm                />
  </div>
  );
}
```

export default FoodContainer;

Import

```
const FoodList = (props) => {
  return (
    <div>
      <ul>
        {food.map((item) =>
          <FoodItem key={item.id} name={item.name} price={item.price} />
        )}
      </ul>
    </div>
  );
}
```

export default FoodList;

Instead of trying to render the entire object, submit the **specific properties**



Import

```
const FoodItem = (props) => {  
  return (<li key={props.id}>  
    <div>  
      <button onClick={props.handleClick}>Del</button>  
    </li>);  
}  
  
export default FoodItem;
```

Import

```
const FoodForm = (      ) => {
  const [inputs, setInputs] = useState({name:"", price:"",isBestSeller: 'true'});

  function handleChange(e) {
    const name = e.target.name;
    const value = e.target.value;
    setInputs(values => ({ ...values, [name]: value }));
  }

  function handleSubmit(e) {
    e.preventDefault();
    const newFood = {

    };
    setInputs({name:"",price:"",isBestSeller: 'true'});

  }
```

```
return (<form onSubmit={
    }>

    <input type="text" name="name" value={inputs.name} onChange={handleChange}/>

    <input type="number" name="price" value={inputs.price} onChange={handleChange}/>

    <select name="isBestSeller" onChange={handleChange}>
      <option value="true">BestSeller</option>
      <option value="false">Normal</option>
    </select>

    <button>Add menu</button>

  </form>);
}
export default FoodForm;
```

2. User / admin mode

USER MODE

ซ่อนปุ่มลบ และฟอร์มเพิ่มข้อมูล

ADMIN MODE

แสดงปุ่มลบ และฟอร์มเพิ่มข้อมูล

ใช้ localStorage บันทึก Mode
ปัจจุบันไว้

User Mode Admin

Our Menu

- cake - 35 baht 🏆
- bread - 25 baht
- milk - 15 baht 🏆
- donut - 45 baht
- cookie - 55 baht 🏆

Admin Mode User

Our Menu

- cake - 35 baht 🏆 Del
- bread - 25 baht Del
- milk - 15 baht 🏆 Del
- donut - 45 baht Del
- cookie - 55 baht 🏆 Del

New Food

name :

price :

Best Seller : BestSeller ▾

Add menu

3. CSS

ปรับแต่งโดยใช้ CSS