ARMIS API GUIDE V4.0

Armis Centrix™

September 21, 2025

Table of contents

1 Overview 19
2 Basic instructions and best practices 19
2.1 Obtaining your authorization token 19
2.1.1 Example 20
2.2 Simultaneous connections 20
2.3 API rate limiting 20
2.3.1 Best practices to avoid rate-limited errors 21
2.4 Paging through large amounts of data 21
2.5 Getting large device data sets 21
2.5.1 Example—Retrieve the first 100 devices 21
2.5.2 Example—Get the next 100 devices 22
2.6 Iterating through devices or alerts by time 23
2.6.1 Example 23
2.7 Searching for devices or alerts by time 25
2.7.1 Example—Devices 25
2.7.2 Example—Alerts by time 26
3 Access token 27
3.1 Returning a temporary access token 27
3.1.1 Permissions required 27
3.1.2 URI parameters 27
3.1.3 Example 27
3.1.4 Responses 27
4 Alerts 28
4.1 Updating alerts with the Armis Centrix™ status 28
4.1.1 Permissions required 28
4.1.2 URI parameters 28
4.1.3 Example—Setting the alert status to “UNHANDLED” 28
4.1.4 Example—Setting the alert status to “SUPPRESSED” 29
4.1.5 Example—Setting the alert status to “RESOLVED” 30
4.1.6 Responses 30

© Copyright Armis Security 2025

5 ARP 31
5.1 Uploading an ARP table 31
5.1.1 Permissions required 31
5.1.2 URI parameters 31
5.1.3 Example 31
5.1.4 Responses 32
6 Boundaries 33
6.1 Returning all boundaries information 33
6.1.1 Permissions required 33
6.1.2 URI parameters 33
6.1.3 Example 33
6.1.4 Response parameters 35
6.1.5 Responses 35
6.2 Getting a boundary by ID 35
6.2.1 Permissions required 35
6.2.2 URI parameters 35
6.2.3 Example 36
6.2.4 Response parameters 36
6.2.5 Responses 36
6.3 Creating a new boundary 37
6.3.1 Permissions required 37
6.3.2 URI parameters 37
6.3.3 Example 37
6.3.4 Responses 37
6.4 Deleting a boundary 37
6.4.1 Permissions required 37
6.4.2 URI parameters 38
6.4.3 Responses 38
6.5 Updating a boundary 38
6.5.1 URI parameters 38
6.5.2 Example 38
6.5.3 Responses 39
7 Business applications 40
7.1 Bulk operation associating devices to business applications 40

7.1.1 Permissions required 40
7.1.2 URI parameters 40
7.1.3 Example 40
7.1.4 Responses 40
7.2 Bulk operation on business applications 41
7.2.1 Permissions required 41
7.2.2 URI parameters 41
7.2.3 Example 41
7.2.4 Responses 41
7.3 Getting business application by ID 42
7.3.1 Permissions required 42
7.3.2 URI parameters 42
7.3.3 Example 42
7.3.4 Response parameters 43
7.3.5 Responses 43
8 Certificate 44
8.1 Returning the tenant's root CA certificate (PEM file) 44
8.1.1 Permissions required 44
8.1.2 URI parameters 44
8.1.3 Responses 44
9 Collectors 45
9.1 Returning existing collectors 45
9.1.1 Permissions required 45
9.1.2 URI parameters 45
9.1.3 Example 45
9.1.4 Responses 45
9.2 Returning image URL collectors 46
9.2.1 Permissions required 46
9.2.2 URI parameters 46
9.2.3 Responses 46
9.3 Deleting a collector 46
9.3.1 Permissions required 46
9.3.2 URI parameters 46
9.3.3 Responses 47

© Copyright Armis Security 2025

9.4 Getting collector by ID 47
9.4.1 Permissions required 47
9.4.2 URI parameters 47
9.4.3 Example 47
9.4.4 Responses 48
9.5 Creating a new collector 48
9.5.1 Permissions required 48
9.5.2 URI parameters 48
9.5.3 Example 48
9.5.4 Responses 49
9.6 Updating the collector's name 49
9.6.1 Permissions required 49
9.6.2 URI parameters 49
9.6.3 Example 49
9.6.4 Responses 50
9.7 Updating the collector's password 50
9.7.1 Permissions required 50
9.7.2 URI parameters 50
9.7.3 Example 50
9.7.4 Responses 51
10 Dashboards 52
10.1 Getting existing dashboards 52
10.1.1 Permissions required 52
10.1.2 URI parameters 52
10.1.3 Responses 52
10.2 Getting an existing dashboard by ID 52
10.2.1 Permissions required 52
10.2.2 URI parameters 52
10.2.3 Responses 53
10.3 Creating a new dashboard 53
10.3.1 Permissions required 53
10.3.2 URI parameters 53
10.3.3 Example 54
10.3.4 Responses 54

10.4 Delete dashboard by ID 54
10.4.1 Permissions required 54
10.4.2 URI parameters 54
10.4.3 Responses 55
10.5 Share dashboard by ID 55
10.5.1 Permissions required 55
10.5.2 URI parameters 55
10.5.3 Responses 56
11 Dashlets 57
11.1 Delete dashlet by ID 57
11.1.1 Permissions required 57
11.1.2 URI parameters 57
11.1.3 Responses 58
12 Devices 59
12.1 Returning device information for a given identifier 59
12.1.1 Permissions required 59
12.1.2 URI parameters 59
12.1.3 Example 59
12.1.4 Response parameters 61
12.1.5 Responses 63
12.2 Delete device by ID 63
12.2.1 Permissions required 63
12.2.2 URI parameters 63
12.2.3 Responses 63
12.3 Bulk operations on a device 64
12.3.1 Permissions required 64
12.3.2 Example 64
12.3.3 Responses 64
12.3.4 URI parameters 65
12.4 Setting a tag on an Armis device 65
12.4.1 Permissions required 65
12.4.2 URI parameters 65
12.4.3 Example 65
12.4.4 Responses 66

© Copyright Armis Security 2025

12.5 Removing a tag from an Armis device 66
12.5.1 Permissions required 66
12.5.2 URI parameters 66
12.5.3 Permissions required 67
12.5.4 Example 67
12.5.5 Responses 67
12.6 Updating a custom property on an Armis device 67
12.6.1 Permissions required 68
12.6.2 URI parameters 68
12.6.3 Examples 68
12.6.4 Responses 69
12.7 Adding applications to a device 69
12.7.1 Permissions required 69
12.7.2 URI parameters 70
12.7.3 Example 70
12.8 Update a devices Purdue level 70
12.8.1 Permissions required 70
12.8.2 URI parameters 70
12.8.3 Example 70
12.8.4 Responses 71
12.9 Updating one or more of the device's attributes 71
12.9.1 Permissions required 71
12.9.2 URI parameters 71
12.9.3 Example 71
12.9.4 Responses 72
12.10 Uploading a CSV file with device data 72
12.10.1 Permissions required 72
12.10.2 URI parameters 72
12.10.3 Responses 72
12.11 Returning supported keys 72
12.11.1 Permissions required 73
12.11.2 URI parameters 73
12.11.3 Responses 73
13 Device applications 74

13.1 Get device applications 74
13.1.1 Permissions required 74
13.1.2 URI parameters 74
13.1.3 Example 75
13.1.4 Response parameters 77
13.1.5 Responses 77
13.2 Bulk operation on device applications 77
13.2.1 Permissions required 77
13.2.2 URI parameters 77
13.2.3 Example 78
13.2.4 Responses 78
14 Device boundaries 79
14.1 Bulk operation on device boundaries 79
14.1.1 Permissions required 79
14.1.2 URI parameters 79
14.1.3 Example 79
14.1.4 Responses 80
15 Device properties 81
15.1 Bulk operation on device properties 81
15.1.1 Permissions required 81
15.1.2 URI parameters 81
15.1.3 Example 81
15.1.4 Responses 82
16 Devices tags 83
16.1 Setting the status for a given set of tags and devices 83
16.1.1 Permissions required 83
16.1.2 URI parameters 83
16.1.3 Example 83
16.1.4 Responses 84
17 Integrations 85
17.1 Returning existing integrations 85
17.1.1 Permissions required 85
17.1.2 URI parameters 85
17.1.3 Examples 85

© Copyright Armis Security 2025

17.1.4 Response parameters 87
17.1.5 Responses 87
17.2 Getting the integration by ID 88
17.2.1 Permissions required 88
17.2.2 URI parameters 88
17.2.3 Example 89
17.2.4 Response parameters 90
17.2.5 Responses 90
17.3 Creating a new integration 90
17.3.1 Permissions required 90
17.3.2 URI parameters 91
17.3.3 Example 91
17.3.4 Responses 91
17.4 Deleting an integration 91
17.4.1 Permissions required 91
17.4.2 URI parameters 91
17.4.3 Responses 92
17.5 Updating the parameters of an integration by ID 92
17.5.1 Permissions required 92
17.5.2 URI parameters 92
17.5.3 Example 92
17.5.4 Responses 92
18 Policies 93
18.1 Getting all policies 93
18.1.1 Permissions required 93
18.1.2 URI parameters 93
18.1.3 Example 93
18.1.4 Response parameters 95
18.1.5 Responses 95
18.2 Getting policy by ID 95
18.2.1 Permissions required 95
18.2.2 URI parameters 95
18.2.3 Response parameters 96
18.2.4 Responses 96

18.3 Creating a new policy 97
18.3.1 Permissions required 97
18.3.2 URI parameters 97
18.3.3 Example 97
18.3.4 Response parameters 98
18.3.5 Responses 98
18.4 Deleting a policy by ID 99
18.4.1 Permissions required 99
18.4.2 URI parameters 99
18.4.3 Example 99
18.4.4 Responses 100
18.4.5 Example—Creating an Activity policy 100
18.4.6 Example—Creating a Device policy 102
18.4.7 Example—Creating an IP Connection policy 104
18.5 Updating a policy 105
18.5.1 Permissions required 105
18.5.2 URI parameters 106
18.5.3 Examples 106
18.5.4 Response parameters 108
18.5.5 Responses 109
19 Reports 110
19.1 Creating a new report 110
19.1.1 Permissions required 110
19.1.2 URI parameters 111
19.1.3 Example 111
19.1.4 Responses 111
19.2 Updating a report 112
19.2.1 Permissions required 112
19.2.2 URI parameters 112
19.2.3 Example 112
19.2.4 Responses 113
19.3 Deleting a report by ID 113
19.3.1 Permissions required 113
19.3.2 URI parameters 113

19.3.3 Responses 114
19.4 Getting report details by ID 114
19.4.1 Permissions required 114
19.4.2 URI parameters 114
19.4.3 Example 114
19.4.4 Responses 115
19.5 Getting all report details 115
19.5.1 Permissions required 115
19.5.2 URI parameters 115
19.5.3 Responses 116
19.6 Getting the latest report by ID 116
19.6.1 Permissions required 116
19.6.2 URI parameters 117
19.6.3 Responses 117
19.7 Sending a request to run a report by ID 117
19.7.1 Permissions required 118
19.7.2 URI parameters 118
19.7.3 Responses 118
19.8 System Reports 118
19.8.1 Creating a new system report 118
19.8.1.1 Permissions required 119
19.8.1.2 Request body 119
19.8.1.3 Example 119
19.8.1.4 Responses 120
19.8.2 Enabling or disabling a system report 120
19.8.2.1 Permissions required 120
19.8.2.2 URI parameters 121
19.8.2.3 Request body 121
19.8.2.4 Example 121
19.8.2.5 Responses 122
19.8.3 Getting system report results 122
19.8.3.1 Permissions required 122
19.8.3.2 URI parameters 123
19.8.3.3 Responses 123

20 Roles **126**
20.1 Getting details of all roles 126
20.1.1 Permissions required 126
20.1.2 URI parameters 126
20.1.3 Responses 126
20.2 Creating a new role 126
20.2.1 Permissions required 126
20.2.2 URI parameters 126
20.2.3 Example 127
20.2.4 Responses 131
20.3 Deleting a role 132
20.3.1 Permissions required 132
20.3.2 URI parameters 132
20.3.3 Responses 132
20.4 Get role details 132
20.4.1 Permissions required 132
20.4.2 URI parameters 132
20.4.3 Responses 133
20.5 Update role privileges 133
20.5.1 Permissions required 133
20.5.2 URI parameters 133
20.5.3 Example 133
20.5.4 Responses 137
21 Search **138**
21.1 Return search result for given ASQ search string 138
21.1.1 Permissions required 138
21.1.2 URI parameters 138
21.1.3 Responses 139
21.1.4 Searches types 140
21.1.4.1 activity 141
21.1.4.1.1 Example 141
21.1.4.1.2 Response parameters 141
21.1.4.2 alerts 143
21.1.4.2.1 Examples 143

21.1.4.2.2 Response parameters 147
21.1.4.3 auditlog 148
21.1.4.3.1 Parameters 148
21.1.4.3.2 Response parameters 149
21.1.4.4 applications 150
21.1.4.4.1 Examples 150
21.1.4.4.2 Response parameters 151
21.1.4.5 businessApplications 151
21.1.4.5.1 Example 151
21.1.4.5.2 Response parameters 153
21.1.4.6 connections 154
21.1.4.6.1 Example 154
21.1.4.6.2 Response parameters 155
21.1.4.7 devices 157
21.1.4.7.1 Examples 157
21.1.4.7.2 Response parameters 160
21.1.4.8 operatingSystems 162
21.1.4.8.1 Example 162
21.1.4.8.2 Response parameters 163
21.1.4.9 riskFactors 164
21.1.4.9.1 Example 164
21.1.4.9.2 Response parameters 166
21.1.4.10 services 166
21.1.4.10.1 Example 167
21.1.4.10.2 Response parameters 167
21.1.4.11 traffic 169
21.1.4.11.1 Example 169
21.1.4.11.2 Response parameters 169
21.1.4.12 users 171
21.1.4.12.1 Example 171
21.1.4.12.2 Response parameters 172
21.1.4.13 vulnerabilities 173
21.1.4.13.1 Example 173
21.1.4.13.2 Response parameters 174

21.1.5 orderBy function 175
21.1.5.1 Examples 177
22 Sites 179
22.1 Returning all sites information 179
22.1.1 Permissions required 179
22.1.2 URI parameters 179
22.1.3 Example 180
22.1.4 Responses 181
22.2 Creating a new site 181
22.2.1 Permissions required 181
22.2.2 URI parameters 181
22.2.3 Example 181
22.2.4 Responses 182
22.3 Deleting a site 182
22.3.1 Permissions required 182
22.3.2 URI parameters 182
22.3.3 Responses 182
22.4 Getting a site by ID 183
22.4.1 Permissions required 183
22.4.2 URI parameters 183
22.4.3 Example 183
22.4.4 Responses 183
22.5 Updating a site 184
22.5.1 Permissions required 184
22.5.2 URI parameters 184
22.5.3 Example 184
22.5.4 Responses 184
22.6 Getting all integration IDs of the site 185
22.6.1 Permissions required 185
22.6.2 URI parameters 185
22.6.3 Example 185
22.6.4 Responses 185
22.7 Adding a new integration ID to the site 186
22.7.1 Permissions required 186

22.7.2 URI parameters 186
22.7.3 Example 186
22.7.4 Responses 186
22.8 Deleting an integration ID from the site 186
22.8.1 Permissions required 186
22.8.2 URI parameters 187
22.8.3 Responses 187
22.9 Getting all network equipment device IDs of the site 187
22.9.1 Permissions required 187
22.9.2 URI parameters 187
22.9.3 Example 188
22.9.4 Responses 188
22.10 Adding a new network device ID to the site 188
22.10.1 Permissions required 188
22.10.2 URI parameters 189
22.10.3 Example 189
22.10.4 Example 189
22.10.5 Responses 190
22.11 Deleting a network device ID from the site 190
22.11.1 Permissions required 190
22.11.2 URI parameters 190
22.11.3 Responses 191
23 User Asset Properties 192
23.1 Bulk operations on user asset properties 192
23.1.1 Permissions required 192
23.1.2 URI parameters 192
23.1.3 Example 192
23.1.4 Responses 193
24 Users 194
24.1 Returning existing accounts 194
24.1.1 Permissions required 194
24.1.2 URI parameters 194
24.1.3 Examples 194
24.1.4 Responses 195

24.2 Creating a new account 195
24.2.1 Permissions required 195
24.2.2 URI parameters 196
24.2.3 Example 196
24.2.4 Responses 196
24.3 Deleting a user 197
24.3.1 Permissions required 197
24.3.2 URI parameters 197
24.3.3 Responses 197
24.4 Getting a user by ID or email 197
24.4.1 Permissions required 197
24.4.2 URI parameters 197
24.4.3 Responses 198
24.5 Editing a user 198
24.5.1 Permissions required 198
24.5.2 URI parameters 198
24.5.3 Example 198
24.5.4 Responses 199
25 Vulnerability 200
25.1 Getting CVE-on-asset matches according to CVE or device IDs 200
25.1.1 Permissions required 200
25.1.2 URI parameters 200
25.1.3 Example 201
25.1.4 Responses 202
25.2 Get vulnerabilities matches by filters 202
25.2.1 Permissions required 202
25.2.2 URI parameters 202
25.2.3 Responses 203
25.3 Setting the status of CVE-on-asset matches according to CVE or device IDs 203
25.3.1 Permissions required 203
25.3.2 URI parameters 203
25.3.3 Responses 204

Armis API Guide

Document history

Version	Date	Change
4.0	September 9, 2025	Add examples for `auditLog`. Rename `{org_name}` in some calls to `<armis.instance>`.
3.8	September 1, 2025	Add a new password-settings for collectors API call and add purdue level.
3.7	July 14, 2025	Added new system reports. A new type called `auditLog` under the Search endpoint.
3.6	May 27, 2025	Document `networkInterface` for the fields text box to get network interfaces in the `/api/v1/devices` and `/api/v1/devices`.
3.5	April 29, 2025	IPv6 should be a list item.
3.4	April 3, 2025	Added Tier support to `/api/v1/search/` for device ASQs and `/api/v1/devices/` Added deploymentType to `/api/v1/collectors/_image/`
3.3	March 16, 2025	Added new lastAlertUpdateTime parameter
3.2	February 16, 2025	Added a note that the GET /api/v1/report-results/{report_id}/ endpoint needs to be scheduled an run before using this endpoint.
3.1	January, 2025	Formatting and minor updates.
3.0	December 10, 2024	Updated riskLevel values.
2.9	September 26, 2024	Added new POST /api/v1/user-asset-properties/_bulk/for bulk operations on user properties.

Version	Date	Change
2.8	August 20, 2024	Add example to in:alerts
2.7	August 5, 2024	Add Delete /api/v1/devices/{device_id}/ endpoint.
2.6	July 24, 2024	Correct POST parameter in Updating a custom property
2.5	April 25, 2024	Correct POST /api/v2/integrations/ example. Add results are ordered by the device ID (id). Add Delete and Share dashboard by ID. Add Delete dashlet by ID.
2.4	March 21, 2024	Add `"boundaries"` under "roleAssignment" in the `POST/api/v1/users`.
2.3	February 11, 2024	Add `Get device-application` API.

© Copyright Armis Security 2025

1 Overview

This guide describes the Armis API, which the Armis Centrix™ platform provides. You can use the Armis API to simplify the retrieval and uploading of data. This guide is intended to enable technical teams to quickly get up to speed with the Armis API and to realize proof of value as fast as possible.

Armis recommends using a tool such as Postman or Paw to quickly develop and test the Armis API. This will enable the developer to quickly debug requests to and responses from the API. These calls can then be implemented in your platform of choice.

For more information on the Armis Centrix™ platform, refer to the *Armis user guide*.

> **NOTE:** The name *Armis Query Language* (*AQL*) was changed to *Armis Standard Query* (*ASQ*). However, the API continues to use **`aql`** throughout.

2 Basic instructions and best practices

2.1 Obtaining your authorization token

The authorization token is used for authentication of the Armis API.

To obtain your secret key from the Armis console:

- Go to **Settings** > **API Management**.

If the secret key has not already been created, do the following:

1. Click **Create** to create the secret key.
2. Click **Show** to access the secret key. The following dialog is displayed, from which you can copy your secret key.

3. Once you have obtained the secret key, perform a call to the Armis API to obtain the authentication token. This can be performed as a simple REST query.

> **NOTE:** The Python examples in this document do not include import requests.

The following are examples:

cURL

```
curl -X 'POST' \
  'https://<armis-instance>.armis.com/api/v1/access_token/' \
  -H 'accept: application/json' \
  -H 'Content-Type: application/x-www-form-urlencoded' \
  -d 'secret_key=353dfd76501e8650869b066b37463c7275122c39...'
```

2.1.1 Example

This will generate a response payload as follows in JSON format:

```
{
 "data": {
  "access_token": "e9a237ea027ff6096b1225b9c2a9bbe3ca...",
  "expiration_utc": "2021-06-14T22:30:45.373426+00:00"
 },
 "success": true
}
```

Here, the `access_token` is your authentication token to be used in subsequent Armis API calls.

> **NOTE:** The authentication token has a lifetime of 15 minutes, so if an API call fails, a new authentication token may need to be obtained. Check the return code of the API call. If the access token is invalid, the call will result in an HTTP status of *402 Unauthorized*, and the response payload will be as follows:

```
{
  "message": "Invalid access token.",
  "success": false
}
```

2.2 Simultaneous connections

Armis recommends no more than eight simultaneous connections to the Armis API.

2.3 API rate limiting

Armis APIs are rate-limited to ensure platform stability and availability. However, your application should be built to handle limits gracefully.

The HTTP 429 status code, “Too Many Requests,” indicates that an app has sent too many requests in a given timeframe. This is part of our rate-limiting mechanism to ensure fair usage and protect our systems from abuse or unintentional overload. To avoid this error, the rate of requests needs to be slowed down.

© Copyright Armis Security 2025

2.3.1 Best practices to avoid rate-limited errors

Designing your app with best practices in mind is the best way to avoid rate-limited errors. Consider the following best practices when designing your app:

- Your code should stop making additional API requests until enough time has passed to retry. The recommended backoff time is *five seconds*.
- Ensure your app implements exponential backoff or similar retry mechanisms to avoid overloading the system.
- Optimize your code by filtering API queries to fetch only necessary data.
- Consider using the APIs batching capabilities. You could, for example, fetch many entities in one API call instead of a single entity by ID.
- Use caching for data that your app uses often.

2.4 Paging through large amounts of data

To page through large amounts of data, a simple modification to the Armis API REST calls is all that is required to implement this functionality. We will demonstrate this for device data, but the principle is the same for all REST calls to the Armis API.

2.5 Getting large device data sets

The following query shows how to get large amounts of device information from Armis Centrix™. Let's assume that we want to use a page size of 100, then our initial call to the API will look like this (to retrieve the first 100 devices):

cURL

```
curl "https://<armis-
instance>.armis.com/api/v1/search/?aql=in:device&length=100"
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(
url="https://<armis-instance>.armis.com/api/v1/search/",
            params={"aql": "in:devices ",
                    "length": "100"},
           headers={"Authorization": <access-token>})
```

2.5.1 Example—Retrieve the first 100 devices

The response will be a JSON array of devices similar to this:

```
{
   "data": {
     "count": 100,
     "next": 100,
     "prev": null,
     "results": [
      … (100 device entries)
      ],
     "total": 4415
   },
   "success": true
}
```

The key point here is that the **“length=100”** attribute is used to define the length of the “page” that you want to use.

However, we only retrieved the first 100 devices in the list. To get the next 100 devices in the list, we would then make the following call to the API:

cURL

```
curl "https://<armis-
instance>.armis.com/api/v1/search/?aql=in:device&length=100&from=100" -H
'Authorization: <access-token>'
```

Python

```
response = requests.get(
url="https://<armis-instance>.armis.com/api/v1/search/",
            params={"aql": "in:devices ",
                    "length": "100"},
                    "from": "100"},
            headers={"Authorization": <access-token>})
```

2.5.2 Example—Get the next 100 devices

The response will be a JSON array of devices similar to this:

```
{
       "data": {
          "count": 100,
          "next": 200,
          "prev": null,
          "results": [
            … (100 device entries)
            ],
          "total": 4415
       },
       "success": true
}
```

© Copyright Armis Security 2025

There are two key points to take away from this invocation. The first is that we have added the **"from"="100"** parameter to the API call. This indicates where to start the retrieval of the next set of devices, that is, where the next page starts. The second point to notice is that we have the **"next": 200** value in the response from the API call. This indicates where to start the next API invocation with our chosen page size of 100.

The recommended procedure is to note the total number of device entries in Armis Centrix™ from the initial call to the API, then simply iterate through the appropriate number of pages (with your selected page size) until all of the device information has been retrieved.

> **NOTES:**
> - The Armis API has a maximum page size of 5,000.
> - Calculating the total number of records, which happens when the query is executed can take time. For time sensitive queries, filtering by time precludes iterating through all of the records in the result set and can significantly speed up query response.

2.6 Iterating through devices or alerts by time

In the case of finding devices or alerts over a specific time period, it is useful to specify the desired time frame and order the results accordingly.

2.6.1 Example

The following example illustrates how to get all devices seen over the last 7 days, and the results are ordered by the device ID (`id`). This is important because you do not want to miss any devices because the default sort order is by `lastSeen`, which can result in different results.

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?
aql=in:devices&timeFrame=7%20Days&
orderBy=id" -H 'Authorization: <access-token>'
```

Python

```
response = requests.get(    url="https://<armis-
instance>.armis.com/api/v1/search/",
       params={"aql": "in:devices ",
           "timeFrame": "7 Days",
           "orderBy": "id" },
       headers={"Authorization": <access-token>})
```

The response will be a JSON array of devices similar to this:

```
{
        "data": {
          "count": 10,
          "next": 10,
          "prev": null,
          "results": [
           … (n device entries ordered by the “id” field)
           ],
          "total": 4415
        },
        "success": true
}
```

NOTE: Iterating over a set of results is the recommended best practice to `orderBy` a fixed parameter, for example `id` (device ID), to not to miss data between pages. This is because the default order is by `lastSeen`, so results can change.

2.7 Searching for devices or alerts by time

In the case of finding devices or alerts that have been either `lastSeen` (in the case of devices) or `time` (in the case of an alert), it is useful to specify the desired time frame in general using `before:YYYY-MM-DDTHH:MM:SS` and `after:YYYY-MM-DDTHH:MM:SS`.

For more information of searching for devices, see devices

2.7.1 Example—Devices

The following example shows how to get all devices seen on and after 2022-03-10.

> **NOTE:** The device search endpoint only supports the `after:` clause and is based on the **date** portion and is compared against the `lastSeen` value for the device.

The ASQ is: `in:devices after:2022-03-10`

cURL

```
curl "https://<armis-
instance>.armis.com/api/v1/search/?aql=in%3Adevices%20after%3A2022-03-10"
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(    url="https://<armis-
instance>.armis.com/api/v1/search/",
       params={"aql": "in:devices after:2022-03-10"},
       headers={"Authorization": <access-token>})
```

2.7.2 Example—Alerts by time

The following example illustrates how to get all alerts seen between the after: 2022-03- 11T14:00:00 and the before: 2022-03-16T14:00:00.

> **NOTE:** The alerts search endpoint supports both the `before:` and `after:` clauses and is based on the ***full datetime*** specified and is compared against the `time` value for the alert.

The ASQ is: `in:alerts after:2022-03-11T14:00:00 before:2022-03- 16T14:00:00`

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?aql=
in%3Aalerts%20after%3A2022-03-11T14%3A00%3A00%20before%3A2022-03-
16T14%3A00%3A00" -H 'Authorization: <access-token>'
```

Python

```
response = requests.get(    url="https://<armis-
instance>.armis.com/api/v1/search/",
       params={"aql": "in:alerts after:2022-03-11T14:00:00 before:2022-03-
16T14:00:00"},
       headers={"Authorization": <access-token>})
```

3 Access token

3.1 Returning a temporary access token

POST `/api/v1/access_token/`

3.1.1 Permissions required

- NONE

3.1.2 URI parameters

Name	Type	Description
secret-key	string (formData)	Secret key.

3.1.3 Example

The response will be a JSON array of alerts similar to this:

```
{
  "data": {
    "access_token": "85c5eb5d4fb647bc91a1db46824aac3a83a86117…",
    "expiration_utc": "2023-10-11T09:49:00.818613+00:00"
  },
  "success": true
}
```

3.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.

4 Alerts

For more information about alerts, see the Armis user guide.

4.1 Updating alerts with the Armis Centrix™ status

PATCH `/api/v1/alerts/{alert_id}/`

To update a specific alert, the `alertId` is required. It is the unique numeric identifier of the alert in Armis Centrix™. Only individual alerts can be updated with this method and the update is performed using the HTTP PATCH call.

4.1.1 Permissions required

- **Alert** > **Manage** > **Resolve**
- **Alert** > **Manage** > **Suppress**

4.1.2 URI parameters

Name	Type	Description
alert_id * Required	(path)	The ID of the designated alert
status * Required	string (formData)	The status of the designated alert Available values : UNHANDLED, SUPPRESSED, RESOLVED

There are three states that can be attributed to an Armis alert:

- UNHANDLED
- SUPPRESSED
- RESOLVED

4.1.3 Example—Setting the alert status to “UNHANDLED”

cURL

```
curl -X "PATCH" "https://<armis-instance>.armis.com/api/v1/alerts/<alertId>/"
      -H 'Authorization: <access-token>'
      -H 'Content-Type: application/x-www-form-urlencoded'
      -d "status=UNHANDLED"
```

Python

```
response = requests.patch(
url="https://<armis-instance>.armis.com/api/v1/alerts/<alertId>/",
headers={"Authorization": <access-token>,
         "Content-Type": "application/x-www-form-urlencoded;
charset=utf-8"},
data = {"status": "UNHANDLED"})
```

If the call is successful, it will return the following:

```
{
   "success": true
}
```

If the alert was already in the UNHANDLED state, it will return the following:

```
{
    "message": "Nothing to change",
    "success": false
}
```

4.1.4 Example—Setting the alert status to “SUPPRESSED”

cURL

```
curl -X "PATCH" "https://<armis-instance>.armis.com/api/v1/alerts/<alertId>/"
       -H 'Authorization: <access-token>'
       -H 'Content-Type: application/x-www-form-urlencoded'
       -d "status=SUPPRESSED"
```

Python

```
response = requests.patch(url="https://<armis-
instance>.armis.com/api/v1/alerts/<alertId>/",
headers={"Authorization": <access-token>,
         "Content-Type": "application/x-www-form-urlencoded;
charset=utf-8"},
data = {"status": "SUPPRESSED"})
```

If the call is successful, it will return the following:

```
{
       "success": true
}
```

If the alert was already in the SUPPRESSED state, it will return the following:

```
{
        "message": "Nothing to change",
        "success": false
}
```

4.1.5 Example—Setting the alert status to “RESOLVED”

cURL

```
curl -X "PATCH" "https://<armis-instance>.armis.com/api/v1/alerts/<alertId>/"
        -H 'Authorization: <access-token>'
        -H 'Content-Type: application/x-www-form-urlencoded'
        -d "status=RESOLVED"
```

Python

```
response = requests.patch(
url="https://<armis-instance>.armis.com/api/v1/alerts/<alertId>/",
headers={"Authorization": <access-token>,
          "Content-Type": "application/x-www-form-urlencoded;
charset=utf-8"},
data = {"status": "RESOLVED"})
```

If the call is successful, it will return the following:

```
{
        "success": true
}
```

If the alert was already in the RESOLVED state, it will return the following:

```
{
        "message": "Nothing to change",
        "success": false
}
```

4.1.6 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Nothing to change.
404	Unknown alert.

5 ARP

5.1 Uploading an ARP table

POST `/api/v1/arp/`

5.1.1 Permissions required

- **Device** > **Manage**

5.1.2 URI parameters

Name	Type	Description
arp * Required	file	CSV File encoded in UTF-8.
integrationGroupId	integer	Default value: 0
expiration * Required	number ($float)	Expiration for ARP table in days.

5.1.3 Example

To upload an ARP table into the Armis platform, the following example uses Python:

Python

```
arp_table_data = []

expiration = 1

arp_table_data.append(["10.100.100.1", "11:22:33:44:55:66"])

stream = io.StringIO()
writer = csv.writer(stream, skipinitialspace=True)
writer.writerow(["ip", "mac"])

i = 0
for i in range(len(arp_table_data)):
    writer.writerow(arp_table_data[i])
stream.seek(0)

response = requests.post(
url="https://<armis-instance>.armis.com/api/v1/arp/",
     params={"expiration": expiration},
     headers={"Authorization": <access-token>},
     files = {"arp": stream})
```

The response is a JSON array of devices similar to this (if successful):

```
{ "success": true }
```

5.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. **Name**—Authorization **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string

6 Boundaries

6.1 Returning all boundaries information

GET `/api/v1/boundaries/`

Pagination is supported.

6.1.1 Permissions required

- **Settings** > **Boundary** > **Read**

6.1.2 URI parameters

Name	Type	Description
from	integer (query)	Paging from.
length	integer (query)	Paging length.
affectedSites	(query)	Filter by affected sites. If omitted, all boundaries will be returned.
includeTotal	bool (query)	Return total count, default False.
fields	(query)	Fields to show. If omitted, returns a default subset of fields.

6.1.3 Example

The response will be a JSON array of devices similar to this:

```
{
  "data": {
    "boundaries": [
      {
        "affectedSites": "",
        "id": 3,
        "name": "Off Network",
        "ruleAql": null
      },
      {
        "affectedSites": "",
        "id": 4,
        "name": "network1",
        "ruleAql": {
          "and": [
            "category:Computers"
          ]
        }
      },
      {
        "affectedSites": "",
        "id": 6,
        "name": "new boundary - test when it fails",
        "ruleAql": {
          "and": [
            "type:\"Access Points\""
          ]
        }
      },
      {
        "affectedSites": "Meraki,switch",
        "id": 7,
        "name": "asdf",
        "ruleAql": {
          "and": [
            "name:rule1"
          ]
        }
      }
    ],
    "count": 4,
    "next": 7,
    "prev": 3
  },
  "success": true
}
```

6.1.4 Response parameters

Name	Type	Description
affectedSites	string	Specific sites affected by the boundary logic. E.g., Meraki, Switch, Site A, Site B.
id	integer	The ID assigned to the boundary.
name	string	The boundary's name. E.g., Corporate, Guest, Off Network.
ruleAql	JSON	The rule ASQ parameters.

6.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

6.2 Getting a boundary by ID

GET `/api/v1/boundaries/{boundary_id}/`

6.2.1 Permissions required

- **Settings** > **Boundary** > **Read**

6.2.2 URI parameters

Name	Type	Description
boundary_id * Required	(path)	The boundary ID in the Armis system.
fields	(query)	Fields to show. If omitted, returns a default subset of fields.

6.2.3 Example

```
{
  "data": {
    "affectedSites": "",
    "id": 1,
    "name": "Corporate",
    "ruleAql": {
      "or": [
        "broadcastSsid:Sky,Arm",
        "lastConnectedSsid:Sky,Arm"
      ]
    }
  },
  "success": true
}
```

6.2.4 Response parameters

Name	Type	Description
affectedSites	string	Specific sites affected by the boundary logic. E.g., Meraki, Switch, Site A, Site B.
id	integer	The ID assigned to the boundary.
name	string	The boundary's name. E.g., Corporate, Guest, Off Network.
ruleAql	JSON	The rule ASQ parameters.

6.2.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown boundary.

© Copyright Armis Security 2025

6.3 Creating a new boundary

POST `/api/v1/boundaries/`

6.3.1 Permissions required

- **Settings** > **Boundary** > **Manage** > **Create**

6.3.2 URI parameters

Name	Type	Description
site object	(body)	JSON describing the boundary.

6.3.3 Example

```
{
   "affectedSites": "siteA, siteB",
   "name": "my boundary name",
   "ruleAql": {
     "or": [
       "type:ACCESS_POINT"
     ]
   }
}
```

6.3.4 Responses

This API call has the following HTTP status codes:

Code	Description
201	Request accepted and sent for further processing.
400	Bad request.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

6.4 Deleting a boundary

DELETE `/api/v1/boundaries/{boundary_id}/`

6.4.1 Permissions required

- **Settings** > **Boundary** > **Manage** > **Delete**

6.4.2 URI parameters

Name	Type	Description
boundary_id * Required	(path)	The boundary ID in the Armis system.

6.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown boundary.

6.5 Updating a boundary

PATCH `/api/v1/boundaries/{boundary_id}/`

6.5.1 URI parameters

Name	Type	Description
boundary_id * Required	(path)	The boundary ID in the Armis system.
site	object (body)	JSON describing the boundary.

6.5.2 Example

```
{
   "affectedSites": "siteA, siteB",
   "name": "my boundary name",
   "ruleAql": {
     "or": [
       "type:ACCESS_POINT"
     ]
   }
}
```

6.5.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown boundary.

7 Business applications

7.1 Bulk operation associating devices to business applications

POST `/api/v1/business-application-device-associations/_bulk/`

7.1.1 Permissions required

- Business Applications > Manage > Upsert

7.1.2 URI parameters

Name	Type	Description
body	array[object] (body)	

7.1.3 Example

```
[
  {
    "upsert": {
      "businessApplicationId": 0,
      "deviceId": 0
    }
  }
]
```

7.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

© Copyright Armis Security 2025

7.2 Bulk operation on business applications

POST `/api/v1/business-applications/_bulk/`

7.2.1 Permissions required

- **Business Applications** > **Manage** > **Upsert**

7.2.2 URI parameters

Name	Type	Description
body	array[object]	

7.2.3 Example

```
[
  {
     "upsert": {
       "businessCriticality": "CRITICAL",
       "businessOwnerFullName": "Iorek B",
       "businessUnit": "",
       "description": "Database application to store our users",
       "environmentName": "Env1",
       "identifier": "aaa",
       "installationType": "SAAS",
       "name": "My_app",
       "source": "SERVICENOW",
       "type": "HOMEGROWN"
     }
  }
]
```

7.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

7.3 Getting business application by ID

GET /api/v1/business-applications/

7.3.1 Permissions required

- **Business Applications** > **Read**

7.3.2 URI parameters

Name	Type	Description
business_application_id * Required	Type: (path)	Armis Business Application ID.

7.3.3 Example

```
{
  "data": [
    {
      "businessCriticality": "Critical",
      "businessOwner": "John",
      "businessUnit": null,
      "description": "Database application to store our users",
      "deviceIds": [
        2145,
        10,
        1,
        3,
        2
      ],
      "firstSeen": "2023-05-09T08:32:05.223649+00:00",
      "id": 6,
      "installationType": "SAAS",
      "lastSeen": "2023-10-15T20:51:59.585671+00:00",
      "name": "test business app",
      "operationalStatus": null,
      "type": "Homegrown"
    }
  ],
  "success": true
}
```

© Copyright Armis Security 2025

7.3.4 Response parameters

Name	Type	Description
businessCriticality	string	Describes how critical the business application is. Allowed values: Critical, High, Medium, Low. Mandatory.
businessOwner	string	Describes the Business Owner. Mandatory.
businessUnit	string	Describes the Business Unit.
description	string	A short description for the business application.
deviceIds	list	Device IDs.
firstSeen	timestamp	When the business application was first used.
id	integer	The ID assigned to the business application.
installationType	string	E.g., None, On-Premise, Cloud.
lastSeen	timestamp	When the business application was last used.
name	string	The name of the business application. Mandatory.
operationalStatus	string	Allowed values: Ready or Retired state
type	Enum	The application type. Allowed values: Commercial off the shelf, Homegrown

7.3.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown integration.

8 Certificate

8.1 Returning the tenant's root CA certificate (PEM file)

GET `/api/v1/certificates/root_ca/`

8.1.1 Permissions required

- Settings

8.1.2 URI parameters

None.

8.1.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

© Copyright Armis Security 2025

9 Collectors

9.1 Returning existing collectors

GET /api/v1/collectors/

9.1.1 Permissions required

- **Settings** > **Collector** > **Read**

9.1.2 URI parameters

None.

9.1.3 Example

```
{
  "data": {
    "collectors": [
      {
        "clusterId": 0,
        "collectorNumber": 8100,
        "defaultGateway": "",
        "ipAddress": "",
        "lastSeen": "2023-10-17T14:28:13.360402+00:00",
        "macAddress": "",
        "name": "Armis Virtual Collector 8100",
        "status": "Active",
        "subnet": "",
        "type": "VM"
      }
    ],
    "count": 1,
    "next": null,
    "prev": null,
    "total": 1
  },
  "success": true
}
```

9.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

9.2 Returning image URL collectors

GET `/api/v1/collectors/_image/`

9.2.1 Permissions required

- **Settings** > **Collector** > **Read**

9.2.2 URI parameters

Name	Type	Description
deploymentType	string: (query)	The deployment type of the collector. The values in the drop-down menu may change depending on the tenant. Examples, OVA, QCOW2, VHD, VHDX.

None.

9.2.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

9.3 Deleting a collector

DELETE `/api/v1/collectors/{collector_id}/`

9.3.1 Permissions required

- **Settings** > **Collector** > **Manage**

9.3.2 URI parameters

Name	Type	Description
collector_id * Required	(path)	Armis collector ID.

© Copyright Armis Security 2025

9.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Collector deletion error.
401	Unauthorized Collector ID.
404	Unknown Collector ID.

9.4 Getting collector by ID

GET /api/v1/collectors/{collector_id}/

9.4.1 Permissions required

- **Settings** > **Collector** > **Read**

9.4.2 URI parameters

Name	Type	Description
collector_id * Required	(path)	Armis collector ID.

9.4.3 Example

```
{
  "data": {
    "clusterId": 0,
    "collectorNumber": 8153,
    "defaultGateway": "",
    "ipAddress": "",
    "lastSeen": "2023-10-17T14:37:13.147483+00:00",
    "macAddress": "",
    "name": "Armis Virtual Collector 8153",
    "status": "Active",
    "subnet": "",
    "type": "VM"
  },
  "success": true
}
```

9.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown Collector.

9.5 Creating a new collector

POST `/api/v1/collectors/`

9.5.1 Permissions required

- **Settings** > **Collector** > **Manage**

9.5.2 URI parameters

Name	Type	Description
formData	(body)	

9.5.3 Example

```
{
   "deploymentType": "OVA",
   "name": "My Collector"
}
```

9.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

9.6 Updating the collector's name

PATCH `/api/v1/collectors/{collector_id}/`

9.6.1 Permissions required

- **Settings** > **Collector** > **Manage**

9.6.2 URI parameters

Name	Type	Description
collector_id * Required	(path)	Armis collector ID.
formData	(body)	

9.6.3 Example

```
{
   "deploymentType": "OVA",
   "name": "My Collector"
}
```

9.6.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown Collector.

9.7 Updating the collector's password

PATCH `/api/v1/collectors/{collector_id}/password-settings`

9.7.1 Permissions required

- **Settings** > **Collector** > **Manage**

9.7.2 URI parameters

Name	Type	Description
collector_id * Required	(path)	Armis collector ID.
formData	(body)	

9.7.3 Example

```
{
   "password": "Password123!",
   "password_expiration_policy_months": 3
}
```

9.7.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown Collector.

10 Dashboards

The Dashboards API endpoints enable you to retrieve and create dashboards.

For more information about Armis dashboards, see Dashboards in the Armis user guide.

10.1 Getting existing dashboards

GET `/api/v1/dashboards/`

10.1.1 Permissions required

- NONE

Retrieves existing dashboards and the type-value of each: `Main—VMS`, hich relates to Armis Centrix™ for Vulnerability Prioritization and Remediation (ViPR).

10.1.2 URI parameters

Name	Type	Description
type	string (query)	The type of the dashboard.

10.1.3 Responses

This API call has the following HTTP status code:

Code	Description
200	OK.

10.2 Getting an existing dashboard by ID

GET `/api/v1/dashboards/{dashboard_id}/`

Returns existing dashboard by the Armis dashboard ID.

10.2.1 Permissions required

- NONE

10.2.2 URI parameters

Name	Type	Description
dashboard * Required	(path)	Armis dashboard ID.

© Copyright Armis Security 2025

10.2.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Dashboard not found.

10.3 Creating a new dashboard

POST `/api/v1/dashboards/`

10.3.1 Permissions required

- NONE

10.3.2 URI parameters

Name	Type	Description
body *required	object (body)	

10.3.3 Example

```
{
  "dashboard": {
    "ownerId": 0,
    "title": "My Dashboard"
  },
  "dashlets": [
    {
      "dashlet": {
        "visualizationConfig": {
        "aggregateBy": "COUNT_DISTINCT_DEVICES",
        "groupBy": "DEVICE_TYPE",
        "type": "COLUMN"
      }
    },
    "searchString": "in:devices",
    "title": "My Dashlet"
    }
  ]
}
```

10.3.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.

10.4 Delete dashboard by ID

DELETE /api/v1/dashboards/{dashboard_id}/

10.4.1 Permissions required

- NONE

10.4.2 URI parameters

Name	Type	Description
dashboard_id *required	integer(path)	Armis dashboard ID.

10.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Dashboard not found.

10.5 Share dashboard by ID

PATCH `/api/v1/dashboards/{dashboard_id}/`

10.5.1 Permissions required

- NONE

10.5.2 URI parameters

Name	Type	Description
dashboard_id *required	integer (path)	Armis dashboard ID.
user_id	integer (query)	Armis user ID.
role_id	integer (query)	The role ID in the Armis system.
dashboard_permission * required	string (query)	Armis shared users dashboard permission: Viewer or Editor

10.5.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Dashboard not found.

© Copyright Armis Security 2025

11 Dashlets

	Query
JSON	

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Dashlet not found.

11.1 Delete dashlet by ID

DELETE `/api/v1/dashlets/{dashlet_id}/`

11.1.1 Permissions required

- NONE

11.1.2 URI parameters

Name	Type	Description
dashlet_id *required	(path)	Armis dashlet ID.

11.1.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Dashlet not found.

12 Devices

For more information about devices, see the Armis user guide.

12.1 Returning device information for a given identifier

Identifiers include IP address, MAC, Device ID, Tag, Field and Search.

GET `/api/v1/devices/`

12.1.1 Permissions required

- **Device** > **Read**

12.1.2 URI parameters

Name	Type	Description
id	integer (query)	The Armis device ID.
ip	string (query)	The IPv4 or IPv6 Address of the devices.
mac	string (query)	The MAC Address of the devices.
search	string (query)	The search string.
tag	string (query)	The tag of the devices.
fields	(query)	Fields to show. If omitted, returns a default subset of fields. **NOTE:** To get network Interface data, enter `networkInterface` in the **fields** text box.
from	integer (query)	Paging from.
length	integer (query)	Paging length.

12.1.3 Example

The response will be a JSON array of devices similar to this:

```
{
  "data": {
    "count": 1,
    "data": [
      {
        "accessSwitch": null,
        "boundaries": "test1, tag_boundary, test2",
        "businessImpact": "Unassigned",
        "category": "Handhelds",
        "customProperties": {},
        "dataSources": [
          {
            "firstSeen": "2022-09-05T12:48:41.074628+00:00",
            "lastSeen": "2023-10-19T07:31:14+00:00",
            "name": "API",
            "types": [
              "Data Upload"
            ]
          },
          {
            "firstSeen": "2021-07-04T06:40:35.166307+00:00",
            "lastSeen": "2023-10-19T07:31:14+00:00",
            "name": "Armis Smart Scanner",
            "types": [
              "Vulnerability Management"
            ]
          }
        ],
        "firstSeen": "2021-03-25T09:27:29.286706+00:00",
        "id": 1,
        "ipAddress": "10.202.0.122, 1.1.1.1",
        "ipv6": [
          "fe80:3::1ff:fe23:4567:890a",
          "2600:4040:f015:e900:5160:5160:4f0:acd2:1ac7"
        ],
        "lastSeen": "2023-10-19T07:31:14+00:00",
        "macAddress": "00:0C:29:6D:36:75, AA:AA:AA:AA:AA:AA",
        "manufacturer": "Apple",
        "model": "iPhone 6S",
        "name": "mike's iphone",
        "names": "mike's iphone,333,222,111",
        "operatingSystem": "iOS",
        "operatingSystemVersion": "10.3.1",
        "purdueLevel": 4,
        "riskLevel": 10,
        "sensor": {
          "name": "API",
          "type": "API"
        },
        "site": {
          "location": "Ney York, yefet 16",
          "name": "New York"
        },
        "tags": [
```

```
          "ip connection online 151",
          "tag activity offline",
          "tag ip connection online",
          "66666"
        ],
        "type": "Mobile Phones",
        "userIds": [
          67581
        ],
        "visibility": "Full"
      }
    ],
    "next": null,
    "prev": null,
    "total": 1
  },
  "success": true
}
```


12.1.4 Response parameters

Name	Type	Description
accessSwitch	string	The name of the access switch.
boundaries	string	Armis boundaries e.g., Off Network
businessImpact	string	Business Impact level.
category	string	The device category: computer, handheld, medical, and so on.
customProperties	JSON	JSON list of custom properties.
dataSources	list	List of data sources.
firstSeen	timestamp	When was the device first seen.
id	integer	Device ID.
ipAddress	string	Device IP address.
ipv6	list	Device IPv6 address.
lastSeen	timestamp	When was the device last seen.
macAddress	string	Device MAC address.
manufacturer	string	Device manufacturer, represented in the Armis console as Brand.
model	string	Device model.
name	string	Device name.
names	string	Device names.

Name	Type	Description
operatingSystem	string	Device operating system.
operatingSystemVersion	string	device operating system version
purdueLevel	string	The Purdue level.
riskLevel	string	Risk level assigned to the device: Low (1-30), Medium (41-70), High (71-90), or Critical (91-100).
sensor	JSON	Last sensor that saw the device • name: The sensor name.
site	JSON	Site to which the sensor belongs. • location: The site location. • name | site name
tags	list[string]	Attached device tags.
tier	string	Display the tier information.
type	string	Device type.
user	string	Device user.
userIds	list	List of User IDs.
visibility	string	The visibility e.g., Full.

NOTE: The table above shows the default properties. You can search for other properties using the **fields** box in Swagger. In the following example the property that you are searching for is called `aeTitle` (in the Armis console it's display `AE Title`).

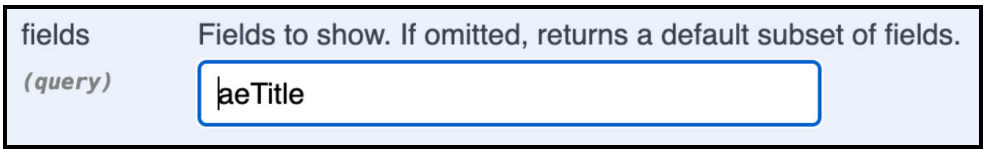

The following table shows examples of how to convert device properties to API fields (without spaces and camelcase):

Armis console field	API field (camelcase)
CrowdStrike CID	crowdstrikeCid
SCCM Client Active	sccmClientActive
Aruba ClearPass Endpoint ID	arubaClearpassEndpointId
Intune Registration State	intuneRegistrationState

© Copyright Armis Security 2025

12.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request. Missing identifier param, must provide one of `id`, `ip`, `mac`, `search`, or `tag`.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

12.2 Delete device by ID

You can delete a single device by its device ID.

`DELETE` `/api/v1/devices/{device_id}/`

> **NOTE:** In addition, you can delete devices in bulk through an existing endpoint: See **`Post`** `v1/devices/_bulk/`.

12.2.1 Permissions required

- **Device** > **Manage** > **Delete**

12.2.2 URI parameters

Name	Type	Description
device_id	(path)	The Armis device ID.

12.2.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request. Missing identifier param, must provide one of `id`, `ip`, `mac`, `search`, or `tag`.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Device not found.

12.3 Bulk operations on a device

POST `/api/v1/devices/_bulk/`

> **NOTE:** You can also delete devices in bulk using this endpoint. Once the device is deleted, the action is recorded in the Audit log. You can delete up to 500 devices.

12.3.1 Permissions required

Device > **Manage** > **Create**

Device > **Manage** > **Edit**

12.3.2 Example

```
[
  {
    "upsert": {
      "category": "HANDHELD",
      "id": 1,
      "ipAddress": "1.1.1.1",
      "ipv6": [
        "fe80:3::1ff:fe23:4567:890a",
        "2600:4040:f015:e900:5160:5160:4f0:acd2:1ac7"
        ],
      "lastSeen": "2024-08-05T08:22:47",
      "macAddress": "aa:aa:aa:aa:aa:aa",
      "model": "iPhone 6S",
      "name": "Mike's iPhone",
      "operatingSystem": "iOS",
      "operatingSystemVersion": "10.3.1",
      "site": "Boston",
      "type": "MOBILE_PHONE"
    }
  }
]
```

12.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid.

12.3.4 URI parameters

Name	Type	Description
device_id * Required	(path)	Armis device ID.

12.4 Setting a tag on an Armis device

POST `/api/v1/devices/{device_id}/tags/`

12.4.1 Permissions required

- **Device** > **Manage** > **Tags**

12.4.2 URI parameters

Name	Type	Description
device_id * Required	(path)	Armis device ID.
tags	object (body)	JSON with format {"tags": ["tag1", "tag2", ...]

12.4.3 Example

The following are examples of setting a tag on a device in Armis Centrix™:

cURL

```
curl -X “POST” "https://<armis-
instance>.armis.com/api/v1/devices/<deviceId>/tags/" -H 'Authorization:
 <access-token>' -d $'{
    "tags": [
      "foo",
      "bar"
    ]
}'
```

Python

```
response = requests.post(url="https://<armis-
instance>.armis.com/api/v1/devices/<deviceId>/tags/",
      headers={"Authorization": <access-token>},
      data=json.dumps({
         "tags": [
             "foo",
             "bar"
          ]
    })
```

If successful, the response will be a JSON like this:

```
{
   "success": true
}
```

12.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid.
404	Unknown device.

12.5 Removing a tag from an Armis device

DELETE `/api/v1/devices/{device_id}/tags/`

12.5.1 Permissions required

- **Device** > **Manage** > **Tags**

12.5.2 URI parameters

Name	Type	Description
device_id * Required	(path)	Armis device ID.
tags	object (body)	JSON with format {"tags": ["tag1", "tag2", ...]

12.5.3 Permissions required

- **Device** > **Manage** > **Tags**

12.5.4 Example

The following are examples for removing a tag from a device in Armis Centrix™:

cURL

```
curl -X “DELETE” "https://<armis-
instance>.armis.com/api/v1/devices/<deviceId>/tags/"
-H 'Authorization: <access-token>' -d $'{
       "tags": [
               "foo"
       ]
}'
```

Python

```
response = requests.delete(url=”https://<armis-
instance>.armis.com/api/v1/devices/<deviceId>/tags/",
               headers={"Authorization": <access-token>},
               data=json.dumps({
                       "tags": [
                               "foo"
                       ]
               })
```

If successful, the response will be a JSON like this:

```
{
    "success": true
}
```

12.5.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid.
404	Unknown device.

12.6 Updating a custom property on an Armis device

POST `/api/v1/devices/custom-properties/_bulk/`

12.6.1 Permissions required

- **Device** > **Manage** > **Edit**

12.6.2 URI parameters

Name	Type	Description
body	arrray[object]	Upsert multiple custom properties for multiple devices in a single operation. This endpoint is highly recommended to be used when a large amount of custom properties should be updated.

12.6.3 Examples

The following are examples for updating custom properties on a device in the Armis Centrix™:

cURL

```
curl -X “POST” "https://<armis-
instance>.armis.com/api/v1/devices/custom-properties/_bulk/" -H
'Authorization: <access-token>' -d $'[
  {
     "upsert": {
       "key": “<Custom-Property-Name>”,
       "value": “<Custom-Property-Value>”,
       “deviceId”: <deviceId>
     }
  }
]'
```

Python

```
response = requests.post(url=”https://<armis-
instance>.armis.com/api/v1/devices/custom-properties/_bulk/",
         headers={"Authorization": <access-token>},
         data=json.dumps([
         {
             "upsert": {
                 "key": “<Custom-Property-Name>”,
                 "value": “<Custom-Property-Value>”,
                 “deviceId”: <deviceId>
             }
         }
        ])
```

If successful, the response will be a JSON like this:

```
[ {"result":{},"status":202}]
```

> **NOTE:** This is a bulk API, which allows for updating multiple devices with one API call. The updating or removing of custom properties is done by sending an array of data elements. Two operations are available: upsert and delete.

For example, to update the custom properties of two devices and remove one from a third, the data elements could look like:

```
[
  {
    "delete": {
      "deviceId": 1,
      "key": "location"
    },
    "upsert": {
      "deviceId": 1,
      "key": "location",
      "value": 123445
    }
  }
]
```

> **NOTE:** `Delete` removes the custom property from the specified device.

12.6.4 Responses

This API call has the following HTTP status code:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

12.7 Adding applications to a device

POST `/api/v1/devices/{device_id}/applications/`

If the application exists it updates its last seen time.

12.7.1 Permissions required

- **Device** > **Manage** > **Edit**

12.7.2 URI parameters

Name	Type	Description
device_id * Required	(path)	Armis device ID.
applications	(body)	An array of applications.

12.7.3 Example

```
{
   "applications": [
      {
        "name": "Chrome",
        "version": "70.0.3538.77"
      },
      {
        "name": "YouTube"
      }
   ]
}
```

12.8 Update a devices Purdue level

POST `/api/v1/devices/{device_id}/applications/`

12.8.1 Permissions required

- **Device** > **Manage** > **Edit**

12.8.2 URI parameters

Name	Type	Description
device_id * Required	(path)	Armis device ID.
body * Required	object (body)	

12.8.3 Example

```
{
   "newLevel": 4
}
```

12.8.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown device.

12.9 Updating one or more of the device's attributes

PATCH `/api/v1/devices/{device_id}/`

12.9.1 Permissions required

- **Device** > **Manage** > **Edit**

12.9.2 URI parameters

Name	Description
device_id * Required	Armis device ID. Type: (path)
device * Required	Armis device. Type: object (body)

12.9.3 Example

```
{
   "CATEGORY": "HANDHELD",
   "MODEL": "iPhone 6S",
   "NAME": "Mike's iPhone",
   "OS": "iOS",
   "OS_VERSION": "10.3.1",
   "SITE": "Boston",
   "TYPE": "MOBILE_PHONE"
}
```

12.9.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown device.

12.10 Uploading a CSV file with device data

POST `/api/v1/devices/csv/`

12.10.1 Permissions required

- **Device** > **Manage** > **Create**

12.10.2 URI parameters

Name	Type	Description
csv * Required	file	CSV File encoded in UTF-8 with the following columns: `device_id`, `mac`, `key`, `value`.

12.10.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

12.11 Returning supported keys

GET `/api/v1/devices/csv/`

12.11.1 Permissions required

- **Device** > **Read**

12.11.2 URI parameters

None.

12.11.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

13 Device applications

13.1 Get device applications

GET `/api/v1/device-applications/`

13.1.1 Permissions required

- **Device** > **Read**

13.1.2 URI parameters

Name	Type	Description
device_ids	string (query)	A list of comma-separated Armis Device IDs. If the `device_ids` are not provided then all the device applications in the environment will be returned, with pagination.
from	integer (query)	Paging from.
length	integer (query)	Paging length.

© Copyright Armis Security 2025

13.1.3 Example

```
{
  "data": {
    "count": 10,
    "items": [
      {
        "deviceId": 1036,
        "firstSeen": "2023-07-03T11:10:36",
        "lastSeen": "2023-08-24T09:42:57",
        "name": "Microsoft-HTTPAPI",
        "version": "2.0"
      },
      {
        "deviceId": 155,
        "firstSeen": "2023-07-03T11:08:57",
        "lastSeen": "2023-09-18T13:14:14",
        "name": "CertificateService",
        "version": "1"
      },
      {
        "deviceId": 450,
        "firstSeen": "2023-07-03T11:32:24",
        "lastSeen": "2023-10-04T11:04:32",
        "name": "OpenSSH",
        "version": "9.0"
      },
      {
        "deviceId": 23,
        "firstSeen": "2023-07-03T11:10:57",
        "lastSeen": "2024-02-05T07:37:47",
        "name": "CrowdStrike",
        "version": null
      },
      {
        "deviceId": 100,
        "firstSeen": "2023-07-03T11:16:18",
        "lastSeen": "2023-07-06T13:59:50",
        "name": "McAfee",
        "version": null
      },
      {
        "deviceId": 866,
        "firstSeen": "2023-07-03T11:11:21",
        "lastSeen": "2023-07-04T15:12:46",
        "name": "OpenSSH",
        "version": "9.0"
      },
      {
        "deviceId": 206,
        "firstSeen": "2023-07-03T11:10:22",
        "lastSeen": "2024-02-08T11:35:00",
        "name": "Zoom",
        "version": null
      }
    ],
    "next": 12,
```

```
    "prev": null
  },
  "success": true
}
```

13.1.4 Response parameters

Name	Type	Description
deviceId	integer	The ID of the Armis device.
firstSeen	timestamp	When was the device application first seen.
lastSeen	timestamp	When was the device application last seen.
name	string	The name of the device application.
version	string	The version of the device application.

13.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

13.2 Bulk operation on device applications

POST `/api/v1/device-applications/_bulk/`

13.2.1 Permissions required

- **Device** > **Manage** > **Edit**

13.2.2 URI parameters

Name	Type	Description
body * Required	array[object] (body)	

13.2.3 Example

```
[
   {
      "upsert": {
        "deviceId": 1,
        "lastSeen": "2023-10-01T05:52:28",
        "name": "Chrome",
        "version": "80.0.3987.122"
      }
   }
]
```

13.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

© Copyright Armis Security 2025

14 Device boundaries

14.1 Bulk operation on device boundaries

POST /api/v1/device-boundaries/_bulk/

14.1.1 Permissions required

- **Device** > **Manage** > **Edit**

14.1.2 URI parameters

Name	Type	Description
body * Required	array[object (body)]	

14.1.3 Example

```
[
   {
      "create": {
        "boundaryName": "Corporate",
        "deviceId": 1
      }
   },
   {
      "delete": {
        "boundaryName": "Guest",
        "deviceId": 2
      }
   }
]
```

14.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

© Copyright Armis Security 2025

15 Device properties

15.1 Bulk operation on device properties

POST /api/v1/device-properties/_bulk/

15.1.1 Permissions required

- Device > Manage > Edit

15.1.2 URI parameters

Name	Type	Description
body	array[object] (body)	Upsert multiple properties for multiple devices in a single operation. This endpoint is highly recommended to be used when a large amount of properties should be updated.

15.1.3 Example

```
[
   {
      "upsert": {
        "description": "The port that is blocked on the device",
        "deviceId": 1,
        "lastSeen": "2023-10-01T05:52:28",
        "type": "SERIAL_NUMBER",
        "value": 123445
      }
   }
]
```

15.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

© Copyright Armis Security 2025

16 Devices tags

16.1 Setting the status for a given set of tags and devices

POST /api/v1/devices_tags/

16.1.1 Permissions required

- **Device** > **Manage** > **Tags**

16.1.2 URI parameters

Name	Type	Description
device-tag state	object (body)	The device tag state to set.

16.1.3 Example

```
{
    "ips": [
       "1.1.1.1",
       "2.2.2.2"
    ],
    "macs": [
       "aa:aa:aa:aa:aa:aa",
       "bb:bb:bb:bb:bb:bb"
    ],
    "remove": false,
    "tags": [
       "foo",
       "bar"
    ]
}
```

16.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

© Copyright Armis Security 2025

17 Integrations

> **NOTES:**
> The `/api/v1/integrations/` has been deprecated and replace by `/api/v2/integrations/`. The main differences are as follows:
>
> - The integration is now named `instance`.
> - The integration type is now named `name`.
> - The integration Category is now Types, and is also now a multi-value key.
> - The endpoints no longer support Sensor ID, and now, the API exposes only Collector ID where it's relevant.

17.1 Returning existing integrations

GET `/api/v2/integrations/`

To get the current list of integrations configured in an Armis instance.

17.1.1 Permissions required

- **Settings** > **Integration** > **Read**

17.1.2 URI parameters

Name	Type	Description
from	integer (query)	Paging from.
length	integer (query)	Paging length.

17.1.3 Examples

The following REST queries are examples using CURL and Python:

cURL

```
curl "https://<armis-instance>.armis.com/api/v2/integrations/"
      -H 'Authorization: <access-token>'
```

Python

```
response = requests.get(
   url="https://<armis-instance>.armis.com/api/v2/integrations/",
   headers={"Authorization": <access-token>})
```

```
{
  "data": {
    "count": 1,
    "integrations": [
      {
        "changeTime": 1703592785455,
        "collectorId": null,
        "creationTime": 1703592785506,
        "enforcementLists": [],
        "id": 11,
        "instance": "crowd 26.12",
        "integrationState": "ACTIVE",
        "lastRunEnd": "2024-01-10T09:47:11.660819+00:00",
        "name": "CrowdStrike",
        "params": {
          "crowdstrike_api_host": "https://api.us-2.crowdstrike.com",
          "crowdstrike_client_id": "fe180695efd34ea1bfaf79f295138380",
          "crowdstrike_client_secret": "********",
          "crowdstrike_fetch_applications": false,
          "crowdstrike_fetch_device_cves": true,
          "crowdstrike_fetch_host_groups": true,
          "crowdstrike_fetch_iot_devices": false,
          "crowdstrike_fetch_unmanaged_assets": false,
          "crowdstrike_is_fetch_device_login_history": false,
          "crowdstrike_user_domain_include_list": "",
          "integration_schedule": {
            "allowed_time": {
              "days": [],
              "hours": []
            },
            "interval": {
              "amount": 8,
              "unit": "Hours"
            },
            "timezone": null
          },
          "mark_discovered_devices_as_managed": true
        },
        "statistics": {
          "extraDataForColumns": {
            "maxLimit": null
          },
          "integrationCyclesStatistics": [
            {
              "entity_type": "Devices",
              "post_filter_amount": 7,
              "sent_to_armis_amount": 7,
              "unique_armis_records_amount": 7
            }
          ],
          "lastSuccessfulCycleEnded": "2024-01-10 09:46:35.500033",
          "modificationDate": 1704880031663,
          "statisticsInfo": [],
          "status": "ACTIVE",
          "statusCategory": "Active, Cycle Ended",
```

```
            "statusCreationTime": 1703592797126,
            "statusExtraDetails": "",
            "statusLastChanged": 1703592844913,
            "statusMessage": ""
          }
        }
      ],
      "next": 9,
      "prev": 7,
      "total": 25
    },
    "success": true
  }
```


17.1.4 Response parameters

Name	Type	Description
count	integer	The number of currently configured integrations.
changeTime	timestamp	A timestamp that indicates when the integration was last modified.
collectorId	integer	The ID of the Armis collector.
creationTime	timestamp	A timestamp that indicates when the integration was created.
enforcementLists	list	Enforcements
id	integer	The ID assigned to the integration.
instance	string	
integrationState	string	E.g., ACTIVE
lastRunEnd	timestamp	
name	string	The integration's name.
params	JSON	The relevant integration parameters. This parameter can be further nested
statistics	JSON	The various statistics related to the integration. This parameter can be further nested.

> **NOTE:** Passwords are not exposed in the integration details fetched by the API. They are replaced with asterisks.

17.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

17.2 Getting the integration by ID

`GET /api/v2/integrations/{integration_id}/`

17.2.1 Permissions required

- **Settings** > **Integration** > **Read**

17.2.2 URI parameters

Name	Type	Description
integration_id * Required	(path)	Armis integration ID.

17.2.3 Example


```
{
  "data": [
    {
      "changeTime": 1703592518203,
      "collectorId": null,
      "creationTime": 1703592518205,
      "enforcementLists": [],
      "id": 5,
      "instance": "aws 26.12 second ARN",
      "integrationState": "ACTIVE",
      "lastRunEnd": null,
      "name": "AWS",
      "params": {
        "auto_fetch_regions": true,
        "aws_access_key_id": "",
        "aws_access_key_secret": "",
        "aws_enable_subsidiary_accounts": false,
        "aws_organizations_account_arn": "",
        "aws_primary_account_arn": "arn:aws:iam::553099138961:role/armis-aws-
integration-role",
        "aws_roles_to_assume": "",
        "integration_schedule": {
          "allowed_time": {
            "days": [],
            "hours": []
          },
          "interval": {
            "amount": 8,
            "unit": "Hours"
          },
          "timezone": null
        },
        "mark_discovered_devices_as_managed": true,
        "use_assume_role_for_primary_account": true,
        "use_organizations_for_subsidiary_accounts": false
      },
      "statistics": null
    }
  ],
  "success": true
}
```

17.2.4 Response parameters

Name	Type	Description
count	integer	The number of currently configured integrations.
changeTime	timestamp	A timestamp that indicates when the integration was last modified.
collectorId	integer	The ID of the Armis collector.
creationTime	timestamp	A timestamp that indicates when the integration was created.
enforcementLists	list	Enforcements
id	integer	The ID assigned to the integration.
instance	string	
integrationState	string	E.g., ACTIVE
lastRunEnd	timestamp	
name	string	The integration's name.
params	JSON	The relevant integration parameters. This parameter can be further nested
statistics	JSON	The various statistics related to the integration. This parameter can be further nested.

17.2.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown Integration.

17.3 Creating a new integration

POST `/api/v2/integrations/`

17.3.1 Permissions required

- **Settings** > **Integration** > **Manage**

17.3.2 URI parameters

Name	Type	Description
formData	(body)	

17.3.3 Example

```
{
  "collectorId": 1,
  "instance": "My Integration",
  "name": "SWITCH",
  "params": {
    "sniff_interface": "eth1"
  }
}
```

17.3.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Custom invalid integration error.

17.4 Deleting an integration

DELETE `/api/v2/integrations/{integration_id}/`

17.4.1 Permissions required

- **Settings** > **Integration** > **Manage**

17.4.2 URI parameters

Name	Type	Description
integration_id * Required	(path)	Armis integration ID.

17.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Integration deletion error.
401	Unauthorized Integration ID.
404	Unknown Integration ID.

17.5 Updating the parameters of an integration by ID

PATCH `/api/v2/integrations/{integration_id}/`

17.5.1 Permissions required

- **Settings** > **Integration** > **Manage**

17.5.2 URI parameters

Name	Type	Description
integration_id * Required	(path)	Armis integration ID.
Body	(body)	

17.5.3 Example

```
{
   "params": {
      "ip_list": "1.2.3.4, 4.3.2.1"
   }
}
```

17.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Custom invalid integration parameter error.
401	User not authorized.
404	Integration not found.

18 Policies

For more information about policies, see the Armis user guide.

18.1 Getting all policies

GET /api/v1/policies/

18.1.1 Permissions required

- Policy > Read

18.1.2 URI parameters

Name	Type	Description
from	integer (query)	Paging from.
length	integer (query)	Paging length.

18.1.3 Example

The following are examples of retrieving all of the policies from Armis Centrix™:

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/policies/" -H
'Authorization: <access-token>'
```

Python

```
response = requests.get(url="https://<armis-
instance>.armis.com/api/v1/policies/",headers={"Authorization": <access-
token>})
```

The response will be a JSON array of policies similar to this:

```
{
   "data": {
     "count": 10,
     "next": 10,
     "policies": [
       {
          "action": {
            "params": {
              "consolidation": {
                "amount": 1,
                "unit": "Minutes"
              },
              "description": "SIEM Test Policy based on DNS queries",
              "severity": "high",
              "type": "Security"
            },
            "type": "alert"
          },
          "id": "69",
          "isEnabled": false,
          "name": "SIEM Test",
          "rules": {
            "and": [
              "protocol:DNS"
            ]
       }
    },
    ….
    {...}
   ],
   "prev": null,
   "total": 48
 },
 "success": true
}
```

18.1.4 Response parameters

Name	Type	Description
action	JSON	The type of action and relevant action parameters: • type—(string). A policy action type (Tag, Untag, Alert, Enforce Devices etc.) • params—JSON. The parameters of the action type (may be nested).
id	integer	Armis policy ID.
isEnabled	boolean	The policy state (enabled/disabled).
name	string	The policy name.
rules	JSON	A recursive JSON with the format: {"and" / "or": [AQL string / rules JSON]} .

18.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK

18.2 Getting policy by ID

```
GET /api/v1/policies/{policy_id}/
```

18.2.1 Permissions required

- **Policy** > **Read**

18.2.2 URI parameters

Name	Type	Description
policy_id * Required	(path)	The ID of the policy to query.

18.2.3 Response parameters

Name	Type	Description
action	JSON	The type of action and relevant action parameters: • type—(string). A policy action type (Tag, Untag, Alert, Enforce Devices etc.) • params—JSON. The parameters of the action type (may be nested).
id	integer	Armis policy ID.
isEnabled	boolean	Default—"false". The policy state (enabled/disabled).
name	string	The policy name.
rules	JSON	A recursive JSON with the format: {"and" / "or": [AQL string / rules JSON]} .

18.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
400	Custom invalid policy parameter error.
404	Unknown policy.

© Copyright Armis Security 2025

18.3 Creating a new policy

POST `/api/v1/policies/`

18.3.1 Permissions required

- **Policy** > **Manage**

18.3.2 URI parameters

Name	Type	Description
body	(body)	

18.3.3 Example

```
{
  "actions": [
    {
      "params": {
        "consolidation": {
          "amount": 1,
          "unit": "Days"
        },
        "severity": "high",
        "type": "Security or Network Performance"
      },
      "type": "alert"
    }
  ],
  "description": "Description (maximal length - 500)",
  "isEnabled": false,
  "labels": [
    "Security"
  ],
  "name": "My Policy",
  "ruleType": "Activity, IP Connection, Device or Vulnerability",
  "rules": {
    "and": [
      "protocol:BMS",
      {
        "or": [
          "content:(iPhone)",
          "content:(Android)"
        ]
      }
    ]
  }
}
```

18.3.4 Response parameters

Name	Type	Description
action	JSON	The type of action and relevant action parameters: • type—(string). A policy action type (Tag, Untag, Alert, Enforce Devices etc.) • params—JSON. The parameters of the action type (may be nested).
isEnabled	boolean	Optional. Default—"false". The policy state (enabled/disabled).
name	string	Mandatory. The policy name.
rules	JSON	Mandatory. A recursive JSON with the format: {"and" / "or": [AQL string / rules JSON]} .

18.3.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	An invalid policy was provided.
409	Policy title already exists.

18.4 Deleting a policy by ID

DELETE `/api/v1/policies/{policy_id}/`

To delete a policy on Armis Centrix™, you only need to send the specific <Policy ID> of the policy.

18.4.1 Permissions required

- **Policy** > **Manage**

18.4.2 URI parameters

Name	Type	Description
policy_id * Required	(path)	The ID of the policy to query.

18.4.3 Example

The following are examples of deleting a policy on Armis Centrix™:

cURL

```
Curl -X “DELETE” "https://<armis-instance>.armis.com/api/v1/policies/<Policy
ID>/" -H 'Authorization:
<access-token>'
```

Python

```
response = requests.delete(url=”https://<armis-
instance>.armis.com/api/v1/policies/<Policy ID>/",headers={"Authorization":
<access-token>})
```

If the call is successful, it will return the following:

```
{
   "success": true
}
```

If the alert was already in the `RESOLVED` state, it will return the following:

```
{
   "message": "Failed in deleting policy",
   "success": false
}
```

18.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Custom invalid policy parameter error.
404	Unknown policy.

18.4.5 Example—Creating an Activity policy

The following are examples of creating an Activity policy on Armis Centrix™:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/" \
    -H 'Authorization: <access-token> \
    -H 'Content-Type: application/json' \
    -d $'{
          "labels": ["Security"],
          "actions": [
            {
              "type": "alert",
              "params": {
                "consolidation": {
                  "amount": 1,
                  "unit": "Days"
                },
                "type": "Security",
                "severity": "high"
             }
           }
          ],
          "isEnabled": true,
          "description": "My
          Description", "ruleType":
          "ACTIVITY",
          "name": "Test ACTIVITY Policy",
          "rules": {
            "and": [
              "protocol:BMS"
            ]
          }
      }'
```

Python

```
response = requests.post(
 url="https://<armis-instance>.armis.com/api/v1/devices/_bulk/",
 headers={"Authorization": <access-token>,
          "Content-Type": "application/json",},
            data=json.dumps({
                "labels": [
                    "Security"
                ],
                "actions": [
                    {
                        "type": "alert",
                        "params": {
                            "consolidation": {
                                "amount": 1,
                                "unit": "Days"
                            },
                            "type": "Security",
                            "severity": "high"
                        }
                    }
                ],
                "isEnabled": True,
                "description": "My Description",
                "ruleType": "ACTIVITY",
                "name": "Test ACTIVITY Policy",
                "rules": {
                    "and": [
                        "protocol:BMS"
                    ]
                 }
            })
     )
```

If successful, the response will be a JSON like this:

```
{
   "data": {
   "id": 274
   },
   "success": true
}
```

Where `274` is the ID of the new policy.

18.4.6 Example—Creating a Device policy

The following are examples of creating a Device policy on Armis Centrix™:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/" \
    -H 'Authorization: <access-token> \
     -H 'Content-Type: application/json' \
     -d $'{
               "labels": [
                 "Security"
               ],
               "name": "Test DEVICE Policy",
               "ruleType": "DEVICE",
               "description": "My Description",
               "rules": {
                 "and": [ "macAddress:(00:00:11:11:22:22)
                 "
                 ]
               },
               "actions": [
                 {
                   "type": "alert",
                   "params": {
                     "consolidation": {
                       "amount": 1,
                       "unit": "Days"
                     },
                     "type": "Security",
                     "severity": "high"
                   }
                 }
             ],
             "isEnabled": true
      }'
```

Python

```
response = requests.post(
 url="https://<armis-instance>.armis.com/api/v1/devices/_bulk/",
 headers={"Authorization": <access-token>,
          "Content-Type": "application/json",},
            data=json.dumps({
                "labels": [
                    "Security"
                ],
                "name": "Test DEVICE Policy",
                "ruleType": "DEVICE",
                "description": "My Description",
                "rules": {
                    "and": [
          "macAddress:(00:00:11:11:22:22)"
             ]
          },
          "actions": [
            {
          "type": "alert",
          "params": {
                   "Consolidation" {
                   "amount": 1,
                   "unit": "Days"
              },
              "Type": "Security",
              "severity": "high"
                }
             }
          ],
          "isEnabled": True
        })
     )
```

If successful, the response will be a JSON like this:

```
{
   "data": {
     "id": 275
   },
   "success": true
}
```

Where `275` is the ID of the new policy.

18.4.7 Example—Creating an IP Connection policy

The following are examples of creating an IP Connection policy on Armis Centrix™:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/" \
     -H 'Authorization: <access-token> \
     -H 'Content-Type: application/json' \|
     -d $'{
            "labels": [
              "Security"
            ],
            "name": "Test IP_CONNECTION Policy",
            "ruleType": "IP_CONNECTION",
            "description": "My Description",
            "rules": {
              "and": [
              "endpointB:(networkLocation:External)"
            ]
         },
         "actions": [
           {
              "type": "alert",
              "params": {
                "consolidation": {
                "amount": 1,
                "unit": "Days"
                },
                "type": "Security", "severity": "high"
              }
           }
         ],
         "isEnabled": true
      }'
```

Python

```
response = requests.post(
 url="https://<armis-instance>.armis.com/api/v1/devices/_bulk/",
 headers={"Authorization": <access-token>,
          "Content-Type": "application/json",},
            data=json.dumps({
                "labels": [ "Security" ],
                "name": "Test IP_CONNECTION Policy",
                "ruleType": "IP_CONNECTION",
                "description": "My Description",
                "rules": {
                    "and":
                      [ "endpointB:(networkLocation:External)" ]
                },
                "actions": [
                    {
                        "type": "alert",
                        "params": {
                            "consolidation": {
                                "amount": 1, "unit": "Days"
                            },
                            "type": "Security",
                            "severity": "high"
                        }
                     }
                ],
                "isEnabled": True
            })
        )
```

If successful, the response will be a JSON like this:

```
{
   "data": {
     "id": 276
   },
   "success": true
}
```

Where `276` is the ID of the new policy.

18.5 Updating a policy

PATCH `/api/v1/policies/{policy_id}/`

18.5.1 Permissions required

- **Policy** > **Manage**

18.5.2 URI parameters

Name	Type	Description
policy_id * Required	(path)	The ID of the policy to query.
Body	(body)	

To update a policy on Armis Centrix™, you only need to send the specific elements that are to be updated for the policy, which is denoted by the <Policy ID.

18.5.3 Examples

The following are examples of changing the status of a policy to be disabled:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/<Policy
ID>/" \
      -H 'Authorization: <access-token> \
      -H 'Content-Type: application/json' \
      -d $'{ "isEnabled": false}'
```

Python

```
response = requests.post(
 url=
"https://<armis-instance>.armis.com/api/v1/policies/<Policy ID>/",
 headers={"Authorization": <access-token>,
          "Content-Type": "application/json",},
data=json.dumps({"isEnabled": false))
```

If the call is successful, it will return the following:

```
{
   "data": {
     "id": "<Policy ID>",
     "name": "Test Policy Name",
     "isEnabled": false,
     "rules": {
       "and": [
          "protocol:Bluetooth",
       {
            "or": [
              "content:(iPhone)",
              "content:(Android)"
            ]}]
},
     "action": {
       "params": {
         "consolidation": {
           "amount": 1,
           "unit": "Days"
         },
         "description": "New Test Policy",
         "severity": "high",
         "type": "Security"
       },
       "type": "alert"
     }
   },
   "success": true
}
```

The following is another example of changing the name of a policy:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/<Policy
ID>/" \
       -H 'Authorization: <access-token> \
       -H 'Content-Type: application/json' \
       -d $'{ "name": “New Policy Name” }'
```

Python

```
response = requests.post(
   url=
"https://<armis-instance>.armis.com/api/v1/policies/<Policy ID>/",
 headers={"Authorization": <access-token>,
          "Content-Type": "application/json",},
data=json.dumps({"name": “New Policy Name”))
```

```
{
   "data": {
     "id": "<Policy ID>",
     "name": "New Policy Name",
     "isEnabled": false,
     "rules": {
       "and": [
         "protocol:Bluetooth",
       ]
     },
     "action": {
     "params": {
       "consolidation": {
         "amount": 1,
         "unit": "Days"
       },
       "description": "New Test Policy",
       "severity": "high",
       "type": "Security"
     },
     "type": "alert"
     }
   },
   "success": true
}
```

18.5.4 Response parameters

Name	Type	Description
action	JSON	The type of action and relevant action parameters: • type—(string). A policy action type (Tag, Untag, Alert, Enforce Devices etc.) • params—JSON. The parameters of the action type (may be nested).
id	integer	Armis policy ID.
isEnabled	boolean	Default—"false". The policy state (enabled/disabled).
name	string	The policy name.
rules	JSON	A recursive JSON with the format: {"and" / "or": [AQL string / rules JSON]} .

18.5.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	An invalid policy was provided.
404	Unknown Policy.
409	Policy title already exists.

19 Reports

The Report API endpoints enable you to create, run, update, or delete a report on a tenant.

For more information about reports, see Reports in the Armis user guide.

For a list of API report examples, see API Report Examples.

The GET calls retrieve a list of existing reports previously configured on a tenant—to retrieve all reports or retrieve a specific report by its ID.

Additionally, if a report has been set on a tenant as a scheduled report, the API can also be used to obtain a link to download the report via a direct download URL. Upon download, the data within the report will reflect the last run cycle.

> **NOTE:** The report must be scheduled and run at least once before using the `GET /api/v1/report-results/{report_id}/` endpoint.

To get the report result as a file, do the following:

1. Get the file URL from the endpoint using the following request:
   `GET /api/v1/report-results/{report_id}/`
2. Download the report file from the URL that is specified in the request.

> **NOTE:** You can also download a report via an email link by sending a request to run the report (see Sending a request to run a report by ID).

The report file name has the following format:

`report_<UUID>.<extension>`

19.1 Creating a new report

POST `/api/v1/reports/`

> **NOTE:** It may be easier to start by generating a report in the Armis console, before automating the creation of reports using the API.

19.1.1 Permissions required

- **Report** > **Manage** > **Create**

19.1.2 URI parameters

Name	Type	Description
body	(body)	

19.1.3 Example

```
{
   "asq": "in:devices",
   "reportName": "test",
   "schedule": {
         "email": ["user@armis.com"],
         "repeatAmount": 2,
         "repeatUnit": "Days",
         "reportFileFormat": "csv",
         "timeOfDay": "15:00",
         "timezone": "Asia/Jerusalem",
         "weekdays": ["Monday"]
   }
}
```

19.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
201	Created. Body: `{"id": 123}`
400	In case of a failure to create the report. The data may indicate the reason for the failure. Body: `{ "message": "additional information", "success": false }`
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
409	Report name already exists.

19.2 Updating a report

PATCH `/api/v1/reports/{report_id}/`

19.2.1 Permissions required

- **Report** > **Manage** > **Edit**

19.2.2 URI parameters

Name	Type	Description
report_id * Required	integer (path)	Patch report by ID.
body	(body)	

19.2.3 Example

```
{
   "asq": "in:devices",
   "reportName": "New Report Name",
   "schedule": {
         "email": ["user@armis.com"],
         "repeatAmount": 2,
         "repeatUnit": "Days",
         "reportFileFormat": "csv",
         "timeOfDay": "15:00",
         "timezone": "Asia/Jerusalem",
         "weekdays": ["Monday"]
   }
}
```

NOTES:

- To clear a field, pass it with an empty value, and ASQ will replace all existing rules.
- All fields are optional.
- Fields that are not provided will be ignored.

19.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK. Body: `{ "data": {"reportId": 123}, "success": true }`
400	Invalid weekday provided in report schedule.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Report not found. Body: `{ "message": "additional information", "success": false }`

19.3 Deleting a report by ID

DELETE `/api/v1/reports/{report_id}/`

19.3.1 Permissions required

- **Report** > **Manage** > **Delete**

19.3.2 URI parameters

Name	Type	Description
report_id * Required	(path)	The ID of the report to query.

19.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
404	Report not found. The resource does not exist.

19.4 Getting report details by ID

GET `/api/v1/reports/{report_id}/`

19.4.1 Permissions required

- **Report** > **Read**

19.4.2 URI parameters

Name	Type	Description
report_id * Required	(path)	The ID of the report to query.

19.4.3 Example

```
{
  "asq": "in:devices timeFrame:\"1 Day\"",
  "reportName": "My Report",
  "schedule": {
    "email": [
      "test@armis.com"
    ],
    "repeatAmount": "2",
    "repeatUnit": "Days",
    "reportFileFormat": "csv",
    "timeOfDay": "15:00",
    "timezone": "Asia/Jerusalem",
    "weekdays": [
      "Monday"
    ]
  }
}
```

© Copyright Armis Security 2025

19.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
404	The report ID could not be found. Body: `{ "message": "additional information", "success": false }`

19.5 Getting all report details

GET `/api/v1/reports/`

19.5.1 Permissions required

- Report > Read

19.5.2 URI parameters

None.

19.5.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK. Body: `{ "total": 282, "items":[{ "asq": "in:devices", "creationTime": "2022-01-01T17:30", "id": 111, "isScheduled": true, "reportName": "ABC", "schedule": { "email": ["user@armis.com"], "repeatAmount": 2, "repeatUnit": "Days", "reportFileFormat": "csv", "timeOfDay": "15:00", "timezone": "Asia/Jerusalem", "weekdays": "Monday" } }, ...] }`
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

19.6 Getting the latest report by ID

GET `/api/v1/report-results/{report_id}/`

19.6.1 Permissions required

- **Report** > **Read**

19.6.2 URI parameters

Name	Type	Description
report_id * Required	(path)	The ID of the report to query.

19.6.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK. Body: `{ "data": { "creationTime": "2023-01-01T10:10:10", "url": "https://{report download link}" } }`
400	Custom invalid report parameters error. The data may indicate the reason for the failure.
404	The Report ID could not be found. Body: `{ "message": "additional information", "success": false }`

19.7 Sending a request to run a report by ID

POST `/api/v1/reports/{report_id}/_run/`

Sends a request to run a report that has a schedule. The new report will be sent via email when ready, to the recipients defined in the report-schedule.

This request will have a rate limit of three reports every five hours, per report ID. A rate limit is required to avoid a single report running repeatedly and creating resource problems.

> **NOTES:**
> - To get the report ID, see Getting all report details.
> - The report or export link will be sent to you by email. It takes time, please be patient.

19.7.1 Permissions required

- **Report** > **Manage** > **Edit**

19.7.2 URI parameters

Name	Type	Description
report_id * Required	(path)	The ID of the report to query.

19.7.3 Responses

This API call has the following HTTP status codes:

Code	Description
202	OK.
401	Unauthorized.
404	The report ID or report schedule could not be found.
429	Too Many Requests. The rate limit has been exceeded. Body: `{ "message": "additional information", "success": false }`

19.8 System Reports

System Report API endpoints enable you to take daily or weekly snapshots of large datasets, including installed applications, risk factors, and vulnerabilities. Reports are based on fixed queries and field sets, ensuring consistent data formats aligned with console data.

New reports are generated daily at 12:00 am GMT. There's no limit on the amount of data exported.

This section includes the following topics:

- Creating a new system report
- Enabling or disabling a system report
- Getting system report results

19.8.1 Creating a new system report

POST `/api/v1/reports/`

> **NOTE:** Upon creation of the system report, you can activate the report immediately by setting the `enabled` field to `true`, as described below. If enabled, the report will run for the first time and daily thereafter at 12:00 am GMT. If you do not enable the report during creation, it will not

run until it is explicitly activated. You can activate or deactivate an existing report at any time. For details, see Enabling or disabling a system report.

19.8.1.1 Permissions required

- **Report** > **Manage** > **Create**

19.8.1.2 Request body

The request body must be a JSON object containing the following fields:

IMPORTANT: Any other field provided in the request body will be considered invalid and will result in a failure to create the report.

Name	Type	Description
asq	string	The predefined query string that determines the dataset for the report. Must be one of the following exact strings: • `in:riskFactors device:(timeFrame:"30 Days")` • `in:applications device:(timeFrame:"30 Days")` • `in:vulnerabilities device:(timeFrame:"30 Days")`
reportName	string	A unique, user-defined name for the report. This free-text name must be unique across all system reports.
reportType	string	The type of report to create. Must be `system-report`.
enabled	boolean	Indicates whether the report should be activated upon creation. Can be `true` or `false`. If not present, defaults to `false`. If `false` or not provided, the report will be created but remain inactive until explicitly enabled.

19.8.1.3 Example

```
{
  "asq": "in:riskFactors device:(timeFrame:\"30 Days\")",
  "reportName": "My Report",
  "reportType": "system-report",
  "enabled": true
}
```

19.8.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
201	Created. Body: `{"id": 123}`
400	In case of a failure to create the report. The request body contains invalid data, such as a missing required field, an invalid `asq` value, an incorrect `reportType`, or any unexpected/invalid fields. The data in the response body will indicate the reason for the failure. Body (Example): `{ "message": "System report should contains only valid asq parameter.", "success": false }`
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
403	Forbidden. The authenticated user does not have the necessary permissions to create a system report.
409	Report name already exists. A report with the specified `reportName` already exists. The `reportName` must be unique.

19.8.2 Enabling or disabling a system report

This endpoint allows you to change the activation status of an existing system report:

PATCH `/api/v1/reports/{report_id}/`

> **NOTE:** An enabled report will generate daily, while a disabled report will not. The `report_id` required for this call is returned when the report is initially created.

19.8.2.1 Permissions required

- **Report** > **Manage** > **Edit**

19.8.2.2 URI parameters

Name	Type	Description
report_id	string	The unique identifier of the report to modify. A report ID is returned in the response when creating a system report. For details, see Creating a new system report.

19.8.2.3 Request body

Name	Type	Description
enabled	boolean	The desired activation status for the report. • `true`—Enables the system report. • `false`—Disables the system report.

19.8.2.4 Example

```
{
  "enabled": true
}
```

19.8.2.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK. The report status was successfully updated. Body: "success": true
400	Bad Request. The request body contains invalid data, such as a missing `enabled` field, a non-boolean value for enabled, or any unexpected/invalid fields in the request body. The response body will provide details on the validation error. Body (Example): `json { "message": "Invalid 'enabled' value provided. Must be true or false.", "success": false }`
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
403	Forbidden. The authenticated user does not have the necessary permissions to modify system reports.
404	Not Found. No report with the specified `report_id` was found.

19.8.3 Getting system report results

Retrieves the results for a specific system report. The response will include one or more links to the report files, which are typically pre-signed URLs for direct download.

GET `/api/v1/report-results/{report_id}/`

19.8.3.1 Permissions required

- **Report** > **View** > **Read**
- Full access to all sites and boundaries

For details on the file content and format of System Reports, see [System Reports—File content and format](#).

19.8.3.2 URI parameters

Name	Type	Description
report_id	string	The unique identifier of the report whose results are to be retrieved. A report ID is returned in the response when creating a system report. For details, see Creating a new system report.

19.8.3.3 Responses

The response will include one or more links to the report files, which are typically pre-signed URLs for direct download. For example:

```
{
  "data": {
    "creationTime": "2025-07-13T00:00:01.106103+00:00",
    "urls": [
      "https://armis-bi-output-qa1.s3.amazonaws.com/AthenaWorkgroups/datalake_
query_service_qa1/52673e3a-5f7c-11f0-8be9-9a4468fd8f4f
/20250713_000001_00000_tmprj_283f38d4-2127-41ed-9e10-c6215b2036c2?X-Amz-
Algorithm=AWS4-HMAC-SHA256&X-Amz-Credential=ASIASUVSVYSQ6QVT3
IE2%2F20250713%2Fus-east-1%2Fs3%2Faws4_request&X-Amz-Date=20250713T140938Z&X-
Amz-Expires=86400&X-Amz-SignedHeaders=host&X-Amz-Security-

Token=IQoJb3JpZ2luX2VjEP7%2F%2F%2F%2F%2F%2F%2F%2F%2F%2FwEaCXVzLWVhc3QtMSJIMEYC
IQCv3dxm2HKtjsLb3cb6KCz3oudqj%2FMITtUugbwriXdh1gIhAOsvdb%

2FNkbflXxkkDe9zGO%2Bwfqd9fLKHe4XdqFdXZU6RKrwFCBcQBRoMMTgxODM3MDg3OTA1Igw2%2BXy
nQsq%2BcDU2YjMqmQUXgnkYSySsAISTLzPUdrAtdVXNrWCM6KhC8AckSS

QJPTGaYzz6FzOxvOtsu9uOcLP14J5xd2I9gYPVYKaJoD5V5fF8mZ%2Fd14XIRG5aHpVkS%2Bjq5sCr
XbEcWw4tp0V1H0OEvl0CFxO1yoyWIINMaU2XLoTwfcQof2z2v8xk7wFP0

97xNKxNEYBMVHUc%2FfXZfkdI4VIg4%2B8pTC%2BxB1kqzRcWkJvVxl5FYMid%2B9EJOkj4MV0Ls%2
FKDPgp%2BO5mZaBMJ5w3vj2uECcA8Wyq1H1DIcm%2F8USP7xoyC9ImQn9

hV2tjvzt6FtFDu4TBhyBEaTyLSJ3CBhixY9AJMUzTh%2FhMw%2Be%2B1w05uyN5TVpFqiHcEZ5snDn
G%2FiTiDUuEem4nCShvW%2B%2FR6FkFUK%2Bsfvb1gPDVRYnTKgxU%2Fu

XenHFXjFffn6o0KrDv4NmCdzRyrkNW3hNu2zWn098n7tU0sBoDP3YN1szx1YCviOK4e9tKyLLmZ%2B
8wIoOGG6FnVofsa5pg1IuOjyjRluL6hLYUNYXJidBrOciuqXdNP9bRK4t

gcfrmstEd7YzFwutUaCUqtQ5LxUNE%2Fv%2BjdW3joUywG1M1%2FFRdClyU6YQmiH3f9VG0uFFg6Vz
4Q3xs9Tq6tqsr81k08DBHUI%2Bd%2F7aTyWyUn2ODJqgoQmNsOuRGD1JV

VvpwcSxDKspnNqpki1FaJe8akK5f2YWQcyqIOkK6D2Hc2API17m8WthDDjc0GXbGN%2Bf2mKZbRjGh
pw4ekuX07a1tzZ0E7aEJV0HMtp3HvruRsyLBWSmaTdrk%2BrRg40xN46V

HNBbwopk5peYtemdkwilwMv3Q%2BsK1%2F9EFVwO5VOa4OPOFSA1N4He1skOgZvH0fY8D8n9Baq79Y
iXVTsvi7D1jdxDCh6c7DBjqwATj1MwcDFsUebqVr%2BY3vA4jd3%2BUde

Tk0idCX71I9Bb1Zy1eWib%2F3KwlkX%2BcDF2kuWh7t%2BO7d7%2BR9mFya8ni5BgFMtPV96IbhSU3
4dPEjPXFkaFX3YTR7ZG4cEaN2zu0yfEpz4dTfZlCM9o7gTOOjtfsDk2q%

2FGBEiNSNdgbwCgVrMByCn9xcDcfRQpBmh35CMBVBxT2wQMtmP9YFMn4p27tISdCkHB5ST5Wp0rXaX
Y4CG&X-Amz-Signature=a3bf0edf17064bd2e4f0a98e054109209205
1d63576811aacabc3f708921bd9b"
    ]
  },
  "success": true
}
```

This API call has the following HTTP status codes:

Code	Description
200	OK. The report results links were successfully retrieved. The response body contains the `creationTime` of the report and an array of URLs to the report files. These URLs allow direct download of the report data. **IMPORTANT:** These URLs are time-limited (e.g., pre-signed S3 URLs) and should be used promptly. See the example above. For details on the file content and format, see System Reports—File content and format.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
403	Forbidden. The authenticated user does not have the necessary permissions to view system report results.
404	Not Found. No report with the specified `report_id` was found, or no report results are available for the requested report.

20 Roles

20.1 Getting details of all roles

GET `/api/v1/roles/`

20.1.1 Permissions required

- **Settings** > **Users And Roles** > **Read**

20.1.2 URI parameters

None.

20.1.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

20.2 Creating a new role

POST `/api/v1/roles/`

20.2.1 Permissions required

- **Settings** > **Users and Roles** > **Manage** > **Roles** > **Create**

20.2.2 URI parameters

Name	Type	Description
Body * Required	(body)	The role privileges. The set includes PII permissions (in advancedPermissions) and permissions per system entity. Each parameter and its nested options are Boolean. If a parent option is True, all its nested options must be True. If a nested option is False, its parent option cannot be True.

© Copyright Armis Security 2025

20.2.3 Example

```
{
  "name": "Custom Role",
  "permissions": {
    "advancedPermissions": {
      "all": true,
      "behavioral": {
        "all": true,
        "applicationName": {
          "all": true
        },
        "hostName": {
          "all": true
        },
        "serviceName": {
          "all": true
        }
      },
      "device": {
        "all": true,
        "deviceNames": {
          "all": true
        },
        "ipAddresses": {
          "all": true
        },
        "macAddresses": {
          "all": true
        },
        "phoneNumbers": {
          "all": true
        }
      }
    },
    "alert": {
      "all": true,
      "manage": {
        "all": true,
        "resolve": {
```

```
        "all": true
      },
      "suppress": {
        "all": true
      },
      "whitelistDevices": {
        "all": true
      }
    },
    "read": {
      "all": true
    }
  },
  "all": true,
  "business_applications": {
    "all": true,
    "manage": {
      "all": true,
      "delete": {
        "all": true
      },
      "upsert": {
        "all": true
      }
    },
    "read": {
      "all": true
    }
  },
  "device": {
    "all": true,
    "manage": {
      "all": true,
      "create": {
        "all": true
      },
      "edit": {
        "all": true
      },
      "enforce": {
        "all": true,
```

```
      },
      "read": {
        "all": true
      }
    },
    "risk_factor": {
      "all": true,
      "manage": {
        "all": true,
        "ignore": {
          "all": true
        },
        "resolve": {
          "all": true
        }
      },
      "read": {
        "all": true
      }
    },
    "settings": {
      "all": true,
      "auditLog": {
        "all": true
      },
      "boundary": {
        "all": true,
        "manage": {
          "all": true,
          "create": {
            "all": true
          },
          "delete": {
            "all": true
          },
          "edit": {
            "all": true
          }
        },
        "read": {
          "all": true
        }
      },
      "businessImpact": {
        "all": true,
        "manage": {
          "all": true
```

```
},
    "user": {
      "all": true,
      "read": {
        "all": true
      }
    },
    "vulnerability": {
      "all": true,
      "manage": {
        "all": true,
        "ignore": {
          "all": true
        },
        "resolve": {
          "all": true
        },
        "write": {
          "all": true
        }
      },
      "read": {
        "all": true
      }
    }
  }
}
```

20.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown role.

20.3 Deleting a role

DELETE `/api/v1/roles/{role_id}/`

20.3.1 Permissions required

- **Settings** > **Users and Roles** > **Manage** > **Roles** > **Delete**

20.3.2 URI parameters

Name	Type	Description
role_id * Required	(path)	The role ID in the Armis system.

20.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown role.

20.4 Get role details

GET `/api/v1/roles/{role_id}/`

20.4.1 Permissions required

- **Settings** > **Users and Roles** > **Read**

20.4.2 URI parameters

Name	Type	Description
role_id * Required	(path)	The role ID in the Armis system.

20.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
404	Unknown role.

20.5 Update role privileges

PATCH `/api/v1/roles/{role_id}/`

20.5.1 Permissions required

- **Settings** > **Users and Roles** > **Manage** > **Roles** > **Edit**

20.5.2 URI parameters

Name	Type	Description
role_id * Required	(path)	The role ID in the Armis system.
body * Required	(body)	The role privileges. The set includes PII permissions (in advancedPermissions) and permissions per system entity. Each parameter and its nested options are Boolean. If a parent option is True, all its nested options must be True. If a nested option is False, its parent option cannot be True.

20.5.3 Example

```
{
  "name": "Custom Role",
  "permissions": {
    "advancedPermissions": {
      "all": true,
      "behavioral": {
        "all": true,
        "applicationName": {
          "all": true
        },
        "hostName": {
          "all": true
        },
        "serviceName": {
          "all": true
        }
      },
      "device": {
        "all": true,
        "deviceNames": {
          "all": true
        },
        "ipAddresses": {
          "all": true
        },
        "macAddresses": {
          "all": true
        },
        "phoneNumbers": {
          "all": true
        }
      }
    },
    "alert": {
      "all": true,
      "manage": {
        "all": true,
        "resolve": {
```

```
        "all": true
      },
      "suppress": {
        "all": true
      },
      "whitelistDevices": {
        "all": true
      }
    },
    "read": {
      "all": true
    }
  },
  "all": true,
  "business_applications": {
    "all": true,
    "manage": {
      "all": true,
      "delete": {
        "all": true
      },
      "upsert": {
        "all": true
      }
    },
    "read": {
      "all": true
    }
  },
  "device": {
    "all": true,
    "manage": {
      "all": true,
      "create": {
        "all": true
      },
      "edit": {
        "all": true
      },
      "enforce": {
        "all": true,
```

```
      },
      "read": {
        "all": true
      }
    },
    "risk_factor": {
      "all": true,
      "manage": {
        "all": true,
        "ignore": {
          "all": true
        },
        "resolve": {
          "all": true
        }
      },
      "read": {
        "all": true
      }
    },
    "settings": {
      "all": true,
      "auditLog": {
        "all": true
      },
      "boundary": {
        "all": true,
        "manage": {
          "all": true,
          "create": {
            "all": true
          },
          "delete": {
            "all": true
          },
          "edit": {
            "all": true
          }
        },
        "read": {
          "all": true
        }
      },
      "businessImpact": {
        "all": true,
        "manage": {
          "all": true
```

```
},
    "user": {
      "all": true,
      "read": {
        "all": true
      }
    },
    "vulnerability": {
      "all": true,
      "manage": {
        "all": true,
        "ignore": {
          "all": true
        },
        "resolve": {
          "all": true
        },
        "write": {
          "all": true
        }
      },
      "read": {
        "all": true
      }
    }
  }
}
```

20.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown role.

21 Search

21.1 Return search result for given ASQ search string

GET `/api/v1/search/`

21.1.1 Permissions required

- NONE

21.1.2 URI parameters

Name	Type	Description
aql *Required	string (query)	The AQL search string
fields	(query)	Fields to show. If omitted, returns a default subset of fields. See Searches types. To get network Interface data, enter `networkInterface` in the **fields** text box. For example: **api/v1/search/?aql=timeFrame%3A%227%20Days%22&fields=networkInterface&includeSample=true&includeTotal=true** This returns network interface information for each device.
from	integer (query)	Paging from
length	integer (query)	Paging length
includeTotal	boolean (query)	If set to "false", the total count will not be calculated.
orderBy	string (query)	Sort order for results, values separated by commas. Default direction is ASC.
tz	string (query)	The time zone to run the query.

© Copyright Armis Security 2025

NOTES:

- Returned fields—All fields will be returned, except for nested entities which will be returned as a list of IDs.
- Optional filters—All filters available for the entity in the ASQ.

21.1.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request. Missing `aql` parameter.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

21.1.4 Searches types

The following types of searches are supported:

activity

alerts

auditlog

applications

businessApplications

connections

devices

operatingSystems

riskFactors

services

traffic

users

vulnerabilities

21.1.4.1 activity

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:activity
{optional filters}
```

21.1.4.1.1 Example

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:activity
type:"Dns Query"
```


```
{
  "data": {
    "results": [
      {
        "activityUUID": "sBEbYGsBAAAAAABkzx4s",
        "title": "e0553d490 performed DNS query to domain 'abc-ssl.xyz.com'",
        "content": "Resolved IPs: 152.101.26.236",
        "type": "Dns Query",
        "protocol": "Wifi",
         "sensor": {
          "name": "0c:8d:db:b2:61:3e"
        },
        "time": "2019-03-06T13:08:53.016075+00:0",
        "deviceIds": [1475,1498],
        "connectionIds": [1599, 9804]
      }
    ]
  },
  "success": true
}
```


21.1.4.1.2 Response parameters

Name	Type	Description
activityUUID	string	Activity ID.
content	string	Additional activity information.
connectionIds	list[integer]	List of connection IDs which are related to the activity.
deviceIds	list[integer]	List of devices IDs which are related to the activity.
protocol	string	Protocol used - Network, Wi-Fi etc.
sensor	JSON	Name of sensor that picked up the activity. **name** | sensor name

Name	Type	Description
site	JSON	The sites where the sensor that picked up the connection is located. • location—The site location. • name—The site name.
sites	JSON	The sites where the sensor that picked up the connection is located. This parameter is used for multiple sites and replaces the `site` parameter. • location—The site location. • name—The site name.
title	string	Activity title.
type	string	Type of activity i.e., First connect, New Device, SSID Beacon Started, etc.
time	timestamp	Activity timestamp.

© Copyright Armis Security 2025

21.1.4.2 alerts

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:alerts
{optional filters}
```

21.1.4.2.1 Examples

The following are examples for retrieving all of the alerts from Armis Centrix™:

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?aql=in:alerts" -
H 'Authorization: <access-token>'
```

Python

```
response = requests.get(url="https://<armis-
instance>.armis.com/api/v1/search/",
       params={"aql": "in:alerts"},
       headers={"Authorization": <access-token>})
```

The response will be a JSON array of alerts similar to this:

```
{
   "data": {
        "count": 10,
        "next": 10,
        "prev": null,
        "results": [
          {
            "activityUUIDs": [
              "AHlSvXkBAAAAAE-7NRHb"
           ],
          "alertId": 7,
          "connectionIds": [
           37919,
            37925,
            37926
          ],
          "description": null,
          "deviceIds": [
            151,
            13
          ],
          "severity": "High",
          "status": "Unhandled",
          "time": "2021-05-30T08:19:03.543857+00:00",
          "title": "Krack attack detected",
          "type": "Anomaly Detection"
        },
        …
      ],
      "total": 24
   },
   "success": true
}
```

An example for Alerts Status that are Unhandled:

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:alerts
status:Unhandled
```

```
{
  "data": {
    "results": [
      {
        "alertId": 600,
        "title": "Restricted Device Connected to the Internet",
        "type": "SYSTEM_POLICY_VIOLATION",
        "time": "2019-03-06T13:08:53.016075+00:0",
        "severity": "Medium",
        "status": "Unhandled",
        "description": "System policy violation alert",
        "deviceIds": [1475,1498],
        "connectionIds": [1599,9804],
        "activityUUIDs": ["CyVdYGsBAAAAAABkjLed","mNVdYGsBAAAAAABkjLZe"]
      }
    ]
  },
  "success": true
}
```


The following example shows how the IP address and MAC address were added to source and destination endpoints for alerts.

```
{
  "data": {
    "count": 1,
    "next": null,
    "prev": null,
    "results": [
      {
        "activityUUIDs": [
          "7Dw-S5EBAAAAAAAFpyh_"
        ],
        "affectedDevicesCount": 1,
        "alertId": 3348149,
        "classification": "Security - Risk",
        "connectionIds": [],
        "description": "The Armis security platform has detected a violation
of a policy and generated an alert.",
        "destinationEndpoints": [
          {
            "id": "2xx.255.255.250",
            "name": "2xx.255.255.250"
          }
        ],
        "deviceIds": [
          1829094
        ],
        "mitreAttackLabels": [
          {
            "matrix": "Enterprise",
            "subTechnique": null,
            "tactic": "TA0043 Reconnaissance",
            "technique": "T1592 Gather Victim Host Information"
          }
        ],
        "policyId": "13485",
        "policyLabels": [
          "general"
        ],
        "policyTitle": "Exclude scanners ",
        "severity": "Medium",
        "sourceEndpoints": [
          {
            "id": 1829094,
            "ip": [
              "10.201.0.125"
            ],
            "macAddress": [
              "xx:0C:29:72:01:1F"
            ],
            "name": "proplus"
          }
        ],
        "status": "Unhandled",
        "statusChangeTime": "2024-08-13T10:10:41+00:00",
        "time": "2024-08-13T10:10:41+00:00",
        "title": "Exclude scanners ",
```

```
        "type": "System Policy Violation"
      }
    ],
    "total": 1
  },
  "success": true
}
```

21.1.4.2.2 Response parameters

Name	Type	Description
alertId	integer	Armis alert ID.
activityUUIDs	list[string]	List of related activity IDs.
connectionIds	list[integer]	List of IDs of the connections related to the alert
description	string	User-defined alert description.
deviceIds	list[integer]	List of IDs of the devices related to the alert.
lastAlertUpdateTime	timestamp	Timestamp of when the alert was last updated to include the most recent events.
severity	string	Alert severity (Low/Medium/High).
status	string	Alert status i.e., `Unhandled`/`Resolved`.
title	string	Alert title.
type	string	Alert type, i.e., `System/User Policy Violation`, `Anomaly Detection`, etc.
time	timestamp	Alert timestamp.

21.1.4.3 auditlog

Queries the Armis Centrix™ audit log. This enhances visibility into user actions and system events, which improves monitoring, ensures compliance, and streamlines troubleshooting.

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:auditLog
{optional filters}
```

21.1.4.3.1 Parameters

The `aql` parameter uses Armis Standard Query (ASQ also called AQL or Armis Query Language) to filter the results. The query must start with `in:auditLog`.

You can use the following filters within the `aql` string:

- `timeFrame`—Filters by time range (e.g., "7 Days", "30 Minutes").
- `action`—Filters by the user action (e.g., "Login Attempt", "Add Tag").
- `user`—Filters by the user's name or email (e.g., "John").

Example cURL and Python requests

This example shows how to query the audit log for all actions performed by a user named "John" within the last 7 days.

cURL

```
curl -X 'GET' \
   'https://<armis-instance>.armis.com/api/v1/search/?

aql=in%3AauditLog%20timeFrame%3A%227%20Days%22%20user%3A%22John%22&includeSamp
le=true&includeTotal=true' \
   -H 'accept: application/json'
```

Python

```
response = requests.get(url="https://<armis-
instance>.armis.com/api/v1/search/",
       params={"aql": 'in:auditLog timeFrame:"7 Days" user:"John"',
          "includeSample": "true",
          "includeTotal": "true"
       },
       headers={"Authorization": "<access-token>"})
```

Example JSON response

The response is a JSON object that includes a `data` field containing the query results.

```
{
  "data": {
    "count": 1,
    "next": 10,
    "prev": null,
    "results": [
      {
        "action": "Login Attempt",
        "additionalInfo": {
          "data": "IP: 192.168.1.1, User Agent: Mozilla/5.0 (Windows NT 10.0;
Win64; x64)",
          "type": "TEXT"
        },
        "id": 10283019,
        "time": "2025-09-18T07:10:16.982717+00:00",
        "timeUtc": "2025-09-18T07:10:16.982717+00:00",
        "trigger": "User Action",
        "user": "John (john.smith123@gmail.com)",
        "userIp": "None"
      }
    ],
    "total": 190
  },
  "success": true
}
```


21.1.4.3.2 Response parameters

Name	Type	Description
ID	integer	The ID assigned to the audit log entry.
time	timestamp	The time the action occurred.
timeUtc	timestamp	The time the action occurred (UTC).
trigger	string	The source or origin that initiated the event. This field indicates what component, service, or action caused the log entry to be created.
action	JSON	The action that occurred.
user	string	The user who performed the action.
userIp	list	A list of IP addresses associated with the user. (e.g., `["192.168.1.1"]`).
additionalInfo	string	Additional information.

21.1.4.4 applications

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:applications
{optional filters}
```

21.1.4.4.1 Examples

The following are examples for retrieving all the applications from Armis Centrix™:

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?aql=in:applications"
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(url="https://<armis-
instance>.armis.com/api/v1/search/",
     params={"aql": "in:applications"},
     headers={"Authorization": <access-token>})
```

The response will be a JSON array of devices similar to this:

```
{
     "data": {
        "count": 10,
        "next": 10,
        "prev": null,
        "results": [
           {
               "devices": 502,
               "firstSeen": "2020-08-13T09:23:36.147000+00:00",
               "lastSeen": "2023-01-15T18:19:01+00:00",
               "name": "Audio MIDI Setup",
               "version": "3.5"
           },
         ...
       ],
       "total": 3200
    },
    "success": true
}
```

> **NOTE:** The total number of applications is the value for "total", in this case 3,200. However, the Armis API defaults to a page size of 10, so there will be only 10 application elements in the results array that is returned. To use a different page size, refer to Paging through large amounts of data.

Additional example for a 7 day period and OpenSSH

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:applications
timeFrame:"7 Days" name:OpenSSH
```

```
{
  "data": {
    "results": [
      {
        "devices": 6,
        "firstSeen": "2020-09-28T18:57:58.731657",
        "lastSeen": "2020-10-05T07:22:33.145168",
        "name": "OpenSSH",
        "version": "7.4p1"
      }
    ]
  },
  "success": true
}
```

21.1.4.4.2 Response parameters

Name	Type	Description
devices	integer	The number of devices that used the application.
firstSeen	timestamp	When the application was first used.
lastSeen	timestamp	When the application was last used.
name	string	Application name e.g., OpenSSH
version	string	The version of the application.

21.1.4.5 businessApplications

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=
in:businessApplications {optional filters}
```

21.1.4.5.1 Example

```
GET https://<armis-
instance>.armis.com/api/v1/search/in:businessApplications
```

```
{
  "data": {
    "count": 2,
    "next": null,
    "prev": null,
    "results": [
      {
        "businessCriticality": "Critical",
        "businessOwner": "Iorek B",
        "businessUnit": null,
        "description": "Database application to store our users",
        "deviceIds": [
          2145
        ],
        "firstSeen": "2023-05-09T08:32:05.223649+00:00",
        "id": 6,
        "installationType": "SAAS",
        "lastSeen": "2023-05-09T08:32:05.223649+00:00",
        "name": "My_app",
        "operationalStatus": null,
        "type": "Homegrown"
      },
      {
        "businessCriticality": "Critical",
        "businessOwner": "Ariel B",
        "businessUnit": null,
        "description": "Demo of Business Application.",
        "deviceIds": [
          556,
          599,
          378,
          564,
          398,
          1771,
          929,
          1938,
          1099,
          6888
        ],
        "firstSeen": "2023-06-19T12:06:29.081237+00:00",
        "id": 14,
        "installationType": "SAAS",
        "lastSeen": "2023-06-19T12:06:29.081237+00:00",
        "name": "Business Application Demo",
        "operationalStatus": null,
        "type": "Homegrown"
      }
    ],
    "total": 2
  },
  "success": true
}
```

21.1.4.5.2 Response parameters

Name	Type	Description
businessCriticality	string	Describes how critical the business application is. Allowed values: Critical, High, Medium, Low. Mandatory.
businessOwner	string	Describes the Business Owner. Mandatory.
businessUnit	string	Describes the Business Unit.
description	string	A short description for the business application.
deviceIds	list	Device IDs.
firstSeen	timestamp	When the business application was first used.
id	integer	The ID assigned to the business application.
installationType	string	E.g., None, On-Premise, Cloud.
lastSeen	timestamp	When the business application was last used.
name	string	The name of the business application. Mandatory.
operationalStatus	string	Allowed values: Ready or Retired state
type	Enum	The application type. Allowed values: Commercial off the shelf, Homegrown

21.1.4.6 connections

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:connections {optional filters}

21.1.4.6.1 Example

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:connections timeFrame:"7 Days" protocol:Wi-Fi


```
{
  "data": {
    "results": [
      {
       "band": null,
        "channel": null,
        "dhcpAuthenticationDuration": null,
        "duration": null,
        "endTimestamp": "2020-10-05T07:52:18.760804",
        "id": 1408,
        "inboundTraffic": 1024,
        "outboundTraffic": 0,
        "protocol": "Wi-Fi",
        "radiusAuthenticationDuration": null,
        "risk": "Medium",
        "rssi": null,
        "sensor": {
          "name": "0c:8d:db:b2:64:66",
          "type": "Access Point"
        },
        "site": {
          "location": "NYU",
          "name": "NYU"
        },
        "snr": null,
        "sourceId": 169,
        "startTimestamp": "2020-10-05T07:52:18.760804",
        "targetId": 254,
        "title": "Connection between HPE8D8D1E0498F and Skynet",
        "totalAssociationDuration": null,
        "traffic": 1024,
        "wlanAssociationDuration": null
      }
    ]
  },
  "success": true
}
```

21.1.4.6.2 Response parameters

Name	Type	Description
band	string	The frequency at which the connection was established: 2.4GHZ or 5GHZ.
bssid	string	The BSSID of the access point or wireless router.
channel	integer	The channel at which connections were established.
duration	integer	Total duration of the connection.
endTimestamp	timestamp	When the connection was ended.
id	integer	The ID assigned to the connection.
inboundTraffic	integer	The volume of the inbound traffic.
outboundTraffic	integer	The volume of the outbound traffic.
protocol	string	Protocol used (Network, Wi-Fi, etc.)
risk	string	The risk associated with the specific connection.
rssi	integer	The level of the signal strength during the connection. RSSI stands for Received Signal Strength Indicator.
sensor	JSON	The sensor that picked up the connection. • name—The sensor name. • type—The sensor type.
site	JSON	The site where the sensor that picked up the connection is located. • location—The site location. • name—The site name.
sites	JSON	The sites where the sensor that picked up the connection is located. This parameter is used for multiple sites and replaces the `site` parameter. • location—The site location. • name—The site name.
snr	integer	The SNR (signal-to-noise) ratio expressed in decibels.

Name	Type	Description
sourceId	integer	The ID of the connection source.
ssid	integer	The SSID for the network.
startTimestamp	timestamp	When the connection was started.
targetId	integer	The ID of the connection target.
title	string	The title assigned to the connection by Armis.
traffic	integer	Total traffic that passed during the connection.

© Copyright Armis Security 2025

21.1.4.7 devices

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:devices
{optional filters}
```

21.1.4.7.1 Examples

The following are examples of retrieving all the devices from Armis Centrix™:

cURL

```
curl "https://<armis-instance>.armiscom/api/v1/search/?aql=in:devices"
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(url="https://<armis-
instance>.armis.com/api/v1/search/",
       params={"aql": "in:devices"},
       headers={"Authorization": <access-token>})
```

The response will be a JSON array of devices similar to the following:

```
{
"data": {
 "count": 10,
 "next": 10,
 "prev": null,
 "results": [
    {
       "accessSwitch": null,
       "boundaries": "Off Network",
       "businessImpact": "Unassigned",
       "category": "Network Equipment",
       "customProperties": {},
       "dataSources": [
          {
            "firstSeen": "2022-04-25T14:56:00+00:00",
            "lastSeen": "2023-01-15T19:14:08+00:00",
            "name": "Meraki",
            "types": [
              "WLC"
            ]
          },
          {
            "firstSeen": "2023-01-09T07:36:32+00:00",
            "lastSeen": "2023-01-15T19:22:40+00:00",
            "name": "Aruba WLC",
            "types": [
              "WLC"
            ]
          }

        ],
        "firstSeen": "2020-01-12T09:35:28+00:00",
        "id": 303239,
        "ipAddress": "",
        "lastSeen": "2022-01-15T19:22:40+00:00",
        "macAddress": "E2:63:22:AC:70:96",
        "manufacturer": null,
        "model": null,
        "name": null,
        "operatingSystem": null,
        "operatingSystemVersion": null,
        "riskLevel": 1,
        "sensor": {
          "name": "a8:46:9d:1c:92:ea",
          "type": "Access Point"
        },
        "site": null,
        "tags": [
          "Access Point"
        ],
        "type": "Access Points",
        "userIds": [],
```

```
      "visibility": "Full"
    },
    {
      "accessSwitch": null,
      "boundaries": "Off Network",
      "businessImpact": "Unassigned",
      "category": "Network Equipment",
      "customProperties": {},
      "dataSources": [
        {
          "firstSeen": "2021-10-19T16:29:52+00:00",
          "lastSeen": "2022-01-15T19:14:08+00:00",
          "name": "Meraki",
          "types": [
            "WLC"
          ]
        },
        {
          "firstSeen": "2021-12-13T09:33:52+00:00",
          "lastSeen": "2021-01-15T19:14:08+00:00",
          "name": "Aruba WLC",
          "types": [
            "WLC"
          ]
        }
      ],
      "firstSeen": "2021-09-14T15:07:39+00:00",
      "id": 983,
      "ipAddress": "",
      "lastSeen": "2023-01-15T19:22:40+00:00",
      "macAddress": "44:48:C1:CD:C9:E0",
      "manufacturer": "Hewlett Packard",
      "model": "Hewlett device",
      "name": "i-a-instant",
      "operatingSystem": null,
      "operatingSystemVersion": null,
      "riskLevel": 2,
      "sensor": {
        "name": "d0:15:66:cf:f9:de",
        "type": "Access Point"
      },
      "site": null,
      "tags": [
        "SSID=i-A-Instant",
        "Off Network",
        "Access Point"
      ],
      "type": "Access Points",
      "userIds": [],
      "visibility": "Full"
    },
    ...

  ],
  "total": 4415
```

```
    },
    "success": true
}
```

NOTES:

- The total number of devices is the value for “total”, in this case 4415. However, the Armis API defaults to a page size of 10, so there will be only 10 device elements in the results array that is returned. To use a different page size, refer to Paging through large amounts of data.
- You can also add fields as parameters to get additional properties, for example:

  `api/v1/search/?aql=in%3Adevices&fields=carbonBlackDefenseStatus&includeTotal=true`

  The format of the properties needs to be the same as the ASQ format of the field.

21.1.4.7.2 Response parameters

Name	Type	Description
accessSwitch	string	The name of the access switch.
boundaries	string	Armis boundaries e.g., Off Network
businessImpact	string	Business Impact level.
category	string	The device category: computer, handheld, medical, and so on.
customProperties	JSON	JSON list of custom properties.
dataSources	list	List of data sources.
firstSeen	timestamp	When was the device first seen.
id	integer	Device ID.
ipAddress	string	Device IP address.
ipv6	list	Device IPv6 address.
lastSeen	timestamp	when was the device last seen
macAddress	string	Device MAC address.
manufacturer	string	Device manufacturer, represented in the Armis console as Brand.
model	string	Device model.
name	string	Device name.
names	string	Device names.
operatingSystem	string	Device operating system.
operatingSystemVersion	string	device operating system version

Name	Type	Description
purdueLevel	string	The Purdue level.
riskLevel	string	Risk level assigned to the device: Low (1-30), Medium (31-70), High (71-90), or Critical (91-100).
sensor	JSON	Last sensor that saw the device • name: The sensor name.
site	JSON	Site to which the sensor belongs. • location: The site location. • name | site name
tier	string	Display the tier information for device ASQs
tags	list[string]	Attached device tags.
type	string	Device type.
user	string	Device user.
userIds	list	List of User IDs.
visibility	string	The visibility e.g., Full.

21.1.4.8 operatingSystems

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:operatingSystems {optional filters}

21.1.4.8.1 Example

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:operatingSystems


```
{
  "data": {
    "count": 10,
    "next": 10,
    "prev": null,
    "results": [
      {
        "devices": 9,
        "firstSeen": "2023-02-13T12:04:26.626349+00:00",
        "lastSeen": "2023-10-12T08:20:14.149862+00:00",
        "name": "Amazon Linux",
        "version": "2"
      },
      {
        "devices": 2,
        "firstSeen": "2023-05-04T17:37:34.895874+00:00",
        "lastSeen": "2023-10-06T13:59:26+00:00",
        "name": "Amazon Linux",
        "version": "2023"
      },
      {
        "devices": 60,
        "firstSeen": "2023-02-12T16:10:35+00:00",
        "lastSeen": "2023-10-12T11:29:04+00:00",
        "name": "Android",
        "version": ""
      },
      {
        "devices": 2,
        "firstSeen": "2023-02-13T12:14:48.044508+00:00",
        "lastSeen": "2023-10-12T13:33:33.785147+00:00",
        "name": "ArubaOS",
        "version": ""
      }
    ],
    "total": 114
  },
  "success": true
}
```

21.1.4.8.2 Response parameters

Name	Type	Description
devices	integer	The number of devices that run the operating system.
firstSeen	timestamp	When the operating system was first seen.
lastSeen	timestamp	When the operating system was last seen.
name	string	The name of the operating system e.g., iOS, Android
version	string	The version of the operating system.

21.1.4.9 riskFactors

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:riskFactors
{optional filters}
```

21.1.4.9.1 Example

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:riskFactors
```

```
{
  "data": {
    "count": 10,
    "next": 10,
    "prev": null,
    "results": [
      {
        "category": "Behavioural",
        "description": "Policy Violation",
        "devices": 6123,
        "group": "Policies",
        "lastSeen": "2023-10-12T13:45:36+00:00",
        "score": "High",
        "status": "Open",
        "type": "Policy Violations"
      },
      {
        "category": "Profile",
        "description": "Device is accepting SMBv1 requests.",
        "devices": 10,
        "group": "Configuration",
        "lastSeen": "2023-10-12T13:34:36.618362+00:00",
        "score": "Medium",
        "status": "Open",
        "type": "SMBv1 Support"
      },
      {
        "category": "Behavioural",
        "description": "Policy Violation",
        "devices": 38,
        "group": "Policies",
        "lastSeen": "2023-10-12T13:32:48+00:00",
        "score": "Medium",
        "status": "Ignored",
        "type": "Policy Violations"
      },
      {
        "category": "Profile",
        "description": "Manufacturer 'VMware' detected",
        "devices": 801,
        "group": "Hardware",
        "lastSeen": "2023-10-12T11:20:39.254261+00:00",
        "score": "Low",
        "status": "Open",
        "type": "Manufacturer Reputation"
      },
      {
        "category": "Profile",
        "description": "Manufacturer 'Apple' detected",
        "devices": 4637,
        "group": "Hardware",
        "lastSeen": "2023-10-12T10:34:52.348939+00:00",
        "score": "Low",
        "status": "Open",
        "type": "Manufacturer Reputation"
```

```
      }
    ],
    "total": 223
  },
  "success": true
}
```

21.1.4.9.2 Response parameters

Name	Type	Description
category	string	The risk category e.g., Profile.
description	string	Description of a risk factor.
devices	integer	The number of devices on which the risk factor is detected.
group	string	E.g., Policies, Hardware
lastSeen	timestamp	When the risk factor was last detected.
score	string	The score assigned to the risk factor.
status	string	E.g., Open, Ignored.
type	string	The risk factor type.

21.1.4.10 services

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:services
{optional filters}
```

21.1.4.10.1 Example

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:services
timeFrame:"7 Days" name:(zoom)
```


```
{
  "data": {
    "results": [
      {
        "devices": 6,
        "firstSeen": "2020-09-28T19:00:00",
        "hosts": 1,
        "inboundTraffic": 123581783523,
        "jitterMS": 3.77868852459016,
        "lastSeen": "2020-10-04T10:00:00",
        "latency": null,
        "name": "Zoom:8801",
        "outboundTraffic": 59229109610,
        "packetLoss": 0.0879424661632147,
        "packetsCount": 308289341,
        "retransmitCount": 0,
        "traffic": 182810893133
        }
    ]
  },
  "success": true
}
```


21.1.4.10.2 Response parameters

Name	Type	Description
devices	integer	The number of devices that used a network service.
firstSeen	timestamp	When the operating system was first used.
hosts	integer	The number of service hosts.
inboundTraffic	integer	The volume of the inbound traffic.
jitterMS	integer	The deviation from true periodicity of a periodic signal (in milliseconds).
lastSeen	timestamp	When the service was last used.
latency	integer	The time it takes for a data packet to reach its destination (in milliseconds).

Name	Type	Description
name	string	The name of the port used by the service.
outboundTraffic	integer	The volume of the outbound traffic.
packetLoss	integer	The number of packets of data that did not reach their destination.
packetsCount	integer	The number of transmitted packets of data.
retransmitCount	integer	The number of times when packets were resent due to being lost or damaged.
traffic	integer	The total traffic volume.

© Copyright Armis Security 2025

21.1.4.11 traffic

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:traffic
{optional filters}
```

21.1.4.11.1 Example

```
GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:traffic
timeFrame:"7 Days" sensors:"0c:8d:db:b2:61:3e"
```


```
{
  "data": {
    "results": [
      {
        "description": "Multicast DNS (mDNS)",
        "devices": 6,
        "firstSeen": "2020-09-28T19:00:00",
        "inboundTraffic": 0,
        "jitterMS": "N/A",
        "lastSeen": "2020-10-04T10:00:00",
        "latency": "N/A",
        "name": "mDNS",
        "outboundTraffic": 82819,
        "packetLoss": "N/A",
        "packetsCount": 220,
        "port": 5353,
        "retransmitCount": 0,
        "traffic": 82819
        }
    ]
  },
  "success": true
}
```


21.1.4.11.2 Response parameters

Name	Type	Description
description	string	The name of a protocol for which the network activity was analyzed.
devices	integer	The number of devices on which the network activity was analyzed.
firstSeen	timestamp	When the protocol was first used.
inboundTraffic	integer	The volume of the inbound traffic.
jitterMS	integer	The deviation from true periodicity of a periodic signal (in milliseconds).
latency	integer	The time it takes for a data packet to reach its destination (in milliseconds).
name	string	The name of the port used by the protocol.

Name	Type	Description
outboundTraffic	integer	The volume of the outbound traffic.
packetLoss	integer	The number of packets of data that did not reach their destination.
packetsCount	integer	The number of transmitted packets of data.
port	integer	The number of the port used by the protocol.
retransmitCount	integer	The number of times when packets were resent due to being lost or damaged.
traffic	integer	The total traffic volume.

© Copyright Armis Security 2025

21.1.4.12 users

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:users {optional filters}

21.1.4.12.1 Example

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:users


```
{
  "data": {
    "count": 1,
    "next": 9,
    "prev": 7,
    "results": [
      {
        "dataSources": [
          {
            "firstSeen": 1693985737554,
            "hideTimestamps": false,
            "icon": "iconIntegrationTypeDatasourceTrafficInspection",
            "id": 71426,
            "key": "TRAFFIC_INSPECTION",
            "lastSeen": 1695833231539,
            "name": "Traffic Inspection",
            "types": [
              "Traffic Inspection",
              "Data Analysis"
            ]
          }
        ],
        "deviceIds": [
          15037,
          14872
        ],
        "displayName": null,
        "email": null,
        "firstSeen": "2023-09-06T07:35:37.554610+00:00",
        "id": 197078,
        "lastSeen": "2023-09-27T16:47:11.539759+00:00",
        "lastUsedDevice": null,
        "name": "I-ALTIRIS$",
        "phone": null,
        "properties": {
          "domain": "ARMI"
        },
        "username": "I-ALTIRIS$"
      }
    ],
    "total": 5211
  },
  "success": true
}
```

21.1.4.12.2 Response parameters

Name	Type	Description
dataSources	list	This can include the following: firstSeen, hideTimestamps, icon, id, key, lastSeen, name, types.
deviceIds	list	List of devices IDs which are related to the user.
displayName	string	The users display name.
email	string	The users email address.
firstSeen	timestamp	When the user was first seen.
id	integer	The ID assigned to the user.
lastSeen	timestamp	When the user was last seen.
lastUsedDevice	string	The last device used.
name	string	The name.
phone	string	The phone number for the user.
properties	string	Additional properties
username	string	The username.

© Copyright Armis Security 2025

21.1.4.13 vulnerabilities

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:vulnerabilities {optional filters}}

21.1.4.13.1 Example

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:vulnerabilities


```
{
        "affectedDevicesCount": 1,
        "attackComplexity": "Low",
        "attackVector": "Not Defined",
        "availabilityImpact": "High",
        "confidentialityImpact": "None",
        "id": 1,
        "description": "An issue was discovered in certain Apple products.
         iOS before 11.3 is affected. The issue involves the \"Find My
iPhone\"
         component. It allows physically proximate attackers to bypass the
iCloud
         password requirement for disabling the \"Find My iPhone\" feature via
         vectors involving a backup restore.",
        "cveUid": "CVE-2018-4172",
        "exploitabilityScore": 0.9,
        "impactScore": 3.6,
        "integrityImpact": "None",
        "privilegesRequired": "None",
        "publishedDate": "2018-03-04T08:26:25.070341",
        "scope": "Unchanged",
        "score": 4.6,
        "severity": "High",
        "status": "Unresolved",
        "userInteraction": "None",
        "vulnerableEntities": [
       {
         "affectedDevicesCount": 1,
         "name": "iOS",
         "version": "11.3",
         "vendor": "Apple"
    }
  ]
}
```

21.1.4.13.2 Response parameters

Name	Type	Description
affectedDevicesCount	integer	The number of devices affected by the vulnerability.
attackComplexity	string	How complicated it is to exploit the discovered vulnerability: `None`, `Low`, `Medium`, `High`, or `Critical`.
attackVector	string	What access the attacker needs to exploit the vulnerability: `Network`, `Adjacent Network`, `Local` or `Physical`.
availabilityImpact	string	Level of impact to the data availability when the vulnerability is successfully exploited on a component: `None`, `Low`, `Medium`, `High`, or `Critical`.
confidentialityImpact	string	Level of impact to the data confidentiality when the vulnerability is successfully exploited on a component: `None`, `Low`, `Medium`, `High`, or `Critical`.
cveUid	string	ID of the corresponding entry in the CVE system.
cvssScore	string	The CVSS version 3 score.
cvssScoreV4	string	The CVSS version 4 score.
description	string	Vulnerability description.
exploitabilityScore	integer	Probability of the vulnerability to be exploited based on the current state of exploitation techniques or automated exploitation code.
id	integer	Armis vulnerability ID.
impactScore	integer	Numerical representation of the impact of a successful vulnerability exploit on your business: low (1-3), medium (4-7), or high (8-10).
integrityImpact	string	Level of impact to the data integrity when the vulnerability is successfully exploited on a component: None, Low, Medium, High, or Critical.
privilegesRequired	string	Level of privileges the attacker needs to exploit the vulnerability successfully: `None`, `Low`, `Medium`, `High`, or `Critical`.
publishedDate	timestamp	Date when the vulnerability was publicly exposed in the CVE system.
qualysScore	string	The Qualys score.

Name	Type	Description
scope	integer	Numerical representation of the vulnerability score calculated by adding exploitabilityScore to impactScore: low (1-3), medium (4-7), or high (8-10).
score	integer	Numerical representation of the vulnerability score calculated by adding exploitabilityScore to impactScore: low (1-3), medium (4-7), or high (8-10).
severity	string	Qualitative representation of the vulnerability severity: `None`, `Low`, `Medium`, `High`, or `Critical`.
status	string	Whether the vulnerability is Unresolved or Resolved. Resolved vulnerabilities will be fetched only by an explicit search for status:Resolved or for a specific id.
userInteraction	string	Whether the attacker can perpetrate the attack alone (None) or they must be assisted by another user (Required).
vulnerableEntities	list[JSON]	The entities (operating systems, applications, etc.) affected by the vulnerability • affectedDevicesCount | integer: Number of devices affected by the vulnerability • name—string: Name of the vulnerable entity. • version—string: Version of the vulnerable entity. • vendor—string: Vendor of the vulnerable entity.

21.1.5 orderBy function

Sorts the results fetched by the Search API by a variety of keywords in ascending or descending order:

```
orderBy={keyword}:{sorting_order}
```

The following keywords are available:

Type of search	orderBy keywords
in:activity	• protocol • sensor • time (default) • type
in:alerts	• severity • status • time • title • type **NOTE:** Most commonly, the `in:alerts` search is used to fetch unhandled alerts starting from the most up-to-date one. Therefore, by default, the search results are ordered first by status, and then by time, which is equivalent to `orderBy=status,time:desc`.
in:devices	• category • id • firstSeen • ipAddress • lastSeen (default) • macAddress • manufacturer • model • brand • name • osFull • riskLevel • sensor • site • type • user

© Copyright Armis Security 2025

Type of search	orderBy keywords
	NOTE: Applying the `osFull` keyword will order the search results by the operating system name (**`operatingSystem`**) and the operating system version number (`operatingSystemVersion`).
in:vulnerabilities	• affectedDevicesCount • attackComplexity • availabilityImpact • confidentialityImpact • exploitabilityScore • impactScore • integrityImpact • privilegesRequired • publishedDate (default) • score • severity • cveUid

NOTES:

- You can provide more than one keyword delimited by commas.
- By default, the values are sorted in ascending order. To apply descending order, append `:desc` to the keyword.

21.1.5.1 Examples

- To retrieve the complete device inventory, apply the `orderBy` parameter with a fixed property like **id** or **macAddress**. For instance, to fetch the list of devices by ID, use the **Pagination** method to specify a viable page length and the `orderBy=id` argument. Repeat the request while changing the pagination value until reaching the end of the device list. It is recommended to automate this operation with a script.
- The following command will fetch the first five devices with the smallest ID and sort them in ascending order:

```
https://<armis-instance>.armis.com/api/v1/search/?aql=in:devices&
length=5&orderBy=id
```

- This command will fetch the first five devices with the largest ID and sort them in descending order:

  ```
  https://<armis-instance>.armis.com/api/v1/search/?aql=in:devices&length=5&orderBy=id:desc
  ```

- The following command will order the first five fetched devices by the manufacturer name in descending order (from Z to A) and by the device ID in ascending order:

  ```
  https://<armis-instance>.armis.com/api/v1/search/?aql=in:devices&length=5&orderBy=manufacturer:desc,id
  ```

22 Sites

22.1 Returning all sites information

GET `/api/v1/sites/`

22.1.1 Permissions required

- **Settings** > **Sites and Sensors** > **Read**

22.1.2 URI parameters

Name	Type	Description
from	integer (query)	Paging from.
length	integer (query)	Paging from.
includeTotal	boolean (query)	Return total count, default False.
fields	(query)	Fields to show. If omitted, returns a default subset of fields.

22.1.3 Example


```
{
  "data": {
    "count": 10,
    "next": 10,
    "prev": 0,
    "sites": [
      {
        "id": "710",
        "integrationIds": [
          "27"
        ],
        "lat": 32.0852999,
        "lng": 34.7817676,
        "location": "Tel_a",
        "name": "Meraki",
        "networkEquipmentDeviceIds": [
          "258",
          "374"
        ]
      },
      {
        "id": "711",
        "integrationIds": [
          "25"
        ],
        "lat": 51.5072178,
        "lng": -0.1275862,
        "location": "London",
        "name": "switch"
      },
      {
        "id": "712",
        "name": "Jane"
      },

      {
        "id": "716",
        "location": "",
        "name": "efwwfe",
        "parentId": "713",
        "tier": "",
        "user": "john1@xyz.com"
      },
    ]
  },
  "success": true
}
```

22.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

22.2 Creating a new site

POST `/api/v1/sites/`

22.2.1 Permissions required

- **Settings** > **Sites and Sensors** > **Manage** > **Sites**

22.2.2 URI parameters

Name	Type	Description
site	object (body)	JSON describing the site.

22.2.3 Example

```
{
  "location": "my location",
  "name": "my site name",
  "parentId": 1,
  "rule_description": "this is rule description",
  "rule": {
    "or": [
      "type:\"Access Points\""
    ]
  },
  "tier": "tier A"
}
```

22.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
201	OK.
400	Bad request.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

22.3 Deleting a site

DELETE `/api/v1/sites/{site_id}/`

22.3.1 Permissions required

- **Settings** > **Sites and Sensors** > **Manage** > **Sites**

22.3.2 URI parameters

Name	Type	Description
site_id * Required	(path)	The site ID in the Armis system.

22.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
204	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown site.

22.4 Getting a site by ID

GET `/api/v1/sites/{site_id}/`

22.4.1 Permissions required

- **Settings** > **Sites and Sensors** > **Read**

22.4.2 URI parameters

Name	Type	Description
site_id * Required	(path)	The site ID in the Armis system.
fields	(query)	Fields to show. If omitted, returns a default subset of fields.

22.4.3 Example

```
{
  "data": {
    "id": "711",
    "integrationIds": [
      "25"
    ],
    "lat": 51.5072178,
    "lng": -0.1275862,
    "location": "London",
    "name": "switch"
  },
  "success": true
}
```

22.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown site.

22.5 Updating a site

PATCH `/api/v1/sites/{site_id}/`

22.5.1 Permissions required

- **Settings** > **Sites and Sensors** > **Manage** > **Sites**

22.5.2 URI parameters

Name	Type	Description
site_id * Required	(path)	The site ID in the Armis system.
site	object (body)	

22.5.3 Example

```
{
  "location": "my location",
  "name": "my site name",
  "parentId": 1,
  "rule_description": "this is rule description",
  "rule": {
    "or": [
      "type:\"Access Points\""
    ]
  },
  "tier": "tier A"
}
```

22.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown site.

22.6 Getting all integration IDs of the site

GET `/api/v1/sites/{site_id}/integrations-ids/`

22.6.1 Permissions required

- **Settings** > **Sites and Sensors** > **Read**

22.6.2 URI parameters

Name	Type	Description
site_id * Required	(path)	The site ID in the Armis system.

22.6.3 Example

```
{
  "data": {
    "integrationIds": [
      27
    ]
  },
  "success": true
}
```

22.6.4 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown site.

22.7 Adding a new integration ID to the site

POST `/api/v1/sites/{site_id}/integrations-ids/`

22.7.1 Permissions required

- **Settings** > **Sites and Sensors** > **Manage** > **Sites**

22.7.2 URI parameters

Name	Type	Description
site_id * Required	(path)	The site ID in the Armis system.
siteIntegrationId	object (body)	Site integration ID.

22.7.3 Example

```
{
  "integrationId": 1
}
```

22.7.4 Responses

This API call has the following HTTP status codes:

Code	Description
400	Bad request, please check the arguments you passed. **Example:** `{ "message": "string", "success": true }`

22.8 Deleting an integration ID from the site

DELETE `/api/v1/sites/{site_id}/integrations-ids/{integration_id}/`

22.8.1 Permissions required

- **Settings** > **Sites and Sensors** > **Manage** > **Sites**

22.8.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system.
integration_id	integer (path)	The integration ID in the site to delete.

22.8.3 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown site.

22.9 Getting all network equipment device IDs of the site

GET `/api/v1/sites/{site_id}/network-equipment/`

22.9.1 Permissions required

- **Settings** > **Sites and Sensors** > **Read**

22.9.2 URI parameters

Name	Type	Description
site_id * Required	(path)	The site ID in the Armis system.

22.9.3 Example

```
{
  "data": {
    "networkEquipmentDeviceIds": [
      235,
      167,
      324,
      437,
      217,
      412,
      373,
      438,
      2801,
      159,
      292,
      413,
      354,
      230,
      223,
      161
    ]
  },
  "success": true
}
```

22.9.4 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown site.

22.10 Adding a new network device ID to the site

POST `/api/v1/sites/{site_id}/network-equipment/`

22.10.1 Permissions required

- **Settings** > **Sites and Sensors** > **Manage** > **Sites**

22.10.2 URI parameters

Name	Type	Description
site_id * Required	(path)	The site Id in the Armis system.
networkEquipmentDeviceId	object (body)	Site network Equipment Device ID.

22.10.3 Example

```
{
  "networkEquipmentDeviceId": 1
}
```

22.10.4 Example

```
{
  "data": {
    "networkEquipmentDeviceIds": [
      235,
      167,
      324,
      437,
      217,
      412,
      373,
      438,
      2801,
      159,
      292,
      413,
      354,
      230,
      223,
      161
    ]
  },
  "success": true
}
```

22.10.5 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown site.

22.11 Deleting a network device ID from the site

DELETE `/api/v1/sites/{site_id}/network-equipment/{network_equipment_id}/`

22.11.1 Permissions required

- **Settings** > **Sites and Sensors** > **Manage** > **Sites**

22.11.2 URI parameters

Name	Type	Description
site_id * Required	(path)	The site ID in the Armis system.
network_equipment_id	integer (path)	

22.11.3 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown site.

23 User Asset Properties

23.1 Bulk operations on user asset properties

POST `/api/v1/user-asset-properties/_bulk/`

> NOTES:
> - The Manage permission was added under Roles and Manage permissions for Users. Only users with this permission can update user properties using this API endpoint.
> - To retrieve user data and properties, use the `GET /api/v1/search/` endpoint. See Search.

23.1.1 Permissions required

- **User** > **Manage** > **Upsert**

23.1.2 URI parameters

Name	Type	Description
Body	array [object]	Upsert multiple properties for multiple user assets in a single operation. This endpoint is highly recommended to be used when a large amount of properties should be updated.

23.1.3 Example

```
[
  {
    "upsert": {
      "lastSeen": "2024-09-26T06:50:00",
      "source": "My Source",
      "type": "EMAILS",
      "userId": 1,
      "value": "'temp@temp.com'"
    }
  }
]
```

23.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates the status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.

24 Users

24.1 Returning existing accounts

GET /api/v1/users/

24.1.1 Permissions required

- **Settings** > **Users And Roles** > **Read**

24.1.2 URI parameters

Name	Type	Description
fields	(query)	Fields to show, delimited by commas. If omitted, returns all fields.

24.1.3 Examples

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/users/"
     -H 'Authorization: <access-token>'
```

Python

```
response =
requests.get(url="https://<armis-instance>.armis.com/api/v1/users/
",
headers={"Authorization": <access-token>})
```

```
{
   "data": {
     "users": [
       {
         "email": "jsmith@acme.com",
         "id": 1,
         "isActive": true,
         "location": null,
         "name": "Acme",
         "phone": null,
         "reportPermissions": "EXPORT",
         "role": "ADMIN",
         "roleAssignment": [
           {
             "name": [
               "Admin"
             ]
           }
         ],
         "title": "",
         "twoFactorAuthentication": false,
         "username": "acme"
       },
      ...
       { // Next user
      }
    ]
   },
   "success": true
}
```

24.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

24.2 Creating a new account

POST `/api/v1/users/`

24.2.1 Permissions required

- **Settings** > **Users and Roles** > **Manage** > **Users** > **Create**

24.2.2 URI parameters

Name	Type	Description
fields	(query)	Fields to show, delimited by commas. If omitted, returns all fields.
formData	(body)	

24.2.3 Example

```
{
  "dashboard_ids_to_clone": [
    "2",
    "6"
  ],
  "email": "jsmith@acme.com",
  "location": "New York, NY, USA",
  "name": "John Smith",
  "phone": "(478) 275-5945",
  "roleAssignment": [
   {
      "boundaries": [
        "Corporate",
        "Guest"
      ],
      "name": [
        "Reporter",
        "Viewer"
      ],
      "sites": [
        "Palo Alto",
        "Tel Aviv"
      ]
    }
  ],
  "title": "Security Analyst",
  "username": "jsmith"
}
```

24.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Unknown dashboard type.

24.3 Deleting a user

DELETE `/api/v1/users/{user_id_or_email}/`

24.3.1 Permissions required

- **Settings** > **Users and Roles** > **Manage** > **Users** > **Delete**

24.3.2 URI parameters

Name	Type	Description
user_id_or_email * Required	(path)	Armis user ID or email.

24.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
404	Unknown user.

24.4 Getting a user by ID or email

GET `/api/v1/users/{user_id_or_email}/`

24.4.1 Permissions required

- **Settings** > **Users and Roles** > **Read**

24.4.2 URI parameters

Name	Type	Description
user_id_or_email * Required	(path)	Armis user ID or email.
fields	(query)	Fields to show, delimited by commas. If omitted, returns all fields.

24.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
404	Unknown user.

24.5 Editing a user

PATCH `/api/v1/users/{user_id_or_email}/`

24.5.1 Permissions required

- **Settings** > **Users and Roles** > **Manage** > **Users** > **Edit**

24.5.2 URI parameters

Name	Type	Description
user_id_or_email * Required	(path)	Armis user ID or email.
fields	(query)	Fields to show, delimited by commas. If omitted, returns all fields.
formData	(body)	

24.5.3 Example

```
{
  "email": "jsmith@acme.com",
  "location": "New York, NY, USA",
  "name": "John Smith",
  "phone": "(478) 275-5945",
  "roleAssignment": [
    {
      "name": [
        "Reporter",
        "Viewer"
      ],
      "sites": [
        "Palo Alto",
        "Tel Aviv"
      ]
    }
  ],
  "title": "Security Analyst",
  "username": "jsmith"
}
```

24.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Invalid format of field `email`.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
404	Unknown user.

25 Vulnerability

The Vulnerability API endpoints enable you to do the following:

- Get CVE-on-asset matches according to CVE or device IDs.
- Set the status (Open, Ignored, Resolved) of CVE-on-asset matches according to CVE or device IDs.

For more information about vulnerabilities, see the Armis user guide and the *ViPR User Guide*.

25.1 Getting CVE-on-asset matches according to CVE or device IDs

GET `/api/v1/vulnerability-match/`

> **NOTE:** Only Armis Centrix™ for Vulnerability Prioritization and Remediation (AKA ViPR) customers can obtain details of matches.

25.1.1 Permissions required

- **Vulnerability** > **Read**

25.1.2 URI parameters

Name	Type	Description
device_ids	string (query)	A list of comma-separated Armis Device IDs.
vulnerability_ids	string (query)	A list of comma-separated Armis Vulnerability IDs.
from	integer (query)	Paging from
length	integer (query)	Paging length

25.1.3 Example


```
{
        "advisoryId": null,
        "avmRating": "MEDIUM",
        "confidenceLevel": "High",
        "cveUid": "CVE-2022-32845",
        "deviceId": 1736828,
        "firstDetected": "2022-12-27T15:39:15.787146+00:00",
        "lastDetected": "2022-12-27T15:39:15.787146+00:00",
        "matchCriteriaString": "OS:(iOS 14.4.2) ",
        "recommendedSteps": null,
        "remediationTypes": null,
        "status": "Resolved",
        "statusSource": "AUTO"
      },
      {
        "advisoryId": null,
        "avmRating": "MEDIUM",
        "confidenceLevel": "High",
        "cveUid": "CVE-2022-32845",
        "deviceId": 49,
        "firstDetected": "2022-11-02T07:41:24.918154+00:00",
        "lastDetected": "2023-01-02T18:58:47.402774+00:00",
        "matchCriteriaString": "OS:(macOS 12.2.1) ",
        "recommendedSteps": null,
        "remediationTypes": null,
        "status": "Resolved",
        "statusSource": "API"
      },
      {
        "advisoryId": null,
        "avmRating": "CRITICAL",
        "confidenceLevel": "High",
        "cveUid": "CVE-2020-1472",
        "deviceId": 1730667,
        "firstDetected": "2021-03-30T10:53:03.377466+00:00",
        "lastDetected": "2023-04-12T11:55:41.598613+00:00",
        "matchCriteriaString": "OS:(Fedora 33) ",
        "recommendedSteps": null,
        "remediationTypes": null,
        "status": "Open",
        "statusSource": "CONSOLE"
      },
      {
        "advisoryId": null,
        "avmRating": null,
        "confidenceLevel": "High",
        "cveUid": "CVE-2023-21427",
        "deviceId": 1734392,
        "firstDetected": "2023-04-23T11:58:49.227537+00:00",
        "lastDetected": "2023-04-23T11:58:49.227537+00:00",
        "matchCriteriaString": "OS:(Android 13.0) ",
        "recommendedSteps": null,
        "remediationTypes": null,
        "status": "Open",
        "statusSource": null
      }
```

25.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request. Missing identifier parameter, must provide one of `device_ids`, `vulnerability_ids`.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
402	Not permitted.

25.2 Get vulnerabilities matches by filters

POST `/api/v1/vulnerability-match/`

> **NOTE:** Only Armis Centrix™ for Vulnerability Prioritization and Remediation (AKA ViPR) customers can obtain details of matches.

25.2.1 Permissions required

Vulnerability > **Read**

25.2.2 URI parameters

Name	Type	Description
starting_id	(formData)	A list of comma-separated Armis Device IDs.
number_of_results	(formData)	Set the number of results. The maximum is 10,000.
device_ids	string (formData)	A list of comma-separated values of Armis device IDs.
vulnerability_ids	string (formData)	A list of comma-separated values of Armis vulnerability IDs.
status	string (formData)	A list of comma-separated values of Armis statuses. Example: Ignored,Open,Resolved,Ticketed
avm_rating	string (formData)	A list of comma-separated values of Armis AVM (ViPR) rating. Example: Critical,High,Low,Medium,<EMPTY>
severity	string	A list of comma-separated values of Armis severity rating.

Name	Type	Description
	(formData)	Example: Critical,High,Low,Medium,Unavailable
last_detected	integer (formData)	When were the matches last seen (in days).

25.2.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Nothing to change.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
402	Not permitted.

25.3 Setting the status of CVE-on-asset matches according to CVE or device IDs

POST `/api/v1/vulnerability/set_status/`

25.3.1 Permissions required

- **Vulnerability** > **Manage** > **Write**

25.3.2 URI parameters

Name	Type	Description
device_ids	string (formData)	A list of comma-separated Armis Device IDs.
vulnerability_ids	string (formData)	A list of comma-separated Armis Vulnerability IDs.
status * Required	string (formData)	The status of the designated vulnerability matches Available values : `OPEN`, `IGNORED`, `RESOLVED`

25.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Nothing to change.
401	Authorization information is missing or invalid. **Name**—Authorization. **Description**—The `access_token` obtained using the `/access_token/` endpoint. **Type**—string.
402	Not permitted.