
Ground shakes

- We reviewed 1,531 records from seven runs.
- The earlier slides already show the TPC precursor and electrical pickup in the PDS.
- Here we look at the early PDS pulses, their timing and possible matches to charge.
- We still need to establish which pulses are real light and where they come from.

TPC: charge readout. PDS: light readout. Slow controls: voltage, current and other operating values. Earlier observations: EDMS 3493627 v1, pp. 9, 21, 23, 79.

Before the main shake

Run 32731, event 33

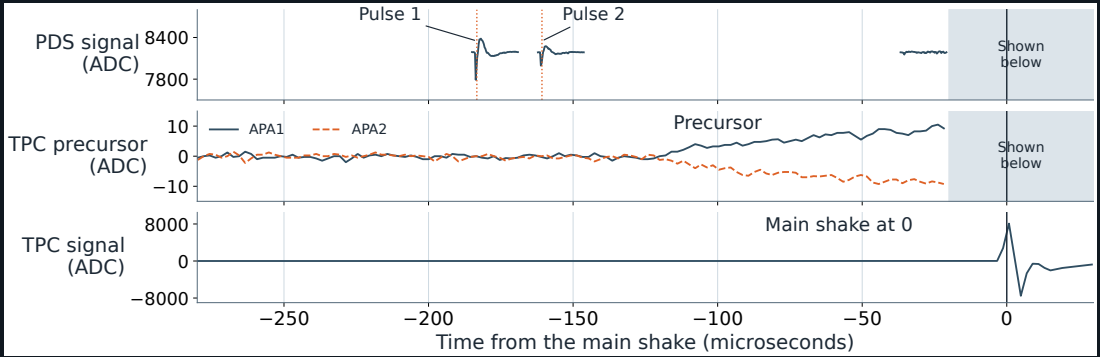


Top: two PDS pulses. **Middle:** the small TPC precursor. **Bottom:** the main shake at time 0. In this event, the PDS pulses come before the small TPC rise.

The upper plots are magnified so we can see the small signals. Gaps mean missing or excluded samples.

Double pulses

Two events from run 32731 · DAPHNE 109, channel 47

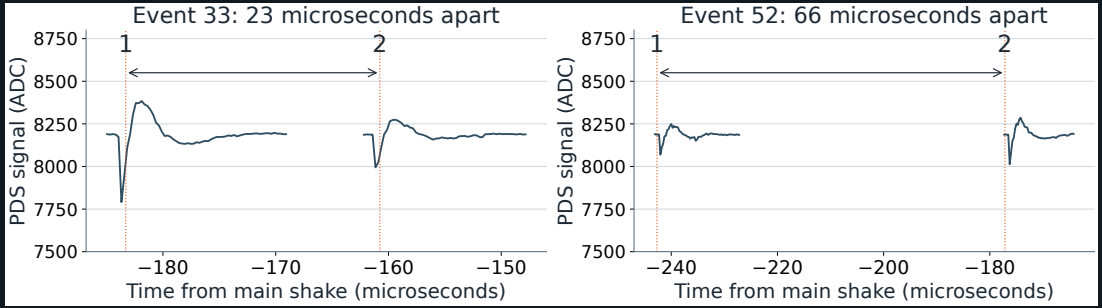


Each dip is a PDS pulse. The gaps are about 23 and 66 microseconds. One source could produce pulses at different intervals.

We find two or more pulses in 101 of 716 events, searching 100–300 microseconds before the shake. These are early pulses, before the main-shake reflections. We have not confirmed that they are light.

Timing of the early PDS pulse

PDS time minus main-shake time · Negative means before the shake

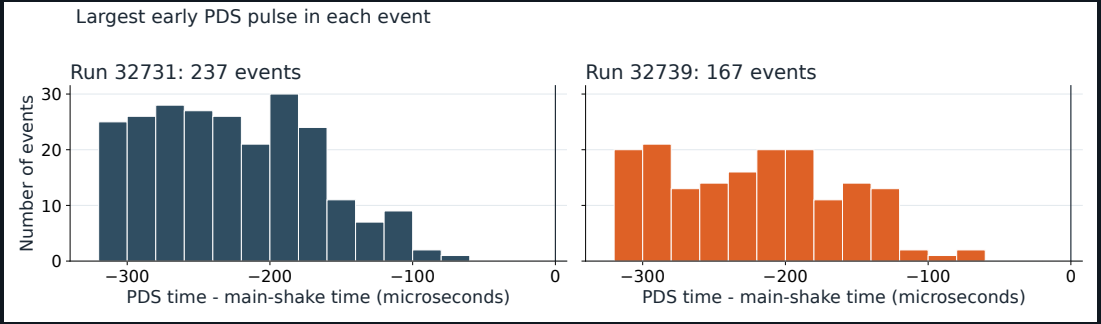


We take the largest sharp pulse before the TPC precursor in each event. The times spread from 73 to 316 microseconds before the shake. The medians are 230 and 220 microseconds.

The pulse finder needs 21 channels. No event has that coverage earlier than about 320 microseconds before the shake. The early tail is unmeasured, so we cannot tell whether the full distribution is Gaussian.

Time between TPC signals and PDS pulses

The TPC signals are short groups of activity on neighbouring wires

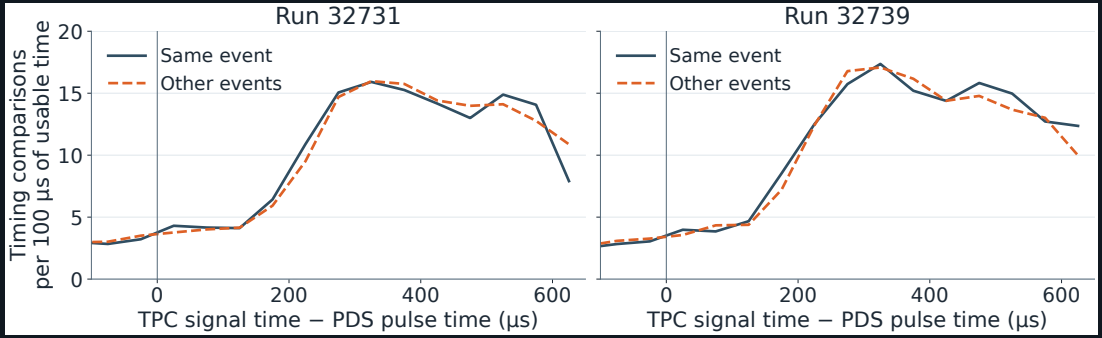


One entry is one selected TPC time minus one PDS pulse time. We do not add or integrate the signals. **Blue:** times from the same event. **Orange:** PDS times from other events.

Y counts these comparisons per 100 microseconds of usable time. A comparison is not a confirmed physical match. TPC signals can include electrical pickup. Repeated activity at one spot remains possible.

Electrical pickup in the PDS

Already seen in disconnected channels · EDMS 3493627 v1, pp. 21–23

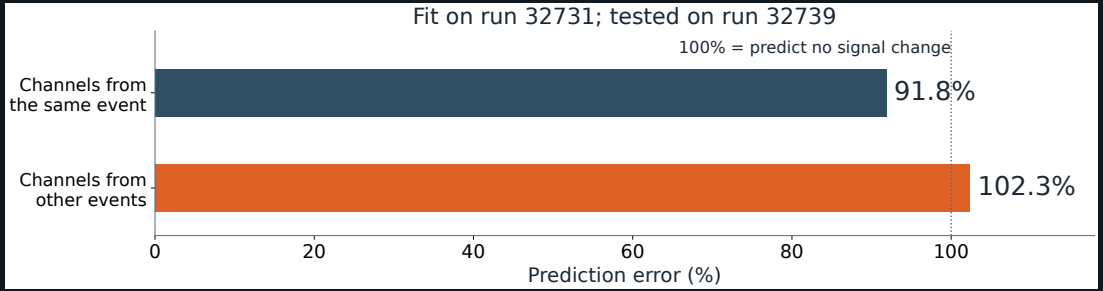

We use disconnected channels to predict part of the signal in connected channels. The prediction works better when both come from the same event. It explains only part of the signal.

Fit on run 32731; tested on run 32739. Lower error is better; 100% means predicting no change. This measures an electrical effect that was already known.

Slow controls

Voltage, current and other monitors · Runs 32731 and 32739

- We compared 32 monitors with three measurements of the PDS and TPC signals.
- No correlation passed our check in both runs.
- A weak current correlation changes when we change the time bins.
- We have not repeated the earlier studies of shake rate versus HV, or of the wire bias being switched off.

The earlier HV and wire-bias observations still stand: EDMS 3493627 v1, pp. 10, 34–35. Slow sampling can miss a short transient. The correlation plot and criteria are in the backup.

Next checks

- Fit the charge tracks. Do different events point to the same place and the same light–charge delay?
- For double pulses, look for two charge signals with the same gap and a common drift delay.
- Recheck the PDS precursor as the wire bias changes in runs 30201 and 30202.
- Compare with events without ground shakes, taken under similar conditions.

The first three checks can use existing data. We still need a matched sample without shakes. Earlier questions: EDMS 3493627 v1, pp. 34–35, 39, 42.

Backup: data and definitions

Saved 2024 records

Month	Run	Records
July	27938	6
	27951	19
October	30201	44
	30202	83
November	32730	1
	32731	716
	32739	662
Total		1,531

Charge readout (TPC)

Measures signals from drifting electrons. APA1 and APA2 are the two charge-readout assemblies used here.

Light readout (PDS)

Records photon-sensor signals and electrical interference. A PDS pulse is not automatically a light flash.


Slow controls (SC)

Operating monitors: 34 channels, 7.74 million archived samples.

Automatic charge screen: 1,516 candidates, five below cut, ten unassessable. Selected files do not measure shake rate. No candidate has a complete 4 ms of pre-shake PDS readout.

Backup: opposite signs in APA1 and APA2

A larger sample of the pattern shown in EDMS 3493627 v1, pp. 14, 79

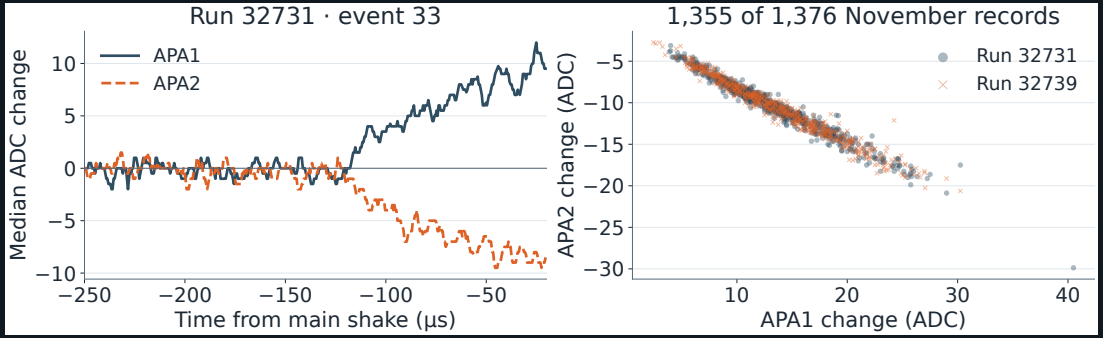


Left: APA1 rises while APA2 falls. **Right:** one dot per event. We see both small precursors clearly in 1,355 of 1,376 November events. The opposite signs were already known.

Median shape agreement after reversing APA2: 0.964 and 0.970. These curves average the readout across each APA; they do not show individual charge tracks.

Backup: the fit depends on the channel

The channel pattern was already shown in EDMS 3493627 v1, p. 21

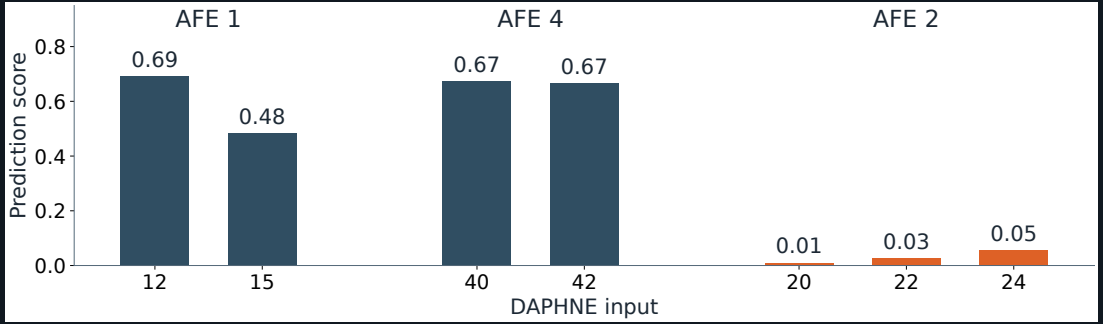


Each bar is a connected channel. Taller bars mean that disconnected channels predict more of its signal. The fit works much better for some groups than for others.

AFE: an eight-channel front-end chip. Score: 0 = no gain over a zero-change guess; 1 = exact prediction. Trained on run 32731; tested on run 32739. A main-shake-trained fit fails on early pulses.

Backup: early pulses and the small TPC precursor

Fit on run 32731; tested on run 32739

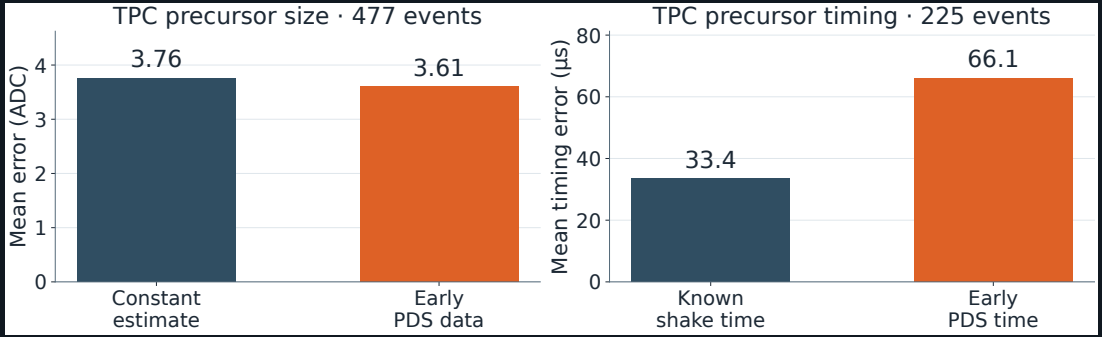


Left: using the PDS improves our estimate of precursor size by only 4.1%. **Right:** timing from the first PDS pulse gives a larger error than timing from the main shake. Lower bars are better.

The two tests use 477 and 225 records, respectively. Signal size is in raw ADC units. We time the small change shared across the APA, not charge arriving from one spot. This does not test a fixed drift distance.

Backup: slow-control correlations

32 monitors × 3 signal measurements · Two November runs

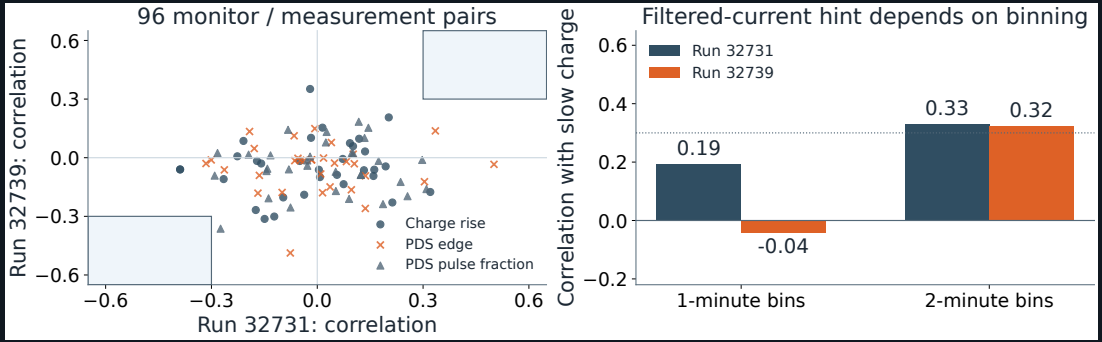

Left: each dot is one monitor–signal pair. A dot in a shaded area would mean a correlation in both runs. None reaches those areas with one-minute bins. **Right:** the current result changes with bin size.

Required: the same sign and magnitude at least 0.30 in both runs, after removing file offsets and time trends. Two ground monitors have too few samples. This comparison does not measure shake rate.