

Troubleshooting task 1.


T3_2025_072

```
R1 - routing table:
0.0.0.0/0 -> X.X.X.X
X.X.X.0/24 -> 0.0.0.0
10.60.92.64/28 -> 0.0.0.0
10.60.92.80/30 -> 0.0.0.0
10.60.92.88/29 -> 10.60.92.77
192.168.83.160/27 -> 10.60.92.82
```

R3 - routing table:
0.0.0.0/0 -> 10.60.92.81
10.60.92.88/29 -> 0.0.0.0
192.168.83.160/27 -> 0.0.0.0

Missing
directly
connected
hol.

```
R2 - routing table:
0.0.0.0/0 -> 10.60.92.90
10.60.92.64/28 -> 0.0.0.0
10.60.92.88/29 -> 0.0.0.0
192.168.82.160/28 -> 0.0.0.0
```

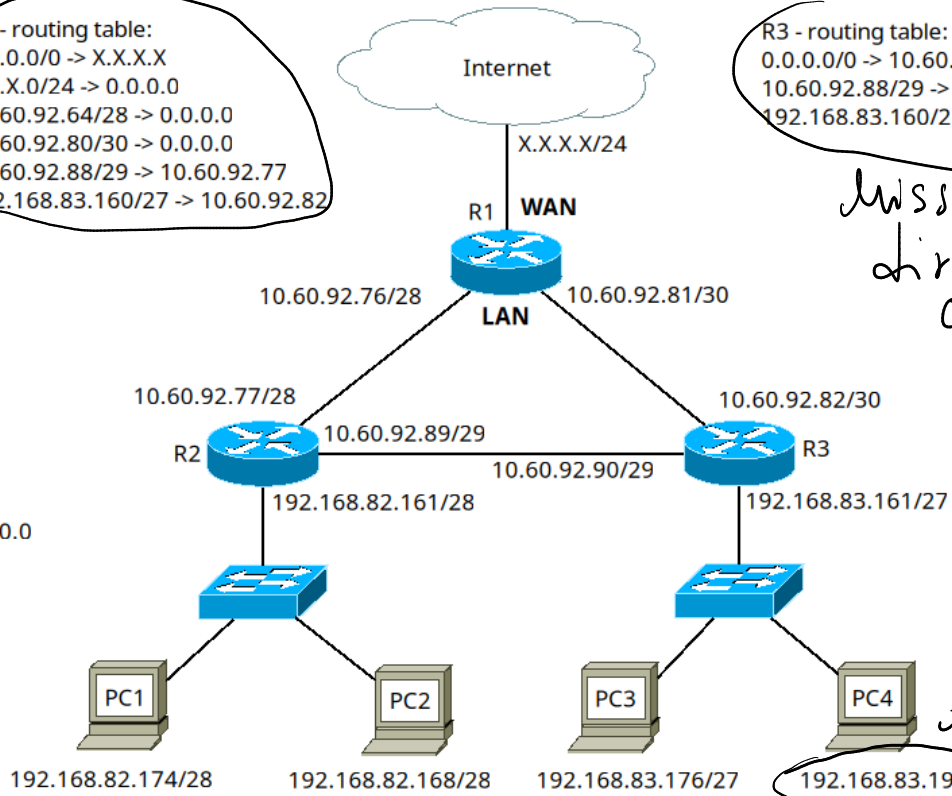

Address outside of range

PC1 - routing table:
0.0.0.0/0 -> 192.168.82.161
192.168.82.160/28 -> 0.0.0.0

PC2 - routing table:
0.0.0.0/0 -> 192.168.82.161
192.168.82.160/28 -> 0.0.0.0

PC3 - routing table:
0.0.0.0/0 -> 192.168.83.161
192.168.83.160/27 -> 0.0.0.0

PC4 - routing table:
0.0.0.0/0 -> 192.168.83.161
192.168.83.160/27 -> 0.0.0.0


Device	Original configuration	Corrected configuration
R1	—	192.168.82.160/28 → 10.60.92.77
R3	—	10.60.92.80/30 → 0.0.0.0
PC4	192.168.83.192/27	192.168.83.190

Troubleshooting task 2.

T3_2025_002

```
R1 - routing table:
0.0.0.0/0 -> X.X.X.X
X.X.X.0/24 -> 0.0.0.0
172.26.197.172/30 -> 0.0.0.0
172.26.197.180/30 -> 0.0.0.0
192.168.138.72/29 -> 172.26.197.182
192.168.138.96/28 -> 172.26.197.182
```

```
R3 - routing table:
0.0.0.0/0 -> 172.26.197.181
172.26.197.180/30 -> 0.0.0.0
172.26.197.192/28 -> 0.0.0.0
192.168.138.96/29 -> 0.0.0.0
172.26.197.172/30 -> 172.26.197.196
```

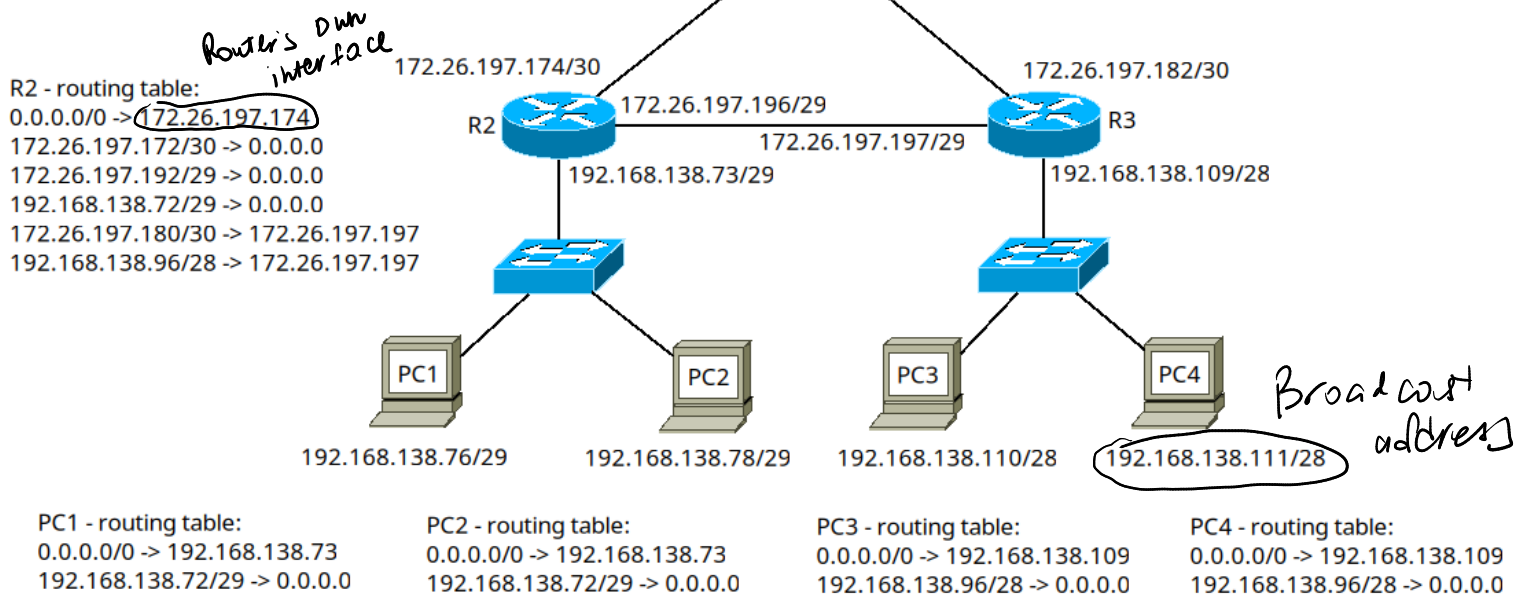


Device	Original configuration	Corrected configuration
R2	0.0.0.0/0 →	0.0.0.0/0 →
	172.26.197.174	172.26.197.173
R3	—	192.168.138.72/29 →
		172.26.197.196
PC4	192.168.138.111/28	192.168.138.108

T3_2025_031

OWN TIP

Missing record



PC4 - routing table:
0.0.0.0/0 -> 192.168.30.161
192.168.30.160/27 -> 0.0.0.0

Device	Original configuration	Corrected configuration
R1	192.168.30.160/27 →	192.168.30.160/27 →
R3	10.24.207.17 —	10.24.207.18 192.168.29.160/27 →
PC1	192.168.29.192/27	10.24.207.25 192.168.29.190