

Introduction to Computer hardware: Physical identification of major components of a computer system such as motherboard, RAM modules, daughter cards, bus slots, SMPS, internal storage devices, interfacing ports. Specifications of desktop and server class computers. Installation of common operating systems for desktop and server use. (Students may be asked to formulate specification for computer to be used as Desktop, Web server)

Motherboard

The motherboard serves as a single platform to connect all of the parts of a computer together. It connects the CPU, memory, hard drives, optical drives, video card, sound card, and other ports and expansion cards directly or via cables. It can be considered as the backbone of a computer.



Features of Motherboard

A motherboard comes with following features –

- Motherboards vary greatly in supporting various types of components.
- Motherboard supports a single type of CPU and few types of memories.
- Video cards, hard disks, sound cards have to be compatible with the motherboard to function properly.
- Motherboards, cases, and power supplies must be compatible to work properly together.

Popular Manufacturers

Following are the popular manufacturers of the motherboard.

- Intel
- ASUS

- AOpen
- ABIT
- Biostar
- Gigabyte
- MSI

Description of Motherboard

The motherboard is mounted inside the case and is securely attached via small screws through pre-drilled holes. Motherboard contains ports to connect all of the internal components. It provides a single socket for CPU, whereas for memory, normally one or more slots are available. Motherboards provide ports to attach the floppy drive, hard drive, and optical drives via ribbon cables. Motherboard carries fans and a special port designed for power supply.

There is a peripheral card slot in front of the motherboard using which video cards, sound cards, and other expansion cards can be connected to the motherboard.

On the left side, motherboards carry a number of ports to connect the monitor, printer, mouse, keyboard, speaker, and network cables. Motherboards also provide USB ports, which allow compatible devices to be connected in plug-in/plug-out fashion. For example, pen drive, digital cameras, etc.

RAM modules

In computing, a memory module or RAM (random-access memory) stick is a printed circuit board on which memory integrated circuits are mounted. Memory modules permit easy installation and replacement in electronic systems, especially computers such as personal computers, workstations, and servers. The first memory modules were proprietary designs that were specific to a model of computer from a specific manufacturer. Later, memory modules were standardized by organizations such as JEDEC and could be used in any system designed to use them.

Types of memory module include:

- TransFlash Memory Module
- SIMM, a single in-line memory module
- DIMM, dual in-line memory module
 - Rambus memory modules are a subset of DIMMs, but are normally referred to as RIMMs
 - SO-DIMM, small outline DIMM, a smaller version of the DIMM, used in laptops

Distinguishing characteristics of computer memory modules include voltage, capacity, speed (i.e., bit rate), and form factor. For economic reasons, the large (main) memories found in personal computers, workstations, and non-handheld game-consoles (such as PlayStation and Xbox) normally consist of dynamic RAM (DRAM). Other parts of the computer, such as cache memories normally use static RAM (SRAM). Small amounts of SRAM are sometimes used in the same


package as DRAM. However, since SRAM has high leakage power and low density, die-stacked DRAM has recently been used for designing multi-megabyte sized processor caches.

Physically, most DRAM is packaged in black epoxy resin.

Daughter Card

A daughtercard or daughterboard is a type of circuit board that gets added to an existing one. Its name is appropriate for its use, since it is connected to a “motherboard” or “main board.” The motherboard is the primary circuit board for a device. It is usually in the device as it is shipped from the factory. A daughtercard may be added later.

Some daughtercard designs are made so that engineers can add functionality to a device without requiring a lot more room inside its housing. These kinds of items are often called riser boards or risers. Some might also call them “mezzanine boards.”

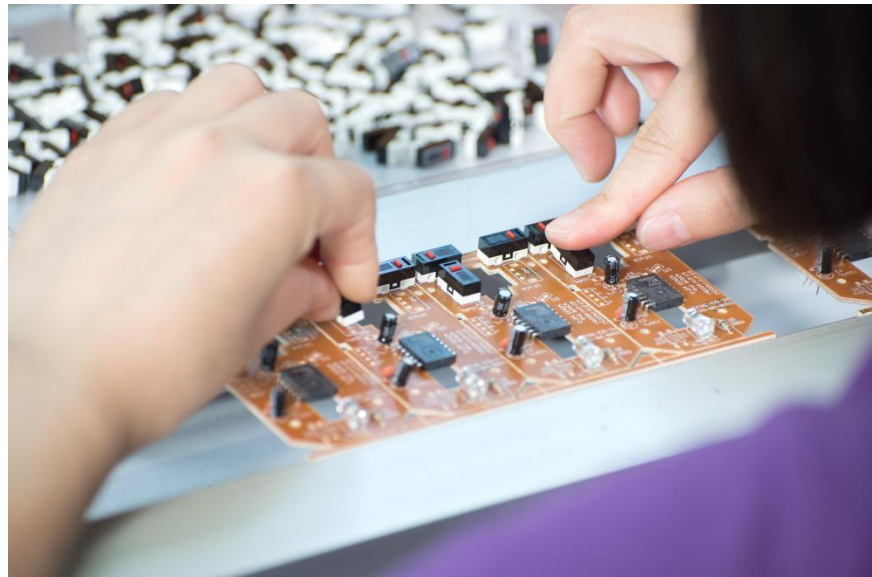

A daughtercard or daughterboard is a type of circuit board that gets added to an existing one.

Daughterboards are different from some other types of additional circuit boards that tech enthusiasts call “expansion cards.” In expansion cards, the circuit board is often plugged in through a gap in the housing of a computer or device. These expansion boards help to give a device more functionality, often for additional sound play or for better visuals on a high-tech monitor or screen.

In contrast to the way expansion boards are used, a daughtercard can be a more fundamental enhancement for a device. Adding a daughtercard often requires getting into the guts of a device. That’s why some users might hire a professional to install it. Companies that make an electronic

device might offer a daughtercard as part of an essential upgrade that allows the product to be used in more various ways.

With the rise of connective USB ports and other technology, it has become less necessary to upgrade devices with daughtercards or daughterboards. A lot of advanced use can be built into a wireless connection and “outsourced” to a remote server, rather than adding it physically into a desktop or laptop computer. However, some types of equipment might still get these kinds of additions as provided by the manufacturer. Computer and electronics makers choose the best ways of offering upgrades that they feel will match the needs and desires of their customer base. Since not a lot of laptop or computer users want to wrestle a daughtercard into an existing circuit board design, companies that sell to a consumer market will probably choose alternatives, or offer professional installation as a free service if they are offering a daughtercard as a way to upgrade a device.

Bus Slots

Alternatively known as a bus slot or expansion port, an expansion slot is a connection or port inside a computer on the motherboard or riser card. It provides an installation point for a hardware expansion card to be connected. For example, if you wanted to install a new video card in the computer, you'd purchase a video expansion card and install that card into the compatible expansion slot.


Computer expansion slots

Below is a listing of expansion slots commonly found in a computer and the devices associated with those slots. Clicking any of the links below provide you with additional details.

- AGP - Video card.
- AMR - Modem, sound card.
- CNR - Modem, network card, sound card.
- EISA - SCSI, network card, video card.
- ISA - Network card, sound card, video card.
- PCI - Network card, SCSI, sound card, video card.
- PCI Express - Video card, modem, sound card, network card.
- VESA - Video card.

Many of the expansion card slots above are obsolete. You're most likely only going to encounter AGP, PCI, and PCI Express when working with computers today. The picture below is an example

of what expansion slots may look like on a motherboard. In this picture, there are three different types of expansion slots: PCI Express, PCI, and AGP.

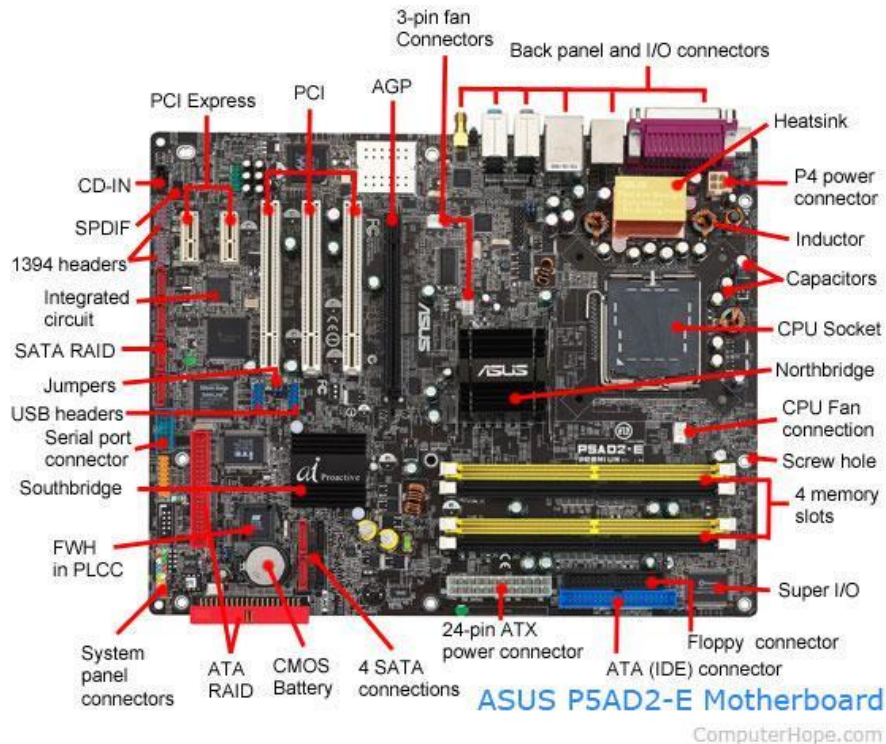

Every computer motherboard is different, to determine how many expansion slots are on your computer motherboard, identify the manufacturer and model of the motherboard. Once you've identified the model of motherboard, you can find complete information about the motherboard in its manual.

Adding additional expansion slots for older motherboards could be accomplished using a riser board, which would add several ISA or PCI slots. Today, riser boards are rarely used with motherboards, as there is limited need for additional expansion slots with modern motherboards.

As mentioned above, every motherboard model is unique, so to determine the type of expansion slots on the motherboard, consult the board's specifications and owner's manual. You can also open the computer case and visually examine the motherboard.

Switched-Mode Power Supply (SMPS)

A switched-mode power supply (SMPS) is an electronic circuit that converts power using switching devices that are turned on and off at high frequencies, and storage components such as inductors or capacitors to supply power when the switching device is in its non-conduction state.

Switching power supplies have high efficiency and are widely used in a variety of electronic equipment, including computers and other sensitive equipment requiring stable and efficient power supply.

A switched-mode power supply is also known as a switch-mode power supply or switching-mode power supply.

Techopedia Explains Switched-Mode Power Supply (SMPS)

Switched-mode power supplies are classified according to the type of input and output voltages. The four major categories are:

- AC to DC
- DC to DC
- DC to AC
- AC to AC

A basic isolated AC to DC switched-mode power supply consists of:

- Input rectifier and filter
- Inverter consisting of switching devices such as MOSFETs
- Transformer
- Output rectifier and filter
- Feedback and control circuit

The input DC supply from a rectifier or battery is fed to the inverter where it is turned on and off at high frequencies of between 20 KHz and 200 KHz by the switching MOSFET or power transistors. The high-frequency voltage pulses from the inverter are fed to the transformer primary winding, and the secondary AC output is rectified and smoothed to produce the required DC voltages. A feedback circuit monitors the output voltage and instructs the control circuit to adjust the duty cycle to maintain the output at the desired level.

There are different circuit configurations known as topologies, each having unique characteristics, advantages and modes of operation, which determines how the input power is transferred to the output.

Most of the commonly used topologies such as flyback, push-pull, half bridge and full bridge, consist of a transformer to provide isolation, voltage scaling, and multiple output voltages. The

non-isolated configurations do not have a transformer and the power conversion is provided by the inductive energy transfer.

Advantages of switched-mode power supplies:

- Higher efficiency of 68% to 90%
- Regulated and reliable outputs regardless of variations in input supply voltage
- Small size and lighter
- Flexible technology
- High power density

Disadvantages:

- Generates electromagnetic interference
- Complex circuit design
- Expensive compared to linear supplies

Switched-mode power supplies are used to power a wide variety of equipment such as computers, sensitive electronics, battery-operated devices and other equipment requiring high efficiency.

Internal Storage Devices

Some storage devices are classed as 'internal' which means they are inside the computer case.

Most computers have some form of internal storage. The most common type of internal storage is the hard disk.

At the most basic level, internal storage is needed to hold the operating system so that the computer is able to access the input and output devices.

It will also be used to store the applications software that you use and more than likely, the original copies of your data files.

Internal storage allows the data and applications to be loaded very rapidly into memory, ready for use. The data can be accessed much faster than data which is stored on an external storage device. This is because internal storage devices are connected directly to the motherboard and its data bus whereas external devices are connected through a hardware interface such as USB, which means they are considerably slower to access.

Internal storage also means that if the computer is moved around, it will still retain its most commonly used data.

The main disadvantage of internal storage is that when the hard disk fails (and it will), all the data and applications may be lost.

This can be avoided to some extent by using more than one hard disk within the machine. Each hard disk has a copy of all the data, so if one fails the other can carry on. This is called a RAID array. An alternative is to use external drives for backup.


Interfacing Ports

A port is a physical docking point using which an external device can be connected to the computer. It can also be programmatic docking point through which information flows from a program to the computer or over the Internet.

Characteristics of Ports

A port has the following characteristics –

- External devices are connected to a computer using cables and ports.
- Ports are slots on the motherboard into which a cable of external device is plugged in.
- Examples of external devices attached via ports are the mouse, keyboard, monitor, microphone, speakers, etc.

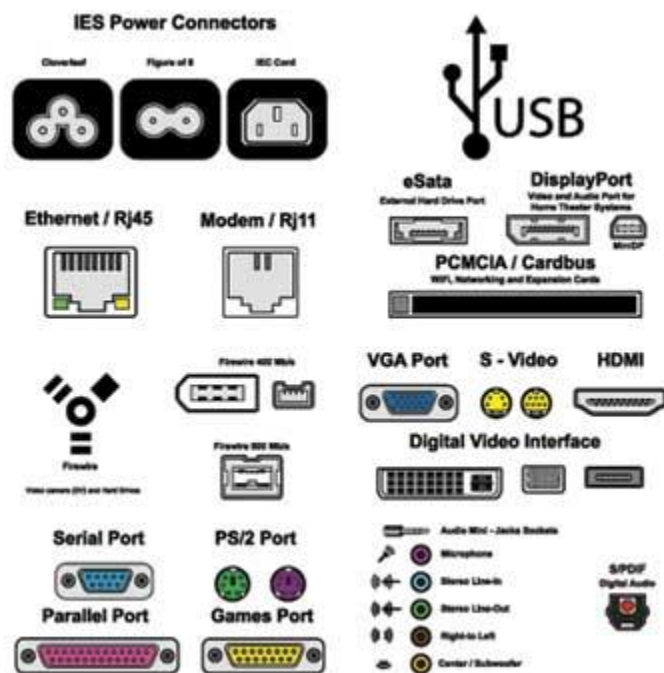

Let us now discuss a few important types of ports –

Serial Port

- Used for external modems and older computer mouse
- Two versions: 9 pin, 25 pin model
- Data travels at 115 kilobits per second

Parallel Port

- Used for scanners and printers
- Also called printer port
- 25 pin model
- IEEE 1284-compliant Centronics port

PS/2 Port

- Used for old computer keyboard and mouse
- Also called mouse port
- Most of the old computers provide two PS/2 port, each for the mouse and keyboard
- IEEE 1284-compliant Centronics port

Universal Serial Bus (or USB) Port

- It can connect all kinds of external USB devices such as external hard disk, printer, scanner, mouse, keyboard, etc.
- It was introduced in 1997.
- Most of the computers provide two USB ports as minimum.
- Data travels at 12 megabits per seconds.
- USB compliant devices can get power from a USB port.

VGA Port

- Connects monitor to a computer's video card.
- It has 15 holes.
- Similar to the serial port connector. However, serial port connector has pins, VGA port has holes.

Power Connector

- Three-pronged plug.
- Connects to the computer's power cable that plugs into a power bar or wall socket.

Firewire Port

- Transfers large amount of data at very fast speed.
- Connects camcorders and video equipment to the computer.
- Data travels at 400 to 800 megabits per seconds.
- Invented by Apple.
- It has three variants: 4-Pin FireWire 400 connector, 6-Pin FireWire 400 connector, and 9-Pin FireWire 800 connector.

Modem Port

- Connects a PC's modem to the telephone network.

Ethernet Port

- Connects to a network and high speed Internet.
- Connects the network cable to a computer.
- This port resides on an Ethernet Card.
- Data travels at 10 megabits to 1000 megabits per seconds depending upon the network bandwidth.

Game Port

- Connect a joystick to a PC
- Now replaced by USB

Digital Video Interface, DVI port

- Connects Flat panel LCD monitor to the computer's high-end video graphic cards.
- Very popular among video card manufacturers.

Sockets

- Sockets connect the microphone and speakers to the sound card of the computer.