
(a) MHA


One KV head per query head

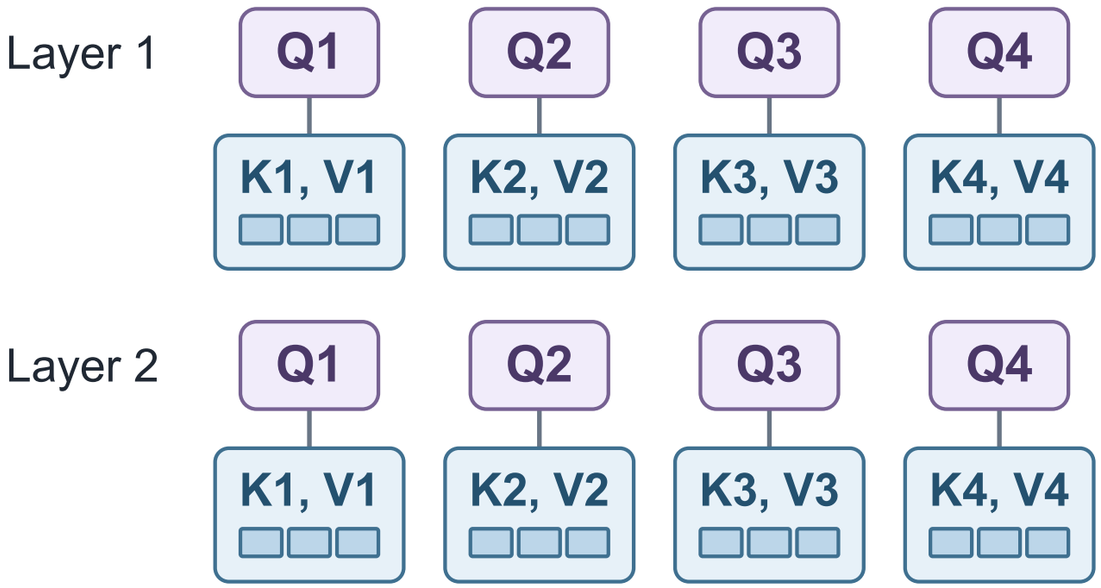

8 cached KV histories

(b) GQA


One KV head per group of query heads

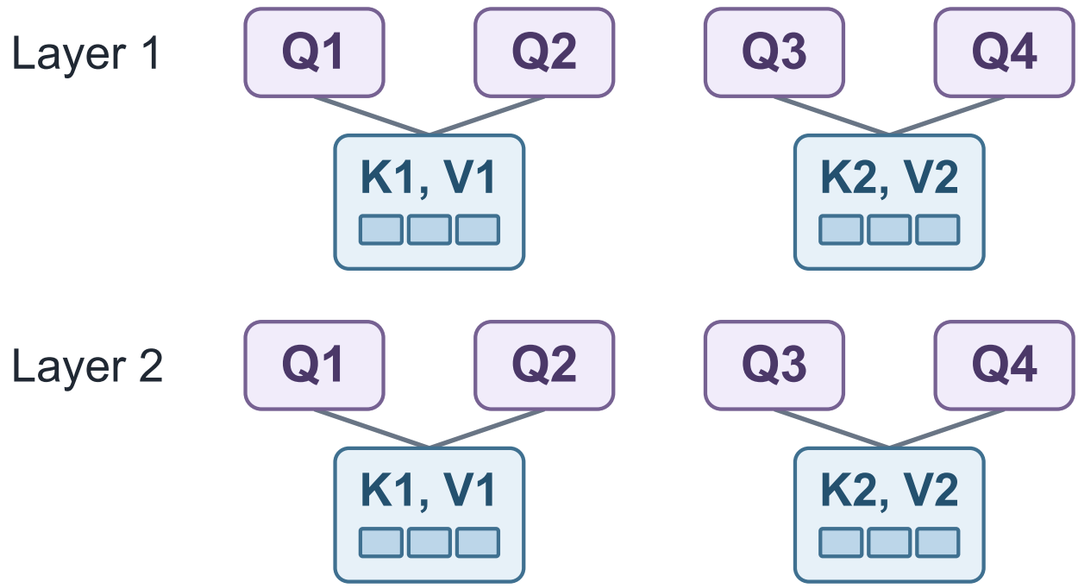

4 cached KV histories

(c) MQA


One KV head per layer

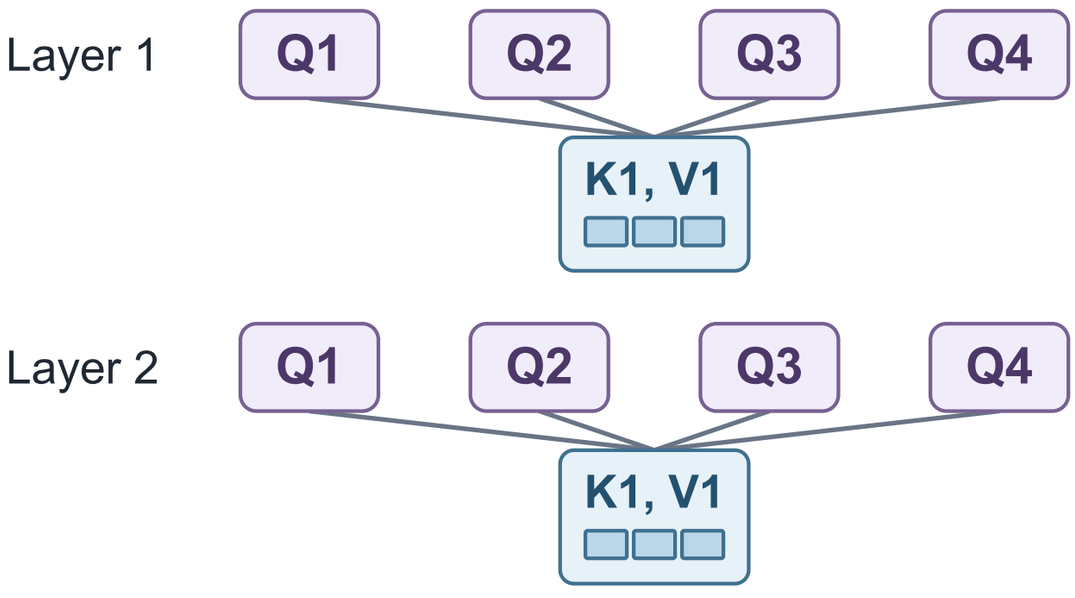

2 cached KV histories

(d) MQA + CLA2

Sharing across two adjacent layers

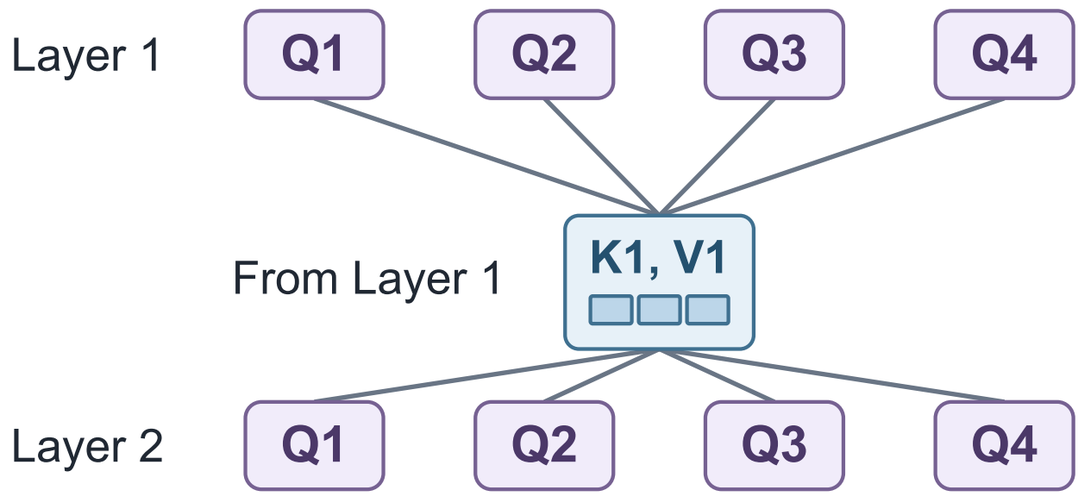

Each layer keeps its own queries

1 cached KV history

Query head (not cached) One KV head's full history Query-to-cache use

All panels: two adjacent layers, four query heads per layer, the same sequence length and head dimension.