ACE TELECOM · REPAIRDESK

Admin Portal User Manual

Sign in, create Staff and Technician accounts, and manage internal users.

AUDIENCE

Shop administrators

PORTAL

https://repairdesk-admin-portal.azurewebsites.net
Same screens: https://black-cliff-0c84a7c00.7.azurestaticapps.net

ADMIN USERNAME

admin

ADMIN PASSWORD

Admin$1234

SCREENSHOTS

Live Azure Admin Portal

Keep these credentials private. Only an Administrator can create and manage Staff and Technician accounts. The full index is in Admin-Portal-User-Manual.md beside this file.

Contents

1. Sign in and who an administrator sees
2. Create and manage Staff, Technicians, and other administrators
3. Repair requests — approve, reject, request info
4. Office location, the Attendance switch, and the attendance list
5. Technician locations and customer ETA
6. Jobs and pins (same work as Staff)
7. Device catalog and business settings

1. Admin credentials

Use these to open the Admin Portal.

Field	Value
Portal URL	https://black-cliff-0c84a7c00.7.azurestaticapps.net
Username	`admin`
Password	`Admin$1234`
Role	Administrator
Local (optional)	http://localhost:4200

> The first API call after the site has been idle can take up to a minute (cold start). If sign-in looks stuck, wait and try once more.

2. Sign in

1. Open the portal URL above.
2. Enter username `admin` and password `Admin$1234`.
3. Click **Sign in**.
4. You land on the **Dashboard**.

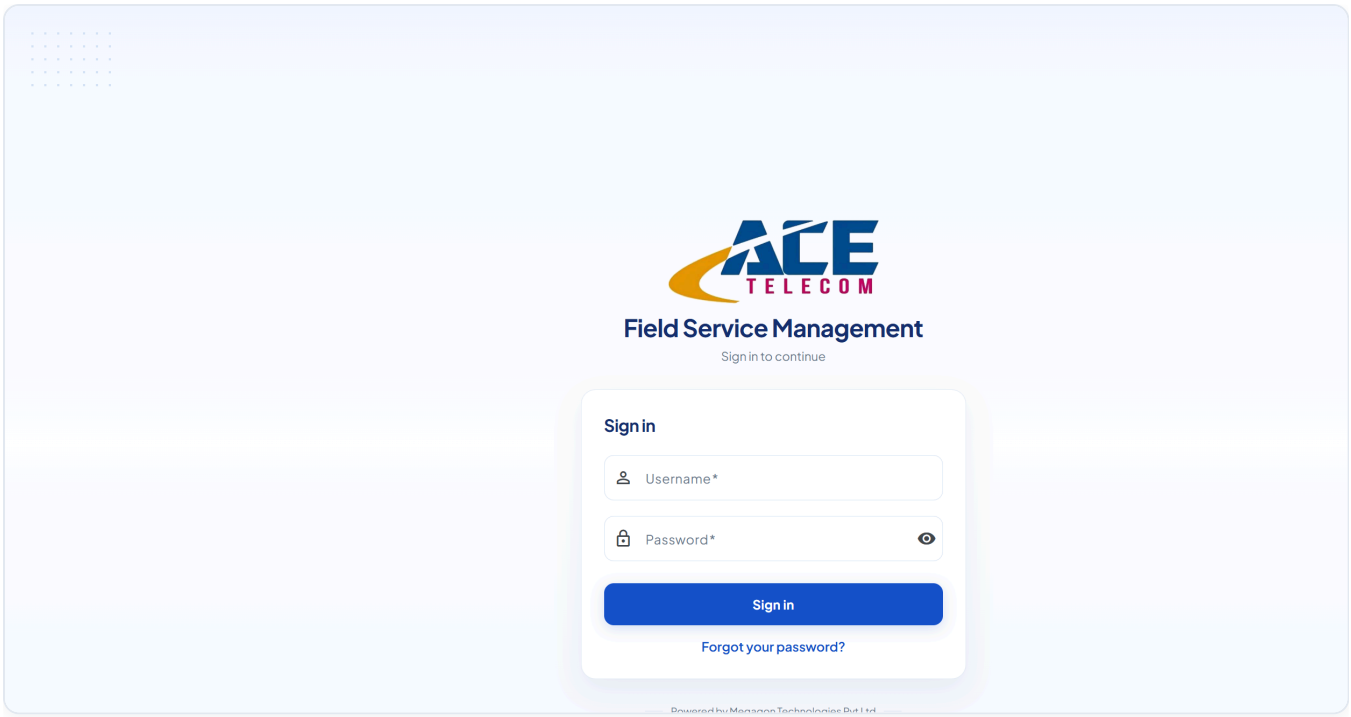


Figure 1. Sign-in page for the ACE Telecom RepairDesk Admin Portal.

Only an **Administrator** can create and manage Staff and Technician accounts. Staff and Technicians cannot open the Staff page.

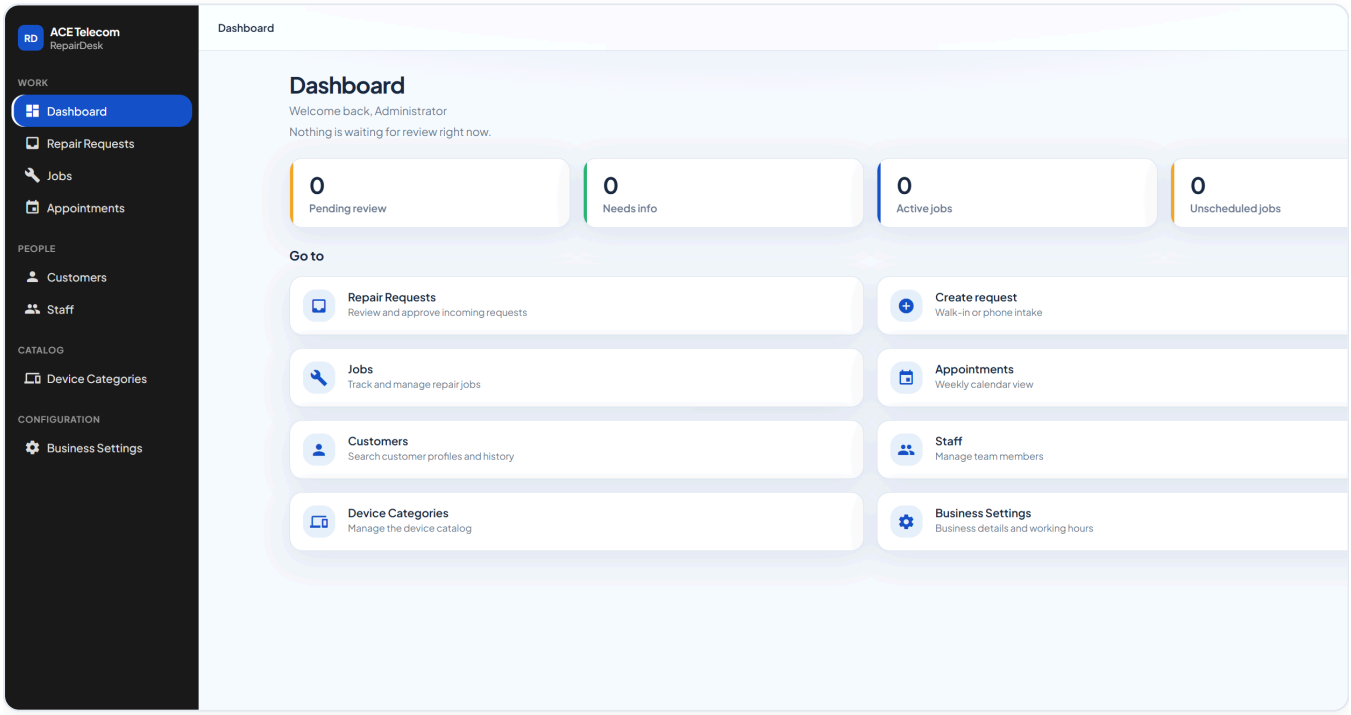


Figure 2. Dashboard after a successful sign-in. Use People → Staff in the left sidebar to manage users.

3. Who lives where

People	Page	Sidebar
Staff, Technicians, other Admins	Staff	People → Staff
Customers (walk-in / phone / app users)	Customers	People → Customers

> Do **not** create customers from Staff. Customer accounts are created from **Create request** (walk-in / phone) or they register in the mobile app.

4. Create a Staff user

1. In the left sidebar, open **People** → **Staff**.
2. Click **Add user** (top right).
3. Fill the **Add user** dialog, then click **Create user**.
4. Give the person their username and temporary password so they can sign in.

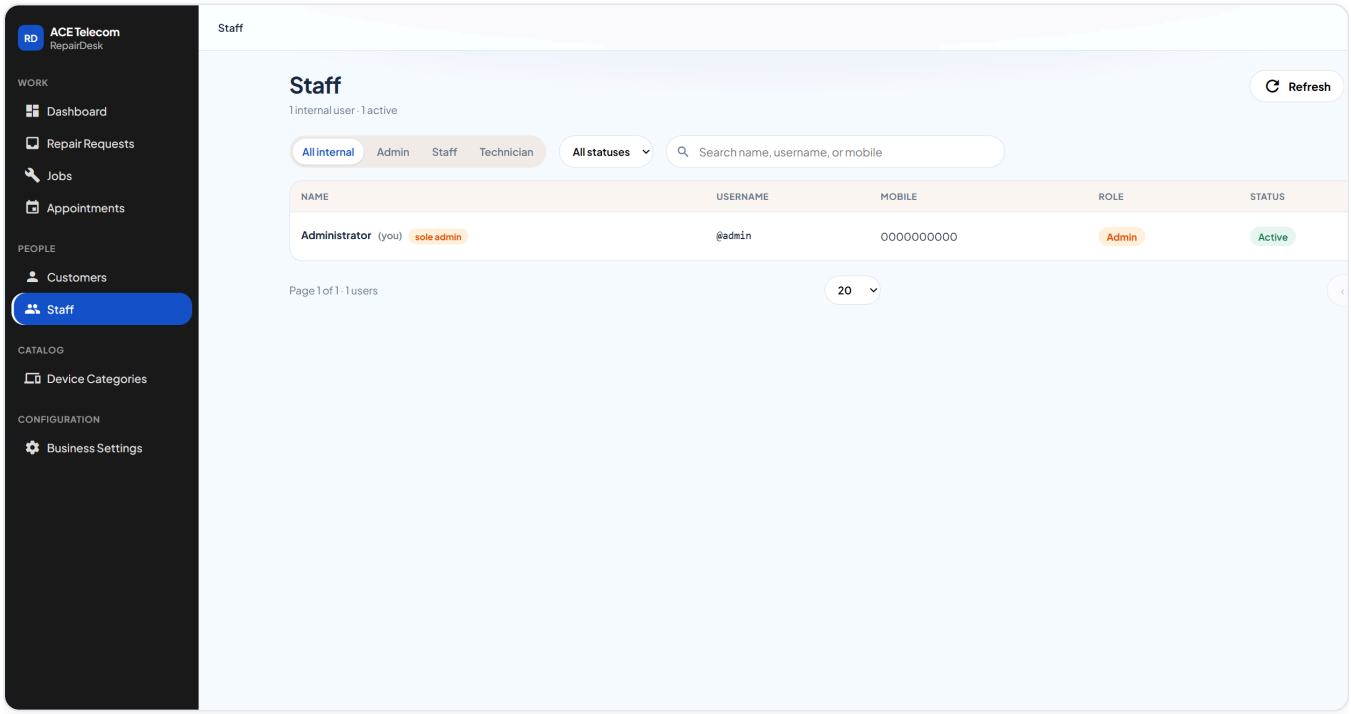


Figure 3. Staff page. Filter by role or status, search by name / username / mobile, then use Add user.

Field	What to enter
Full name	Required. Example: Anita Kumar
Username	Required, at least 3 characters. Cannot be changed later. Example: anita
Mobile	Required, unique. Example: 9876543210
Temporary password	Required, at least 8 characters. Share it with the person yourself — RepairDesk does not email it.
Role	Choose **Staff** (this is the default).

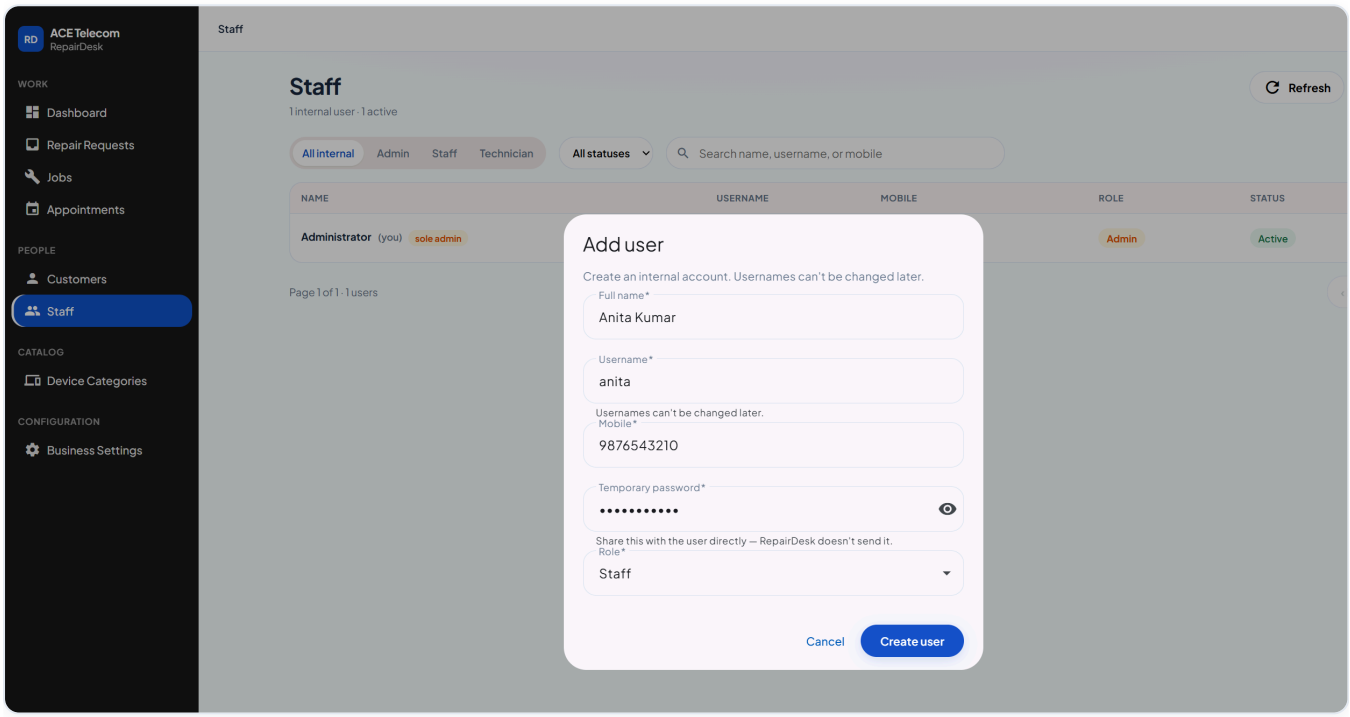


Figure 4. Add user dialog filled for a Staff account. Role defaults to Staff.

A Staff user can work requests, jobs, customers, and appointments. They cannot open Staff management or business settings.

5. Create a Technician

Same flow as Staff, with one change:

1. **People** → **Staff** → **Add user**.
2. Fill name, username, mobile, and a temporary password.
3. Set **Role** to **Technician**.
4. Click **Create user**.

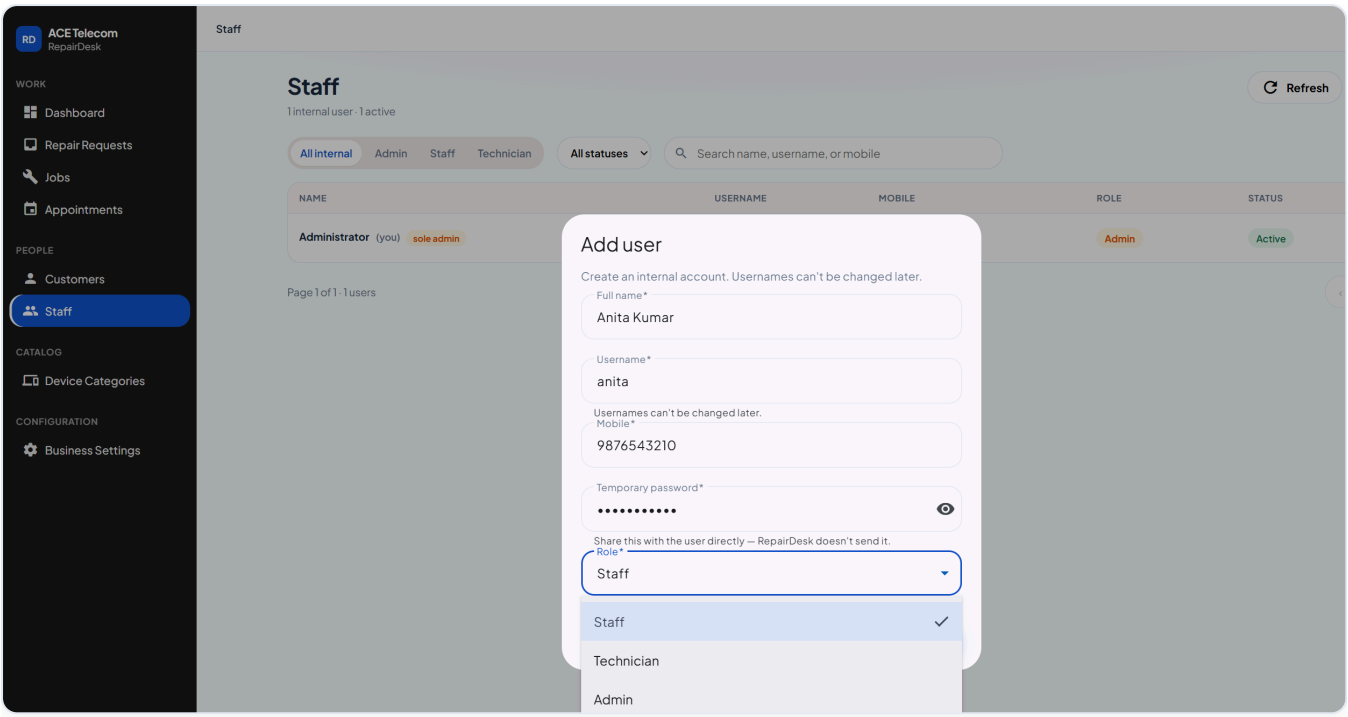


Figure 5. Role list in Add user: Staff, Technician, or Admin.

Only **Active Technicians** appear in the assignable roster when you assign a job or book an appointment.

If you later change a Technician to Staff or Admin, existing jobs stay assigned to them, but they will not be selectable for new assignments.

6. Manage users

Open **People** → **Staff**. The table lists internal accounts only. Your own row is marked **(you)**.

6.1 Find someone

- **Role tabs:** All internal · Admin · Staff · Technician
- **Status:** All statuses · Active · Disabled
- **Search:** name, username, or mobile

6.2 Edit name, mobile, or role

1. Click the row, or open the ⋮ menu → **Edit**.
2. Update Full name, Mobile, and/or Role. Username is shown but cannot be edited.
3. Click **Save**.

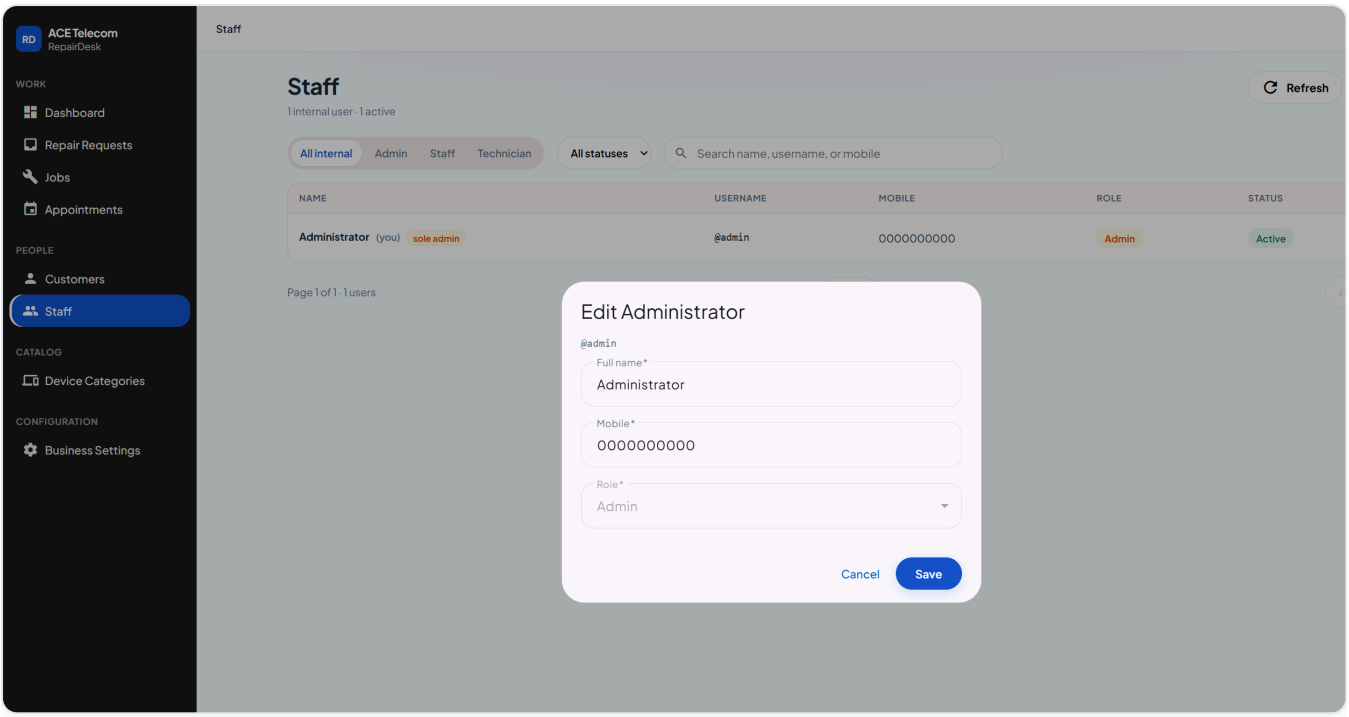


Figure 6. Edit dialog. Username is read-only. You cannot change your own role.

6.3 Disable or enable

- ⋮ → **Disable** — they are signed out immediately and cannot sign in. Jobs and history are kept.
- ⋮ → **Enable** — they can sign in again.

Use Disable for leave or a temporary stop. Use Delete only when the account should not come back.

6.4 Reset a password

1. ⋮ → **Reset password**.
2. Enter a new password (minimum 8 characters).
3. Click **Reset password**.
4. Tell the person the new password yourself. It is never shown again in the portal.

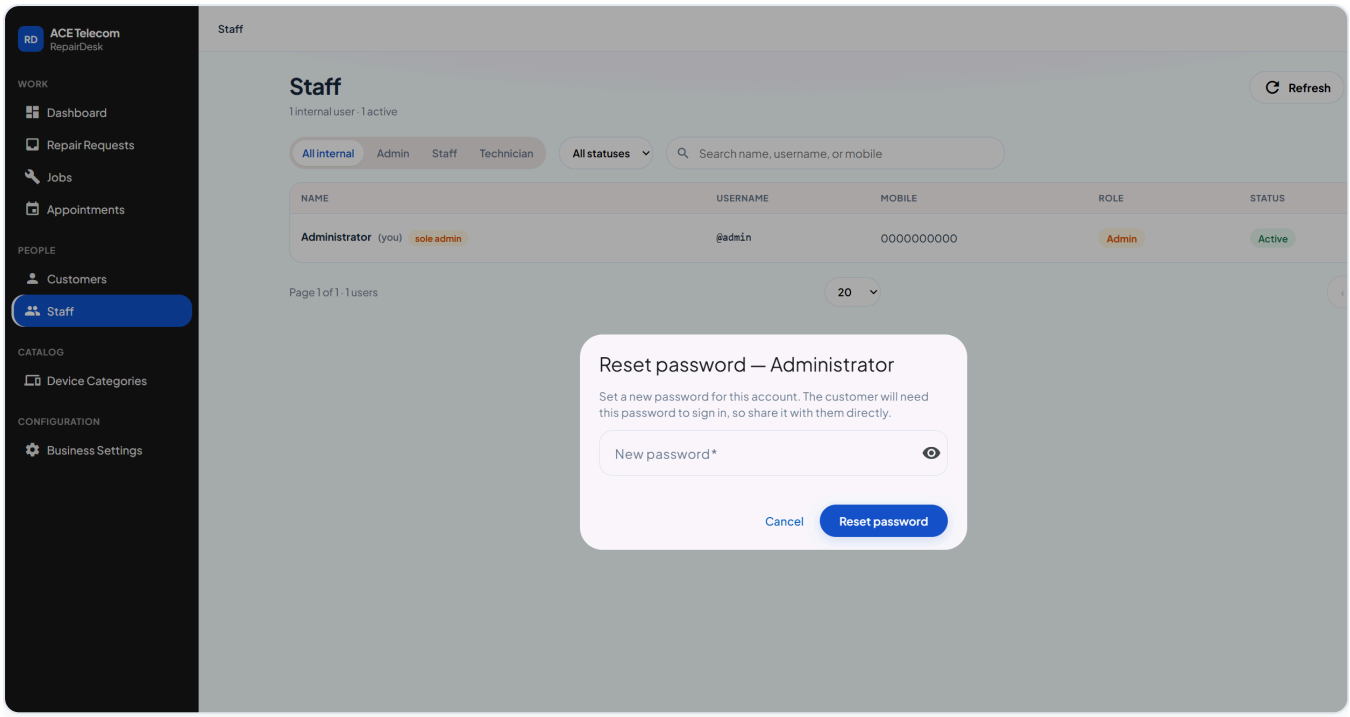


Figure 7. Reset password dialog. Share the new password with the person directly.

6.5 Delete an account

1. ⋮ → **Delete**.
2. Confirm. Access is revoked immediately. Username and mobile become available for a new account.

> There is no undo. You cannot delete your own account.

6.6 Rules that protect the shop

- There must always be **at least one active Administrator**. You cannot disable, delete, or demote the last admin.
- You cannot delete yourself or change your own role.

7. Create another Administrator (optional)

Use **Add user** and set Role to **Admin**. Create a second admin before you disable or delete anyone who is currently the only admin.


8. After you create people

Next step	Where
Take a walk-in or phone repair	Work → Repair Requests → Create request
Assign a job to a technician	Work → Jobs → open the job → assign
Book a visit	Work → Appointments or from the job

Office location, the map, and the repair queue


Work → **Repair Requests** is administrator-only. **Approve & create job** copies the service pin onto a job with the same reference. **Reject** and **Request info** are on the same page. **Create and approve** on the create form does both steps at once.

Configuration → **Office location** is the shop pin. Drag the pin or click **Find**, check the radius, then **Save office location**. Check-in, On-duty tracking, Travel allowance, and Customer ETA stay off until you mean to use them. **Attendance** shows **Start day** and **End day** on the technician's phone. **Allow start outside the office geofence** lets a clear fix outside the shop circle start the day and flags it Outside shop. **Auto end of day** (19:00) closes a day that is still open. Opening a job, Start Repair, and Start Navigating do not check the work day.

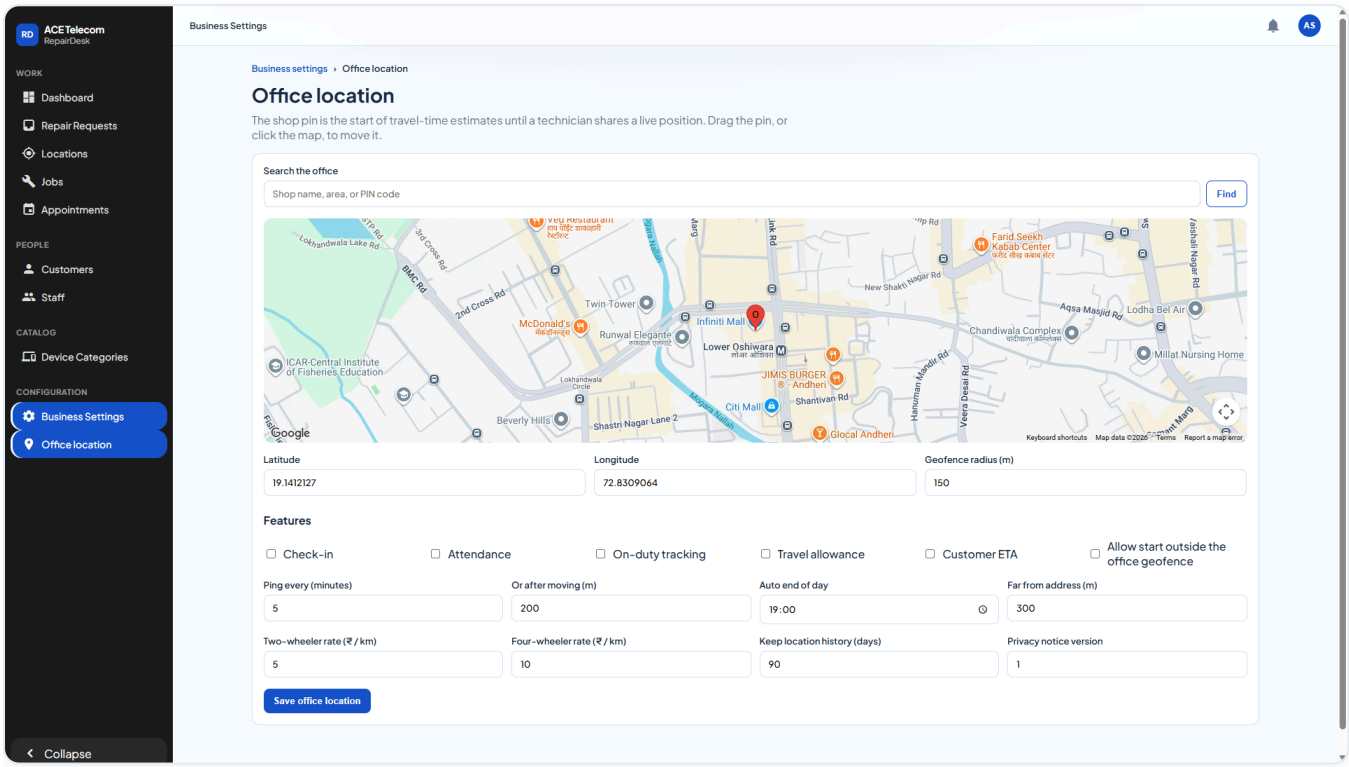


Office pin at Infinity Mall, Andheri. The switches in this picture are off.

Work → **Attendance** is one row per active technician per India date, including Not started. Columns are name, date, status, start flag, end time, Manual or Auto, and hours. Coordinates are not shown. From and To cover at most 31 days. **Download CSV** saves the same columns. While Attendance is off, the list still opens and says an administrator turns it on from Office location. Staff see this page and cannot change the switch.

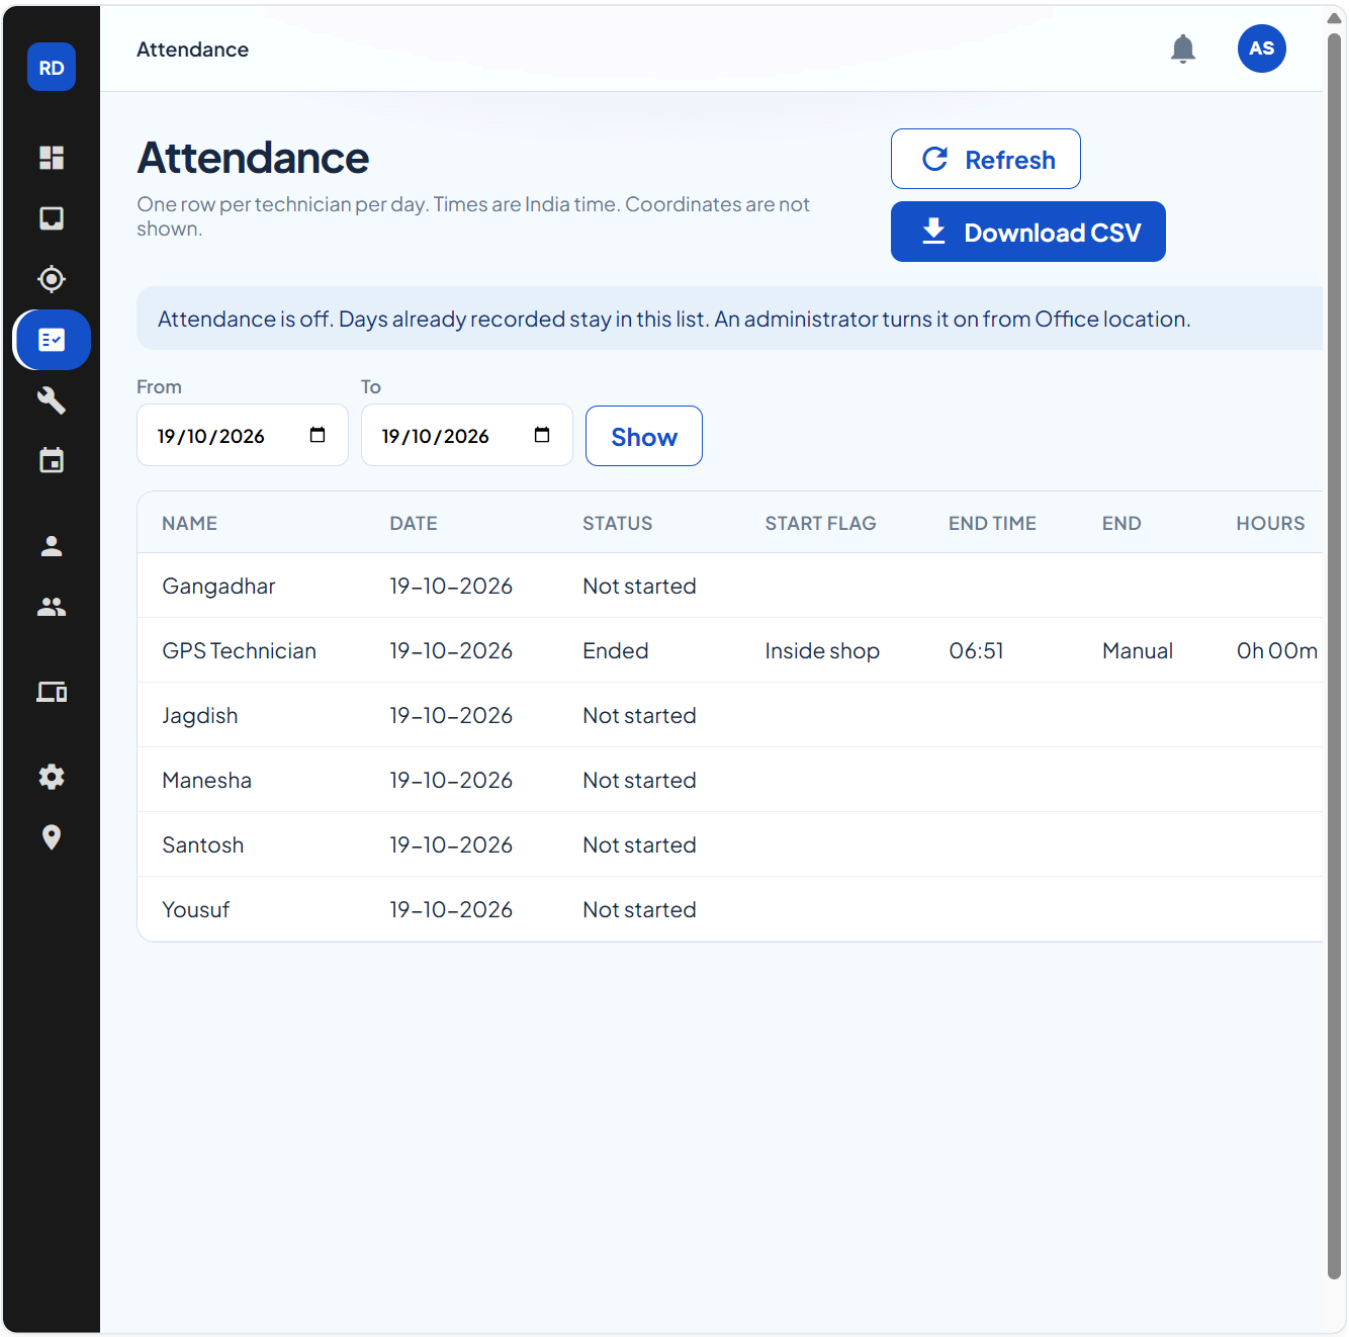


Attendance for 19-10-2026. One day has ended inside the shop. The others are not started.

Work → **Locations** shows **O** (shop), **T** (technician), and job pins. Click **Refresh**. Travel time says **from the technician** or **from the office**. Staff see this page and cannot change the office pin.

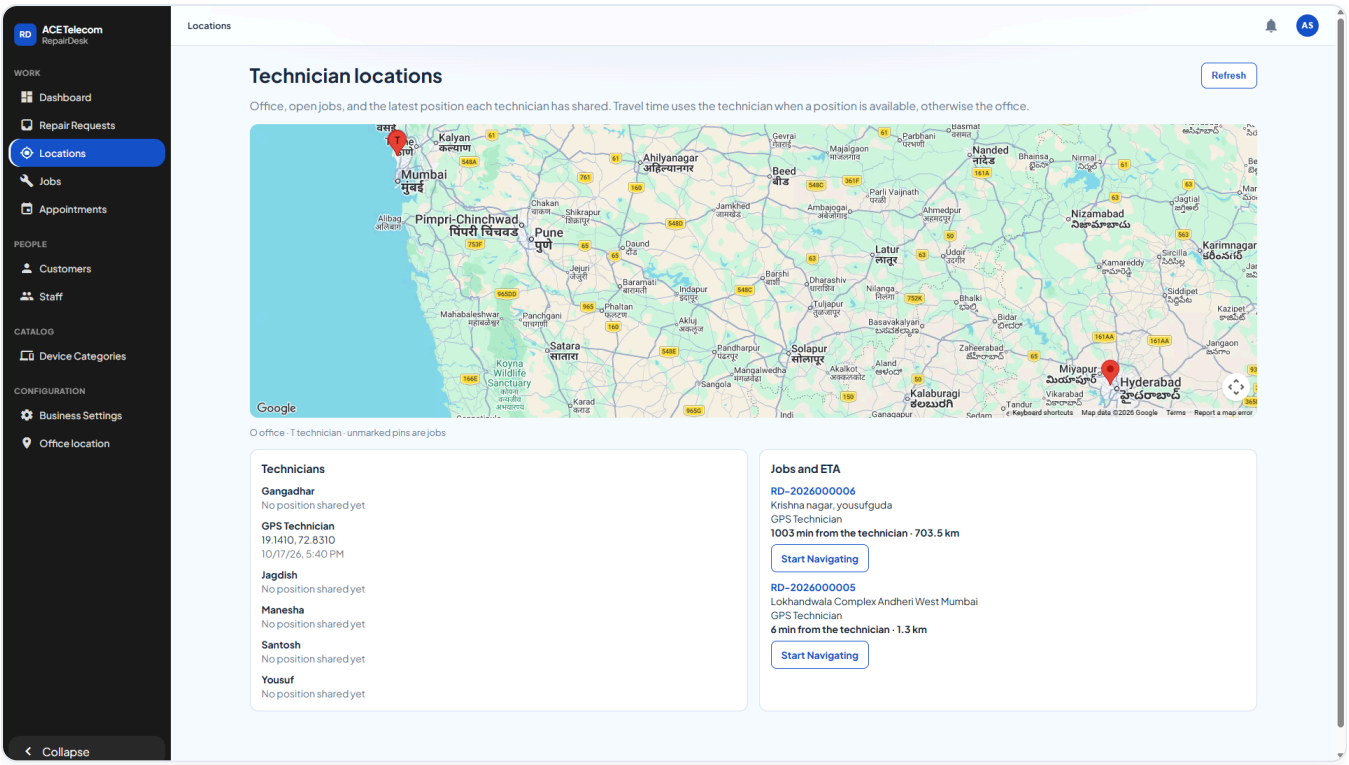

Technician locations and job travel times.

On a job, click **Edit** before the search box appears. Search at least 5 letters, paste the customer's Maps link, or drag the pin, then **Save**. **Start Navigating** opens Google Maps. Device categories, brands, business name, booking horizon, and working hours are under Catalog and Business Settings.

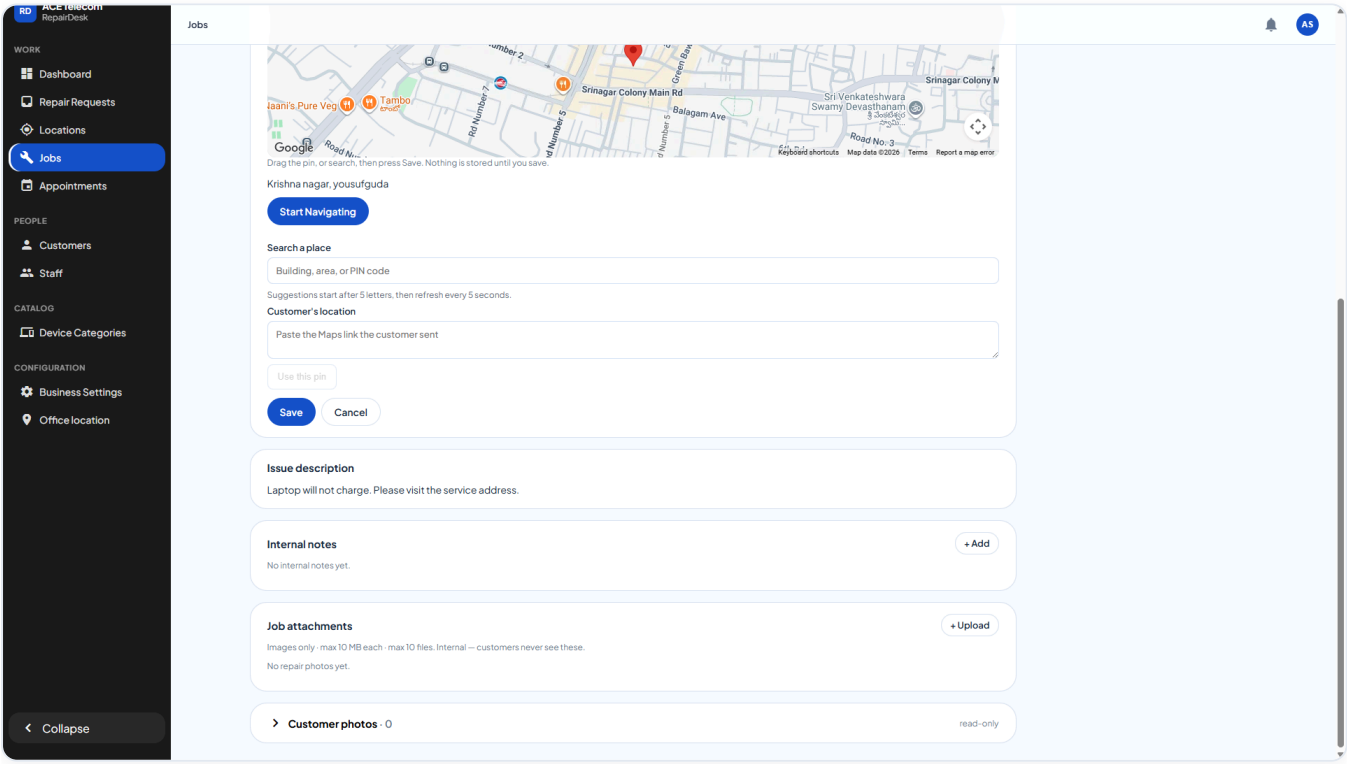

Job pin edit: search, customer's location, Save, and Cancel.

9. Quick reference

Item	Value
Admin portal	https://repairdesk-admin-portal.azurewebsites.net
Admin username	`admin`
Admin password	`Admin$1234`
Create Staff / Technician	People → Staff → Add user
Repair queue	Work → Repair Requests
Office pin and the Attendance switch	Configuration → Office location
Technician work days	Work → Attendance
Where technicians are	Work → Locations
Manage customers	People → Customers
Password minimum	8 characters
Username	Permanent after create