Proposal only · switches stay off

Attendance monitoring

Pictures of the proposed RepairDesk screens. This is not a build. Attendance, Check-in, On-duty tracking, Travel allowance, Customer ETA, and Allow start outside the office geofence stay off. The shop stays the one already saved.

Technician home. A duty card appears only while Attendance is on. Start day waits up to 8 seconds for a fix. The server decides inside or outside the saved shop pin and radius (150 m by default). Not now leaves the day unstarted. Jobs and Appointments stay available.

Outside the shop. A trustworthy fix beyond 150 m is refused when allow-start-outside is off. The day does not start. The same outside fix starts the day when that switch is on, flagged Outside shop.

Weak or mocked fixes still start the day. Staff see Location missing, Location uncertain, or Mocked location. Opening a job, starting a repair, and Start Navigating are unchanged.


Staff and Admin list. A new Attendance item under Work, on the web and the phone. Today in India, one row per active technician, including people who have not started. No coordinates. The web page can download the same columns.

Office location. The existing administrator screen. This slice does not add a switch and does not turn any on.

Sample day **18-10-2026**. Names and times are sample rows so the columns are readable. The 420 m distance is a sample. No customer phone numbers are shown.

1. Technician home — Start day


Shown only while Attendance is on. The privacy line is the notice for version 1: the start time, and whether they were at the shop, are stored. Not now is the decline. The day stays unstarted, and jobs stay available. On the sample list this is Arun Das.

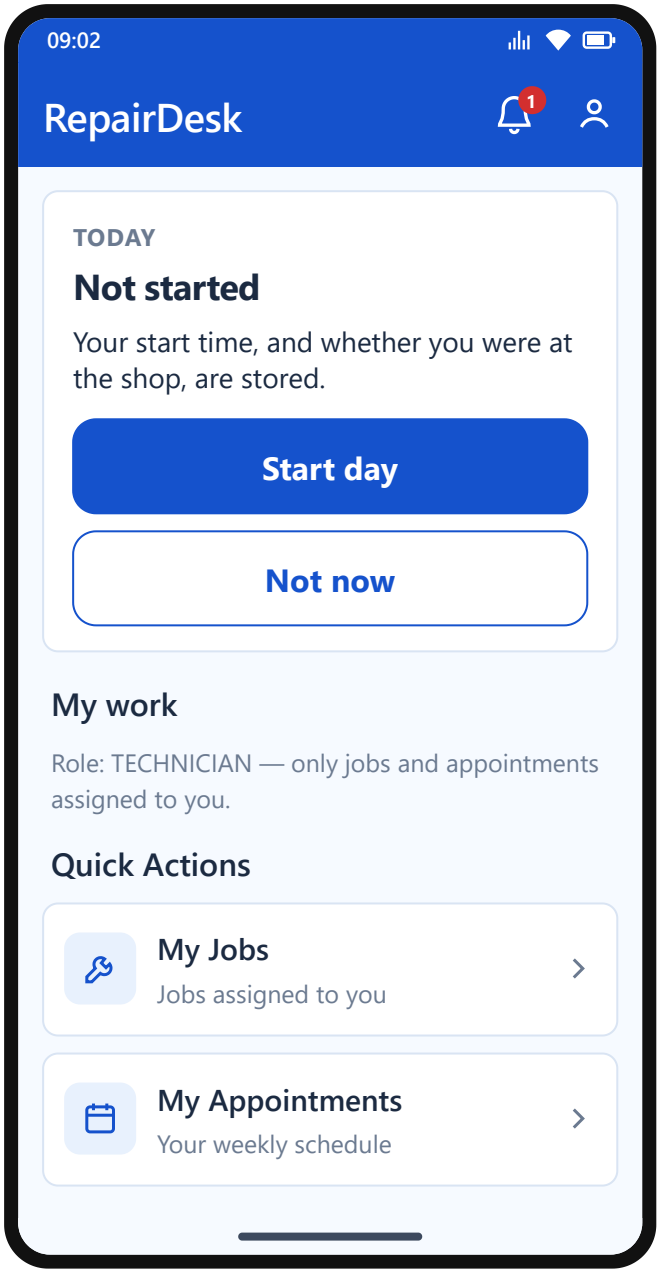

Technician home · Attendance on

2. Refused start — outside the shop


Allow start outside is off. The fix is trustworthy and outside the saved radius. The server returns the distance. 420 m is a sample. Start day was not saved, so the staff list stays Not started, the same as someone who has not tapped Start day. Jobs and Appointments stay available. This refusal is only for Start day.

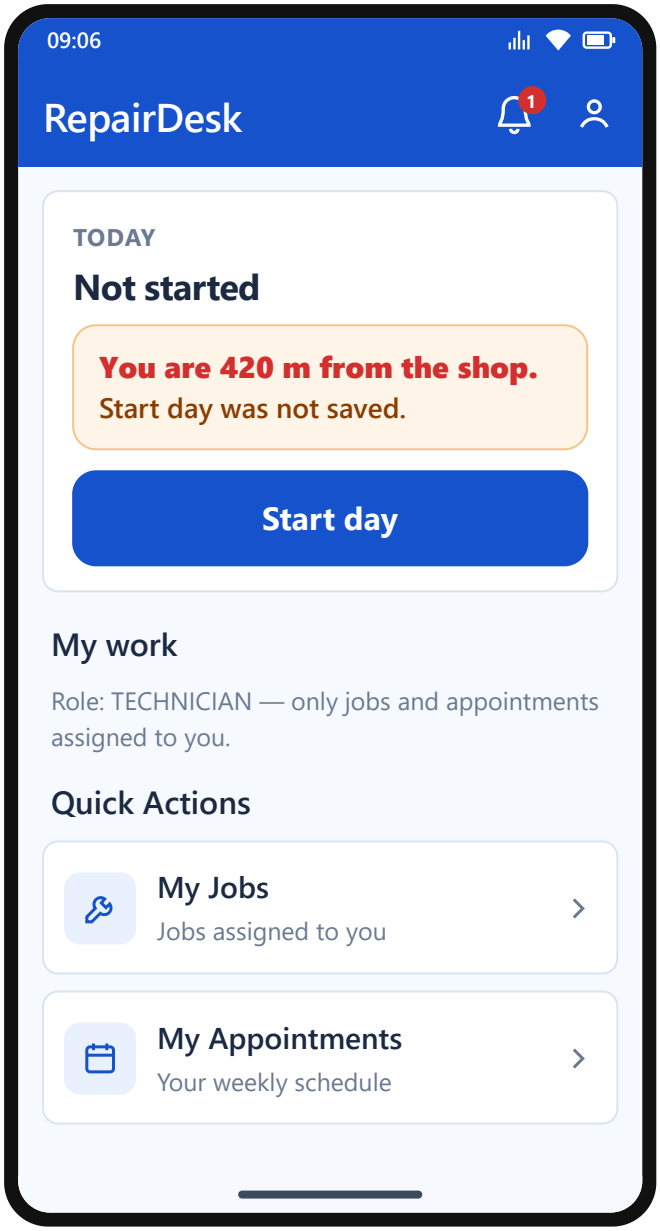


Day did not start · allow-start-outside off

3. Flagged starts — missing, uncertain, mocked


No fix, a fix wider than the radius, or a mocked location still starts the day. Staff see the flag. Jobs and Appointments stay available. These three are saved even when allow-start-outside is off. Meera Shah had no fix and is auto-ended at 19:00. Kiran Patel's accuracy was wider than the radius. Neha Iyer's phone reported a mock location and is still on duty, so hours stay blank.

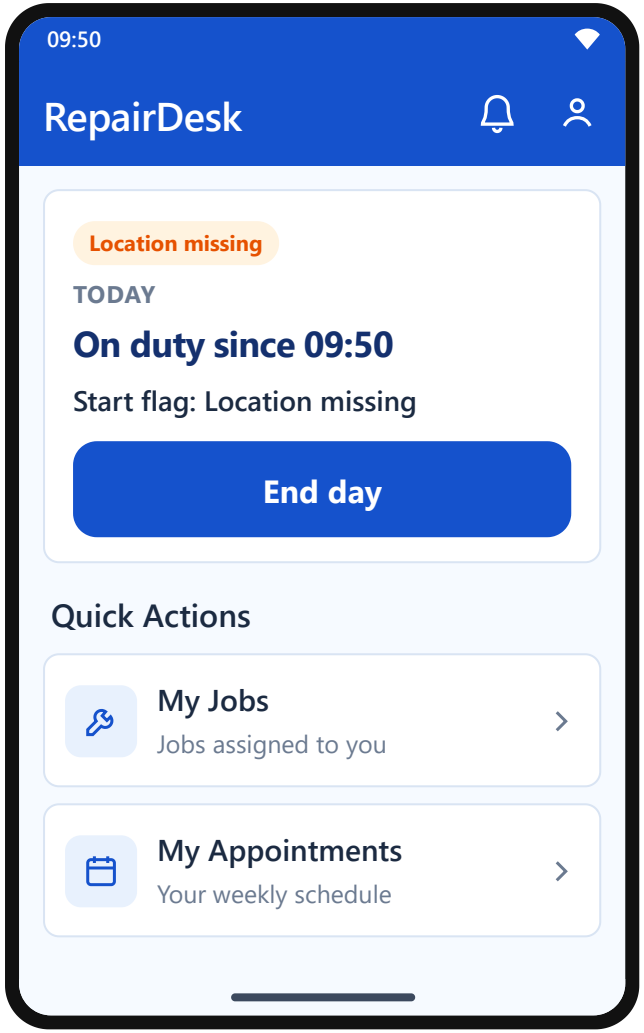

Meera Shah · no fix in 8 seconds

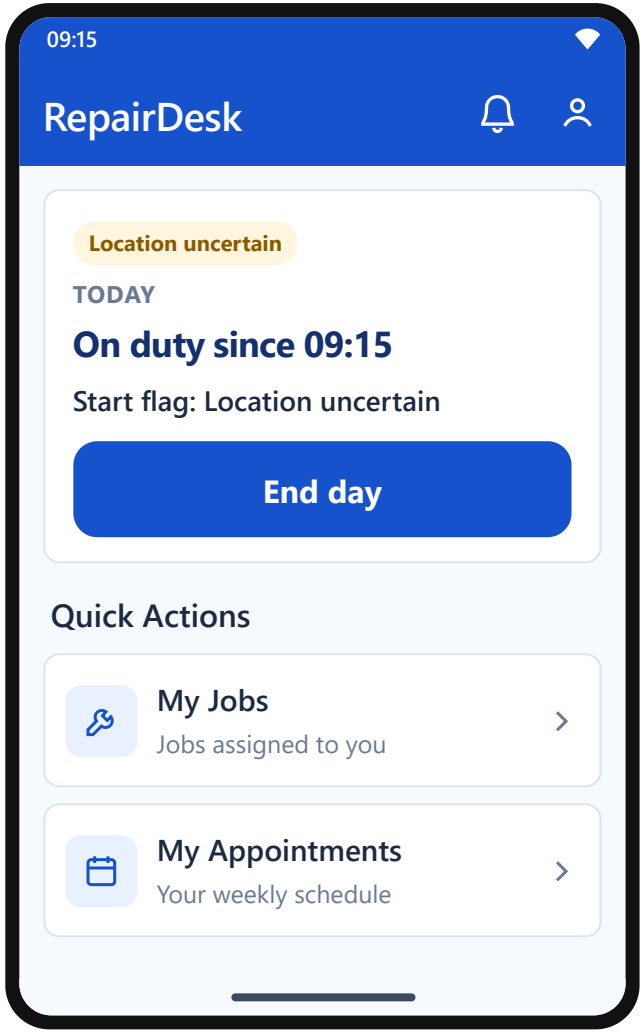


Kiran Patel · accuracy wider than 150 m

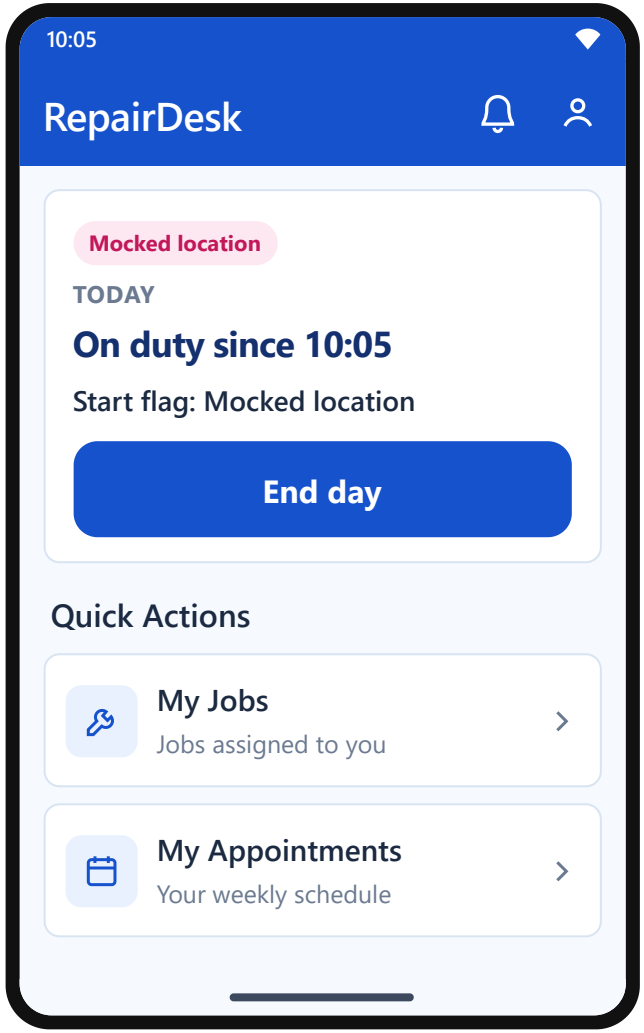


Neha Iyer · Android mock location

4. End day, and the ended card

End day is on the home once the day is open. It is always allowed. A missing or outside fix is recorded with the end. After End day the card reads Ended, with the time and Manual. Sample: Ravi Kumar, started outside the shop at 09:04, ended 17:40, 8 h 36 m. Jobs and Appointments stay. An open repair stays in progress. Auto-end is separate: at 19:00 IST the server closes an open day with How ended = Auto and no end fix.

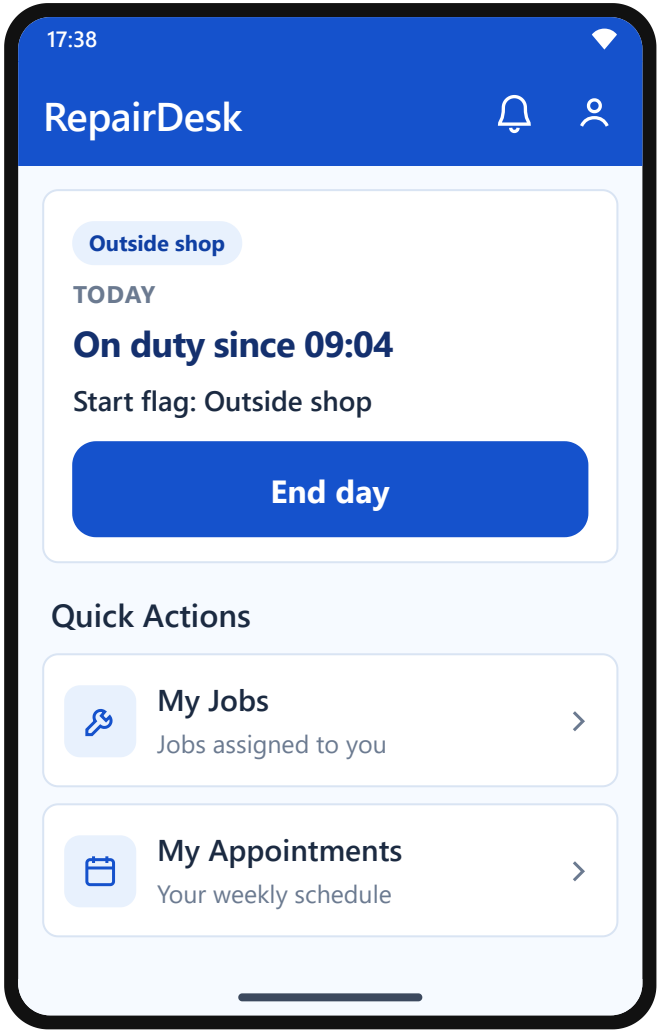


Before · End day is allowed

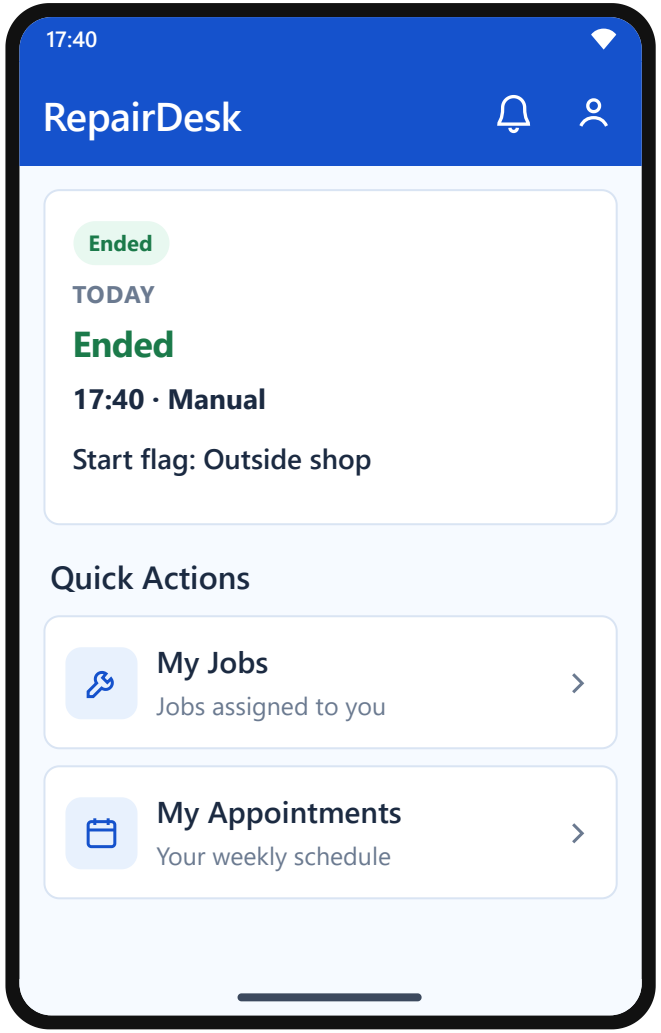

After · Ravi Kumar · 8 h 36 m


5. Staff and Admin — Attendance on the web

New item under Work. It does not replace Locations. Staff and Admin can open it; technicians cannot. Today is 18-10-2026 in India. From and To can cover at most 31 days. Coordinates stay off this list. Download writes the same columns as UTF-8 CSV with a BOM, dates dd-MM-yyyy. Asha Rao is the inside-shop start and is still on duty. A refused outside start looks like Arun Das: Not started. Hours appear only when both times exist.

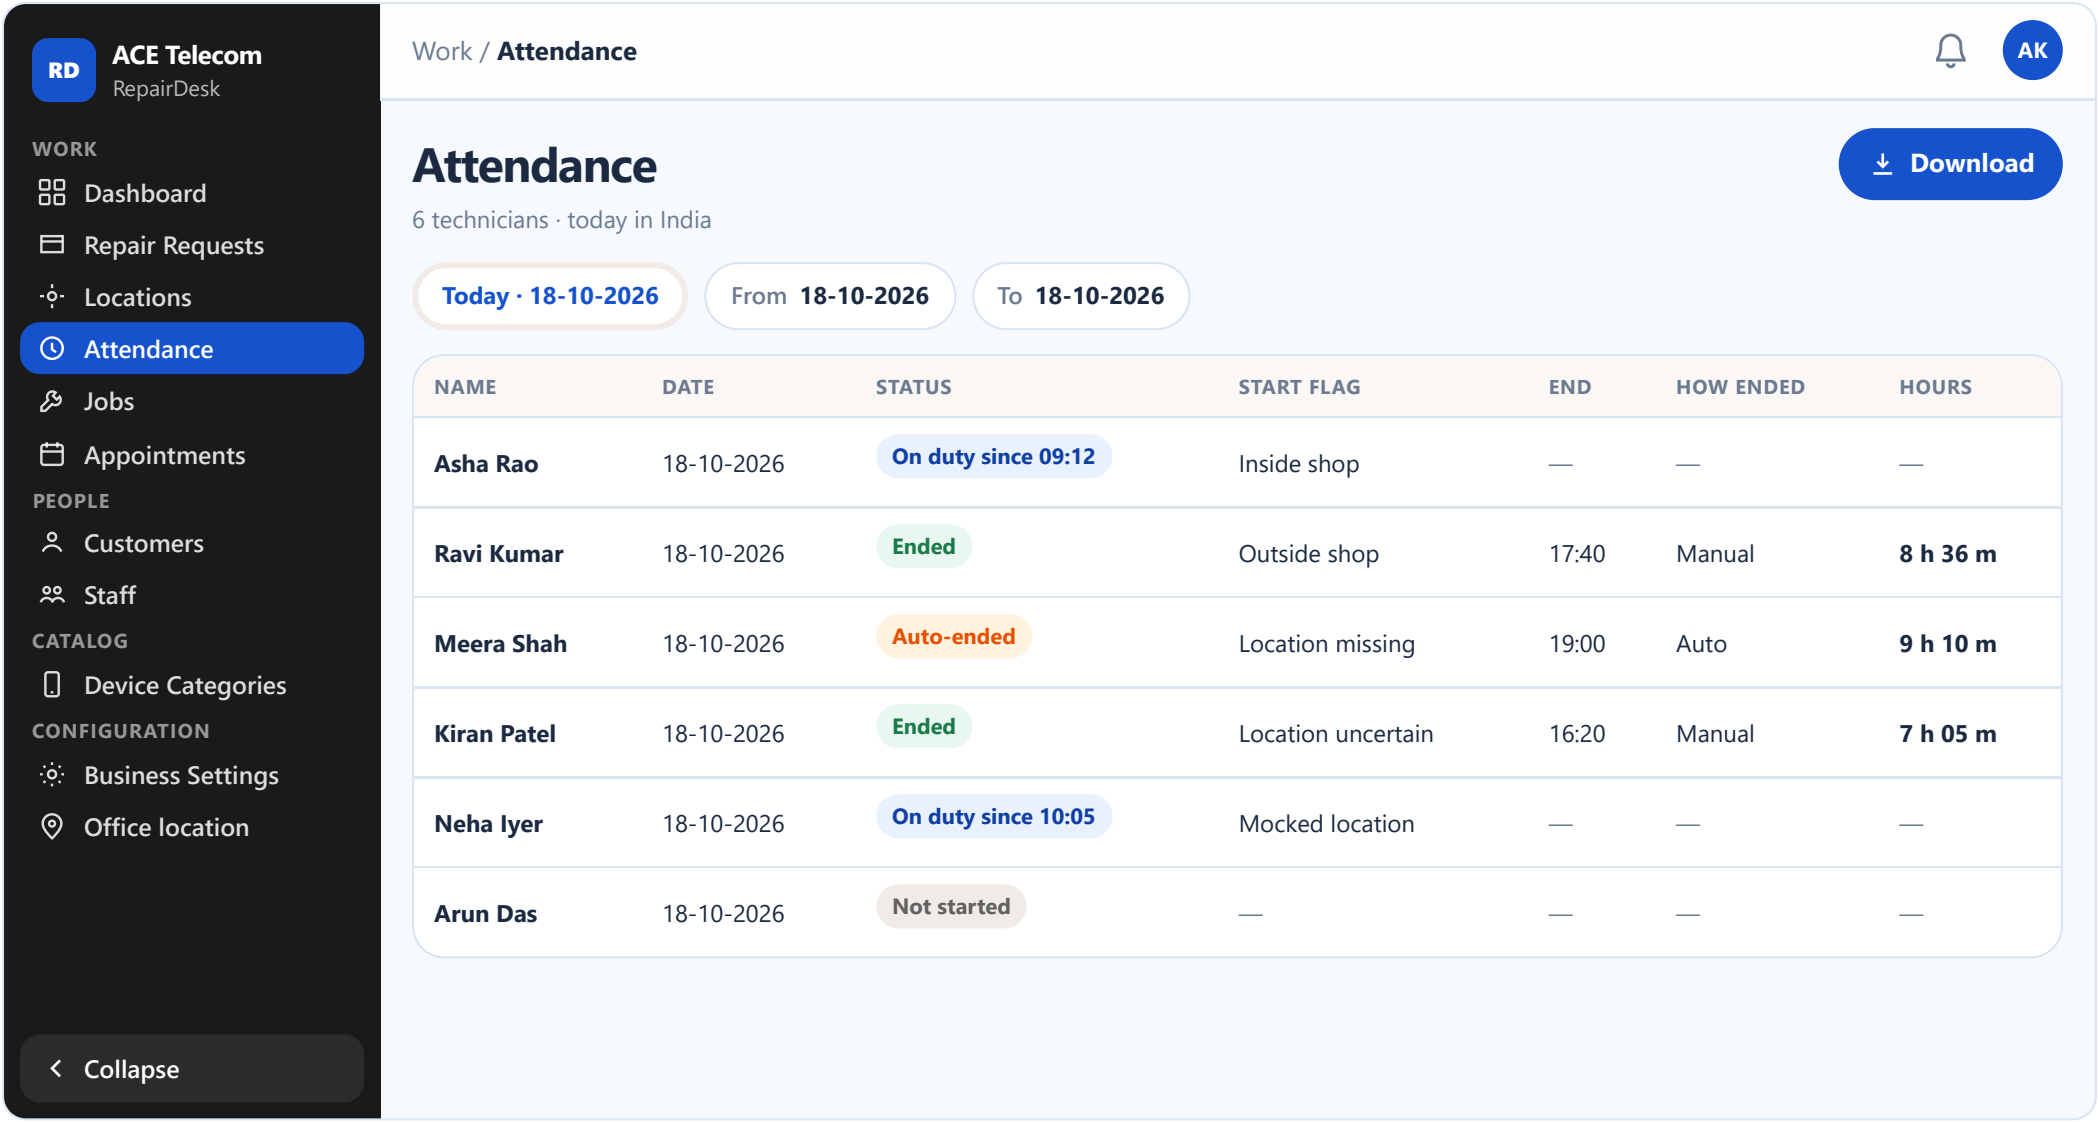

6. The same Attendance list on the phone

Staff and Admin open Attendance under Work. The rows match the web list. Download stays on the web. Technicians do not get this screen. Coordinates are not on it.

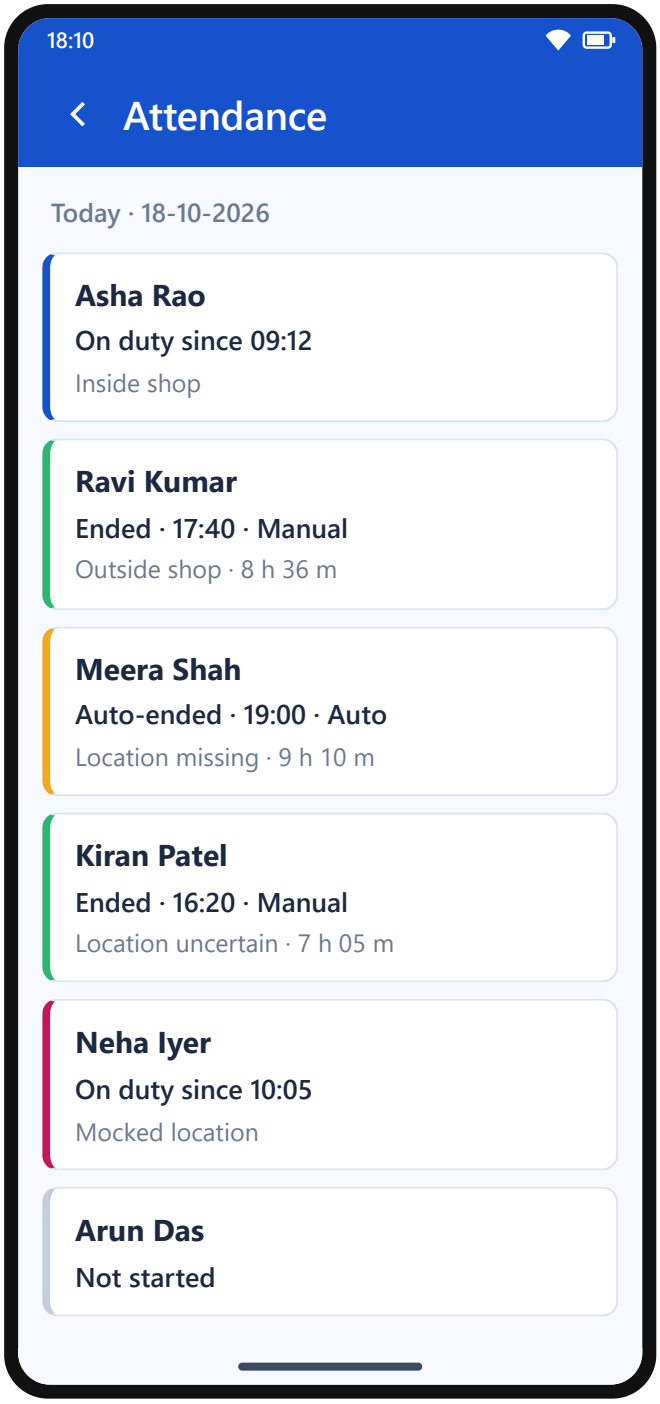

Staff phone · Attendance

7. Office location stays the existing screen

No new settings screen. Office location stays the administrator page already built, on the web at /settings/location and on the phone. Only an administrator can open it. The shop pin, the 150 m radius, auto-end at 19:00, privacy notice version 1, the kilometre rates, and the six switches stay on that screen. This slice does not add a switch and does not turn any on. The picture below is the live administrator page as it is today.

