


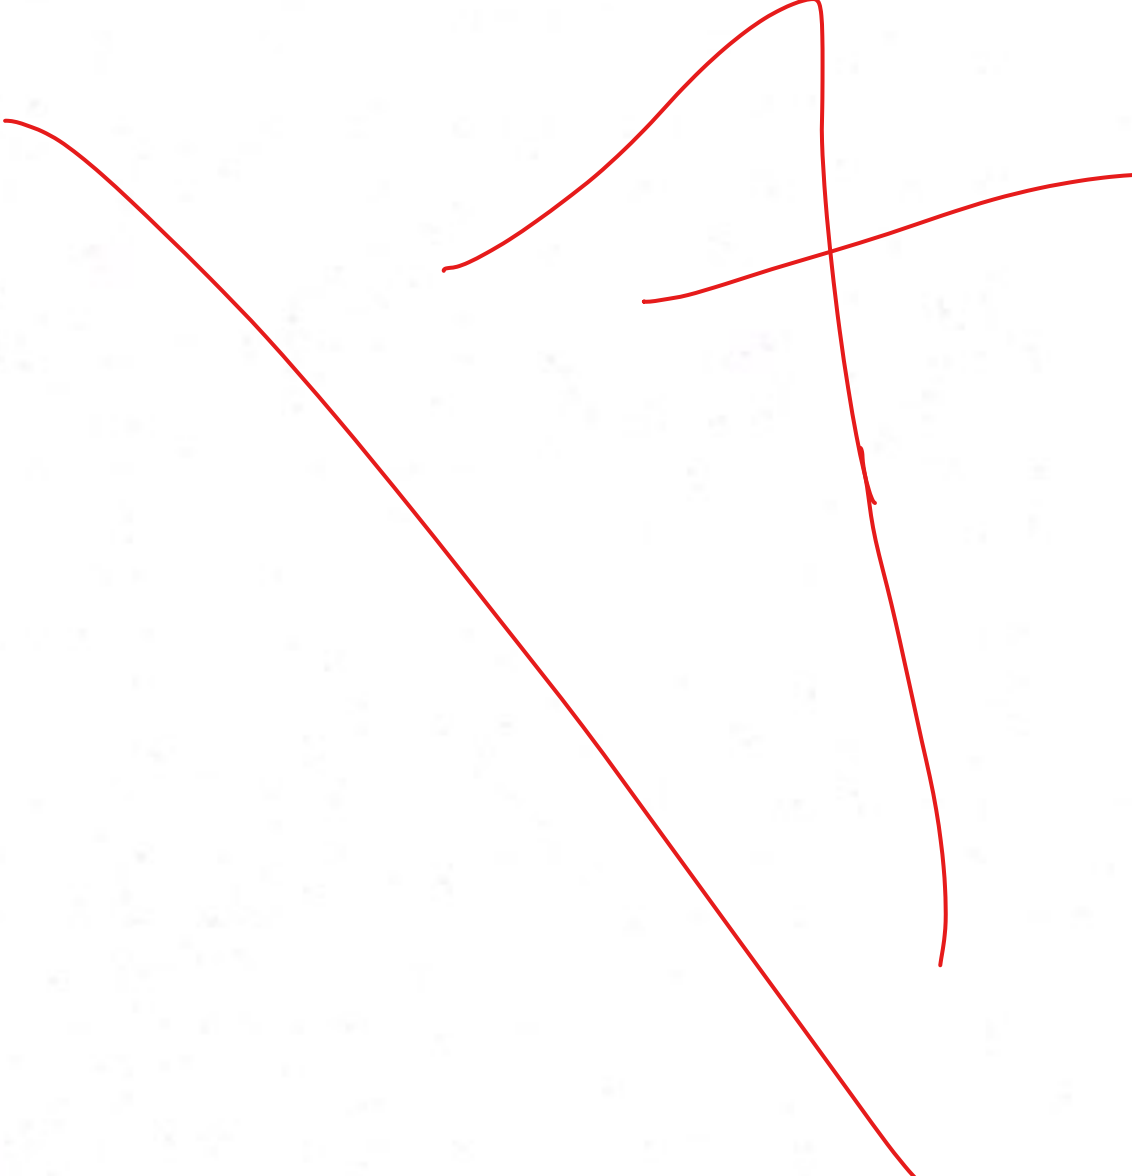


Name : Saddam Faiyaz Sarker

Sec : 8

CSE420

20101468

"Ans - To The Ques .NO. 3"

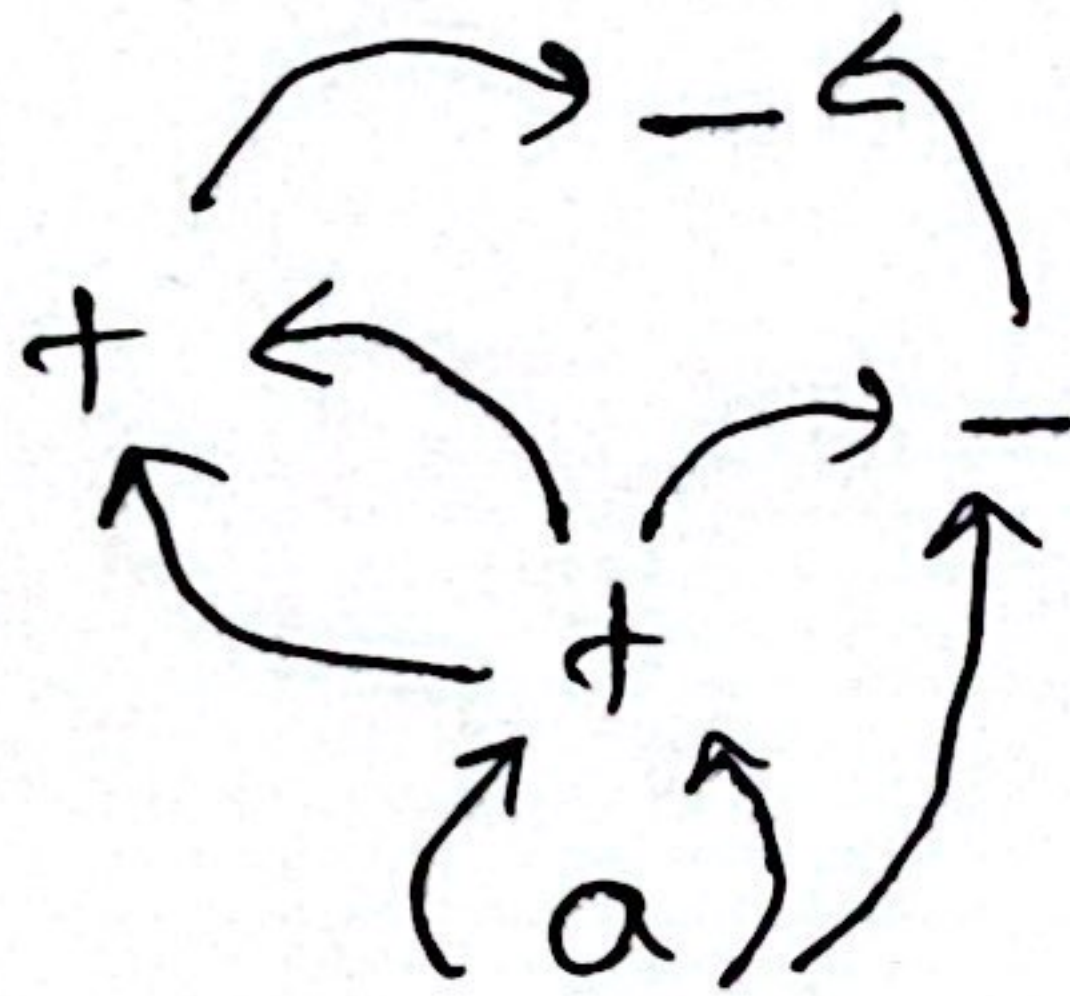

Directed Acyclic Graph

@

The general expression would be -

$$a = (a + a) + (a + a) - a$$

##

$$a = \boxed{(a + a) + - (a + a) - a}$$

Three address code for above DAG -

$$0 \rightarrow t_1 = (a + a)$$

$$1 \rightarrow t_2 = (t_1 - a)$$

$$4) a = t_4$$

$$2 \rightarrow t_3 = \text{unminus } t_2$$

$$3 \rightarrow t_4 = (t_1 + t_3) \quad \underline{\text{Ans.}}$$

⑥

3 address code -

$$0 - t_1 = (a + a)$$

$$1 - t_2 = (t_1 - a)$$

$$2 - t_3 = \text{uminus } t_2$$

$$3 - t_4 = (t_1 + t_3)$$

$$4 - a = t_4$$

Quadruples

	OP	arg1	arg2	Result
0	+	a	a	t ₁
1	-	t ₁	a	t ₂
2	uminus	t ₂		t ₃
3	+	t ₁	t ₃	t ₄
4	=	t ₄		a

Ans.

Triples

	OP	arg1	arg2
0	+	a	a
1	-	(0)	a
2	uminus	(1)	
3	+	(0)	(3)

	OP	arg1	arg2
4	=	(4)	

Ans.

' Ans. To The Ques. NO. 2 ' 4

[Single List of Hashtable]

At first, making the table for global symbols ,

Global symbol		
Name	Type	D-Type
x	var	float
v	var	float
m	array	int

②

argCount : int, 2
 argValues : char, 2
 x : float, 2
 m : char, 2
 t : float, 2
 v : int, 2

①

main : (int, char) →
 void, 1

④

③

②

OK

V : int, 4
Count : int, 4
n : float, 4

S : float, 3
c : int, 3

t : float, 7 → S : ~~int~~ float, 6

Count : var, 5
m : float, 5
p : val, 5

— x —

