

Snapdragon® X Series

Qualcomm® Hexagon™ NPU Driver

Known Issues | Changelog | Install Instructions
1.0.0.14

NEW DRIVER DETAILS

- Version: 30.0.0220.3000
- Release Date: 01-08-2026
- Installation: Please follow the installation instructions.

KNOWN ISSUES

- Dell devices require **Manual Install 2 (Have Disk method Steps 12-17)** after executing the installer.
- 5005 Error During Concurrent App Usage
 - When **MEP** and **Foundry App** run simultaneously, both the camera and Foundry applications may hang on **CRM8300** platforms.
 - Running the **LLAMA-v3.1 8B model** on **16GB devices** may fail, while the same workload runs successfully on **64GB devices**.

CHANGELOG

Quality/Performance Improvements

- Enhanced security with comprehensive bug resolutions for improved stability.

NPU Fixes

- Fix memory exhaustion issues that occur during stressed conditions.

Changes targeting Software Developers

- None

New Feature and API Add-Ons

- None

Limitations

- For Hibernate and resume features please ensure the base BSP should be 8500.
- No rollback is supported.


INSTALLATION INSTRUCTIONS

1. Download the driver from Qualcomm Software Center.
2. Run the **installer** (mcdm_drivers_8380.exe) and proceed through the dialog screen.




3. Agree the terms and conditions and click install for installing the "Qualcomm (R) Hexagon (TM) NPU Driver."

Qualcomm Hexagon NPU Driver Update
Known Issues | Changelog | Install Instructions
1.0.0.14

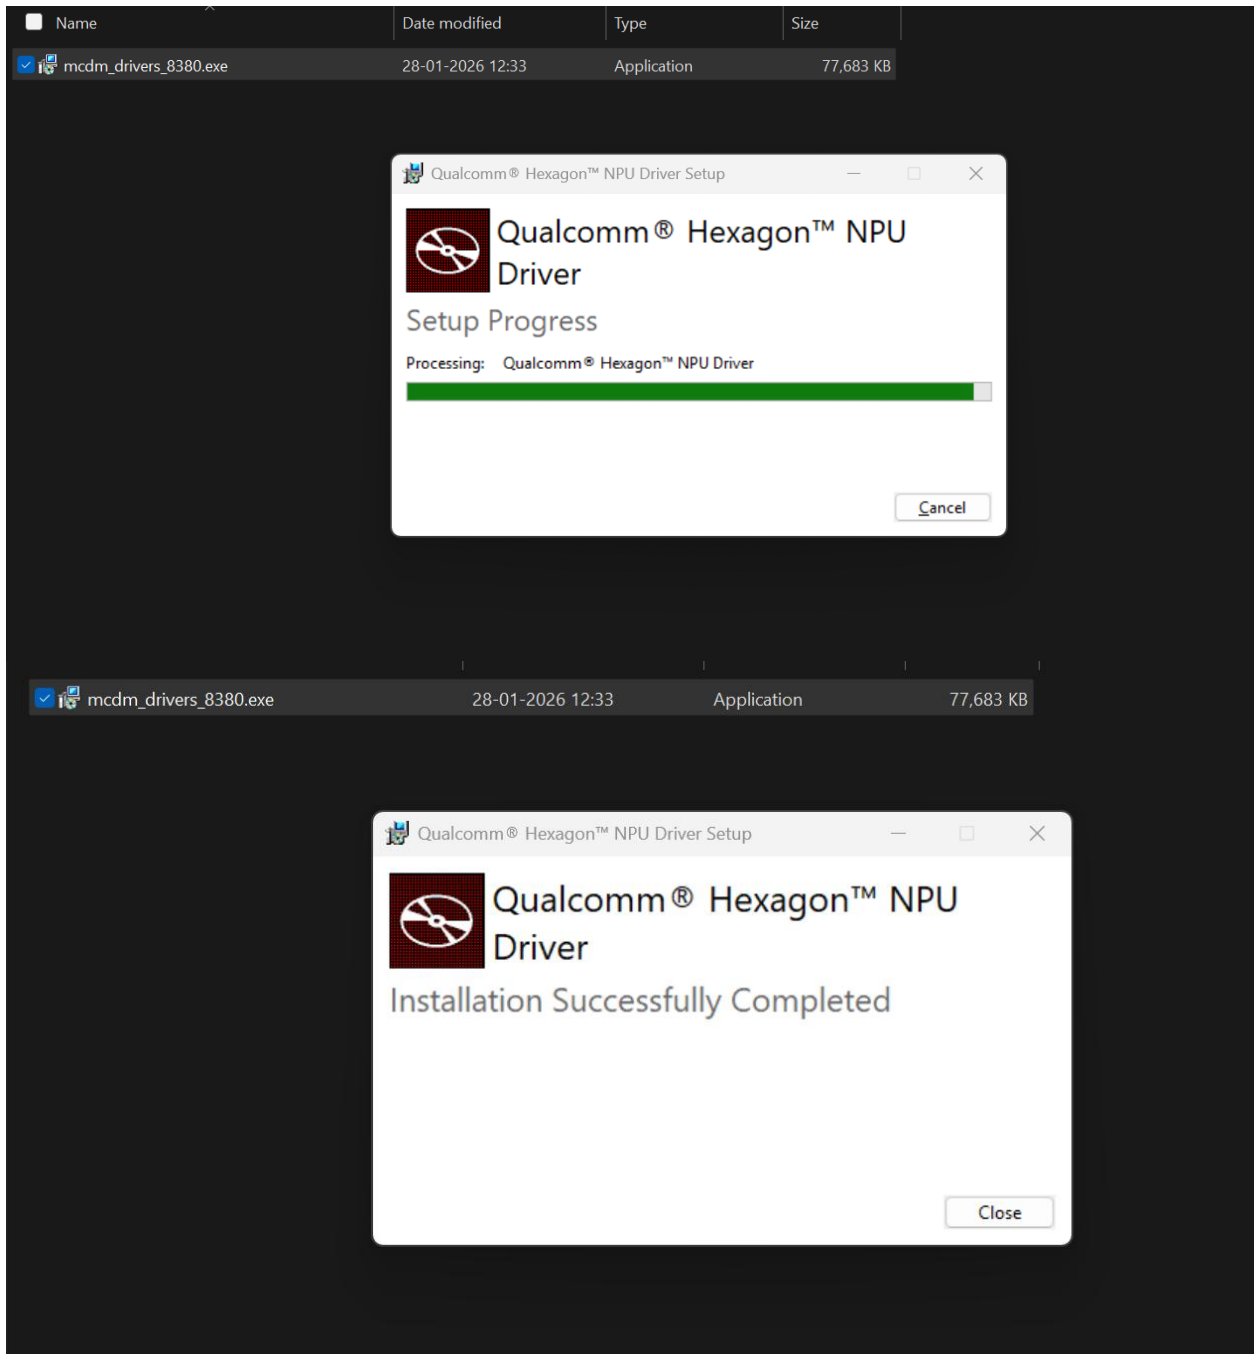


4. Post installation & reboot the device, verify the driver version if updated as expected. From device manager goto Neural processors, “Snapdragon(R) X Elite ... - Qualcomm(R) Hexagon (TM) NPU”. Right click to properties.

Qualcomm Hexagon NPU Driver Update
Known Issues | Changelog | Install Instructions
1.0.0.14

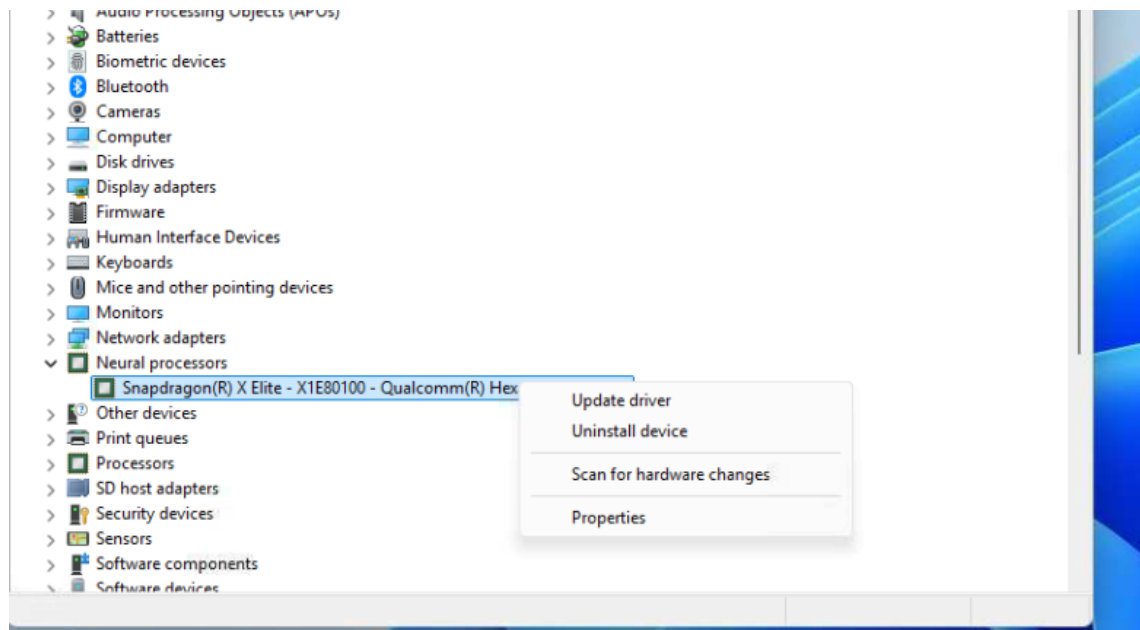


5. Select the “Driver” tab and check the “Driver Version”

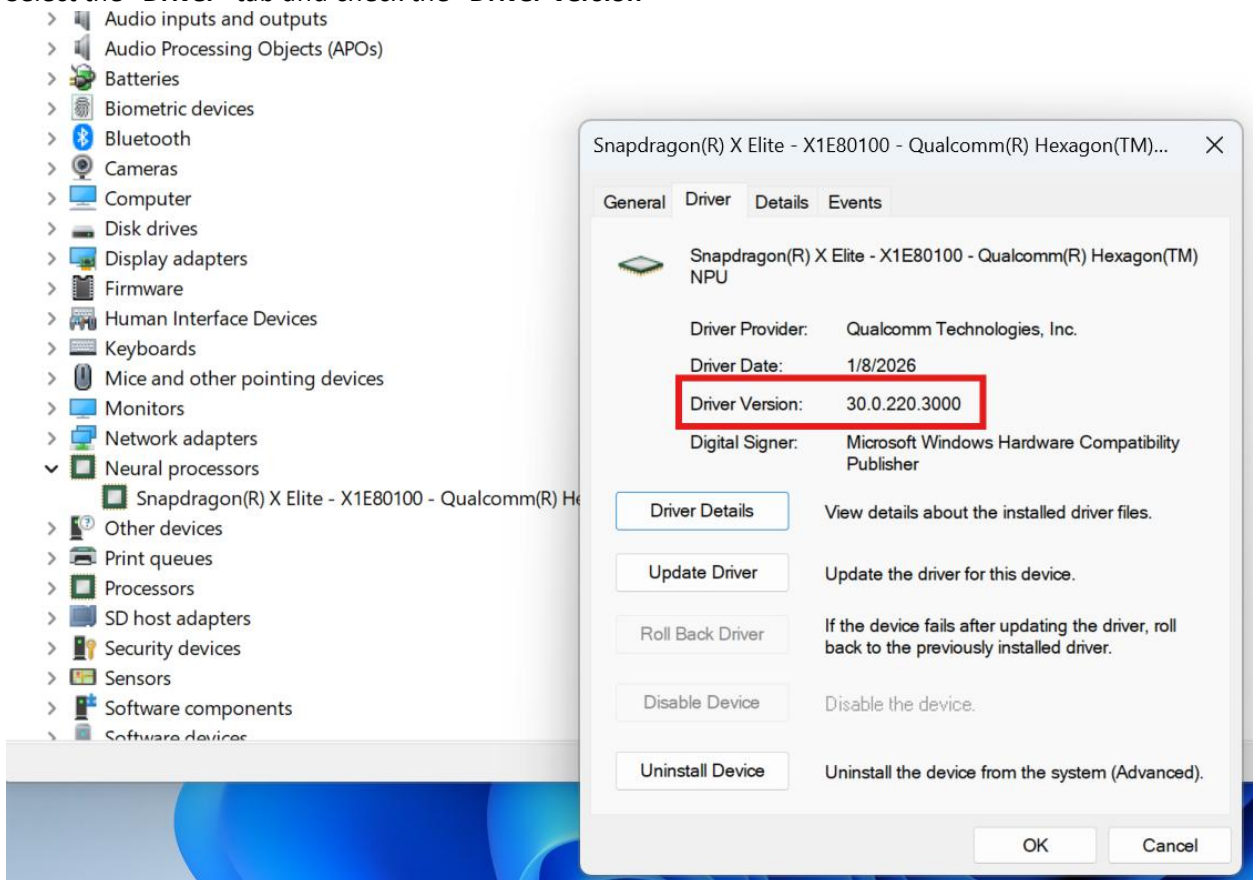


Snapdragon
X Series


6. If “Driver Version” is “**30.0.220.3000**”, then the driver was installed successfully, proceed to testing & reviewing the product.
 - a. If an older driver is listed, proceed to **Step 7**. Some OEM devices do not update with the installer and require **Manual Install 1** or **Manual Install 2**.
7. **Manual Install 1:** Right click on “**Snapdragon(R) X Elite...– Qualcomm (R) Hexagon (TM) NPU**” and select “**Update driver**”

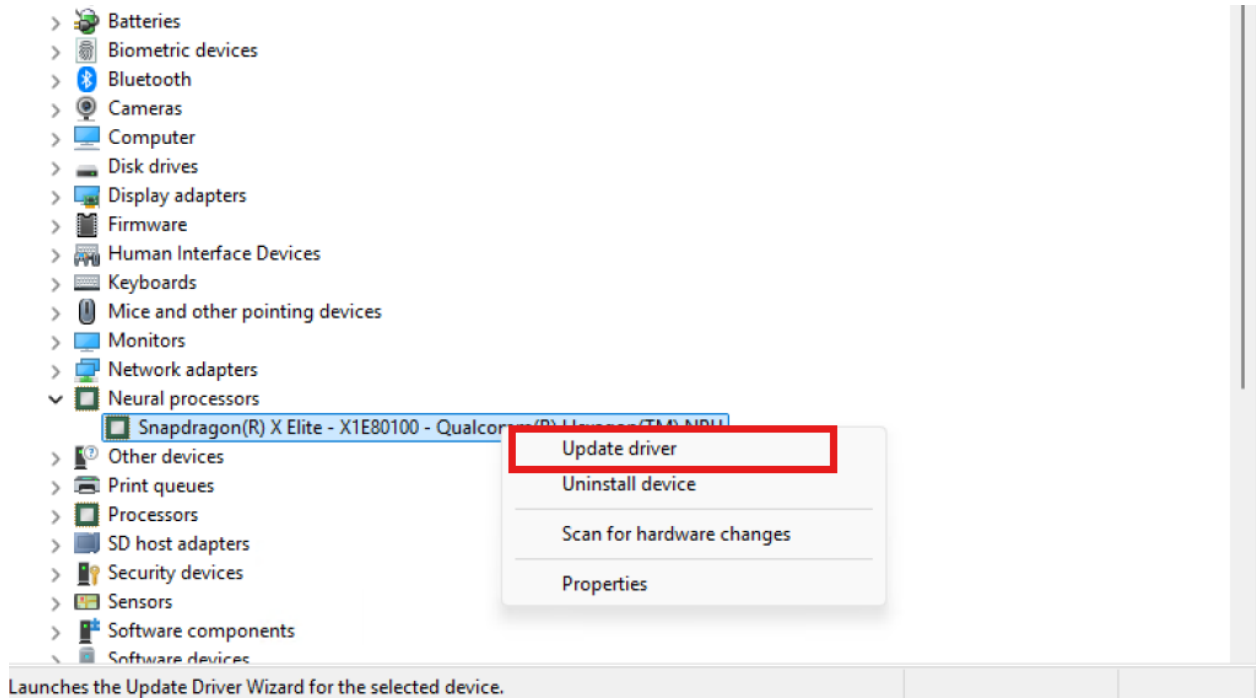

8. Select “**Browse my computer for drivers**”

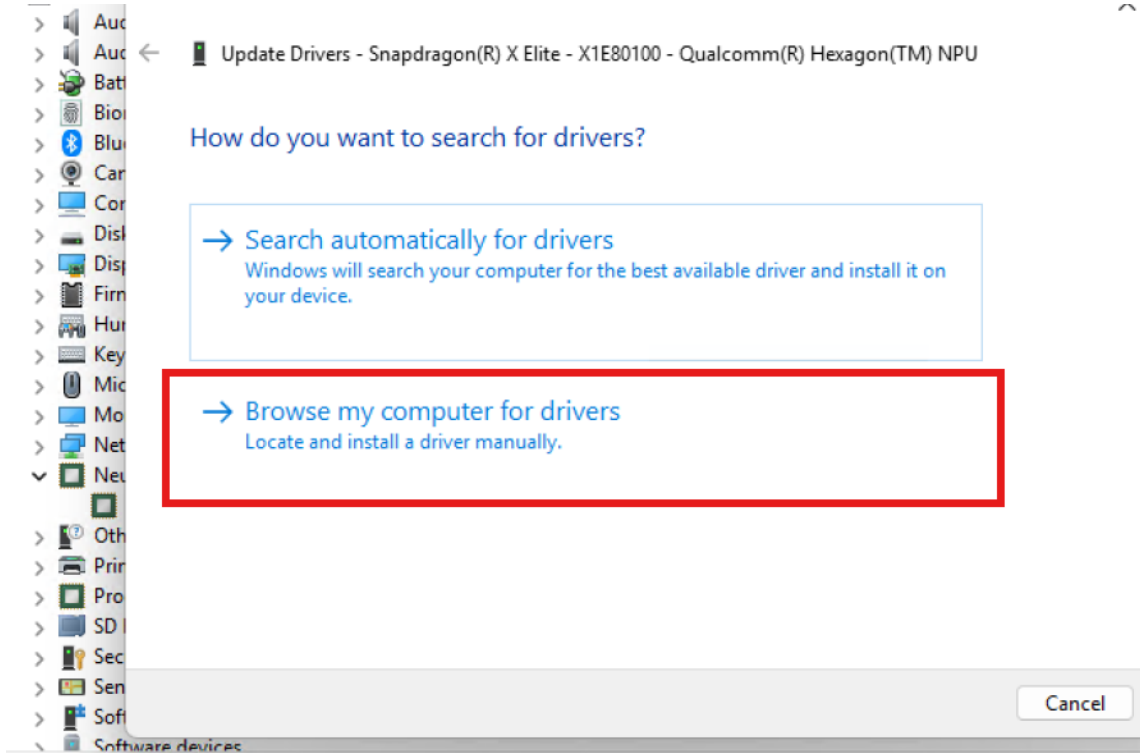

9. Browse to the “C:\QCDrivers\mcdm_drivers...” folder. If there are multiple “mcdm_drivers ...” folders, select the newest one. If not already done, change your Explorer View to show hidden items. Select the **qcnspmcdm8380** subfolder.
 - a. If the folder is not present, jump to **Step 2** to extract the contents of the installer again

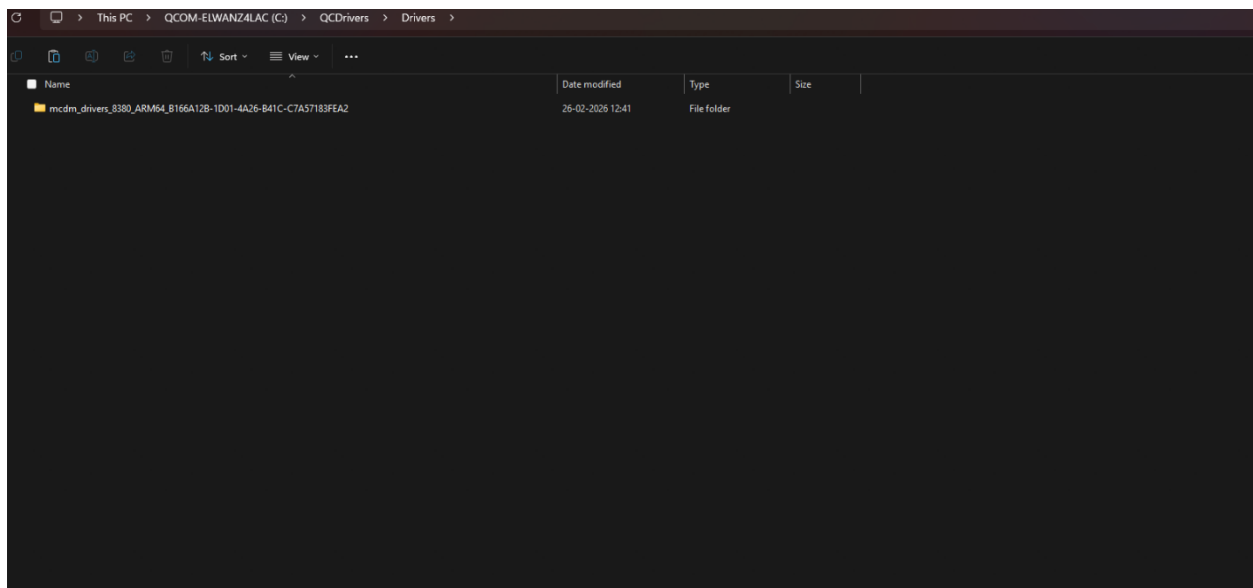

10. Click “OK” and then “Next” to install the driver. Close any dialog boxes that appear.
 - a. In case of availability of .exe, use the .exe
11. Verify the driver version (**Steps 4-6**).
 - a. If the driver is still not updated, proceed to **Manual Install 2 (Step 12)**



12. **Manual Install 2:** perform **Step 7 & Step 8** to open the “Browse for drivers on your computer” window.
13. Select “Let me pick from a list of available drivers on my computer”



←  Update Drivers - Snapdragon(R) X Elite - X1E80100 - Qualcomm(R) Hexagon(TM) NPU

Browse for drivers on your computer

Search for drivers in this location:

C:\

Browse...

☒ Include subfolders

→ Let me pick from a list of available drivers on my computer
This list will show available drivers compatible with the device, and all drivers in the same category as the device.


Next

Cancel

14. Select “Have Disk”




Snapdragon
X Series

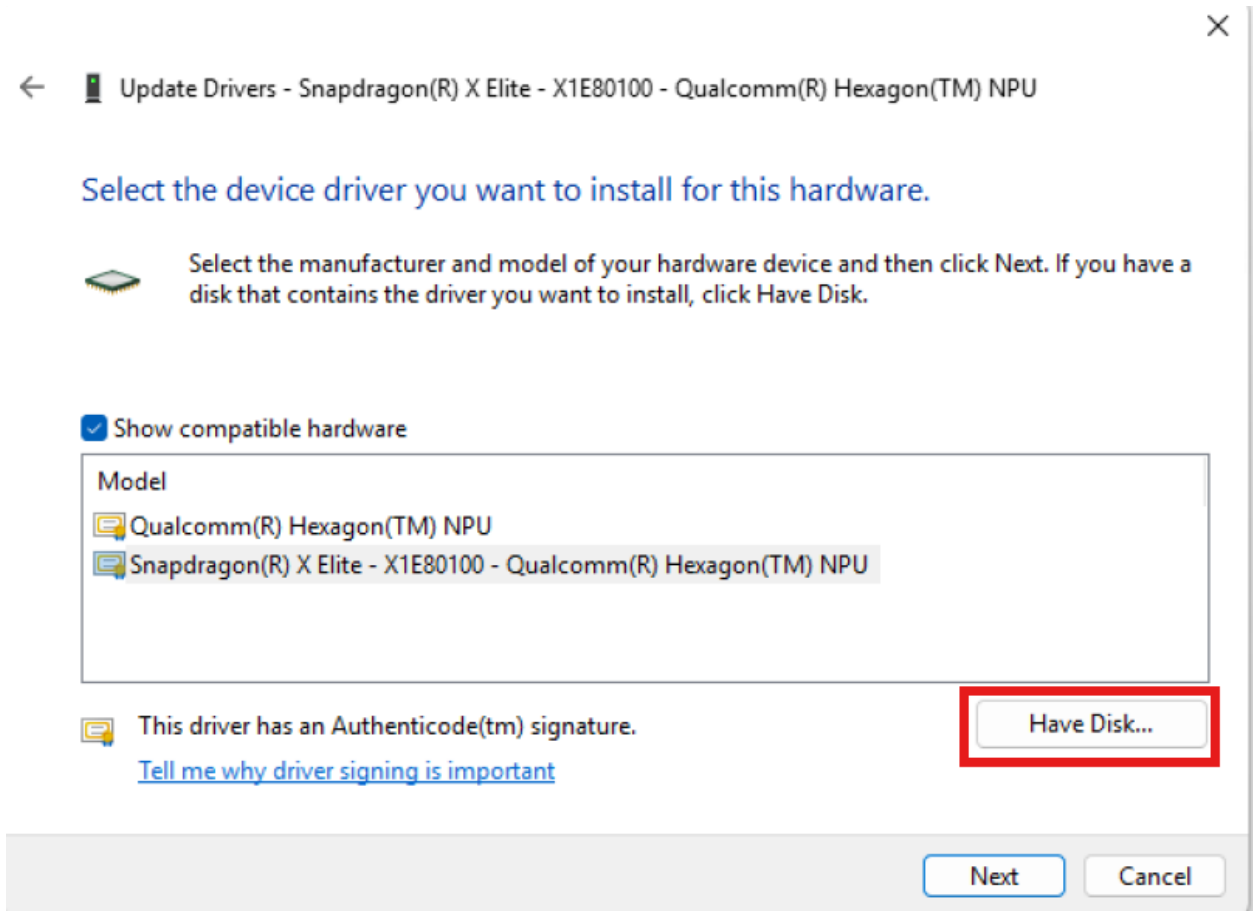

15. Click "**Browse**" and navigate to the "C:\QCDrivers\mcdm_drivers..." folder. If there are multiple "mcdm_drivers..." folders, open the newest one. If not already done, change your Explorer View to show hidden items. Select the **qcnspmcdm8380** subfolder and select "**qcnspmcdm8380.inf**"

←  Update Drivers - Snapdragon(R) X Elite - X1E80100 - Qualcomm(R) Hexagon(TM) NPU

Select the device driver you want to install for this hardware.

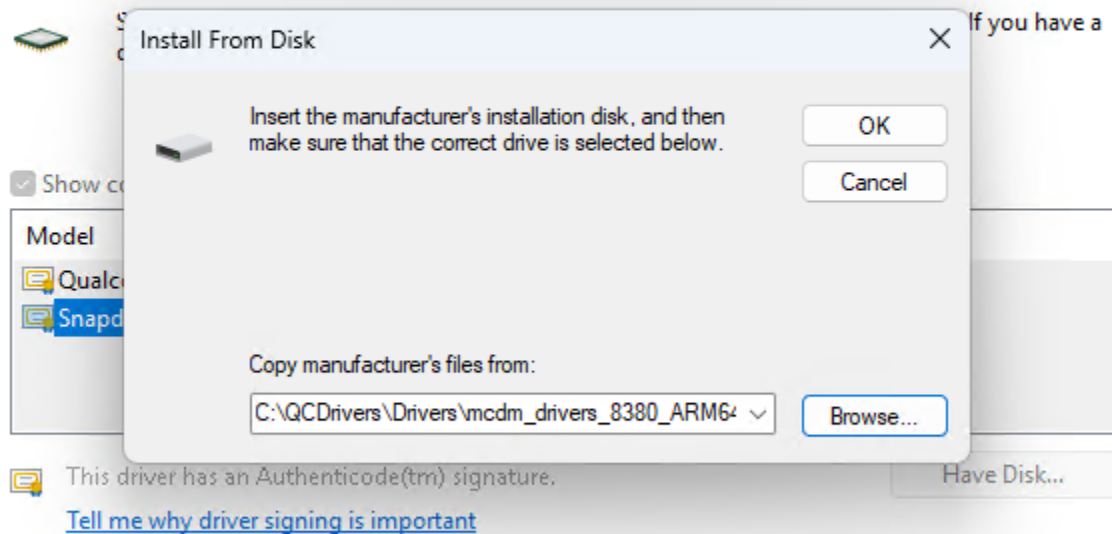

16. Click **“OK”** and then **“Next”** to install the driver. You should get a “Windows has successfully updated your drivers” message.
17. Verify the driver version (**Steps 4-6**)


UNINSTALL INSTRUCTIONS

1. To rollback and uninstall this driver, open “Control Panel”, select **“Qualcomm (R) Hexagon (TM) NPU Driver”**, and select **“Uninstall”**.


Qualcomm Hexagon NPU Driver Update

Known Issues | Changelog | Install Instructions


1.0.0.14

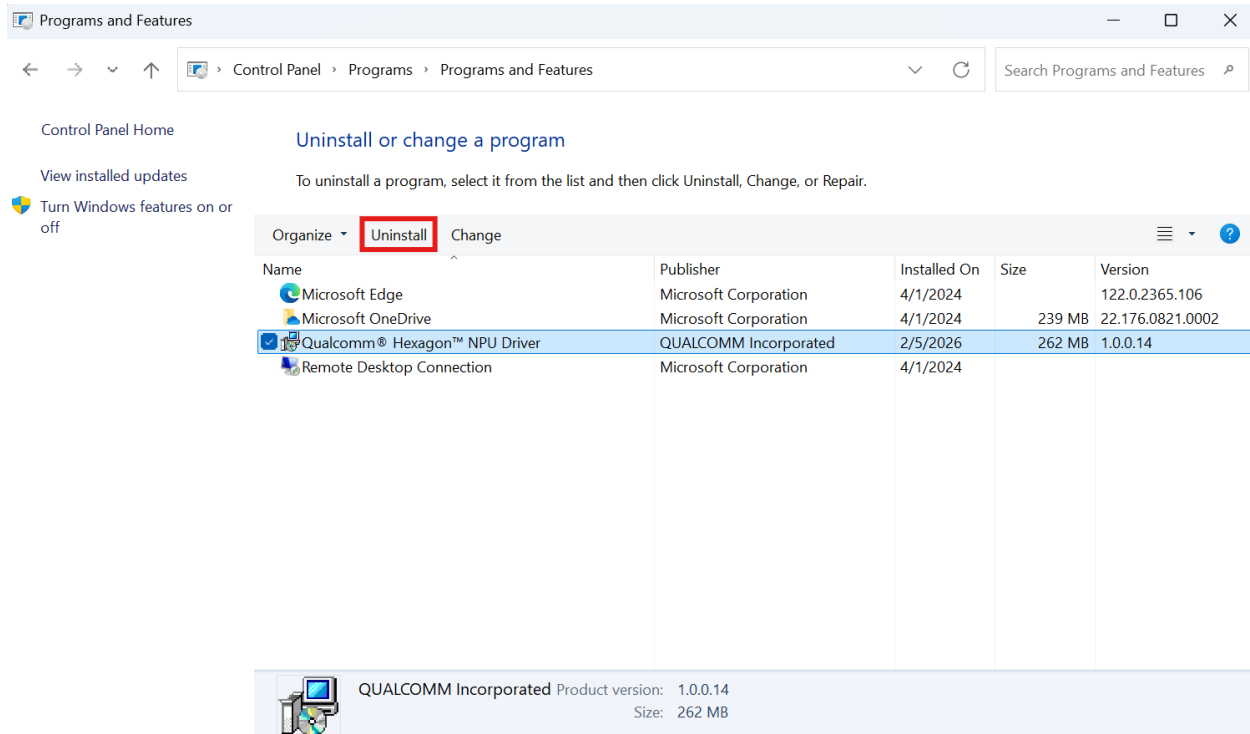

2. Click “Uninstall” from the popup window. The driver will then be reverted/rolled back to the OEM driver.

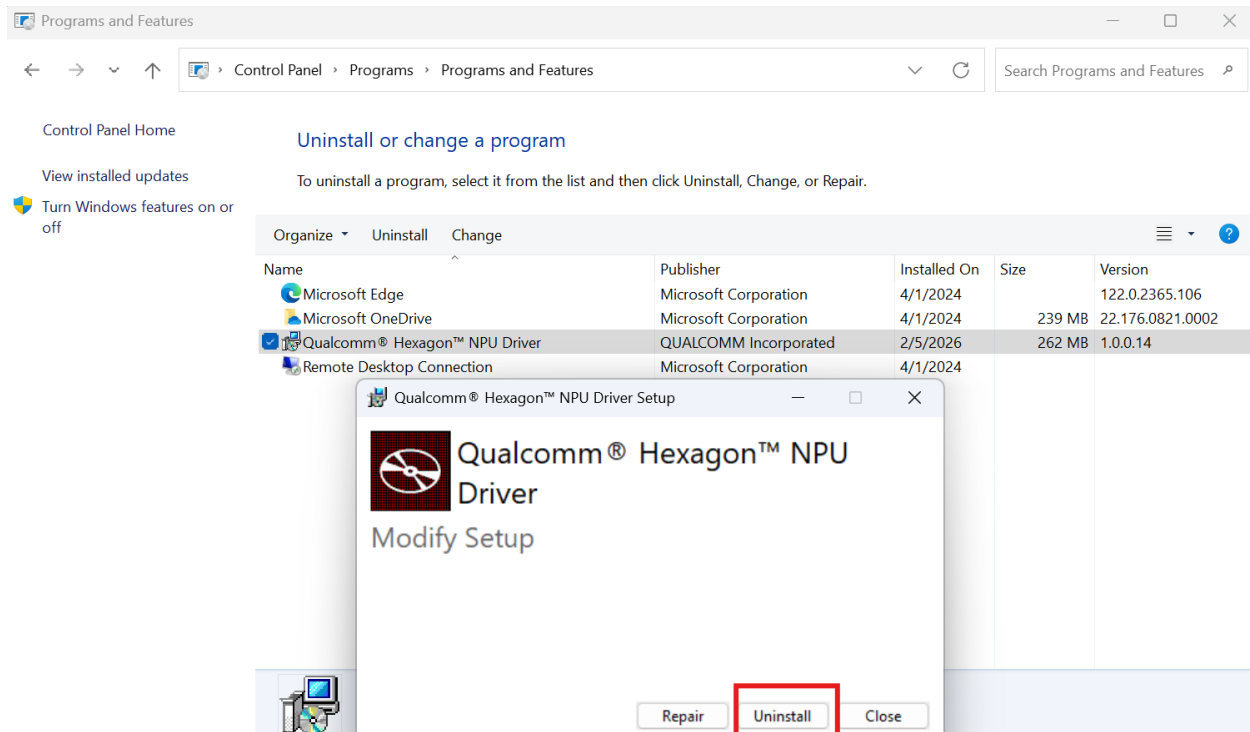

3. On successful uninstall reboot the device:

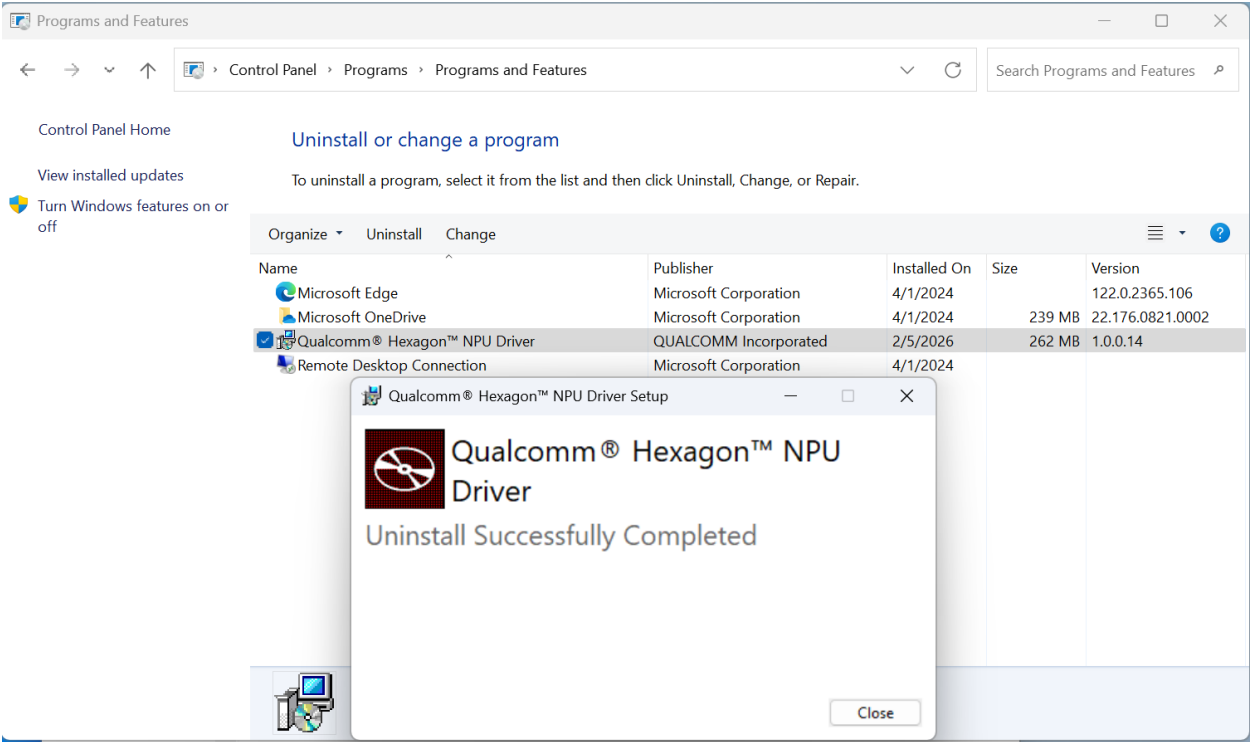

Snapdragon and Qualcomm branded products are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm patented technologies are licensed by Qualcomm Incorporated.
©2025 Qualcomm Technologies, Inc. All Rights Reserved.