

Exemple 05 — Casser des empreintes de mots de passe avec John the Ripper et Hashcat

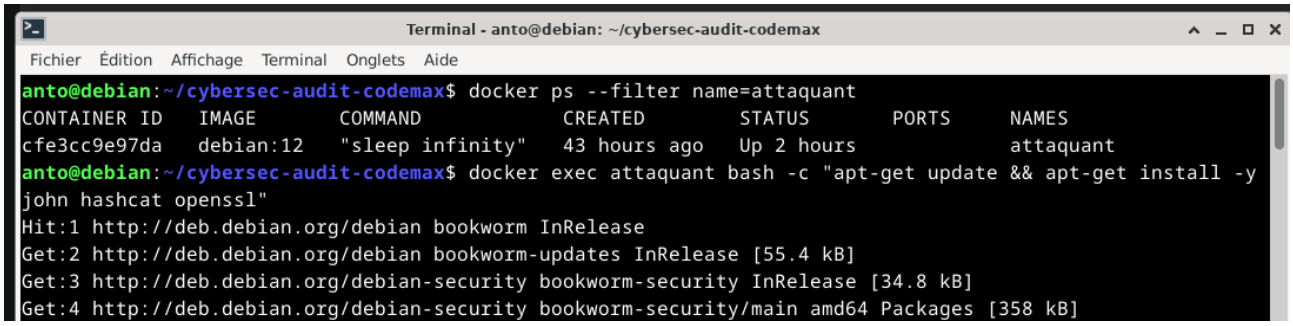

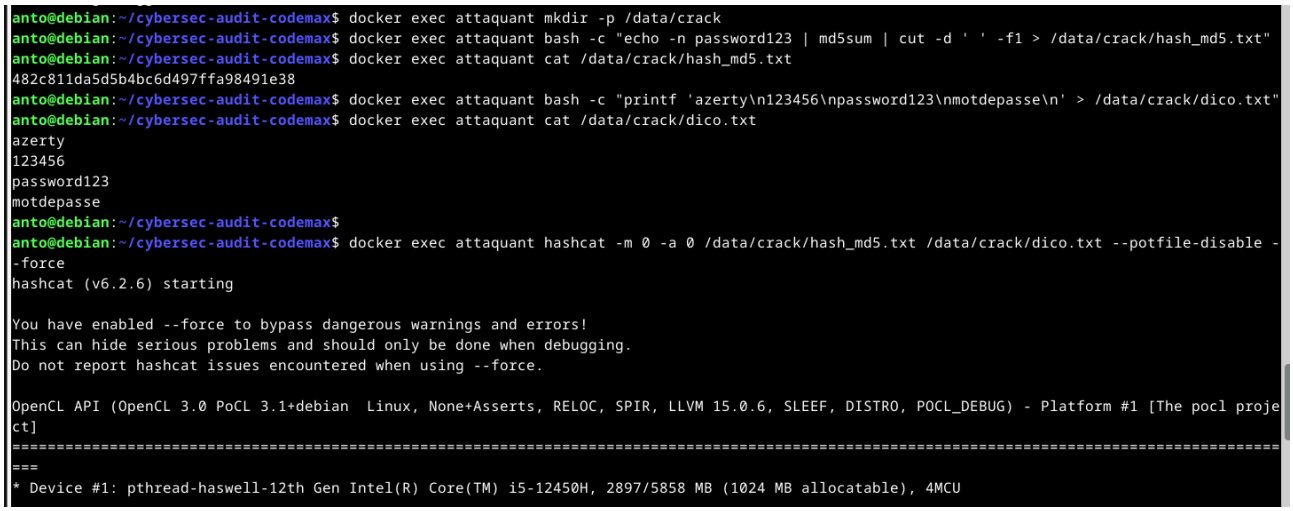

```
* Not-Iterated
* Single-Hash
* Single-Salt
* Raw-Hash

ATTENTION! Pure (unoptimized) backend kernels selected.
Pure kernels can crack longer passwords, but drastically reduce performance.
If you want to switch to optimized kernels, append -O to your commandline.
See the above message to find out about the exact limits.

Watchdog: Temperature abort trigger set to 90c

Initializing device kernels and memory. Please be patient...Initializing backend runtime for device #1. Please be patient...Initialized backend
 runtime for device #1Host memory required for this attack: 1 MB

Initialized device kernels and memoryStarting self-test. Please be patient...Finished self-testDictionary cache built:
* Filename..: /data/crack/dico.txt
* Passwords.: 4
* Bytes.....: 37
* Keyspace..: 4
* Runtime...: 0 secs

The wordlist or mask that you are using is too small.
This means that hashcat cannot use the full parallel power of your device(s).
Unless you supply more work, your cracking speed will drop.
For tips on supplying more work, see: https://hashcat.net/faq/morework

Approaching final keyspace - workload adjusted.

482c811da5d5b4bc6d497ffa98491e38:password123

Session..........: hashcat
Status...........: Cracked
Hash.Mode........: 0 (MD5)
Hash.Target......: 482c811da5d5b4bc6d497ffa98491e38
Time.Started.....: Wed Oct 28 10:16:51 2026, (0 secs)
Time.Estimated...: Wed Oct 28 10:16:51 2026, (0 secs)
Kernel.Feature...: Pure Kernel
Guess.Base.......: File (/data/crack/dico.txt)
Guess.Queue......: 1/1 (100.00%)
Speed.#1.........:       31 H/s (0.01ms) @ Accel:512 Loops:1 Thr:1 Vec:8
Recovered........: 1/1 (100.00%) Digests (total), 1/1 (100.00%) Digests (new)
Progress.........: 4/4 (100.00%)
Rejected.........: 0/4 (0.00%)
Restore.Point....: 0/4 (0.00%)
Restore.Sub.#1...: Salt:0 Amplifier:0-1 Iteration:0-1
Candidate.Engine.: Device Generator
Candidates.#1....: azerty -> motdepasse
Hardware.Mon.#1..: Util: 30%

Started: Wed Oct 28 10:15:41 2026
Stopped: Wed Oct 28 10:16:52 2026
anto@debian:~/cybersec-audit-codemax$ docker exec attaquant hashcat -m 0 /data/crack/hash_md5.txt --show --potfile-disable
Mixing --potfile-disable is not allowed with --show or --left.

anto@debian:~/cybersec-audit-codemax$
```

```
anto@debian:~/cybersec-audit-codemax$ docker exec attaquant bash -c "openssl passwd -6 -salt N1aqXz7p password123 > /data/crack/hash_sha512.txt
"
anto@debian:~/cybersec-audit-codemax$ docker exec attaquant cat /data/crack/hash_sha512.txt
$6$N1aqXz7p$SqNF2Nw/EvntQboooGh0ycUTx8JtBdc/y.HJj2mrB2V7y3iNWQ/XNwHB4crqs.tLf417nB8/rdQv2s940T.a60
anto@debian:~/cybersec-audit-codemax$ docker exec attaquant john --wordlist=/data/crack/dico.txt /data/crack/hash_sha512.txt
Created directory: /root/.john
Loaded 1 password hash (crypt, generic crypt(3) [?/64])
Will run 4 OpenMP threads
Press 'q' or Ctrl-C to abort, almost any other key for status
password123      (?)
1g 0:00:00:00 100% 33.33g/s 133.3p/s 133.3c/s 133.3C/s azerty..motdepasse
Use the "--show" option to display all of the cracked passwords reliably
Session completed
anto@debian:~/cybersec-audit-codemax$ docker exec attaquant john --show /data/crack/hash_sha512.txt
?:password123

1 password hash cracked, 0 left
anto@debian:~/cybersec-audit-codemax$
```