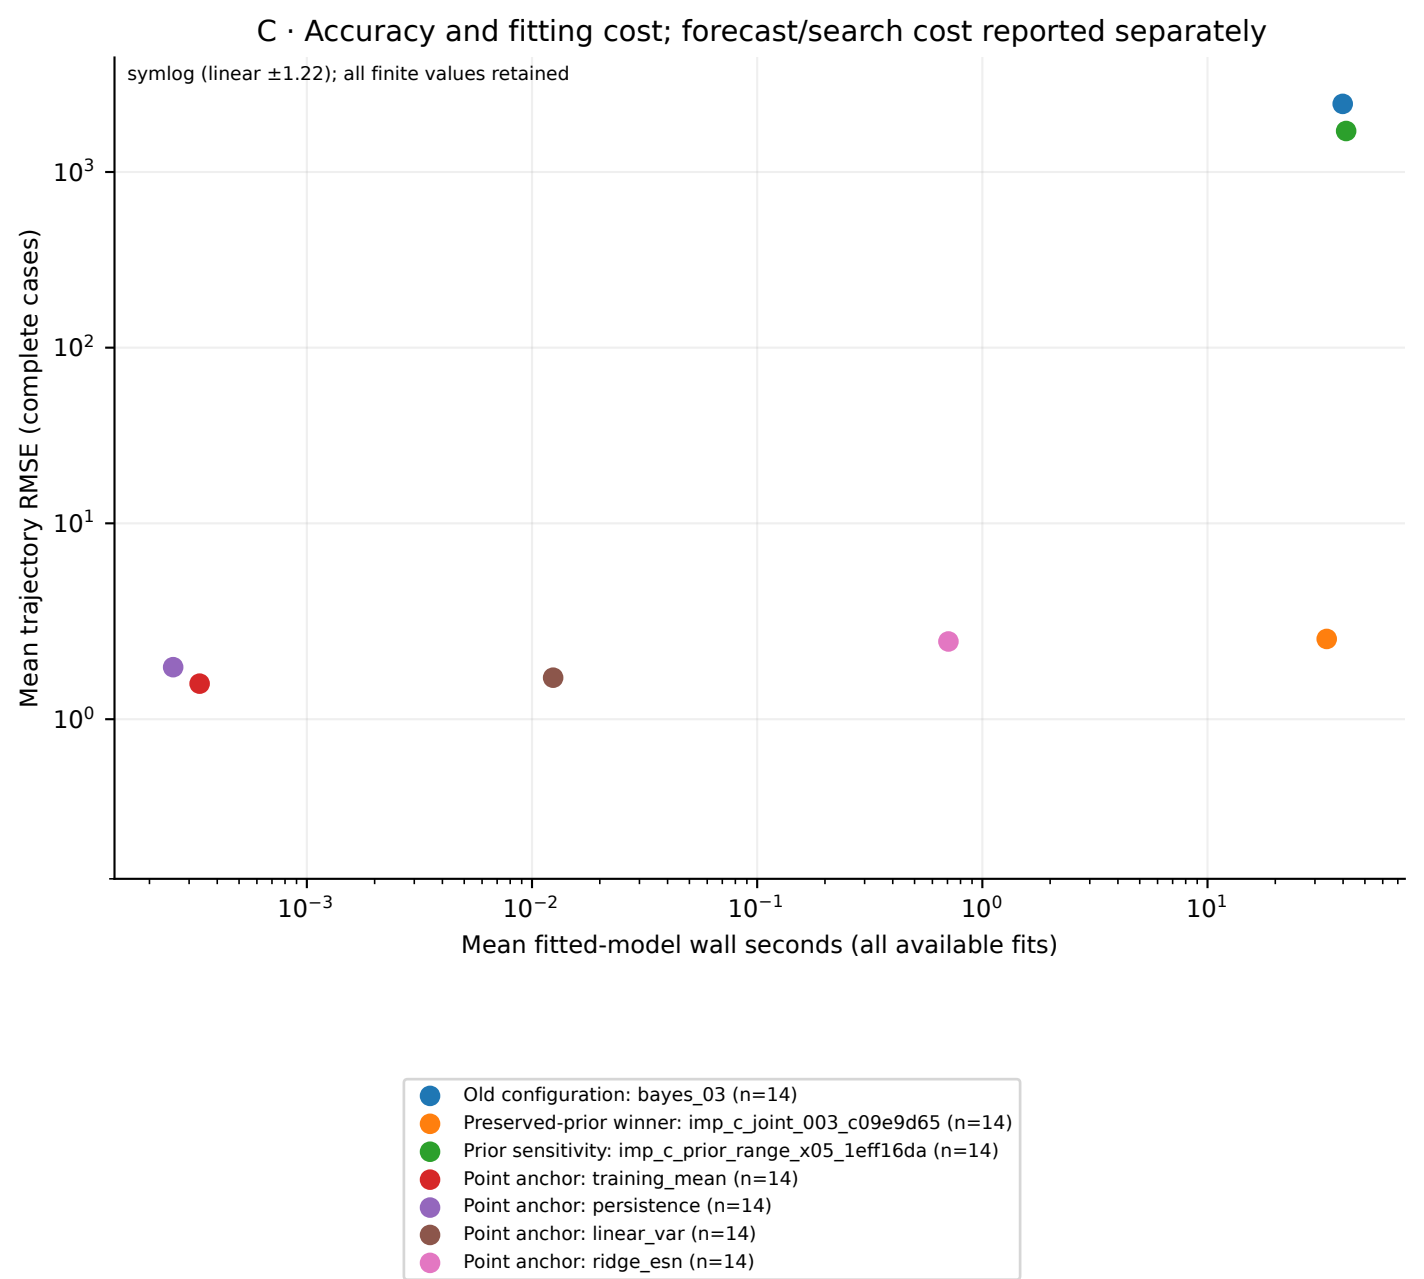
C · Accuracy and fitting cost; forecast/search cost reported separately
symlog (linear ±1.22); all finite values retained
Mean trajectory RMSE (complete cases)
10^3
10^2
10^1
10^0
10^{-3}
10^{-2}
10^{-1}
10^0
10^1
Mean fitted-model wall seconds (all available fits)
Old configuration: bayes_03 (n=14)
Preserved-prior winner: imp_c_joint_003_c09e9d65 (n=14)
Prior sensitivity: imp_c_prior_range_x05_1eff16da (n=14)
Point anchor: training_mean (n=14)
Point anchor: persistence (n=14)
Point anchor: linear_var (n=14)
Point anchor: ridge_esn (n=14)