

TABLE OF CONTENTS

TABLE OF CONTENTS	1
1- INTRODUCTION	2
2- PROCEDURE	2
2-1 INSTALL THE PRINTER	2
2-2 PRINT A TEST PAGE	4
2-3 PRINTING PROTOCOLS	4
REVISION HISTORY	5


1- INTRODUCTION

This procedure applies to all Signa Lx systems equipped with Octane SGI computers operating with 9.1 and M4A software.

2- PROCEDURE


2-1 Install the Printer

1. In the Toolchest drop-down list, select **System>Printer Manager**.

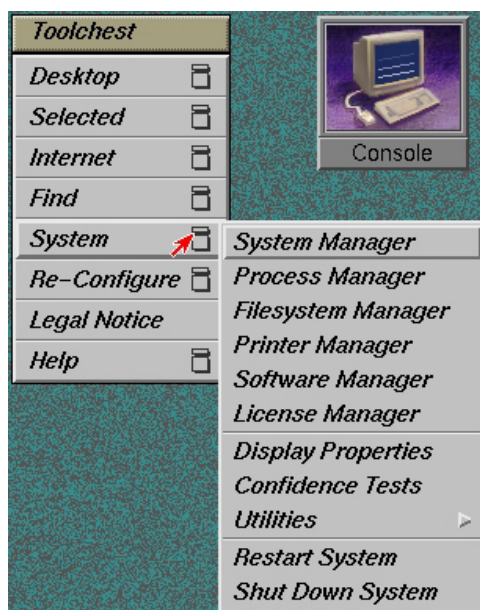

SYSTEM PRINTER MANAGER
ILLUSTRATION 1

2. In the Printer Manager, select the **ADD** button.

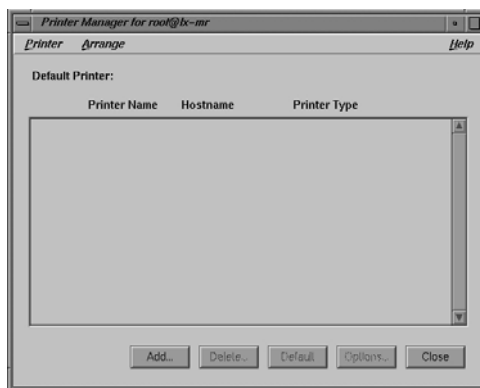

PRINT MANAGER – ADD PRINTER
ILLUSTRATION 2

- Under *Printer Connected To*, click the **Remote Host** radio button.

The screenshot shows a Windows-style dialog box titled "Add Printer". It contains several input fields and radio buttons. The "New Printer Name" field is filled with "printer". Under "Printer Connected To", the "Remote Host" radio button is selected. Under "Remote server an SGI?", the "No" radio button is selected. The "Remote Host Name" field is filled with "192.168.141.288", and a "List Printers" button is to its right. Below this is an empty "Printer List" box. The "Remote Printer Name" field is also filled with "printer". At the bottom of the dialog are four buttons: "OK", "Apply", "Cancel", and "Help".


PRINTER INFORMATION
ILLUSTRATION 3

- Under *New Printer Name*, enter the printer name established by the site's network administrator.
- Under *Remote server an SGI?*, click the **No** radio button.
- Under *Remote Host Name*, enter the printer IP address.
- Under *Remote Printer Name*, enter the printer name established by the site's network administrator.
- Select the **OK** button.

The [Installing network printer] message will appear. This process may take 2 to 5 minutes. The Printer Manager screen will appear with the added printer listed.


2-2 Print a Test Page

1. In Printer Manager, select the added printer.
2. In the *Printer* drop-down menu, select **Send Test Page**. Verify that the test page printed.

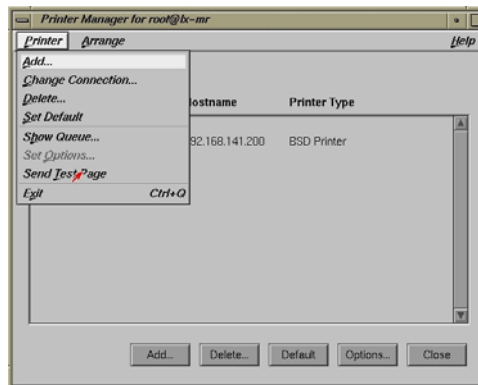

SEND TEST PAGE
ILLUSTRATION 4

3. In Printer Manager, select the **Close** button.

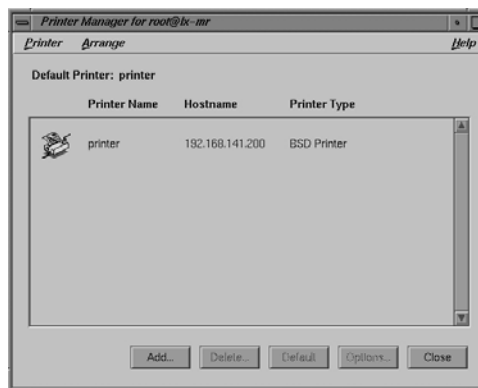

CLOSE THE SCREEN
ILLUSTRATION 5

4. On the Main screen, right-click and select **Logout**.
5. Re-boot both applications (log in as Signa).

2-3 Printing Protocols

1. Go to Service Desktop and select **Utilities**.
2. Select **Save/Restore/PrintProtocol**.
3. Select the **Start** button. The UtilShell window will appear.
4. In Configure, select **Landscape**.
5. Set all margins to "0" (zero).
6. Select a protocol, a sub-protocol, and then **Print**. Verify that the test page was printed.

Note:

Although the page prints, the "Printing" message may not disappear.

Note:

You may also print from the Report Manager interface, (printer may be listed as ps2).
You can print from jot or any UNIX application that supports LPR.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
1	05/27/2009	P. Lyman	Initial Version.