Conditional calibration by volatility
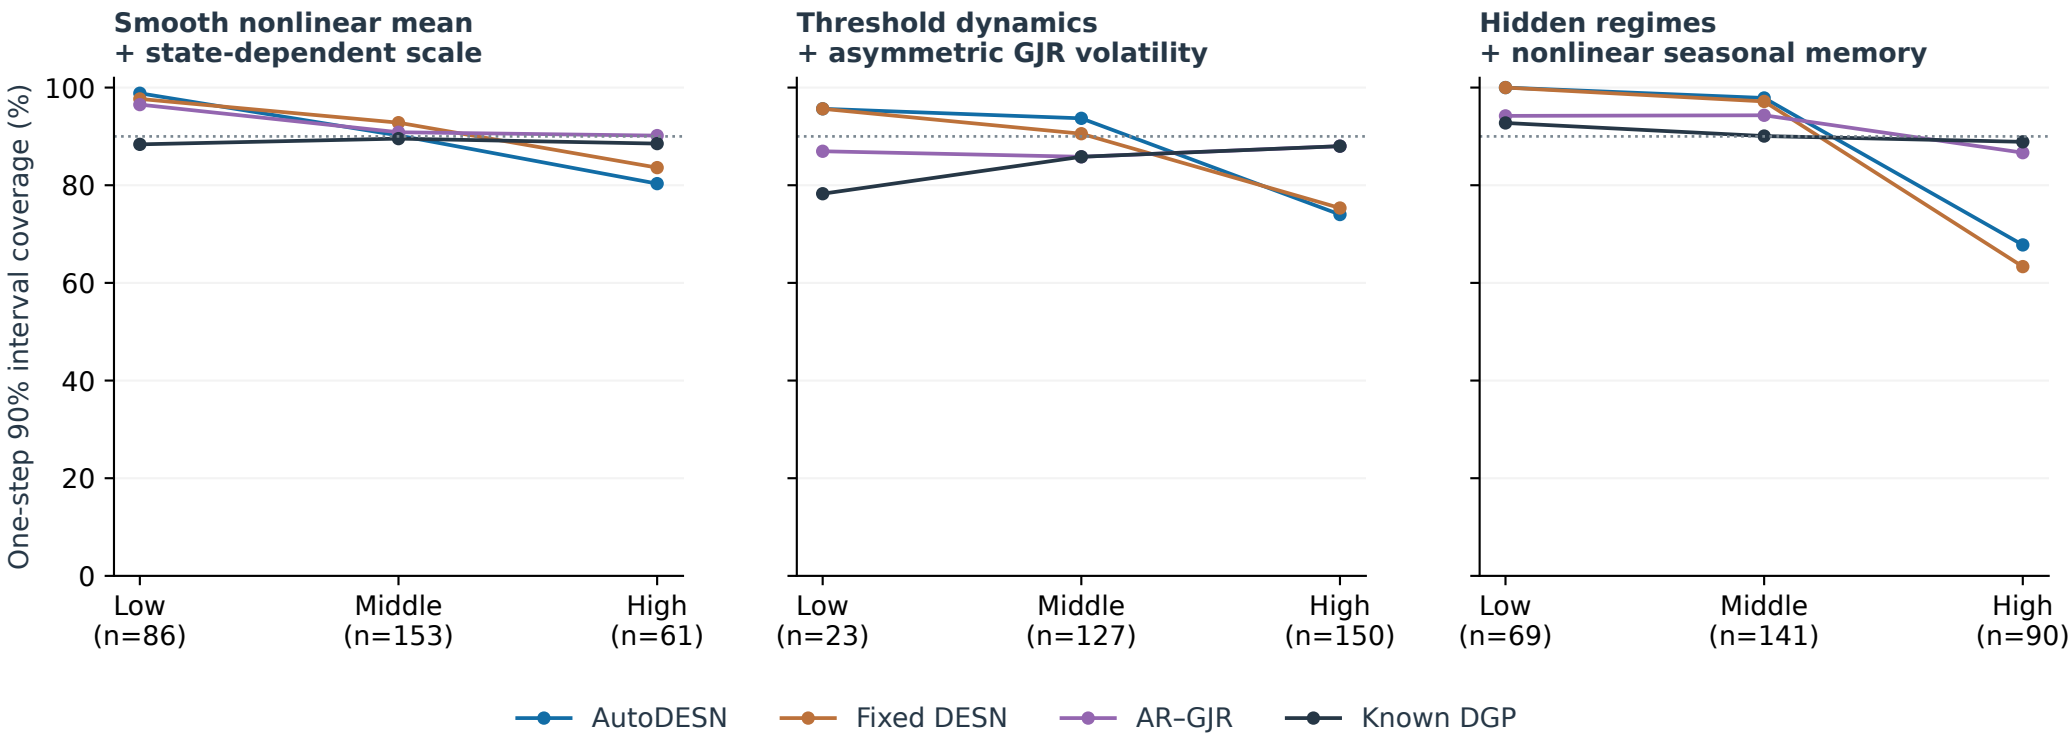
Groups use training-only known-DGP SD quartiles. Counts are dependent targets, not independent replications.