TPPA PAYMENTS

Admin guide

Setting up and running TPPA Payments from the head-office console.

For: Head-office administrators (Admin)

Version 1.0 · 2026-11-10

The screenshots come from a demonstration system: every name, account, amount and code in them is made up.

Contents

1 About this guide

Who can do what

2 Getting started

Signing in

Two-step sign-in

Confirm it is you

The parts of the console

The Overview

3 Setting up, in order

4 Branches

Create a branch

Change a branch

Deactivate a branch

Utilities at this branch

5 Users

The roles

Create a user

Change a user

Unlock a user

Reset a password

Reset two-step sign-in

Deactivate or reactivate a user

Administrators are read only for you

What the server refuses

6 Terminals

Counter or kiosk

Create a terminal

The one-time code, and how IT registers the terminal

A terminal waiting for setup

The terminal page

OR series

Edit a terminal's details

Reset registration: the same computer, set up again

Revoke a terminal

Kiosk settings

7 Utilities

Add a utility

8 Fees and VAT

Make a new version

Drafts made by Accounting

Approve a version

Withdraw or discard

9 Receipt layout

The counter form

The thermal roll (kiosks)

Approve, withdraw or discard a layout

10 Daily report

11 Collection files

The rule: every terminal closes the day first

Make the files before every terminal closed

Download the files

Generate again

12 Exceptions

Resolve a problem

Kiosk credits resolve themselves

13 Kiosks

A kiosk's page

Take a kiosk out of service

Bring a kiosk back into service

Cash collections

Enter the count

Record a collection from its slip

14 Audit log

15 Alert emails

Send a test email

16 When something is not right

17 Quick reference

1. About this guide

This guide is for **administrators** at head office. You use the **head-office console**, the web page where TPPA Payments is set up and watched. Tellers work in the teller app and customers pay at kiosks; everything they use comes from what you set up here.

As an admin you:

- set up **branches**, **users**, **terminals** (teller counters and kiosks) and **utilities**;
- approve the **fees and VAT** and the **receipt layouts**, and set when they take effect;
- watch the day: the **daily report**, the **collection files** for the utilities, the **exceptions** and the **kiosks**;
- read the **audit log** and choose who receives the **alert emails**.

What you cannot do: create or change **administrators** (admins and super admins). Only a super admin can (see the Super admin guide). Nobody can change their own role, branch or status.



1 The menu: only the pages your role may use

2 Who is signed in, and the role

3 Light, dark or as this computer

4 Sign out

The menu of an admin.

The screenshots come from a demonstration system: names, accounts, OR numbers and codes in them are made up. Some pictures were taken as another role (a branch manager or Accounting); the caption says so where it matters.

Who can do what


The console shows each person only the pages their role may use. The server refuses the same things, whatever the screen shows.

Page or task	Super admin	Admin	Accounting	Branch manager	Kiosk custodian
Overview	Yes	Yes	Yes	Yes (own branch)	Yes (own branch)
Branches, Users, Terminals, Utilities	Yes	Yes	No	No	No
Create or change admins and super admins	Yes	No	No	No	No
Fees and VAT, Receipt layout: see and draft	Yes	Yes	Yes	No	No
Fees and VAT, Receipt layout: approve	Yes	Yes	No	No	No
Daily report, Exceptions, Audit log	Yes	Yes	Yes	Own branch	No
Collection files, once every terminal has closed	Yes	Yes	Yes	Own branch	No
Collection files before every terminal closed	Yes	Yes	No	Own branch	No
Kiosks: see them	Yes	Yes	Yes	Own branch	Own branch
Kiosks: take out of service, bring back	Yes	Yes	No	Own branch	No
Kiosks: count a collected box, record from a slip	Yes	Yes	Yes	No	No
Alert emails	Yes	Yes	No	No	No

2. Getting started

Signing in

Open the console address that IT gave you in a web browser.

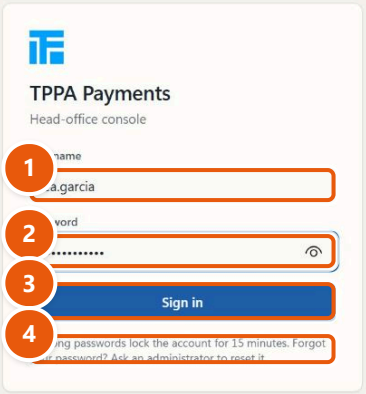


1. Your username
2. Your password
3. Sign in
4. Lockout and forgotten password

The sign-in page of the head-office console.

1. Type your **Username** (1) and **Password** (2).
2. Click **Sign in** (3).

The console opens on the **Overview**. If head office requires two-step sign-in for admins, the console asks for a code first (see Two-step sign-in below).

When the sign-in does not work, the page says why:

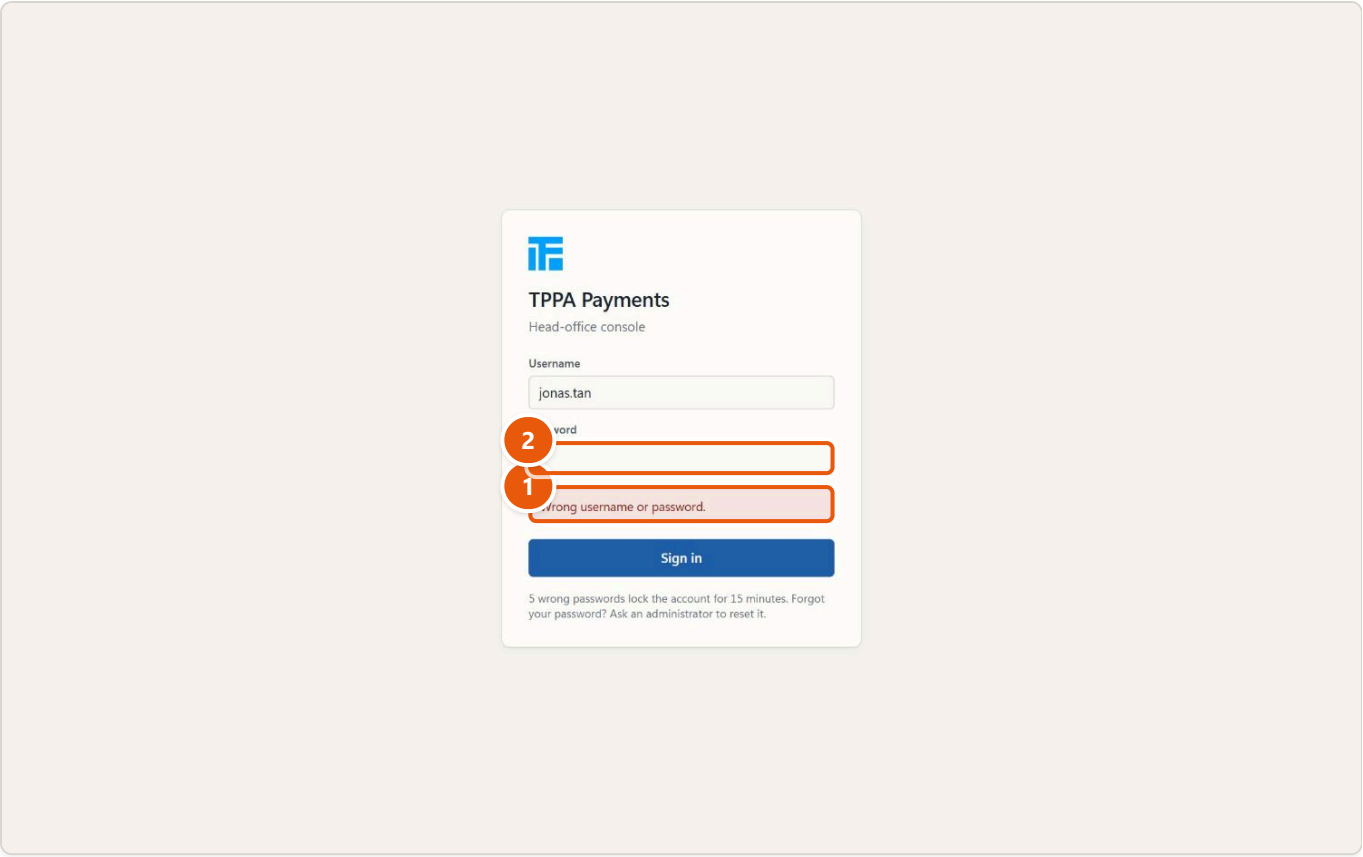

1 What went wrong

2 The password is cleared: type it again

Message | What to do |

| ---------- | ---------- | | "Wrong username or password." | Type the password again (the field is emptied). Check Caps Lock. | | "This account is locked after too many failed attempts. Try again in 15 minutes or ask an administrator to unlock it." | Wait 15 minutes, or ask another administrator to unlock you. | | "Too many attempts from this computer. Wait a minute and try again." | Wait a minute. | | "This account cannot sign in. Ask an administrator." | Your account is inactive. Ask another administrator. | | "Enter your username and password." | One of the fields is empty. |

> **Warning:** Five wrong passwords in a row lock the account for 15 minutes. There is no "forgot password" link: another administrator resets the password for you.


Two-step sign-in

Two-step sign-in is required for super admins. Head office may require it for admins too: then the first time you sign in, the console takes you to **Set up two-step sign-in**. You need your phone with an authenticator app (Google Authenticator, Microsoft Authenticator or similar).

1. Type your password again in **Confirm your password** and click **Continue**.
2. Scan the QR code with the app (or type the key shown under it).
3. Write down the 10 **recovery codes** and keep them somewhere safe, not on the phone.
4. Tick **I have saved these codes somewhere safe (not on this phone)**.
5. Type the 6-digit code the app shows and click **Turn on two-step sign-in**.

The Super admin guide shows these screens step by step.

From then on, every sign-in asks for the code after your password:

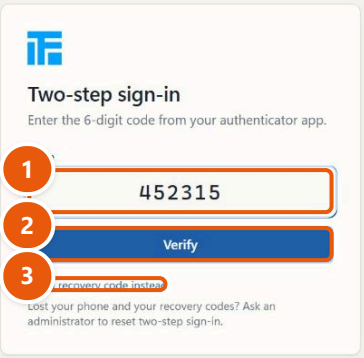

1. The code from the authenticator app
2. Verify
3. No phone? A recovery code

Later sign-ins: after the password, the code from the app.


1. Open the authenticator app and type the 6-digit **Code** (1).
2. Click **Verify** (2).

No phone? Click **Use a recovery code instead** (3) and type one of your recovery codes. Each recovery code works only once. Lost the phone and the codes? Ask a super admin to reset your two-step sign-in. You cannot switch two-step sign-in off yourself.

Message	What to do
"That code is not right. Check the time on your phone and use the newest code."	Use the code shown now; check that the phone's clock is right.
"That recovery code is not valid or was already used."	Use another recovery code.
"Too many wrong codes. The account is locked for 15 minutes."	Wait 15 minutes, then sign in again.

Confirm it is you

Sensitive changes ask for your password again the first time in a while:

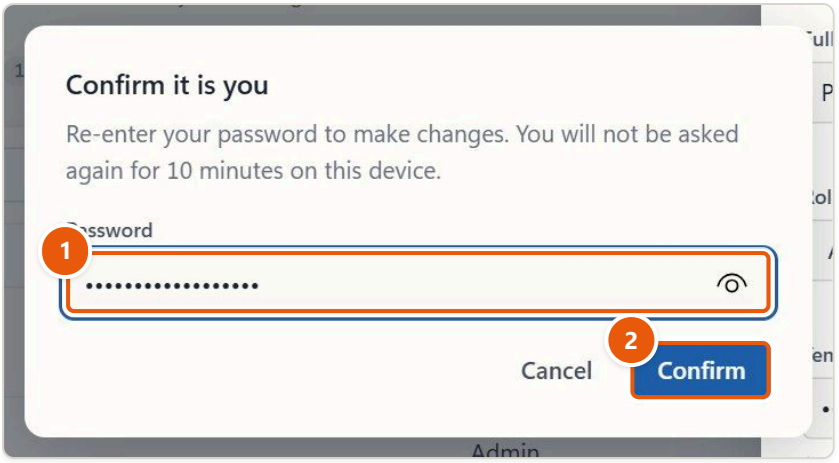

1 Your own password again 2 Confirm

Sensitive changes ask for the password again.

1. Type your own **Password** (1).
2. Click **Confirm** (2).

The change you asked for then goes ahead by itself: you do not need to click **Save** again. The console does not ask again for a while on this device (the dialog says 10 minutes). A wrong password shows "Incorrect password. Too many wrong attempts lock the account."


It is asked when you create or change users (and reset a password, unlock, reset two-step), branches, utilities and the utilities at a branch, terminals (create, new code, edit, reset, revoke), OR series, fee versions and receipt layouts (save, approve, discard, withdraw), kiosk settings, taking a kiosk out of service or back, counting a kiosk box, recording a collection from a slip, and saving the alert emails. It is not asked to make collection files, resolve an exception or send a test email.

The parts of the console

On the left is the menu. It holds only the pages your role may use, in groups:

Group	Pages
(top)	Overview
Setup	Branches, Users, Terminals, Utilities
Rules	Fees and VAT, Receipt layout
Daily work	Daily report, Collection files, Exceptions, Kiosks
Records	Audit log
System	Alert emails

At the bottom of the menu are your name and role, **Sign out**, and the theme switch: **Same as this computer**, **Light** or **Dark**. The theme is kept in this browser.

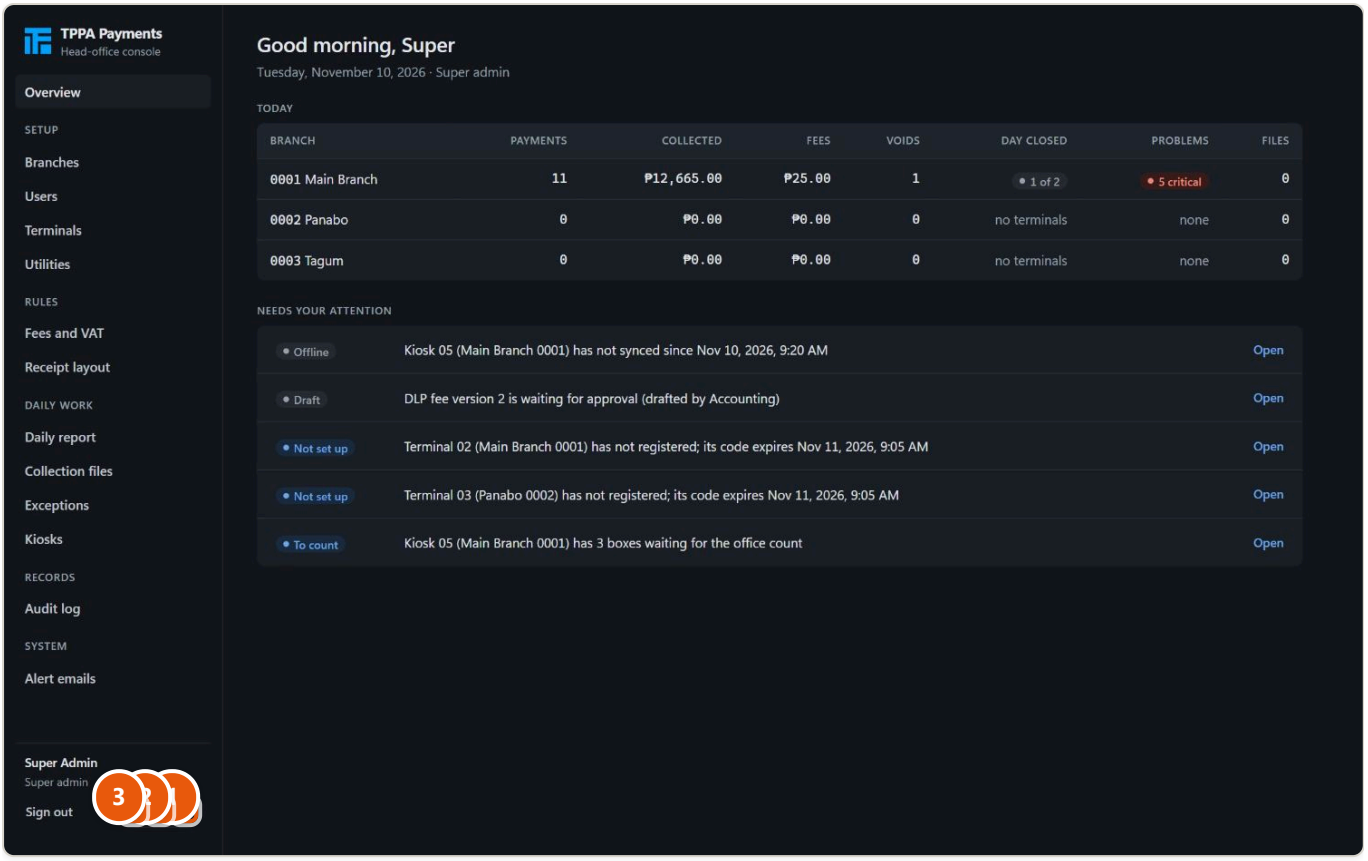

1 Dark

2 Light

3 Same as this computer


The theme switch: the choice is kept in this browser.

On a narrow screen the menu moves into a top bar: open it with **Open the menu**.

To sign out, click **Sign out**. Sign out when you leave a shared computer.

The Overview

The **Overview** is the first page after sign-in. It greets you, shows the date and your role, then two parts.

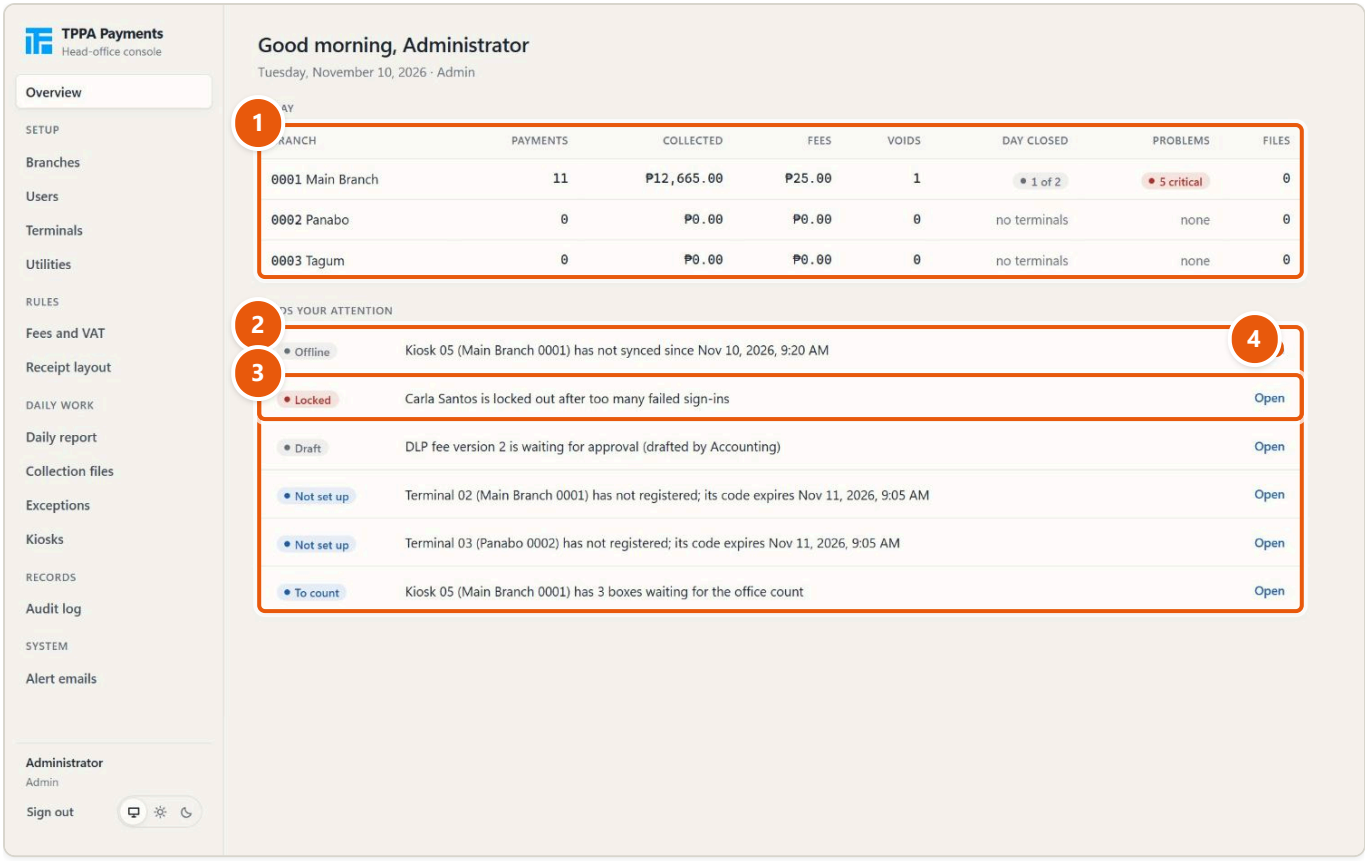

1. Today, per branch
2. Needs your attention
3. A locked-out user
4. Open goes to the page to fix it

Overview as an admin.

Today (1) shows each branch's business day so far. Click a branch to open its daily report.

Column	What it shows
Payments	How many payments were taken today
Collected	The bill amounts collected for the utilities
Fees	TPPA's service fees
Voids	How many payments were voided
Day closed	How many of the branch's registered terminals have closed the day ("no terminals" if none)
Problems	Open critical exceptions ("none" if there are none)
Files	Collection files made for today

Needs your attention (2) lists what to act on, the most urgent first. Click a line (4) to go to the page where you fix it. When nothing is left, it reads "Nothing needs your attention. Everything is set up and in force."

Chip	What it means	What to do
No fee	A utility has no fee in force: tellers cannot take payments for it	Fees and VAT: approve a version for it

Chip	What it means	What to do
No layout	No receipt layout is in force: tellers cannot print official receipts	Receipt layout: approve a version
No OR series	A registered terminal has no OR series: it cannot issue receipts	The terminal's page: **Open series**
Kiosk down	A kiosk is out of service (not by head office), with the reasons	Kiosks: see why; the custodian usually fixes it in staff mode
Running low	A terminal's OR series has less than 5 % of its numbers left	Prepare the next range on the BIR permit; see OR series under Terminals
Offline	A kiosk has not synced for more than 10 minutes	Kiosks: check with the branch (power, network)
Collect	A kiosk's cash box is at 75 % of its limit or more	Ask the branch to collect the cash
Locked	A user is locked out after too many failed sign-ins (3)	Users: **Unlock**, or **Reset password**
Draft	A fee or receipt layout version is waiting for approval	Check it and approve it, or discard it
Not set up	A terminal has not registered yet, with when its code expires	Give the code to IT; if it expired, **Issue new code**
To count	Collected kiosk boxes are waiting for the office count	Kiosks, Cash collections: **Enter the count**
Scheduled	A fee or layout version will take effect at a set time	Nothing, unless it is wrong: then withdraw it before it takes effect


3. Setting up, in order

A new installation is set up in this order. The Overview's **Needs your attention** shows what is still missing.

1. **Branches** (each with its 4-digit code).
2. **Utilities** (for example Davao Light, DLP), then enable each one at its branches with the branch's client code (Branches, the branch, Utilities at this branch).
3. **Fees and VAT**: a fee version for each utility, approved.
4. **Receipt layout**: the counter form, and the thermal roll if there are kiosks, approved.
5. **Users**: branch managers, tellers, kiosk custodians, Accounting.
6. **Terminals**: each counter and kiosk, with its OR series; IT registers each one with its one-time code.
7. **Alert emails**: who is told when something goes wrong.

4. Branches

Setup, Branches lists every branch with its code, name, address, active staff and status.

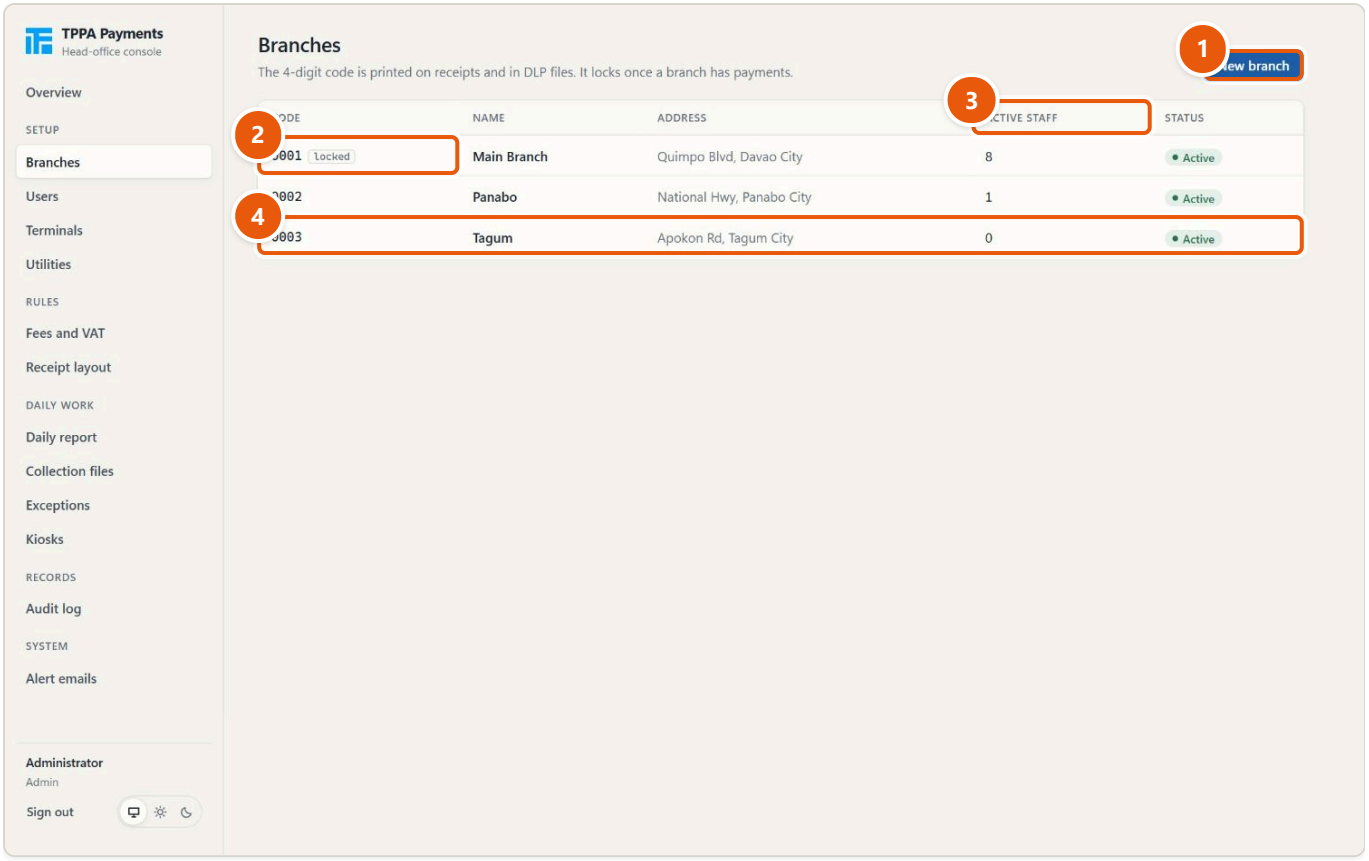


1. New branch
2. Code: locked once there are payments
3. People assigned
4. Click a branch to edit it

Branches.

The 4-digit code is printed on receipts and in the utilities' collection files. It locks (the lock icon, 2) once the branch has payments.

Create a branch

1. Click **New branch** (1 above).
2. The **Code** is filled with the next free number; change it if needed.
3. Type the **Name** (for example Digos) and the **Address** (optional).
4. Click **Create branch**.

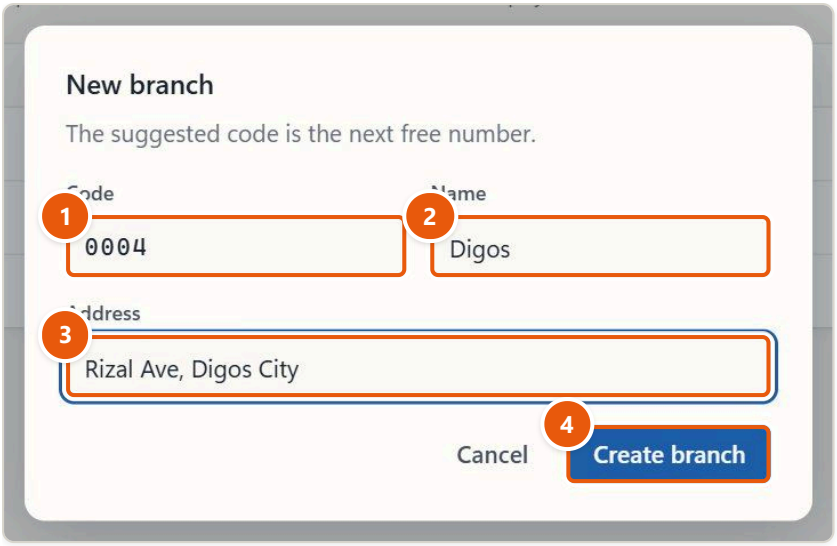


1 The next free code
2 Name
3 Address (optional)
4 Create branch

A new branch (left with Cancel here).

The console says "Branch created and recorded in the audit log."

Change a branch

1. Click the branch in the list. Its page opens on the right.
2. Change the **Name** or **Address** (and the **Code**, while the branch has no payments).
3. Click **Save**. The console says "Branch saved."

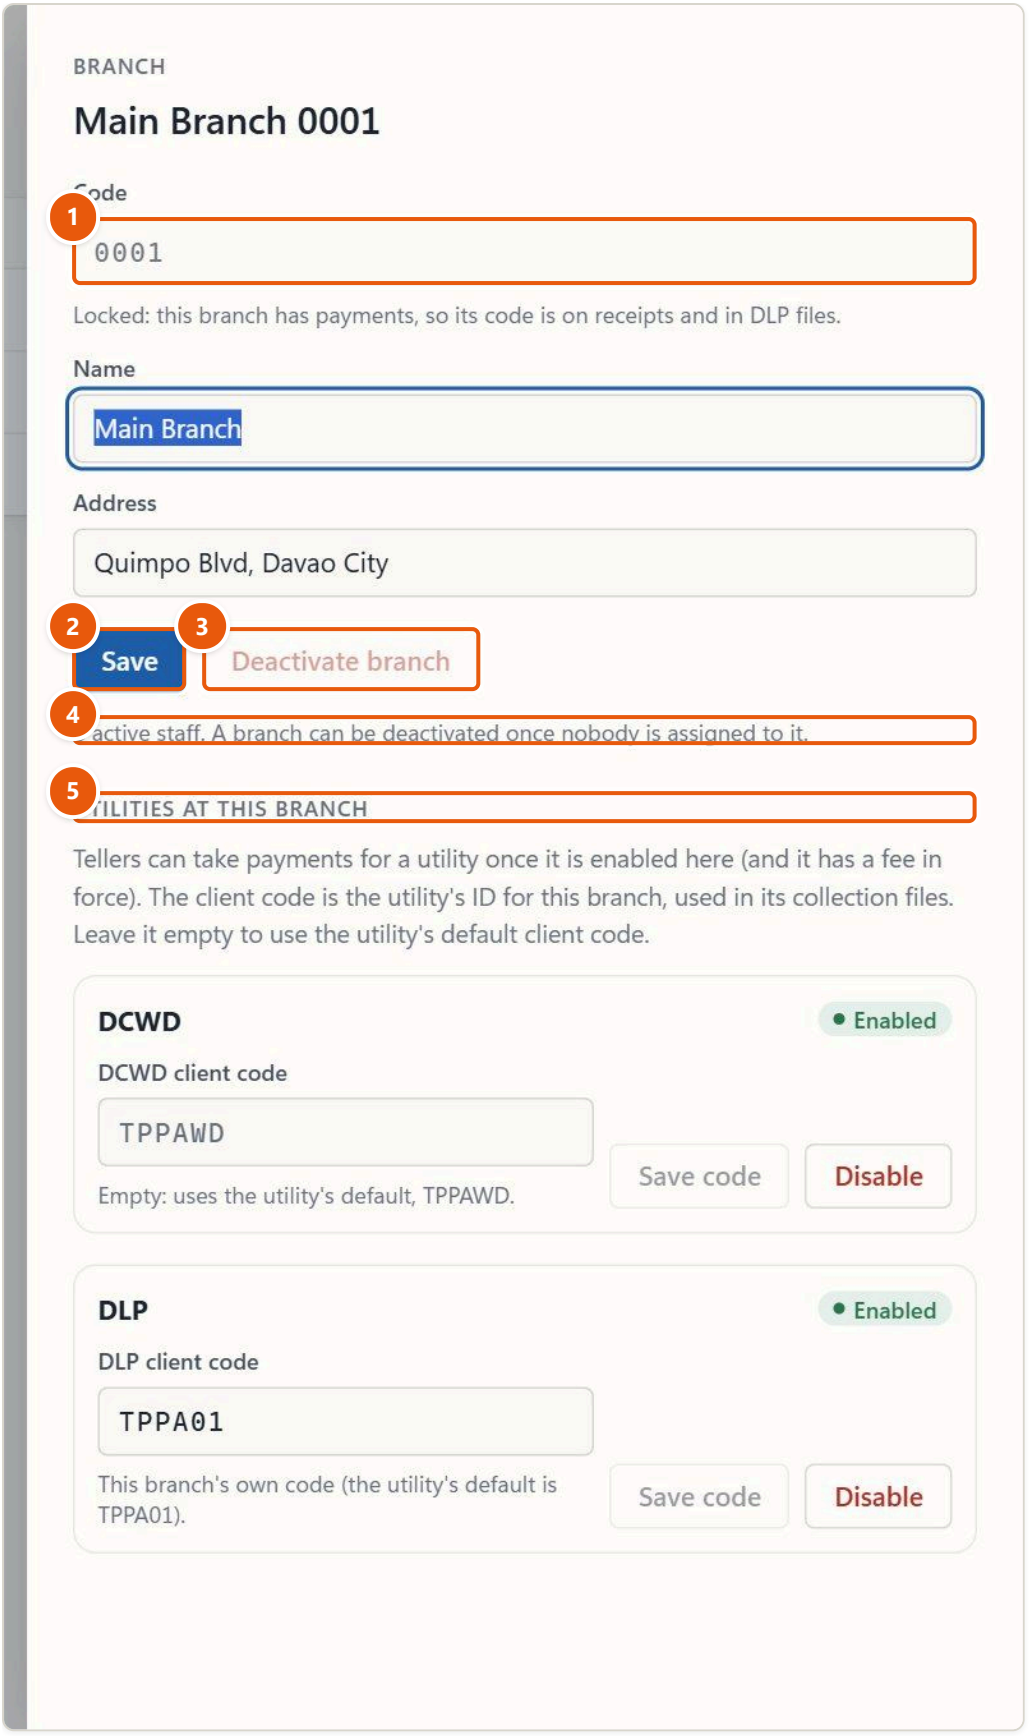

1. Locked: this branch has payments
2. Save
3. Deactivate: only with nobody assigned
4. Why it cannot be deactivated now
5. Utilities at this branch

The Main Branch: its code is locked and it has staff.


When the branch has payments, the code field is greyed and reads "Locked: this branch has payments, so its code is on receipts and in DLP files." A branch without payments shows "Can still change: no payments yet."

Deactivate a branch

A branch can be deactivated only when nobody is assigned to it. While it has staff, **Deactivate branch** is greyed and the page says, for example, "8 active staff. A branch can be deactivated once nobody is assigned to it." Move those people to another branch or deactivate them first (Users).

1. Open the branch.
2. Click **Deactivate branch**. The console says "Branch deactivated."

A deactivated branch shows **Reactivate branch** instead. It can no longer be chosen for new users or terminals.

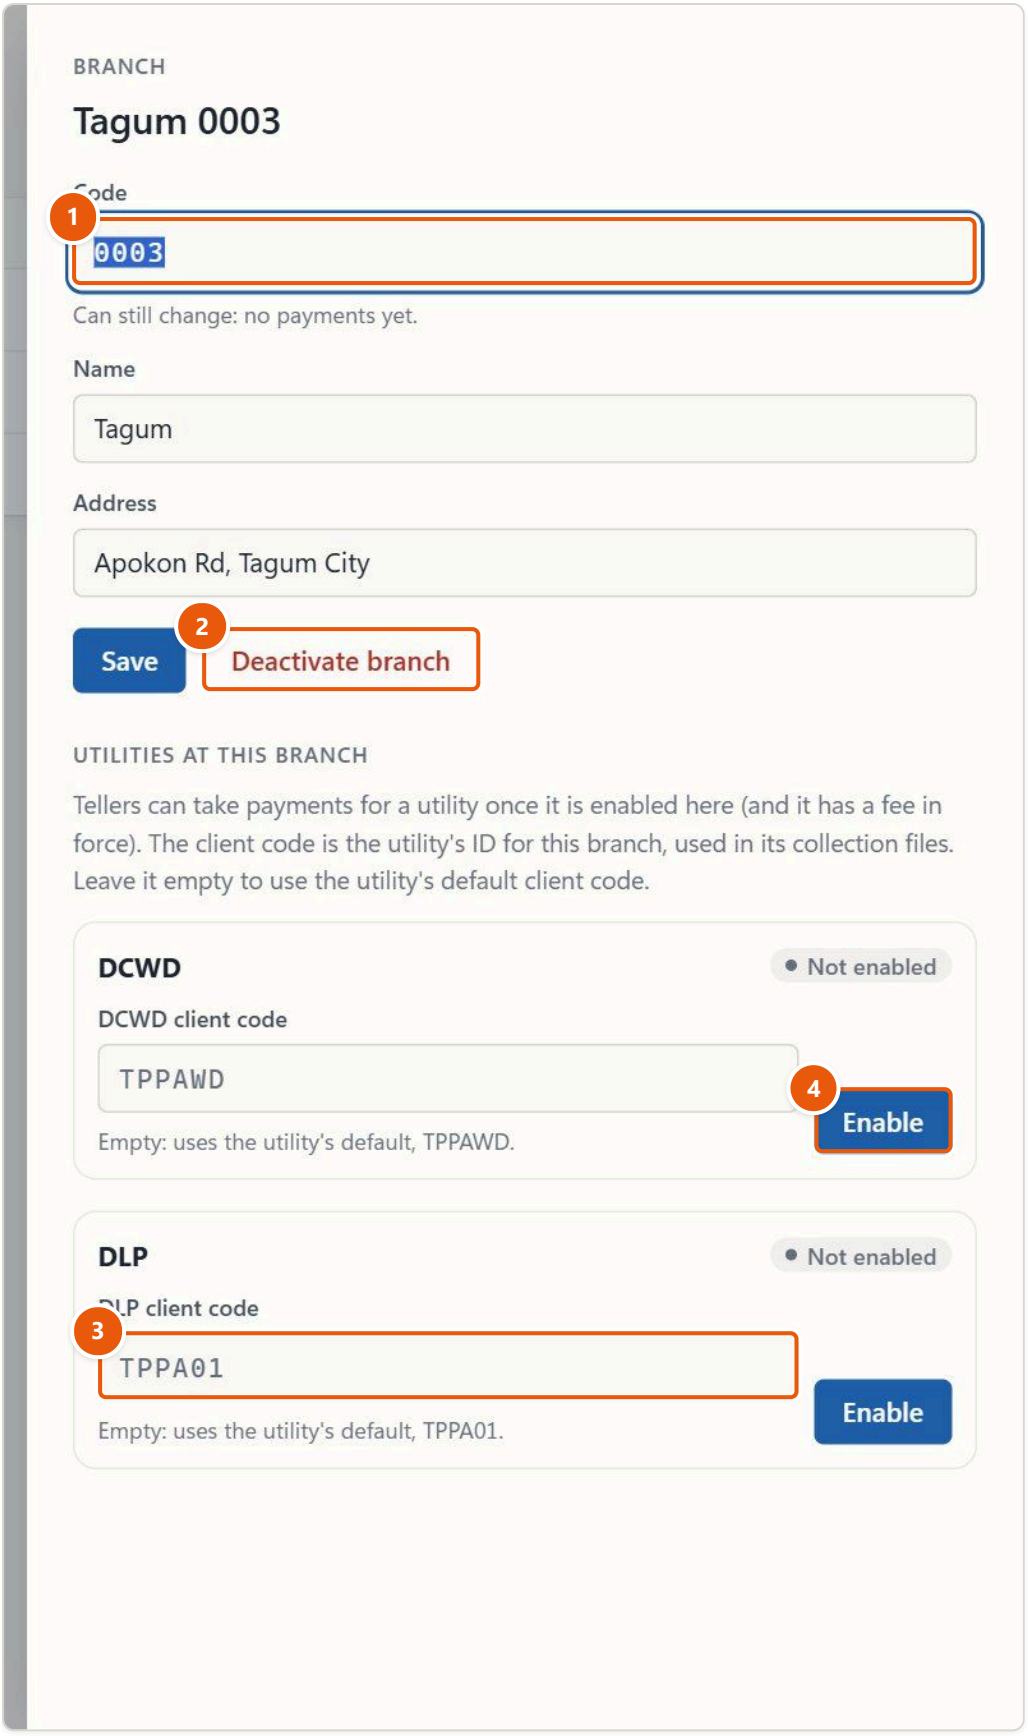


1 Can still change: no payments yet
2 Deactivate branch
3 Enter a client code (or use the default)
4 Enable the utility here

A branch with no payments and no staff: the code can change and it can be deactivated.

Utilities at this branch

Tellers can take payments for a utility at a branch only once it is **enabled** there (and the utility has a fee in force). The **client code** is the utility's ID for that branch; it is in the name of the branch's collection files.

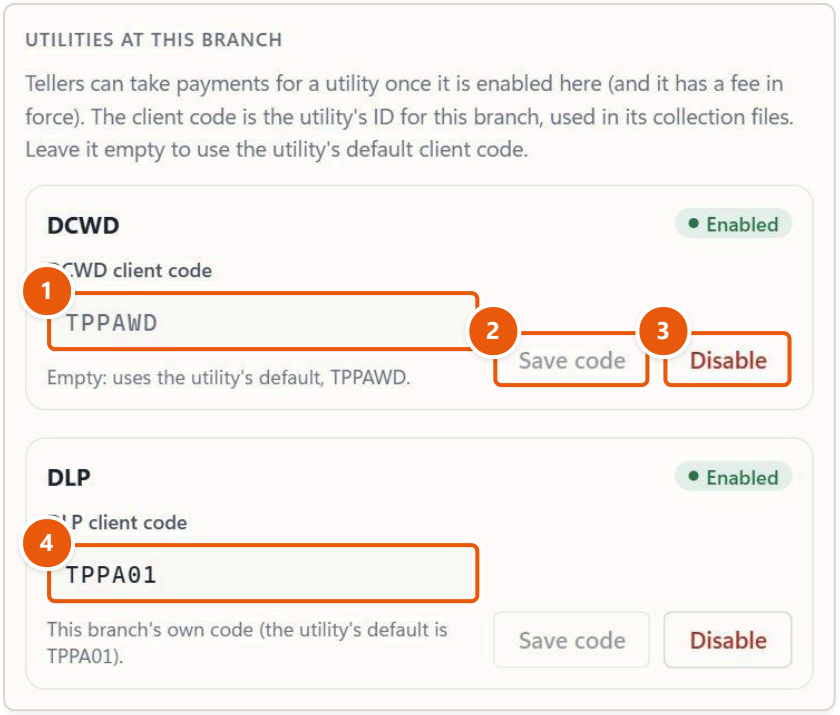

1. DCWD: empty uses the utility's default
2. Save code
3. Disable it at this branch
4. DLP: the branch's own client code

Utilities at this branch, with their client codes.

To enable a utility at a branch:


1. Open the branch and go down to **Utilities at this branch**.
2. In the utility's client code field, type the code the utility gave this branch, or leave it empty to use the utility's default client code (the hint says which).
3. Click **Enable**. The console says, for example, "DLP enabled at this branch."

To change the code later, type it and click **Save code** ("Client code saved."). To stop the utility at the branch, click **Disable** ("DLP disabled at this branch."). Past payments and files are kept.

A branch's own client code always wins over the utility's default. If the utility has no default, the field reads "Enter the client code to enable it here."

5. Users

Setup, Users lists everyone who may sign in to the console, the teller app or a kiosk.

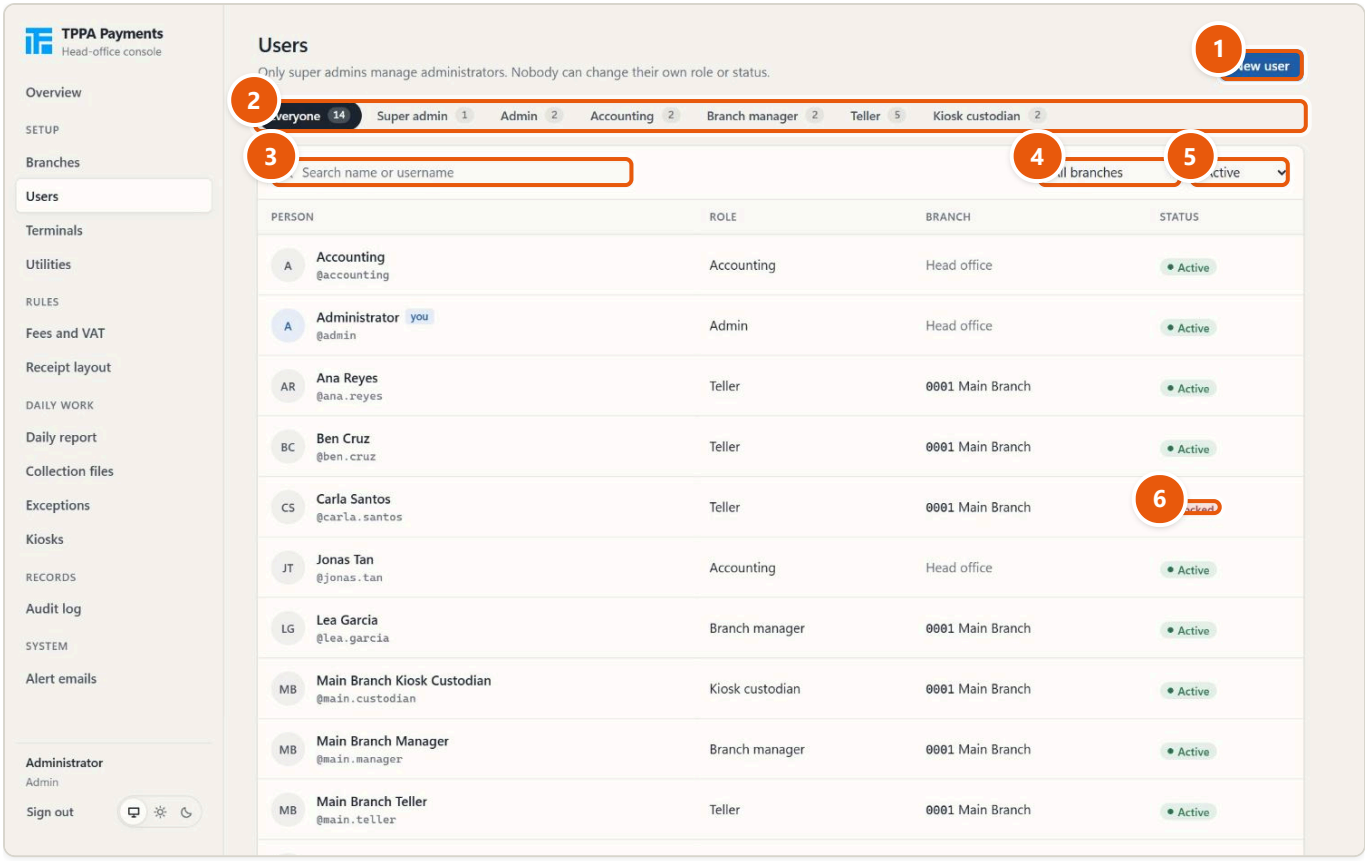

1. New user
2. Filter by role (with counts)
3. Search
4. Branch
5. Active, inactive or any
6. Status: Locked after failed sign-ins

Users as an admin: everyone active, by role.

- The role tabs (2) filter by role and show how many people each holds.
- **Search** (3) finds a name or username; **Branch** (4) and the status filter (5: **Active**, **Inactive** or **Any status**) narrow the list.
- **Status** (6) is **Active**, **Inactive** or **Locked** (after failed sign-ins).
- "Two-step on" under a role means the person signs in with an authenticator app.
- Head-office roles show "Head office" as their branch. Your own row has a "you" tag.

The roles


Role	Works in	Branch	What they do
Super admin	The console	None	Everything an admin does, plus administrators. See the Super admin guide.
Admin	The console	None	Everything in this guide
Accounting	The console	None	Reports, collection files, exceptions, audit; drafts fees and layouts; counts kiosk boxes
Branch manager	The teller app and the console	Required	Takes payments, approves voids and refunds at the counter; the branch's reports and kiosks
Teller	The teller app	Required	Takes payments, reprints, asks for voids, closes the day

Role	Works in	Branch	What they do
Kiosk custodian	Kiosk staff mode, and the console's Kiosks	Required	Collects kiosk cash, loads paper, clears faults; sees the branch's kiosks in the console

Branch managers, tellers and kiosk custodians need a branch and see only that branch's data. Head-office roles have no branch.

Create a user

1. Click **New user** (1). The **New user** page opens on the right.
2. Type the **Full name** and the **Username** (4-30 letters, digits, `.` or `_`).
3. Choose the **Role**. "Super admin (super admin only)" and "Admin (super admin only)" cannot be chosen by an admin.
4. Choose the **Branch** for a branch manager, teller or kiosk custodian. For head-office roles the field reads "Head office (no branch)".
5. Type a **Temporary password** of at least 12 characters. Give it to the person directly.
6. Type an **E-mail (optional)**.
7. Click **Create user**. The console says "User created. They can sign in now."

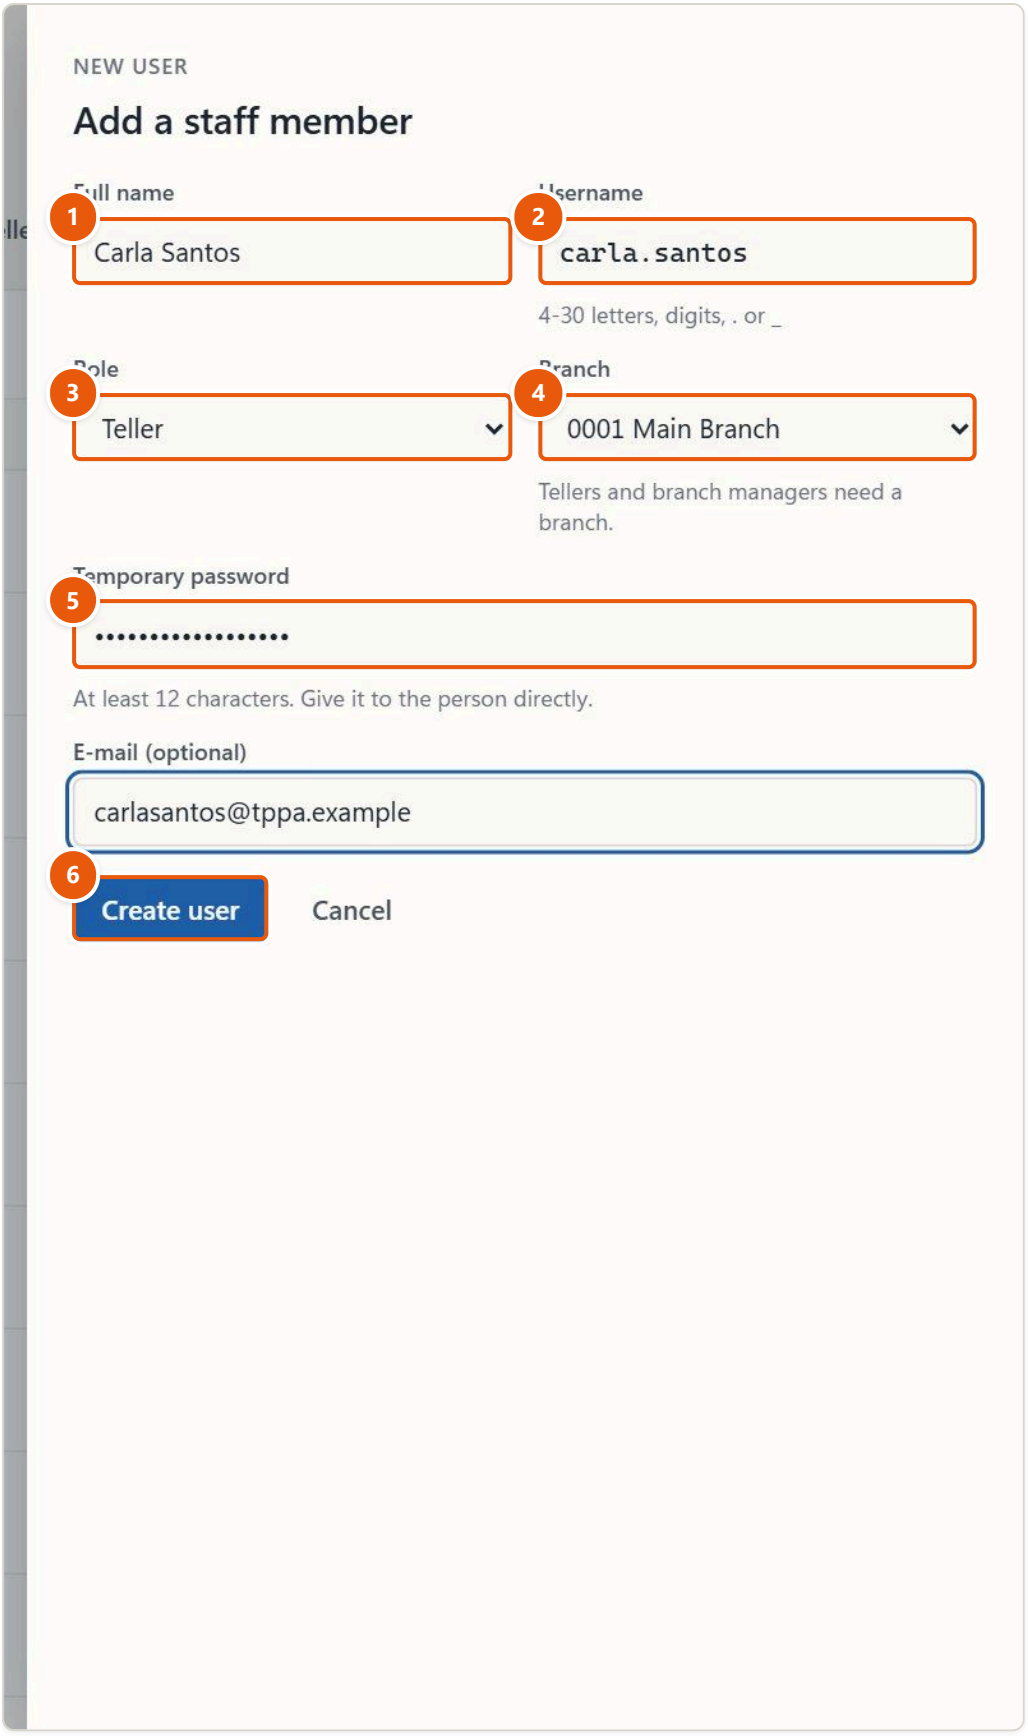

1. Full name
2. Username: 4-30 letters, digits, . or _
3. Role
4. Branch: tellers and branch staff need one
5. Temporary password, 12 characters or more
6. Create user

Adding a teller at the Main Branch.

Change a user


1. Click the person in the list. Their page opens on the right.
2. Change the **Full name**, **Role**, **Branch** or **E-mail**.
3. Click **Save**. The console says "Saved. Changes apply on their next click."

Important: Changing someone's role, branch or status signs them out on every device.

When you open your own account, the page says "This is you. You can correct your name and e-mail; another administrator changes your role, branch or status."

Unlock a user

Five wrong passwords lock an account for 15 minutes. It unlocks by itself, or you unlock it at once.

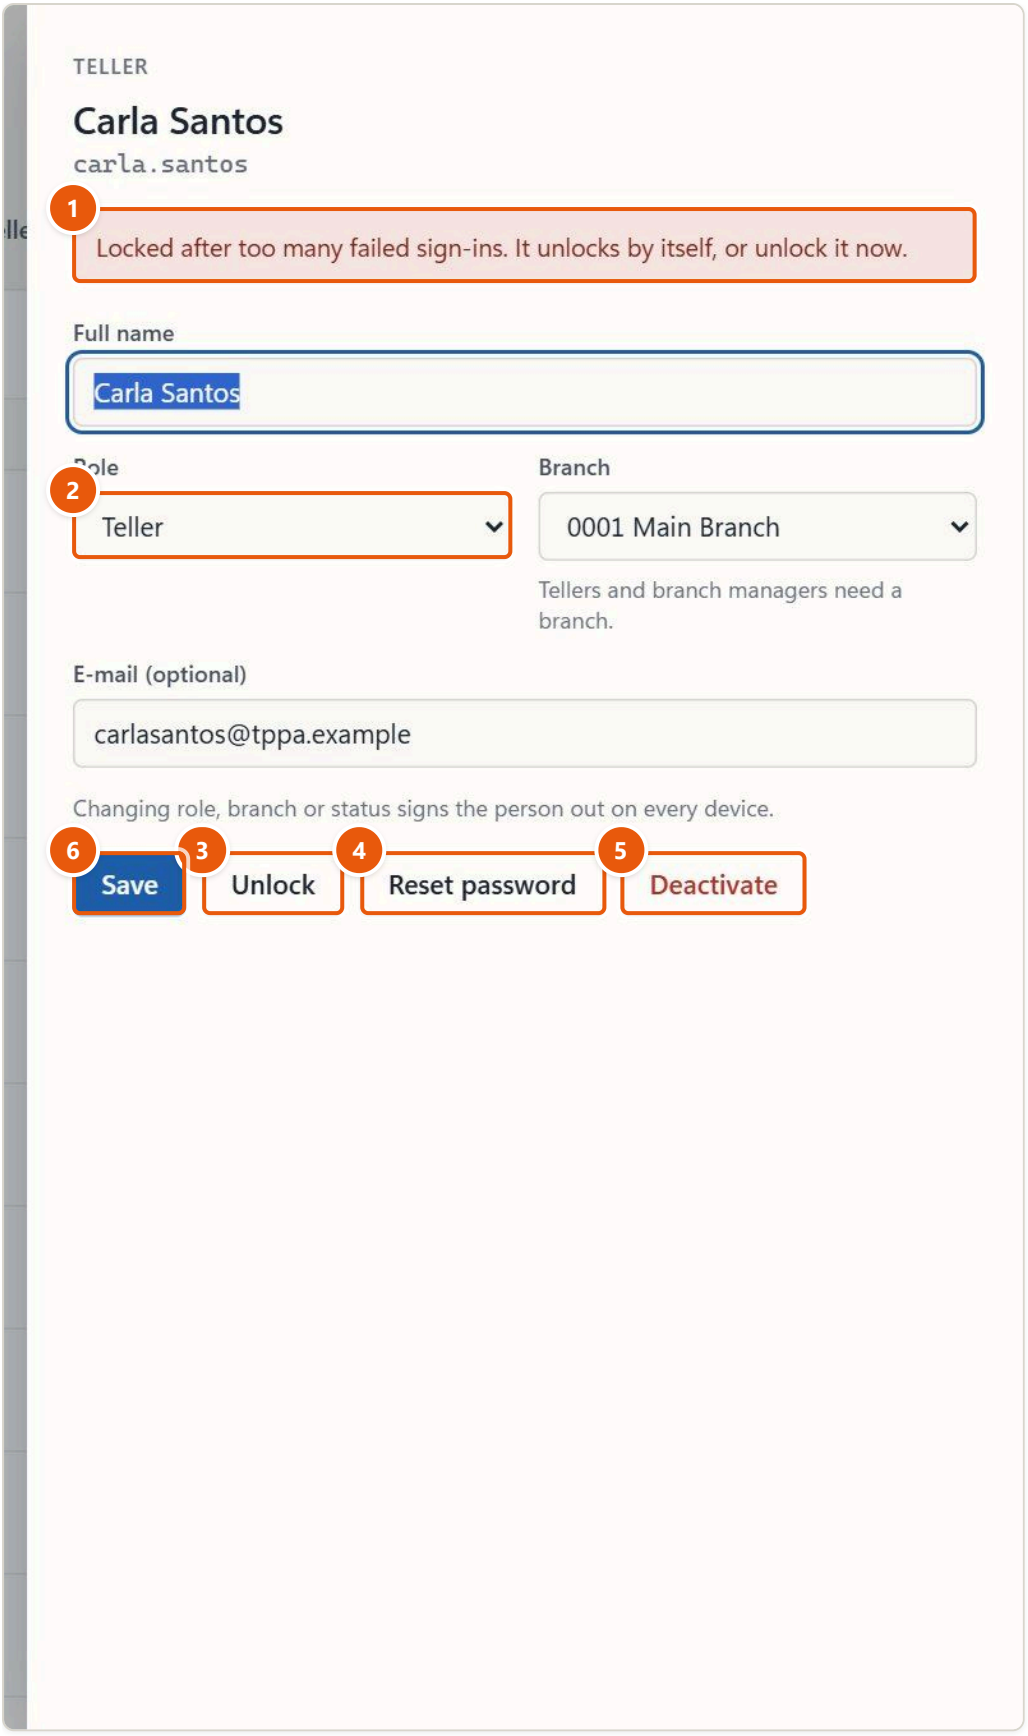

1. Locked: it unlocks by itself, or now
2. Role and branch
3. Unlock
4. Reset password
5. Deactivate
6. Save changes


A user locked after five wrong passwords.

1. Open the person. The page says "Locked after too many failed sign-ins. It unlocks by itself, or unlock it now." (1).
2. Click **Unlock** (3). The console says "Unlocked."

Reset a password

When someone has forgotten their password:

1. Open the person and click **Reset password** (4 above).
2. Type a **New temporary password** of at least 12 characters.
3. Click **Reset password**. The console says "Password reset. They are signed out everywhere."

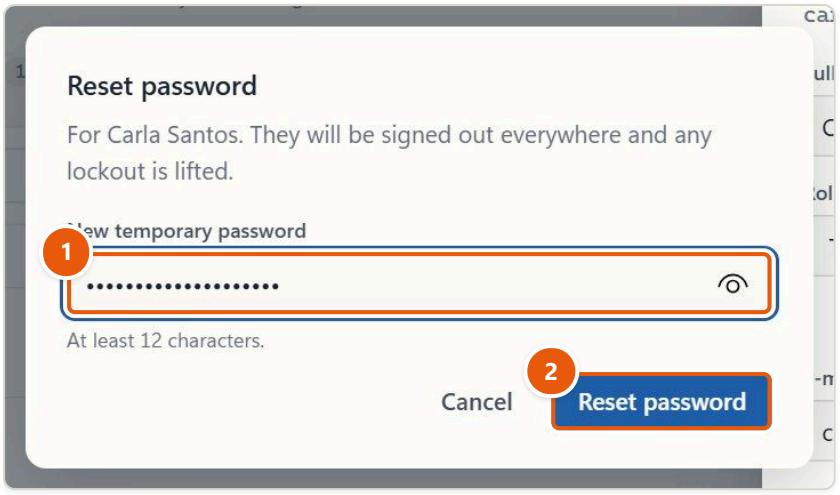

1 A new temporary password 2 Reset password

Resetting a password signs the person out everywhere.

A reset also lifts a lockout. Give the new password to the person directly. You cannot reset your own password: another administrator does.

Reset two-step sign-in


When someone with two-step sign-in has lost their phone and their recovery codes, open the person and click **Reset two-step**. The button shows only for people who have two-step on. The console says "Two-step sign-in reset. They set it up again at next sign-in." They are signed out everywhere. Only a super admin can do this for an administrator.

Deactivate or reactivate a user

When someone leaves, open the person and click **Deactivate**. The console says "Deactivated and signed out everywhere." They can no longer sign in anywhere; their past work stays in the records. To find them again, set the status filter to **Inactive**; open them and click **Reactivate** ("Reactivated.").

Administrators are read only for you

When you open an admin or a super admin, the page says "Only a super admin can change an administrator." Every field and **Save** are greyed, and there is no **Unlock**, **Reset password** or **Deactivate**.

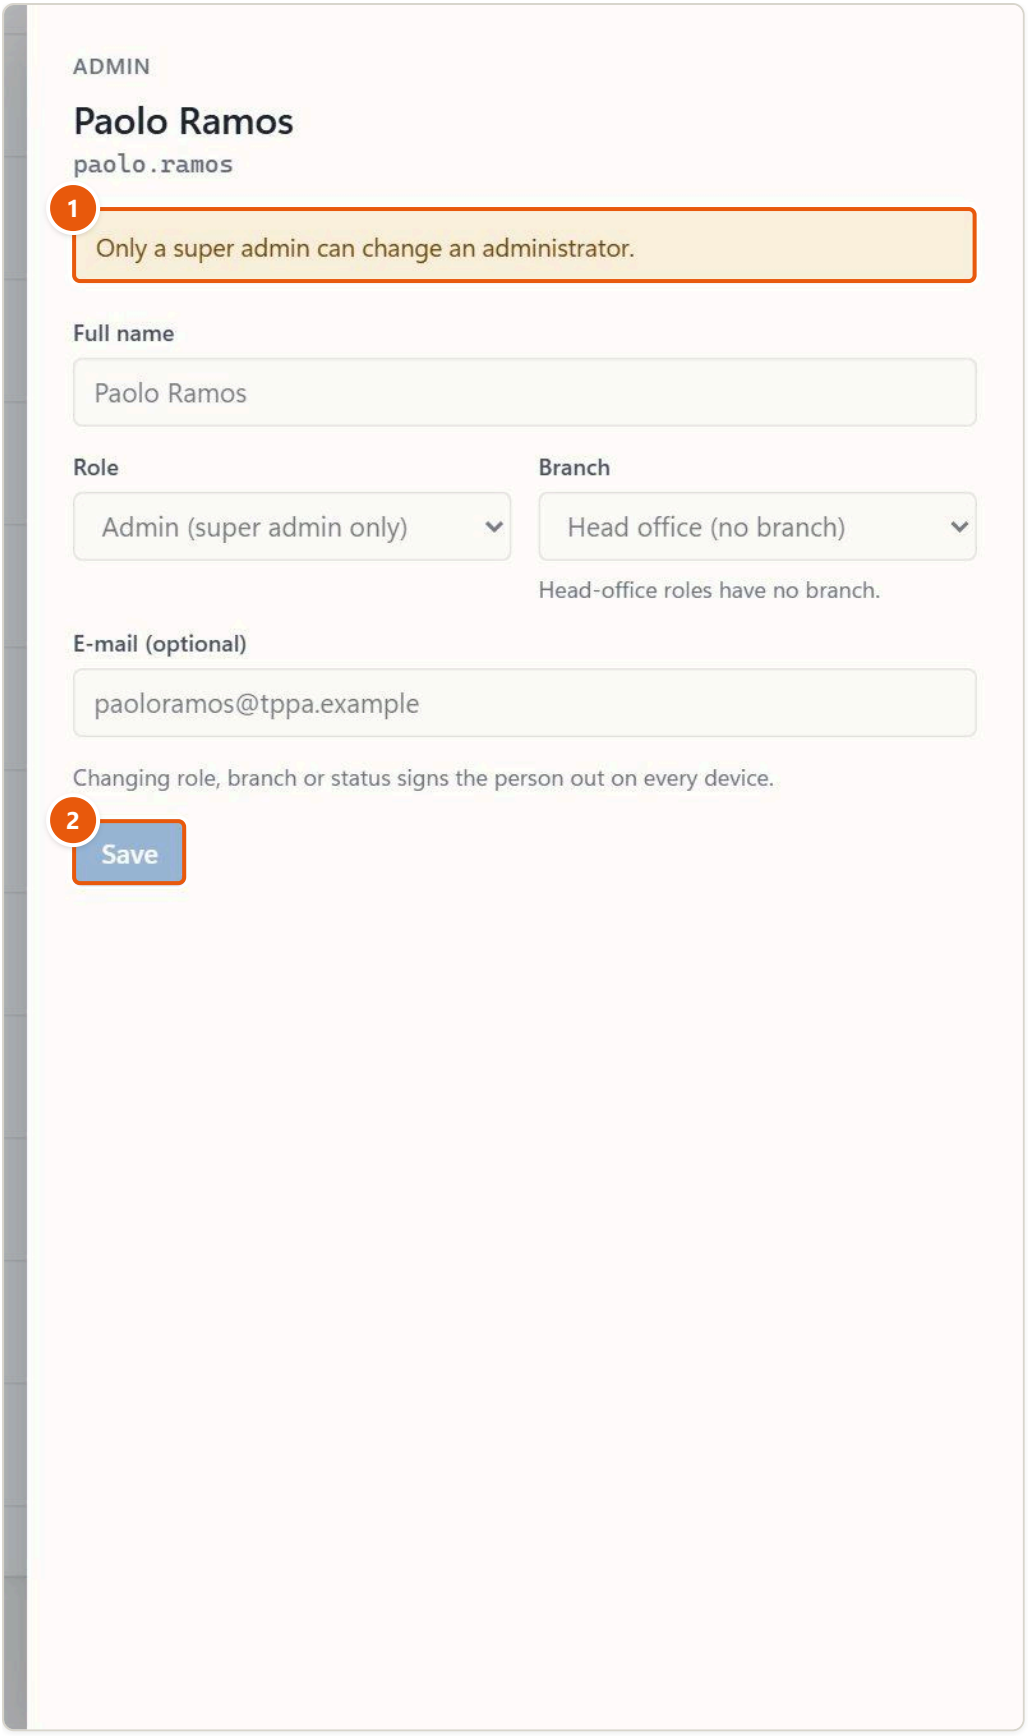

1 Admins cannot change administrators

2 Save is off


An admin opens another administrator: read only.

What the server refuses

Message	Why
"Only a super admin can manage administrators"	You tried to create or change an admin or super admin
"Ask another administrator to change your role, branch or status"	Your own account
"Ask another administrator to reset your password"	Your own password
"Branch managers, tellers and kiosk custodians need a branch; head-office roles must not have one"	The role and the branch do not fit

6. Terminals

A **terminal** is one teller computer (a **counter**) or one **kiosk**. **Setup, Terminals** lists them all.

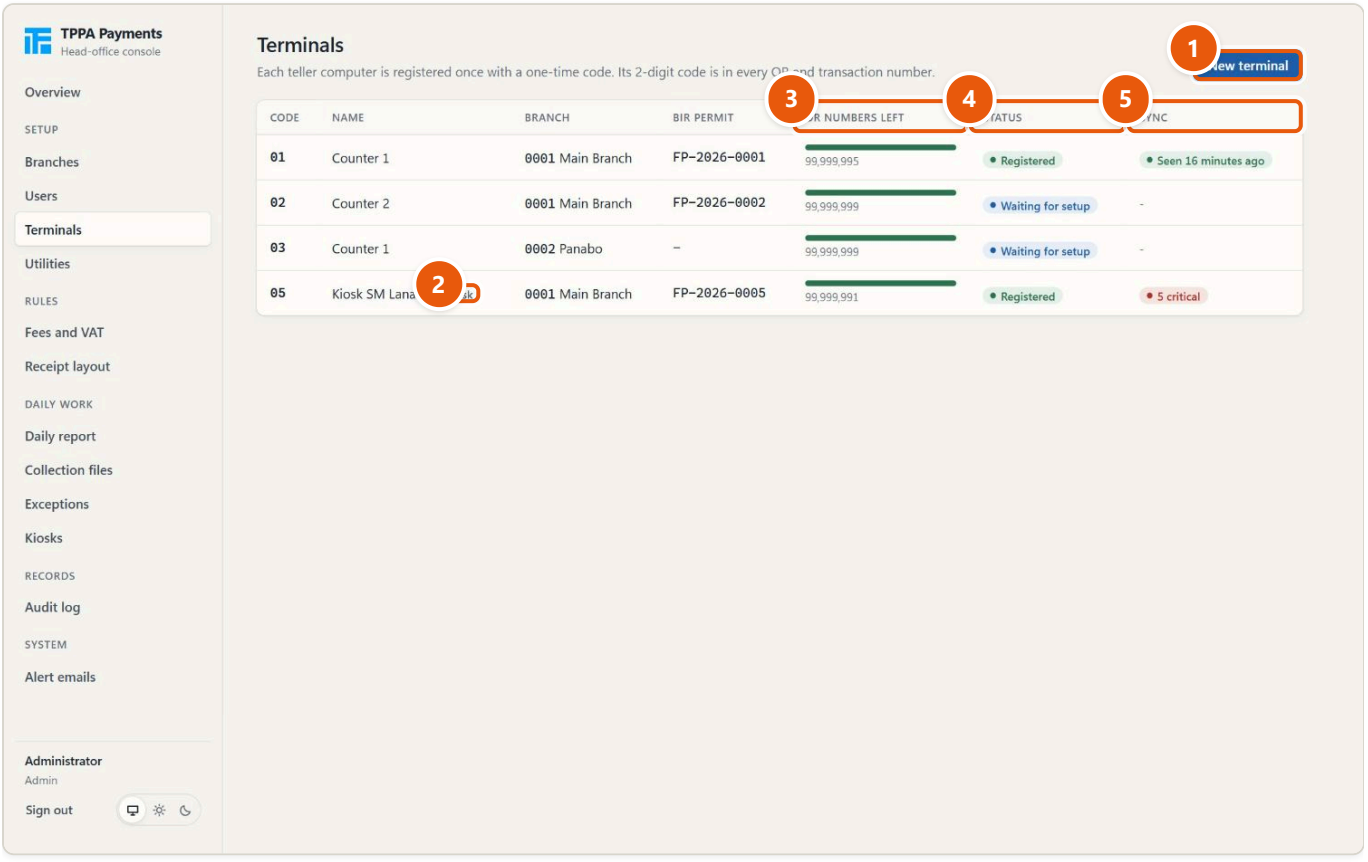

1 New terminal
2 A kiosk
3 OR numbers left
4 Registered or waiting for setup
5 Sync status

Terminals: counters and kiosks.

- **Code** is the terminal's 2-digit code. It is in every OR number and transaction number it issues.
- A "Kiosk" tag (2) marks a kiosk.
- **OR numbers left** (3) shows how much of the terminal's OR series is left.
- **Status** (4) is **Registered**, **Waiting for setup** or **Revoked**.

- **Sync** (5) shows when the terminal was last heard from ("Seen 16 minutes ago"), or a problem first: "N critical" (open critical exceptions), "Never synced", "Clock off" or "Clock off: blocked".


Counter or kiosk

Kind	What it is
Counter (teller)	A teller computer at a branch counter, running the teller app
Kiosk (self-service)	A self-service kiosk: cash only, exact amount. It starts with the default kiosk settings.

The kind is fixed once the terminal is created.


Create a terminal

1. Click **New terminal** (1).
2. Choose the **Kind**: **Counter (teller)** or **Kiosk (self-service)**.
3. Choose the **Branch**.
4. The **Code** is filled with the next free one; change it if needed.
5. Type the **Name** (for example Counter 3, or Kiosk SM Lanang).
6. Type the **BIR permit no.** if you have it (optional; you can add it later).
7. Click **Create and get code**.

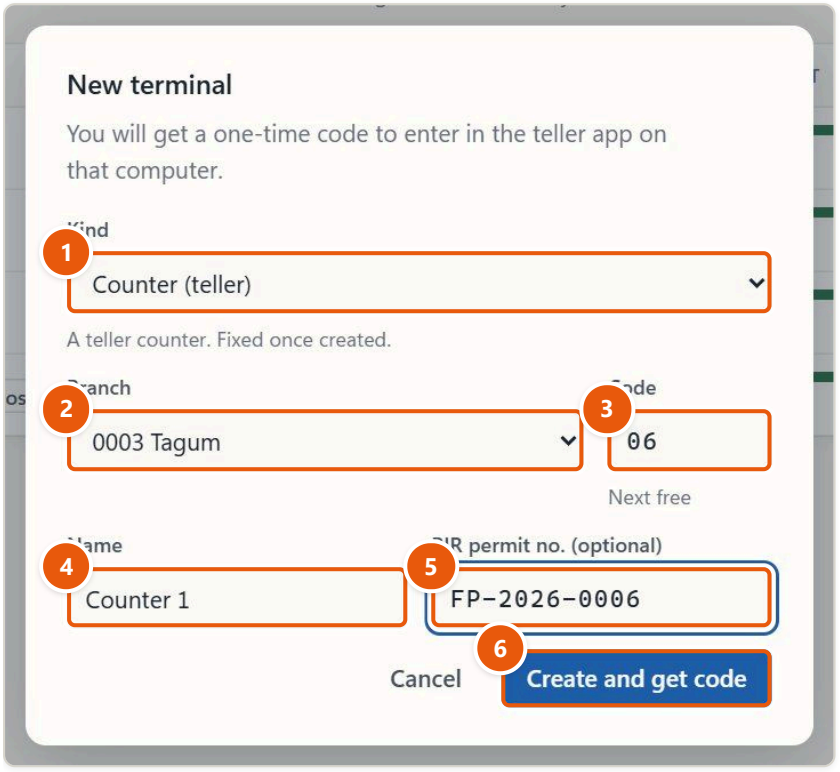

1 Counter or kiosk: fixed once created
2 Branch
3 Code: the next free one
4 Name
5 BIR permit no.
6 Create and get code

A new counter terminal (left with Cancel here).

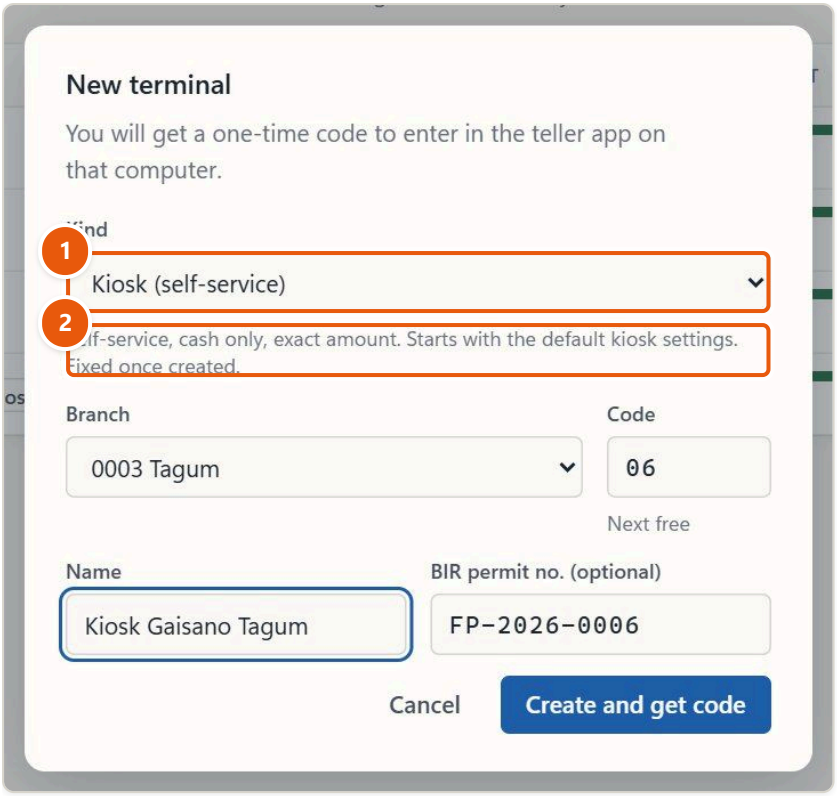


1 Kiosk (self-service)

2 Starts with the default kiosk settings

A new kiosk (left with Cancel here).

The console shows the terminal's one-time code (next section). Then open the terminal's page and **open its OR series** (see OR series below): without one, a registered terminal cannot issue receipts.

The one-time code, and how IT registers the terminal

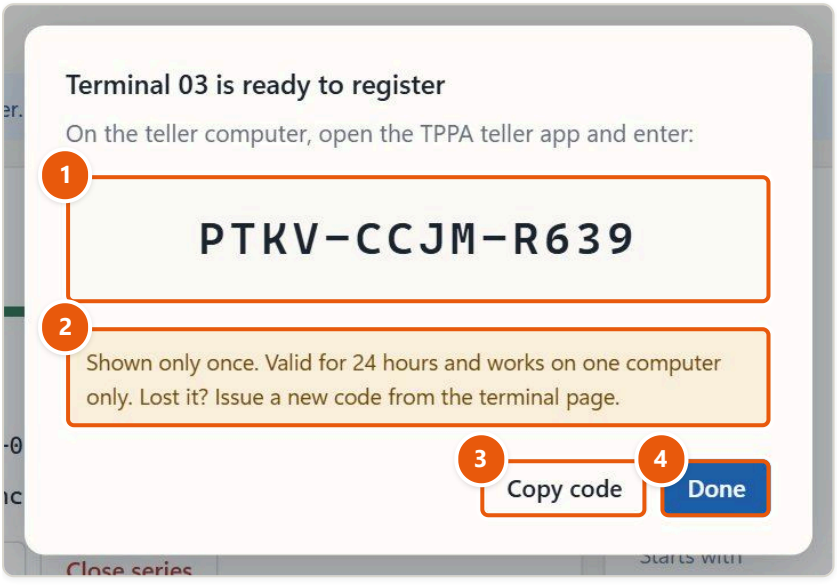

1 The one-time code

2 Shown once, 24 hours, one computer

3 Copy code

4 Done

The code to type in the teller app on that computer.


The code (1) is how the computer proves it is this terminal. It is **shown only once**, is **valid for 24 hours** and **works on one computer only** (2).

1. Click **Copy code** (3), or write the code down.
2. Give it to IT, who installs the computer.
3. Click **Done** (4).

On a counter, IT opens the TPPA teller app, types the code in **One-time code** and clicks **Register this computer**. On a kiosk, IT opens staff mode in the TPPA kiosk app and enters the code. The app then downloads its settings from head office and the terminal shows **Registered** here. The IT and set-up guide describes the installation.

A terminal waiting for setup

Until the app registers, the terminal's page shows when the code expires:

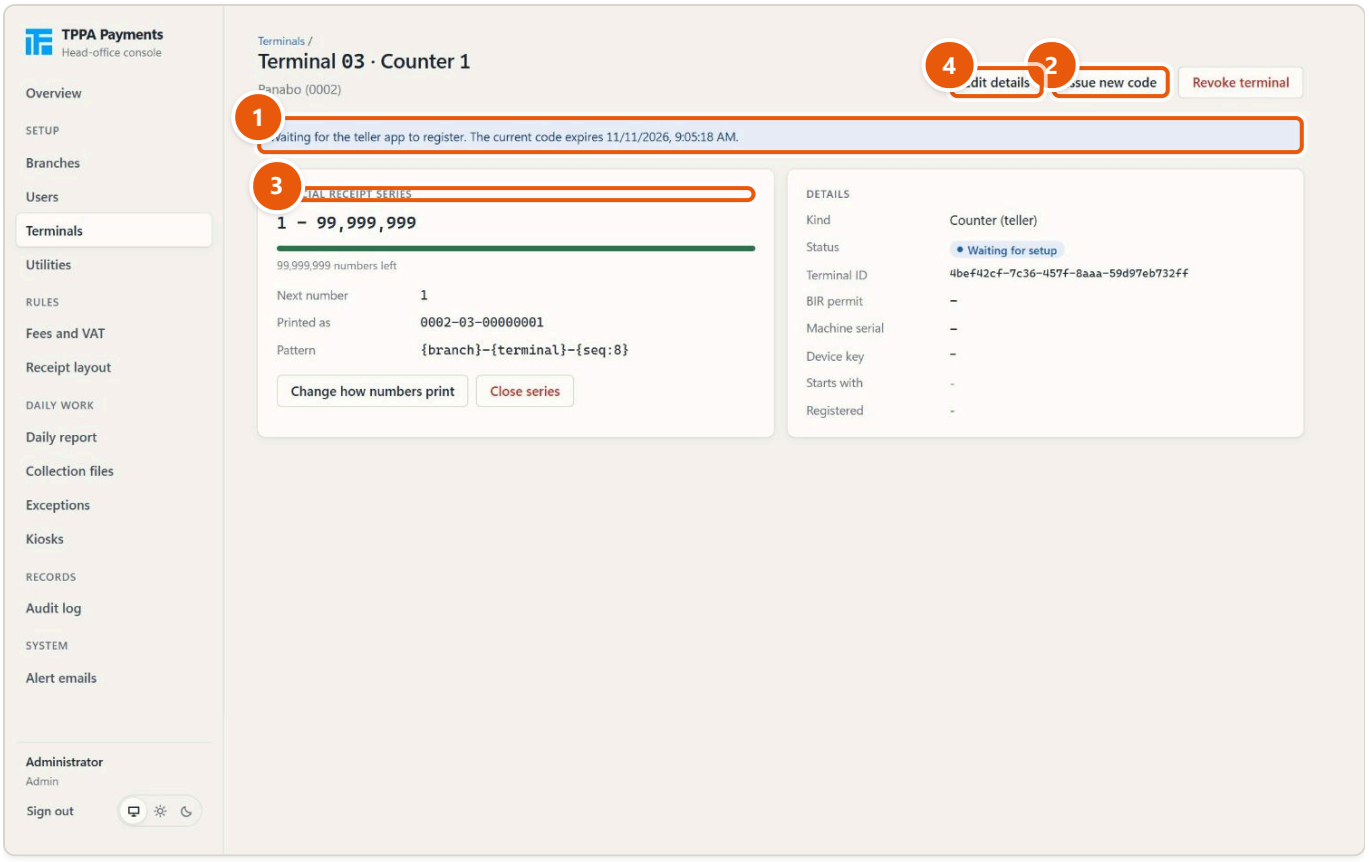


1. Waiting for setup, and when the code expires
2. Issue new code
3. Its OR series is ready
4. Edit details

A counter not set up yet (Counter 1 at Panabo).

If the code expired, or was lost, click **Issue new code** (2). A new code is shown, and the console says "New code issued; the old one no longer works."

The terminal page

Click a terminal in the list to open its page.

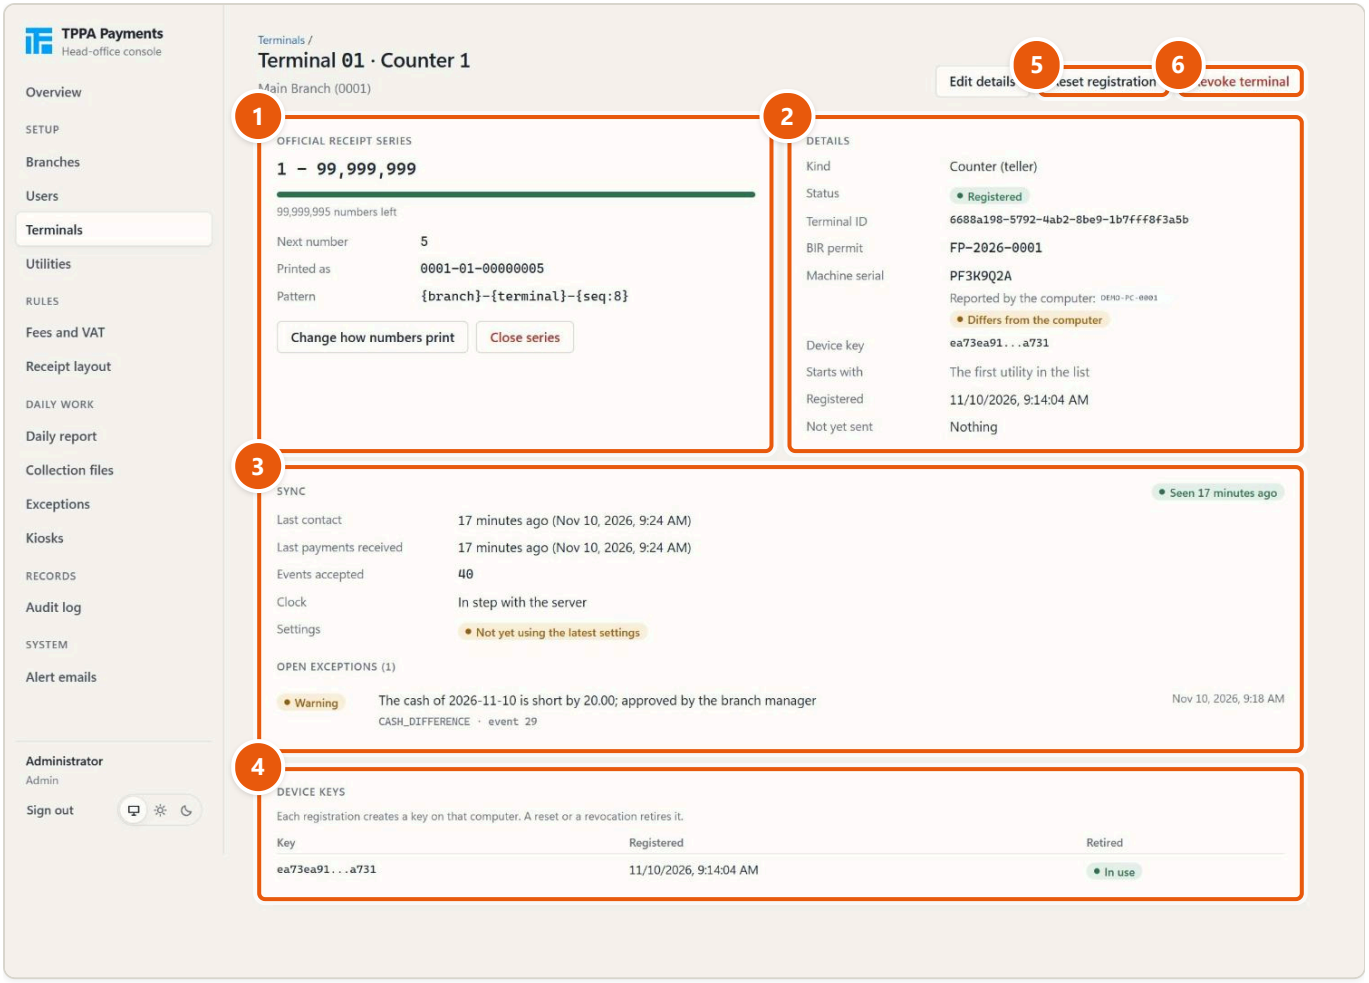

1. OR series: range, numbers left, next number
2. Details: kind, BIR permit, serial, key
3. Sync: last contact, settings, open exceptions
4. Device keys
5. Reset registration (same computer)
6. Revoke (lost or replaced)

A registered counter terminal.

- **Official receipt series** (1): the range, the numbers left, the next number and how it prints.
- **Details** (2): kind, status, terminal ID, BIR permit, machine serial, device key, the utility the payment screen starts with, when it registered, and **Not yet sent** (records on the computer not yet at head office).
- **Sync** (3): last contact, the last payments received, the events accepted, the **Clock** (for example "In step with the server") and **Settings** (whether the terminal uses the latest settings). **Open exceptions** lists the problems this terminal sent.
- **Device keys** (4): each registration creates a key on that computer. A reset or a revocation retires it; the key in use shows "In use".

If the **Machine serial** you entered is not the one the computer reports, it shows "Reported by the computer: ..." and "Differs from the computer". Check the BIR permit, then correct it with **Edit details**.

OR series

Official receipt (OR) numbers come from the terminal's **OR series**: a range of numbers that matches the BIR permit. A terminal has at most one active series. Numbers are never reused.

Open a series (when the terminal has none):


1. On the terminal's page, click **Open series**.
2. Type the **First number** and **Last number** from the BIR permit.
3. Check the **Pattern** (how the number prints; the hint shows an example).
4. Click **Open series**. The console says "Series opened."

The dialog reads "Use the range on the BIR permit for this terminal. Ranges never overlap and numbers are never reused." A range that overlaps an earlier one is refused.

Running low: when less than 5 % of the series is left, the bar turns amber, the page says "open the next series soon" and the Overview lists it. Get the next range on the BIR permit. When the series is used up, close it and open the next one (the server refuses a second active series: "already has an active series; close it first").

Close a series:

1. Click **Close series**.
2. Type a **Reason** (at least 3 characters; it goes into the audit log).
3. Click **Close series**.

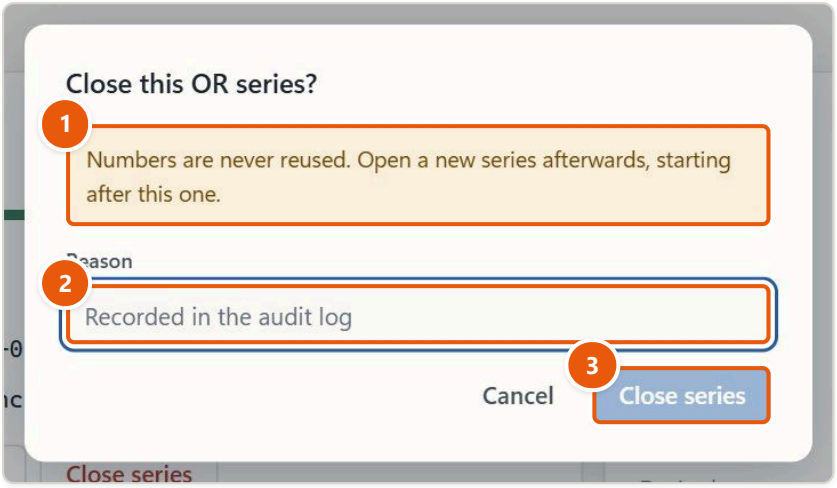


1 Numbers are never reused
2 Reason, for the audit log
3 Close series

Closing an OR series (left with Cancel here).

The numbers left in a closed series are never used. Open a new series afterwards, starting after this one.

Change how numbers print (the number itself does not change):

1. Click **Change how numbers print**.
2. Type the **Pattern**, using `{branch}`, `{terminal}`, `{yyyy}`, `{yy}` and `{seq:N}` (the sequence with N digits). The usual pattern is `{branch}-{terminal}-{seq:8}`.
3. Check how the next receipt would print, and that it fits the receipt (2).
4. Choose when it **Takes effect**: at least 1 hour ahead, so offline terminals receive it first.
5. Click **Schedule**.

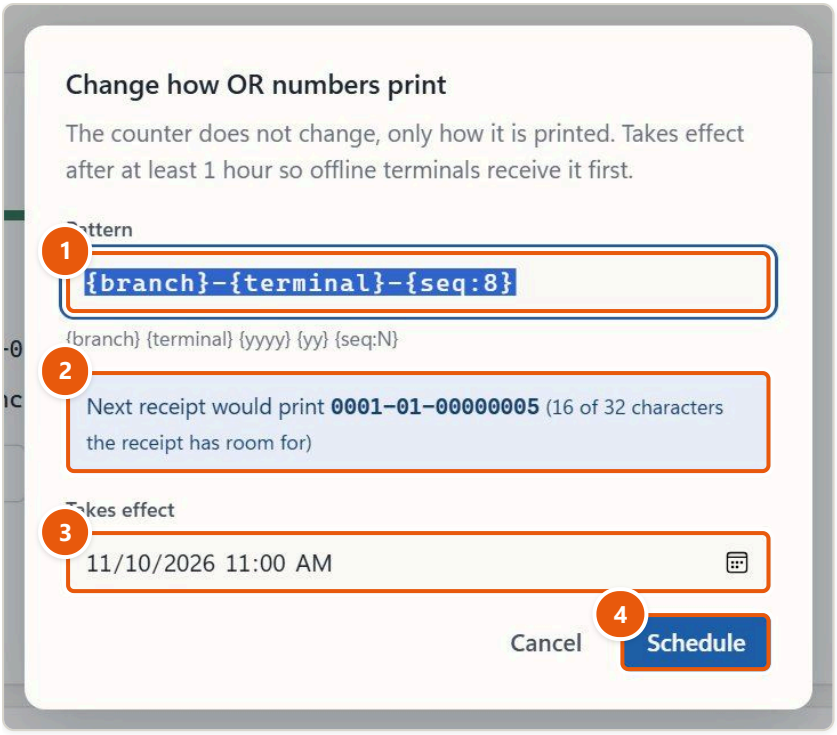


1. Pattern
2. How the next receipt would print
3. Takes effect
4. Schedule

Changing how OR numbers print (left with Cancel here).

Edit a terminal's details

1. Click **Edit details**.
2. Change the **Name**, the **BIR permit no.** and the **Machine serial** (as on the BIR permit). If the computer has reported its serial, click **Use this** to copy it.
3. Choose what the **Payment screen starts with**: a utility, or the first utility in the list. The teller can still change it for each customer. It applies at the next sync.
4. Click **Save**.

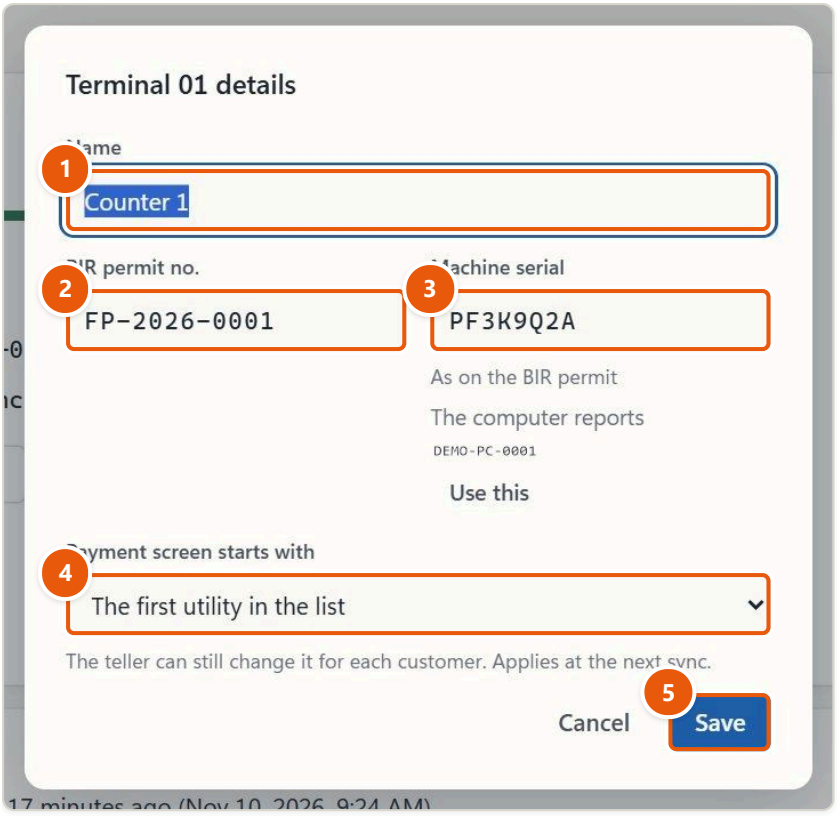


1. Name
2. BIR permit no.
3. Machine serial, as on the permit
4. The utility the payment screen starts with
5. Save

A terminal's details (left with Cancel here).

Reset registration: the same computer, set up again

Use **Reset registration** only when the **same computer** must be set up again, for example after Windows was reinstalled. It keeps the terminal's code, BIR permit and OR series. The current key stops working at once; a teller app still running there signs everyone out and goes back to setup, keeping what it has not sent in a separate file.

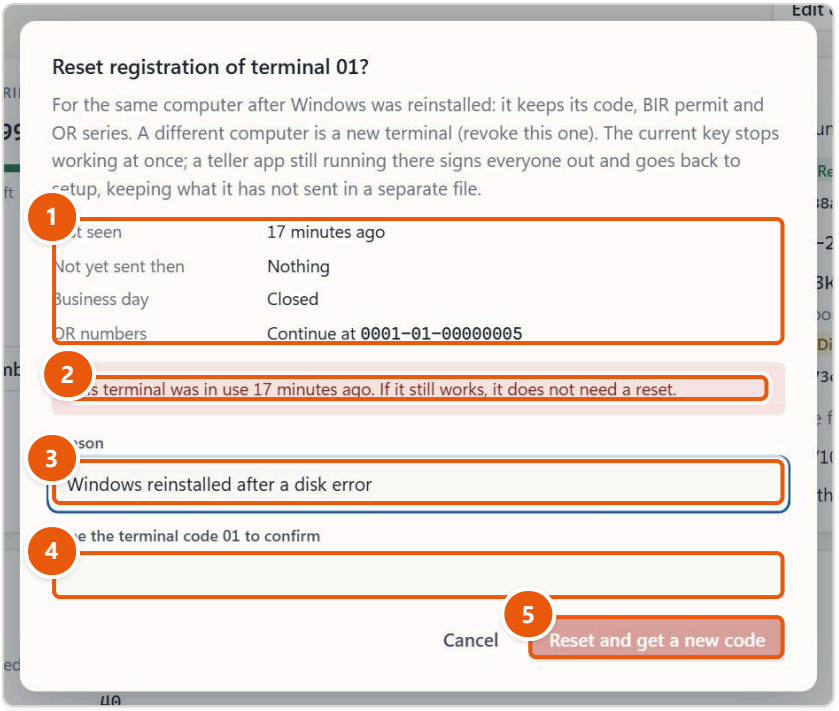

1. Last seen, not yet sent, business day, OR numbers
2. What to check first
3. Reason
4. Type the terminal code to confirm
5. Reset and get a new code

Reset registration (left with Cancel here: Counter 1 keeps working).

1. Click **Reset registration**.
2. Read the facts (1): last seen, not yet sent, the business day and where OR numbers continue.
3. Read the warnings (2). For example, "This terminal was in use 17 minutes ago. If it still works, it does not need a reset." Records not yet sent cannot be sent after a reset, so let the computer sync first if it still runs. For a kiosk, collect its cash box first.
4. Type a **Reason** (3), at least 3 characters.
5. When the dialog asks, type the terminal code to confirm (4).
6. Click **Reset and get a new code** (5). The console says "Registration reset: the old key no longer works." and shows the new one-time code for IT.

> **Warning:** A different computer is a **new terminal**: revoke this one and create a new one.

Revoke a terminal


Use **Revoke terminal** for a lost, stolen or replaced computer.

1. Click **Revoke terminal**.
2. Type a **Reason**.
3. Click **Revoke terminal**. The console says "Terminal revoked."

The dialog warns: "This cannot be undone. The terminal stops working at its next sync and its OR series closes." A revoked terminal is never used again; replacement hardware is a new terminal.

Kiosk settings

A kiosk's page has a **Kiosk settings** card, after its details.

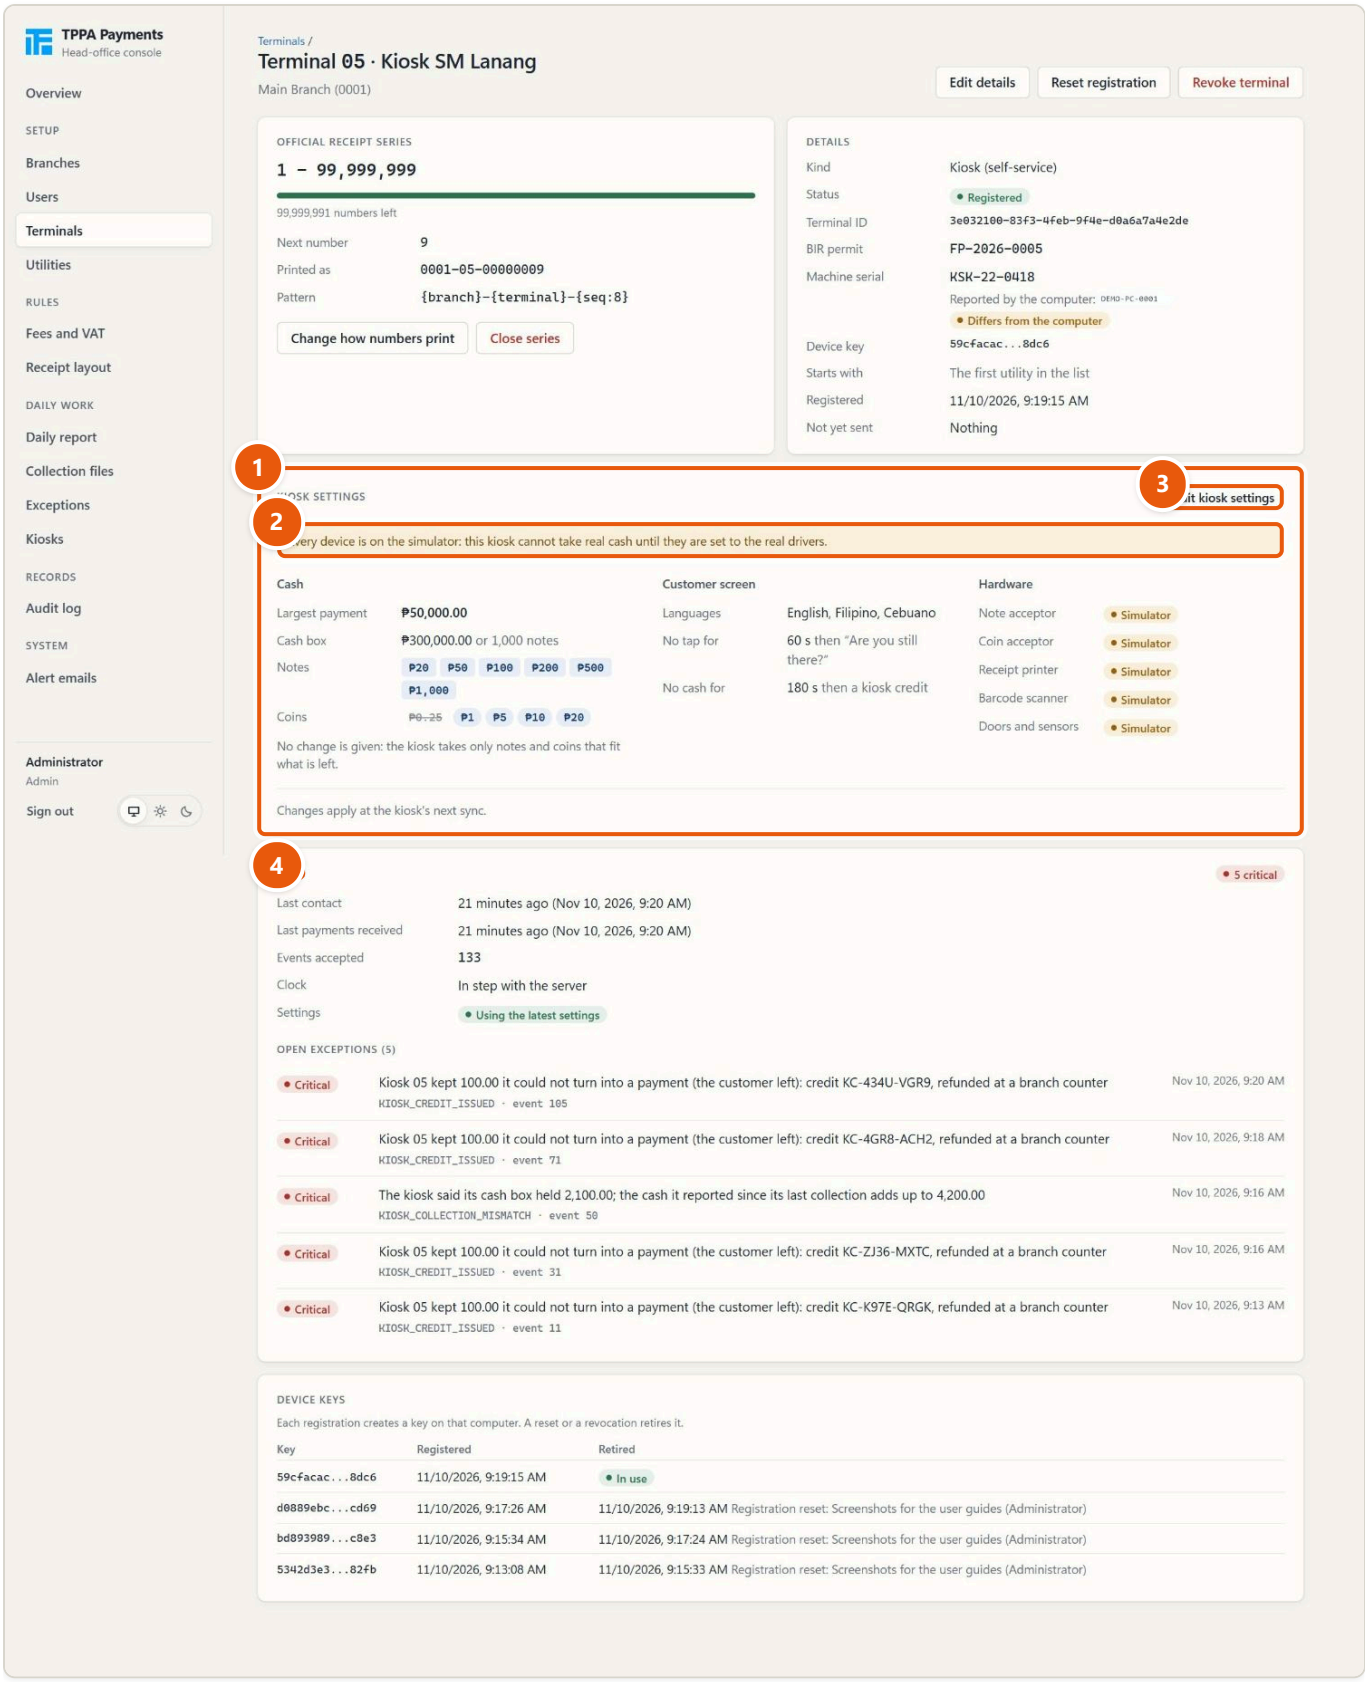

1. Kiosk settings
2. Simulated devices take no real cash
3. Edit kiosk settings
4. Sync, as for a counter

A kiosk's terminal page.

- **Cash**: the largest payment, the cash-box limit (in pesos and in notes), the notes and coins accepted. No change is given: the kiosk takes only notes and coins that fit what is left to pay.
- **Customer screen**: the languages, how long without a tap before "Are you still there?", and how long without cash before the cash in becomes a **kiosk credit**.
- **Hardware**: the driver for each device.


> **Warning:** "Every device is on the simulator: this kiosk cannot take real cash until they are set to the real drivers." (2). A kiosk on the simulator is for testing. Set each device to its real driver before the kiosk takes customers' money.

To change them:

1. Click **Edit kiosk settings** (3).
2. Change what you need (the limits are checked as you type and again by the server):

Setting	Rule
Largest payment	Up to ₱100,000.00
Cash-box limit	The amount at which the box counts as full
Cash box holds (notes)	The number of notes; the kiosk goes out of service at 90 %
Notes / Coins accepted	Click each value to accept it or not
Languages on screen	English, Filipino, Cebuano
Seconds without a tap	20 to 300; then "Are you still there?"
Seconds without cash	60 to 900; then the cash in becomes a kiosk credit
Hardware profile	A driver per device, and its serial port or Windows printer

3. Click **Save kiosk settings**. The console says "Kiosk settings saved."

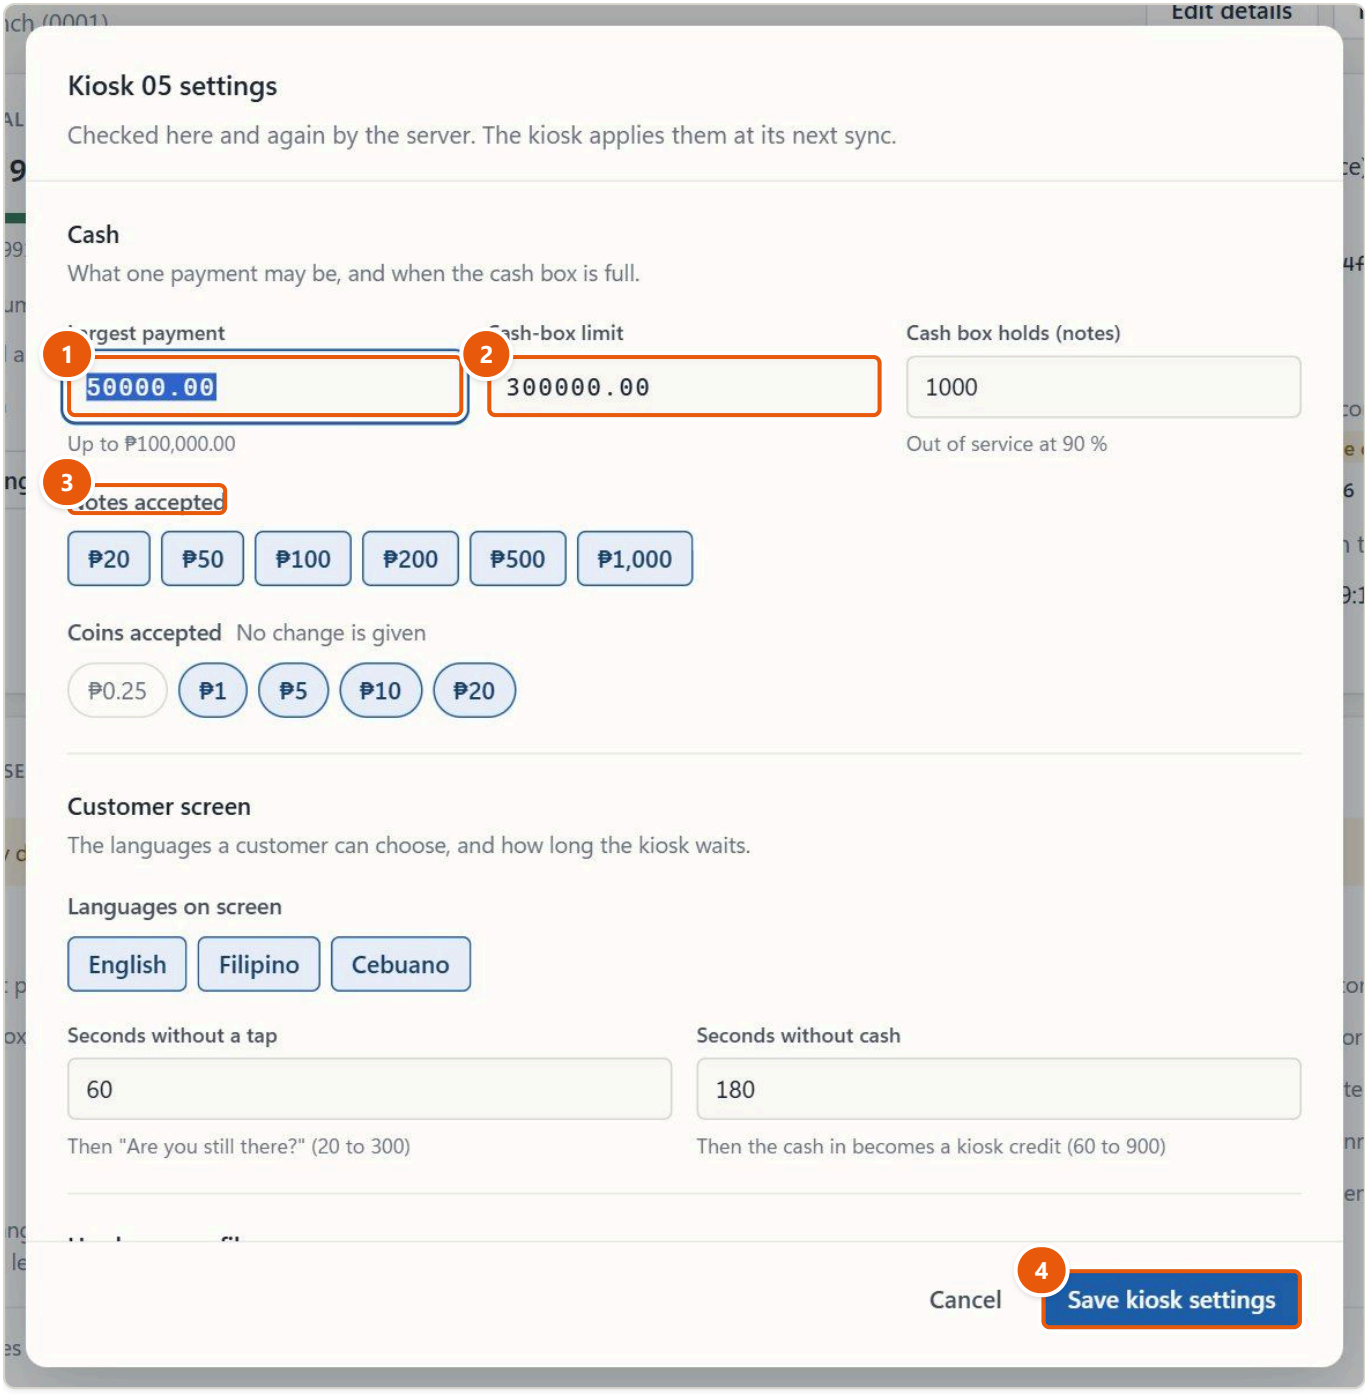


1. Largest payment
2. Cash-box limit
3. Notes and coins accepted
4. Save kiosk settings

Editing a kiosk's settings (left with Cancel here).

The kiosk applies them at its next sync.

7. Utilities

Setup, Utilities holds the utilities TPPA collects for. Each card is its own form.

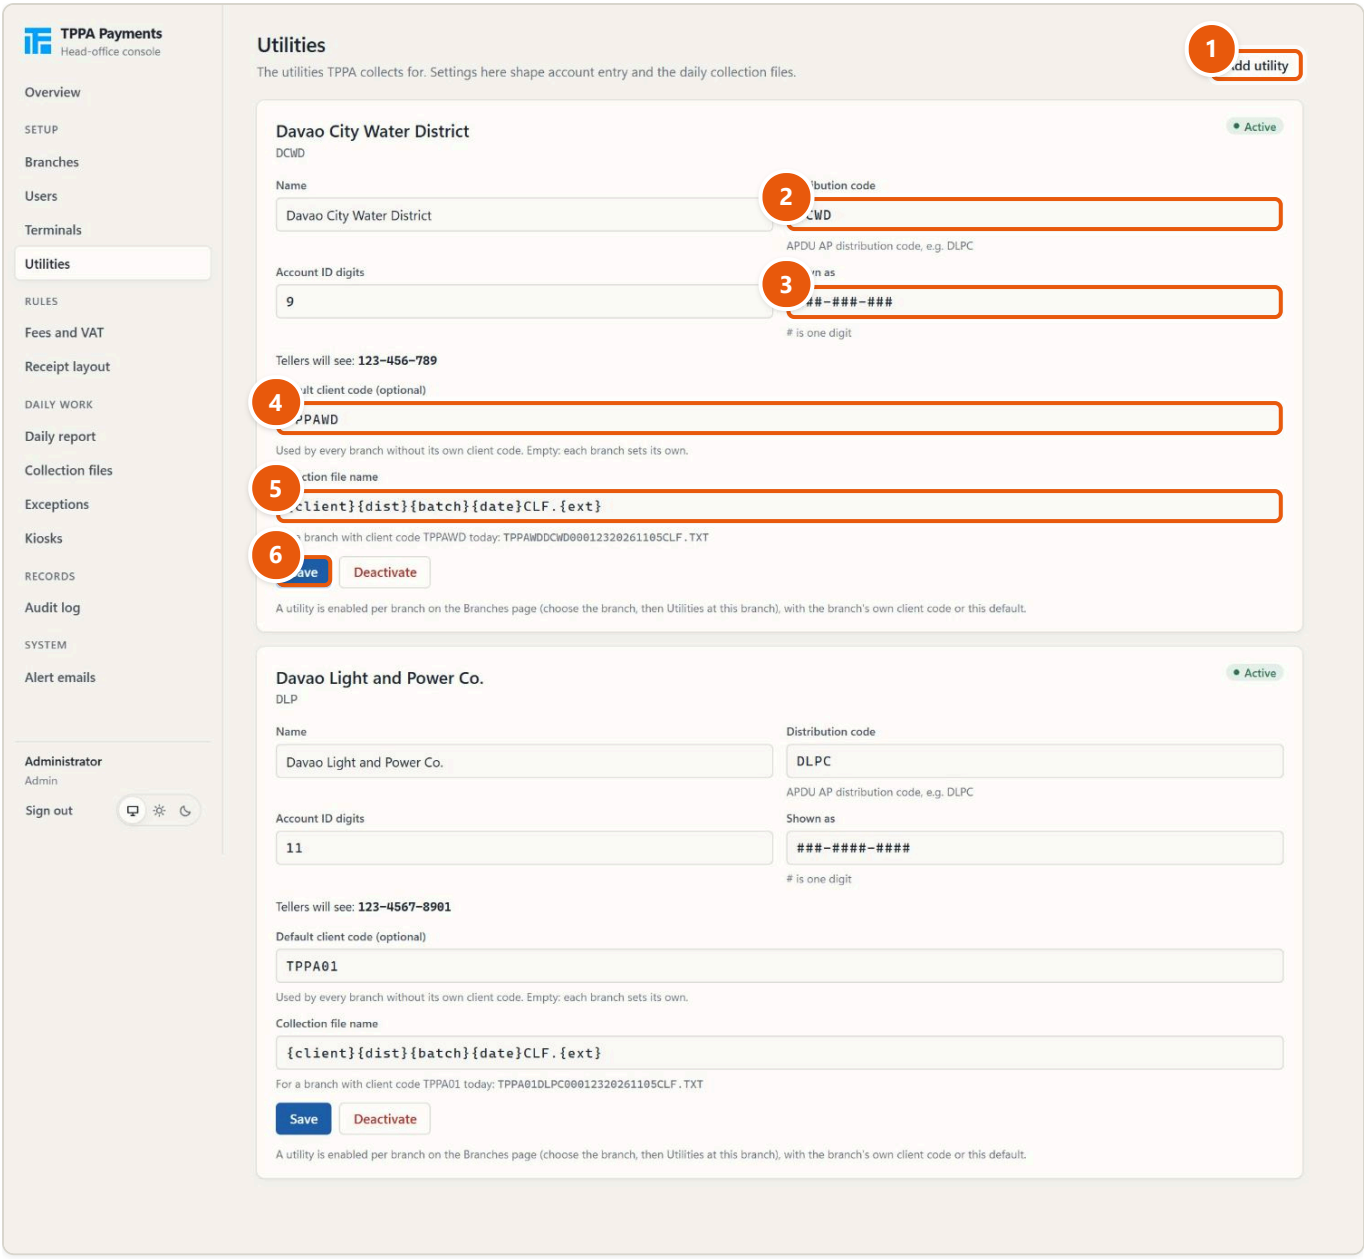

1. Add utility
2. Distribution code (in file names)
3. How tellers see the account number
4. Default client code
5. Collection file name
6. Save

Field | What it is |


| --- | --- | | Name | The utility's name | | Distribution code (2) | The utility's AP distribution code (4 characters, for example DLPC). It is in the file names. | | Account ID digits | How many digits a customer's account number has | | Shown as (3) | How the number is shown: `#` is one digit, for example `###-####-####`. "Tellers will see: ..." | | Default client code (4) | Used by every branch without its own client code. Empty: each branch sets its own. | | Collection file name (5) | The pattern of the file names, with `{client}` `{dist}` `{batch}` `{date}` `{ext}`; an example shows below |

The **Shown as** mask must have one `#` for each digit; otherwise the card says what is wrong and **Save** stays greyed. Click **Save** (6) after a change ("Saved.").

To stop collecting for a utility, click **Deactivate** ("Utility deactivated."); **Reactivate** brings it back. A utility is enabled at each branch on the Branches page (see Utilities at this branch, under Branches).

Add a utility

1. Click **Add utility** (1).
2. Type the **Utility code**: TPPA's short name for it, for example DLP. It never changes after creation.
3. Type the **Name**, the **Distribution code** and, if the utility gave one code for all of TPPA, the **Default client code**.
4. Type the **Digits** and how they are **Shown as**.
5. Click **Add utility**. The console says "Utility added."

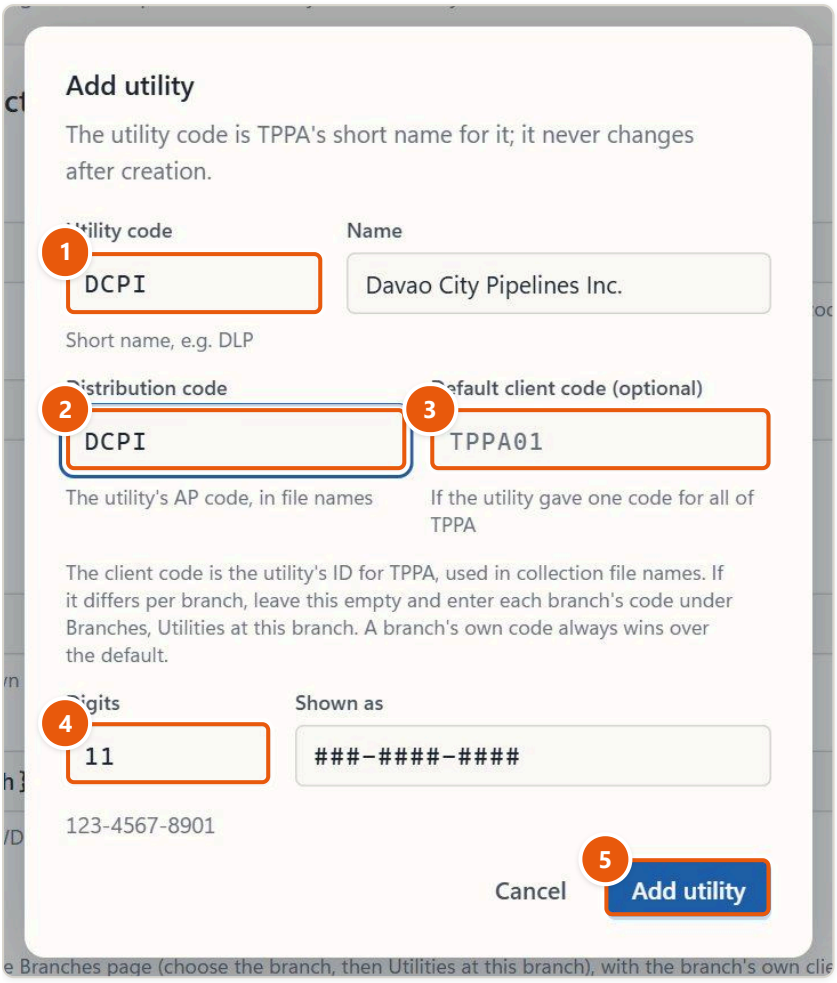


1 Utility code: never changes
2 Distribution code
3 Default client code
4 Digits and how they show
5 Add utility

Adding a utility (left with Cancel here).

Then enable it at its branches, and give it a fee version: until a fee is in force, tellers cannot take payments for it.

8. Fees and VAT

Rules, Fees and VAT holds TPPA's service fee for each utility, as **versions**. A version takes effect at its approved time. Approved versions never change: to change the fee, you make a new version and approve it with a start time.

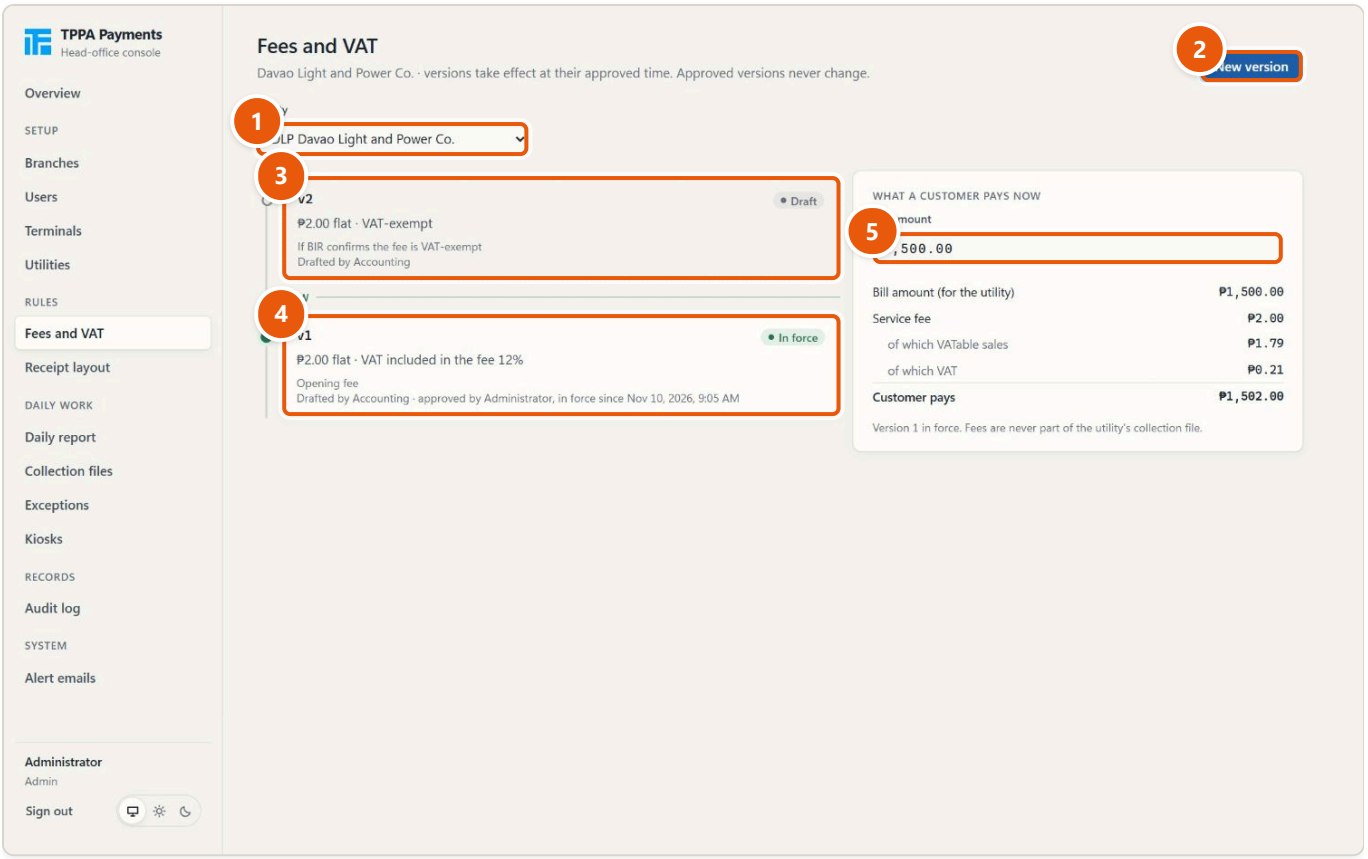


1. Utility
2. New version
3. A draft waiting for approval
4. The version in force
5. What a customer pays now

Fees and VAT for DLP: versions, newest first.

1. Choose the **Utility** (1).
2. The versions are listed newest first, with **NOW** between what is coming and what is past.
3. **What a customer pays now** (5) shows the fee in force for a sample bill amount. Fees are never part of the utility's collection file.

Chip	Meaning
Draft	Being prepared; waiting for approval
From (a date)	Approved, takes effect at that time (scheduled)
In force	The version tellers and kiosks use now
Replaced	Was in force; a later version replaced it
Retired	A discarded draft or a withdrawn version; never used

Click a version to open it. A version in force is read only:

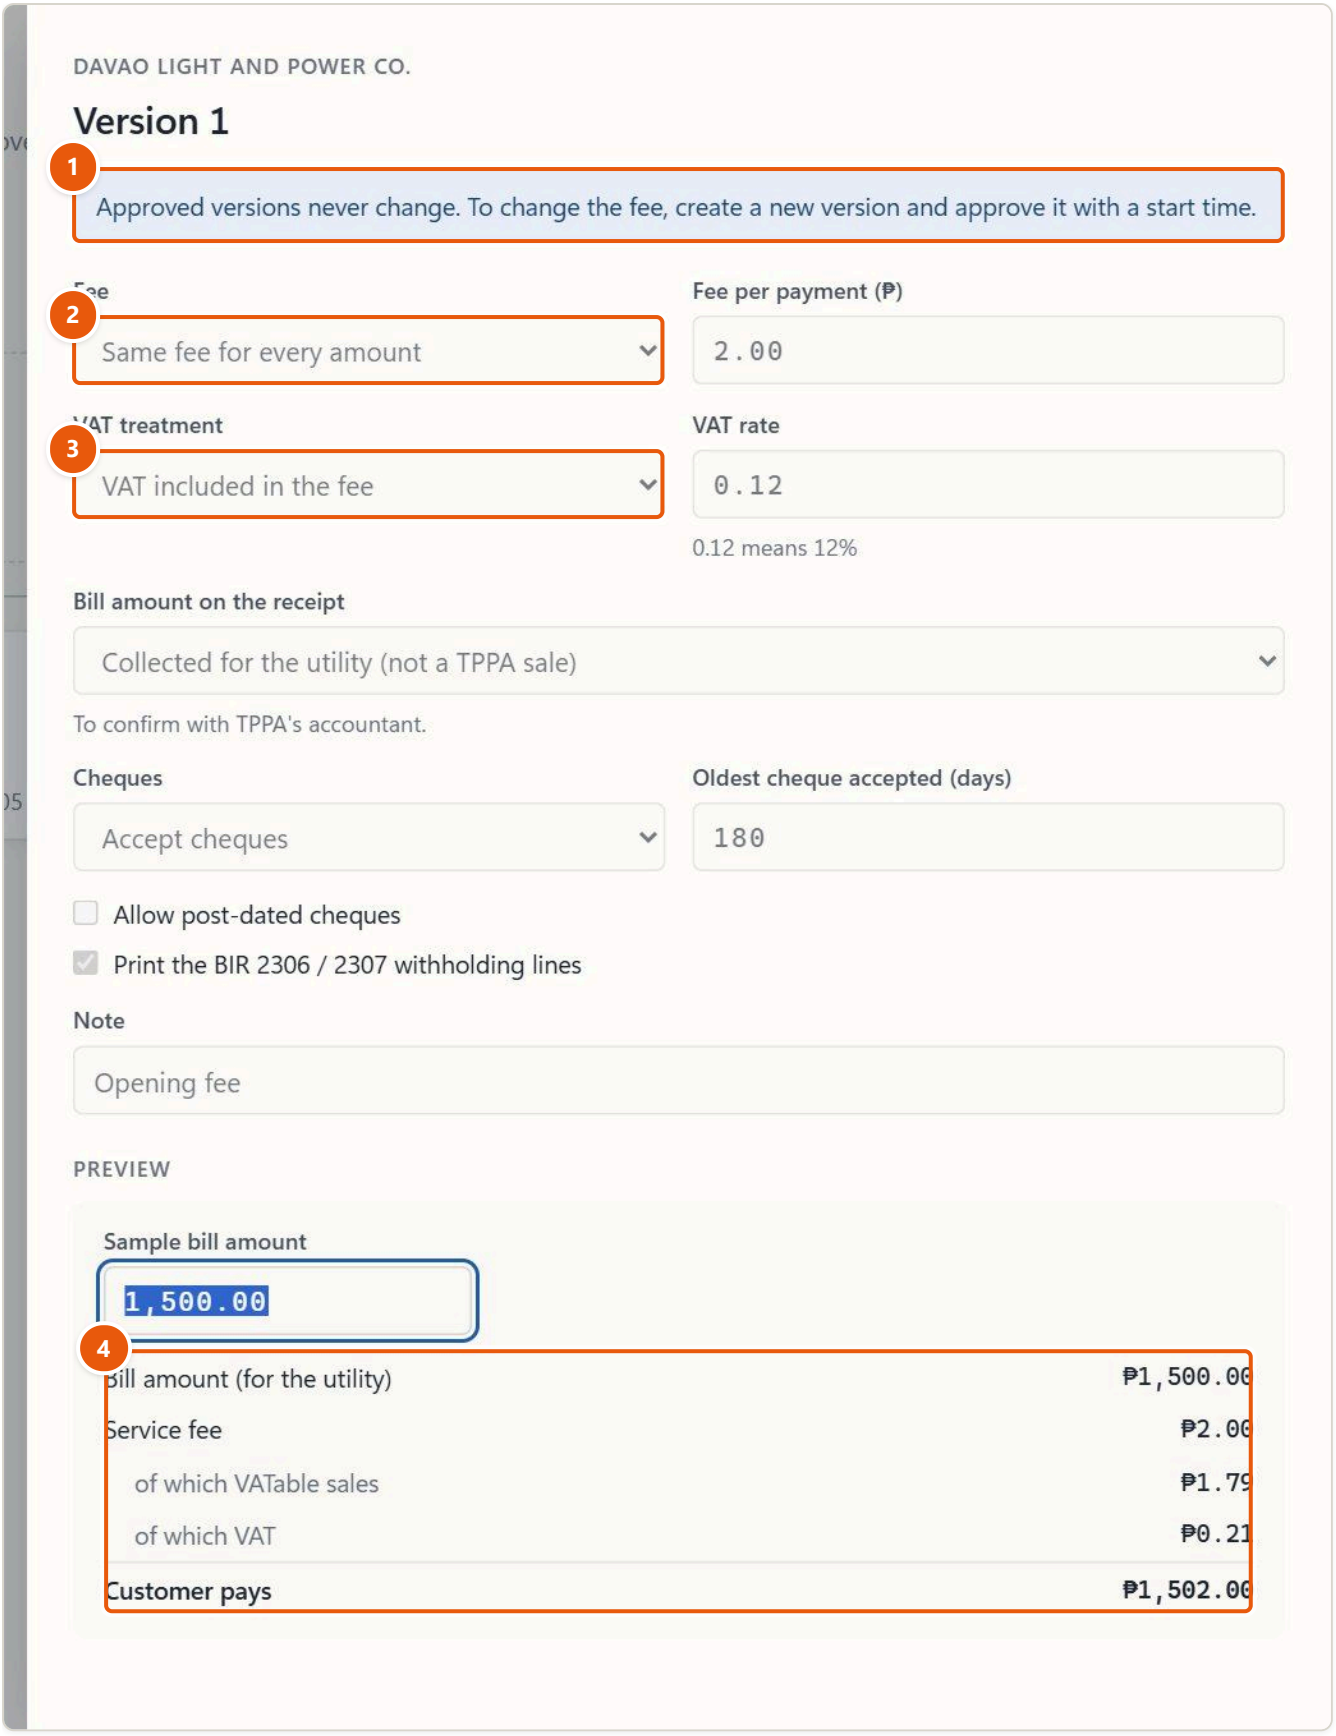


1. Approved: never changes
2. Fee
3. VAT treatment and rate
4. Preview for a sample bill

The version in force (read only).

Make a new version

Accounting or an admin drafts a version; an admin approves it.


1. Click **New version** (2 on the Fees page).
2. Choose the **Fee**: **Same fee for every amount** (then the **Fee per payment (₱)**) or **Different fee by bill amount** (then the tiers).
3. Choose the **VAT treatment** and, where it applies, the **VAT rate** (0.12 means 12%).
4. Set **Bill amount on the receipt**, the **Cheques** rules (accept or not, **Oldest cheque accepted (days)**, **Allow post-dated cheques**) and **Print the BIR 2306 / 2307 withholding lines**.
5. Type a **Note**: why this version (for example a new BIR ruling).
6. Try a **Sample bill amount** in the preview to see what a customer would pay.
7. Click **Save draft**, or **Save and approve…** to approve it at once.

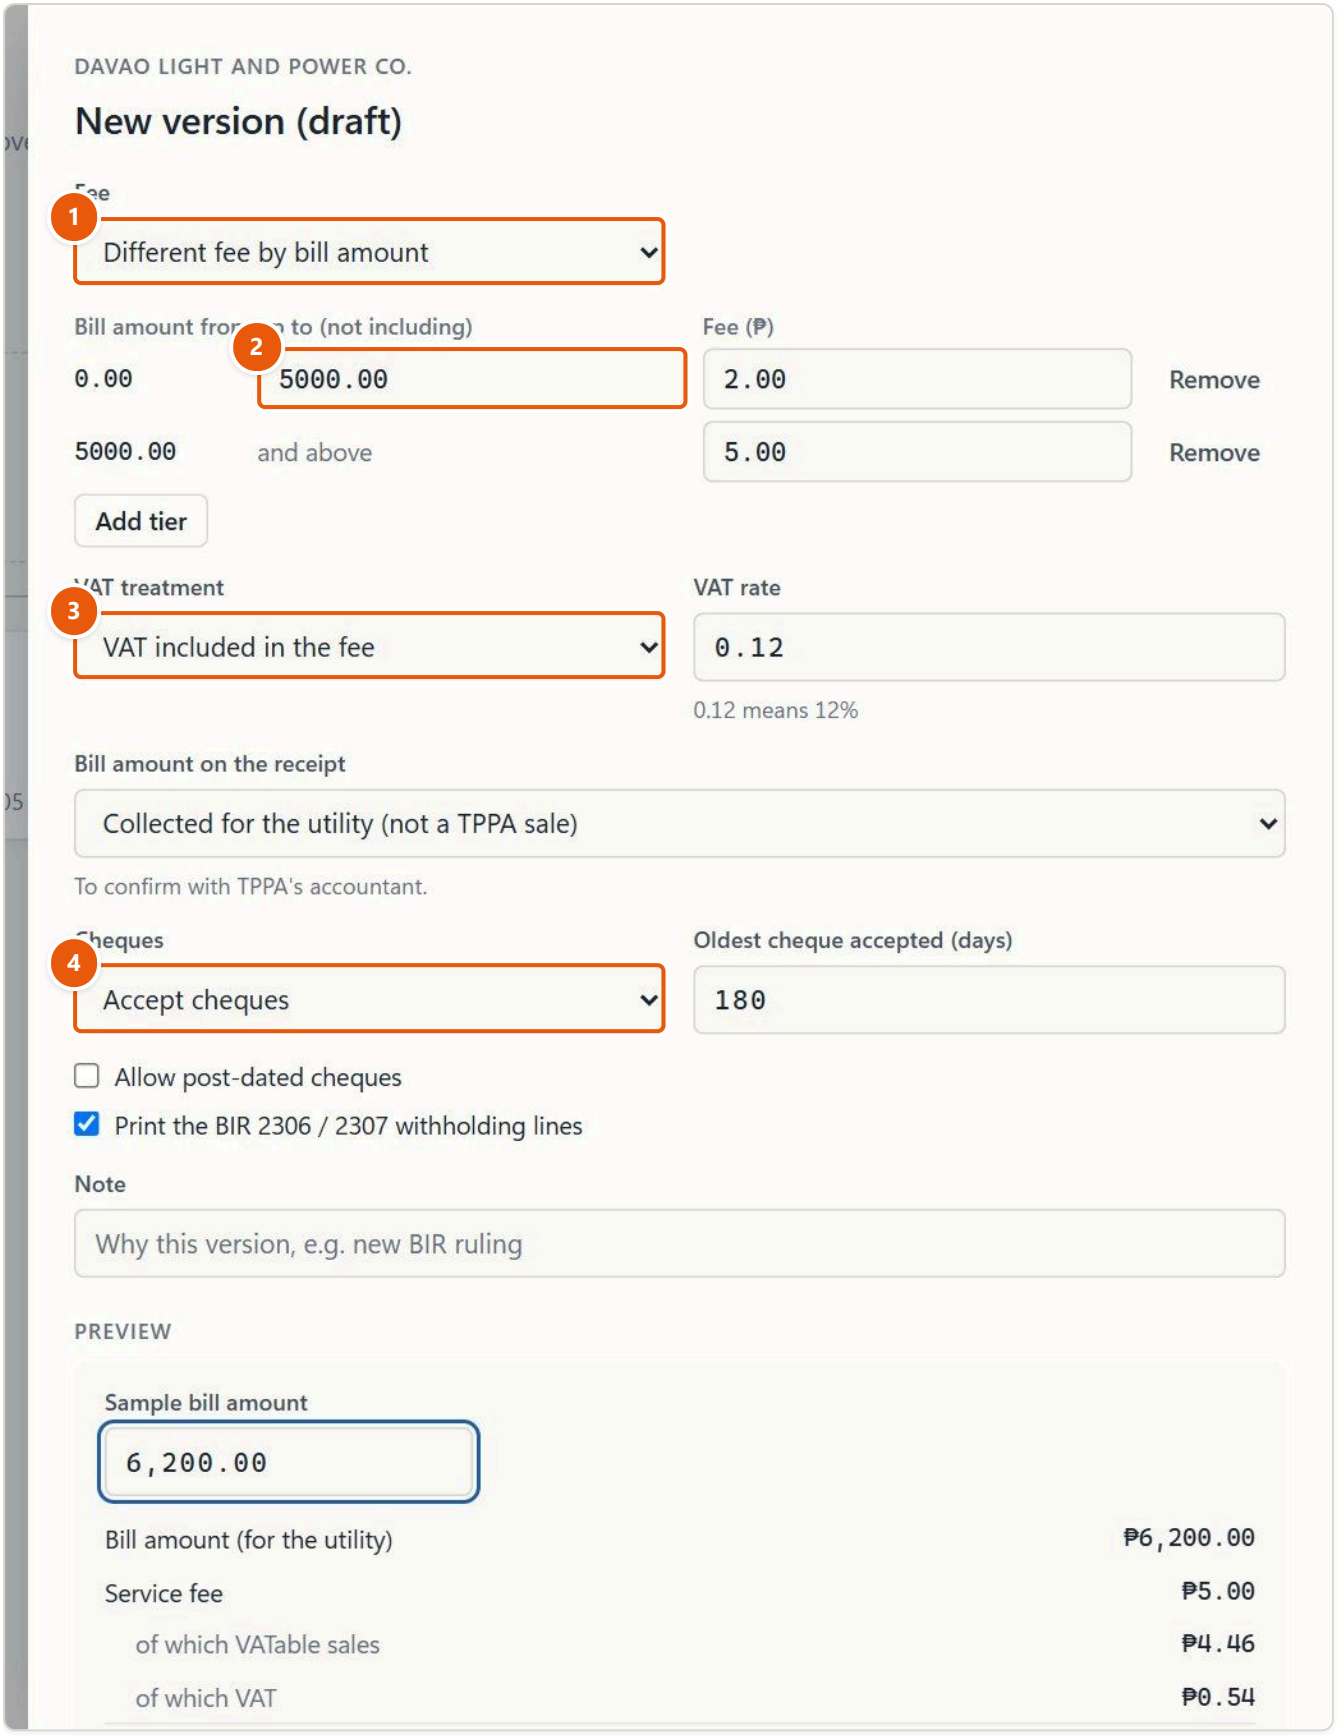

1 Same fee, or by bill amount
2 Tiers: up to (not including)
3 VAT
4 Cheques

A fee by bill amount, with two tiers.

Each tier runs from its amount **up to, not including**, the next one ("and above" for the last). Click **Add tier** or **Remove** to change them.

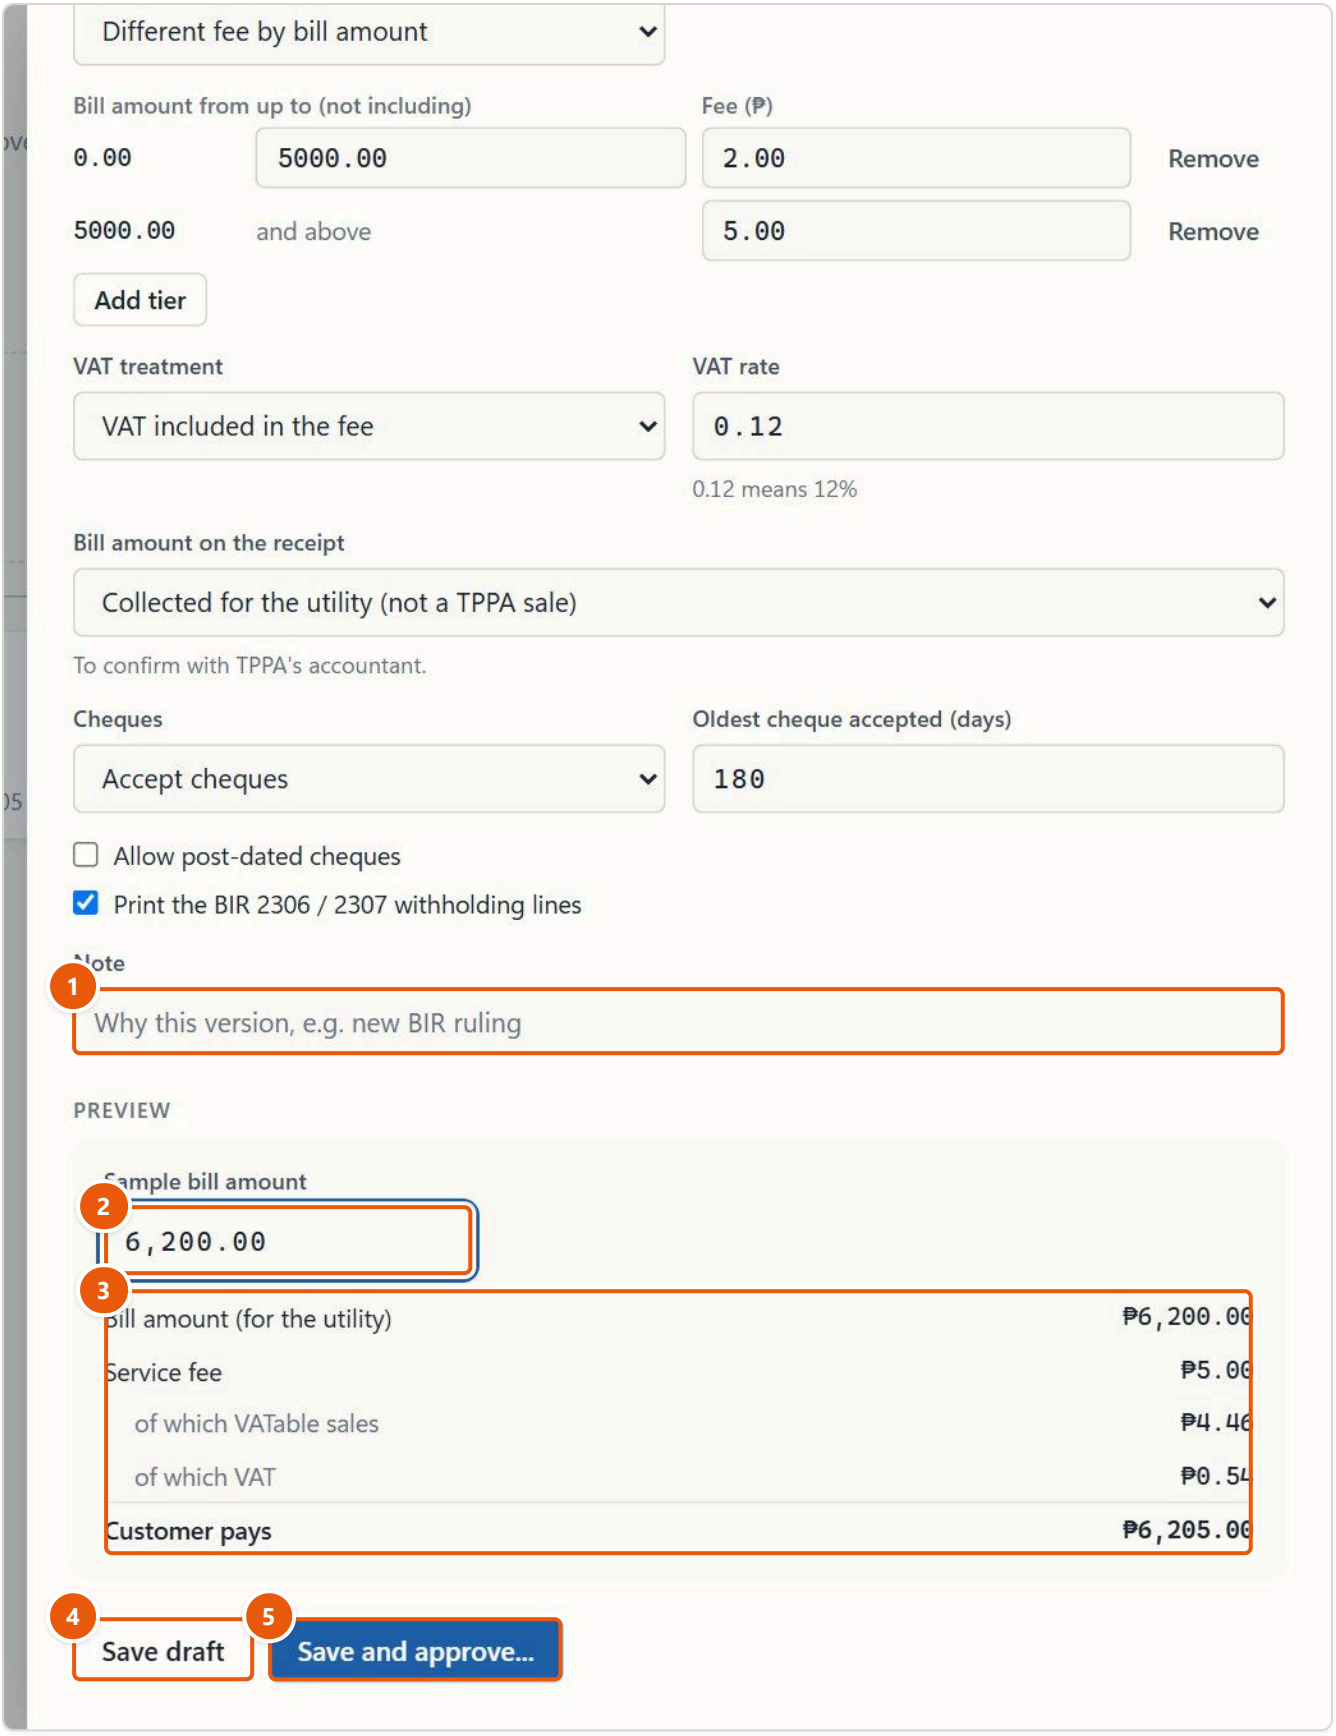

1. Why this version
2. Try a bill amount
3. What the customer would pay
4. Save draft
5. Save and approve...

The preview follows as you type.


The VAT treatments:

VAT treatment	What it means
VAT included in the fee	The fee includes VAT at the rate (for example 12%)
VAT added on top of the fee	VAT at the rate is added to the fee
VAT-exempt	No VAT; the fee is VAT-exempt sales
Zero-rated	VAT at 0%

Note: "Bill amount on the receipt" ("Collected for the utility (not a TPPA sale)" or "Within the sales lines") is marked "To confirm with TPPA's accountant."

Drafts made by Accounting

Accounting sees **Save draft** and **Discard draft** but not **Approve**, with the line "An Admin approves drafts and sets when they take effect." Their draft shows on your Overview as **Draft**.

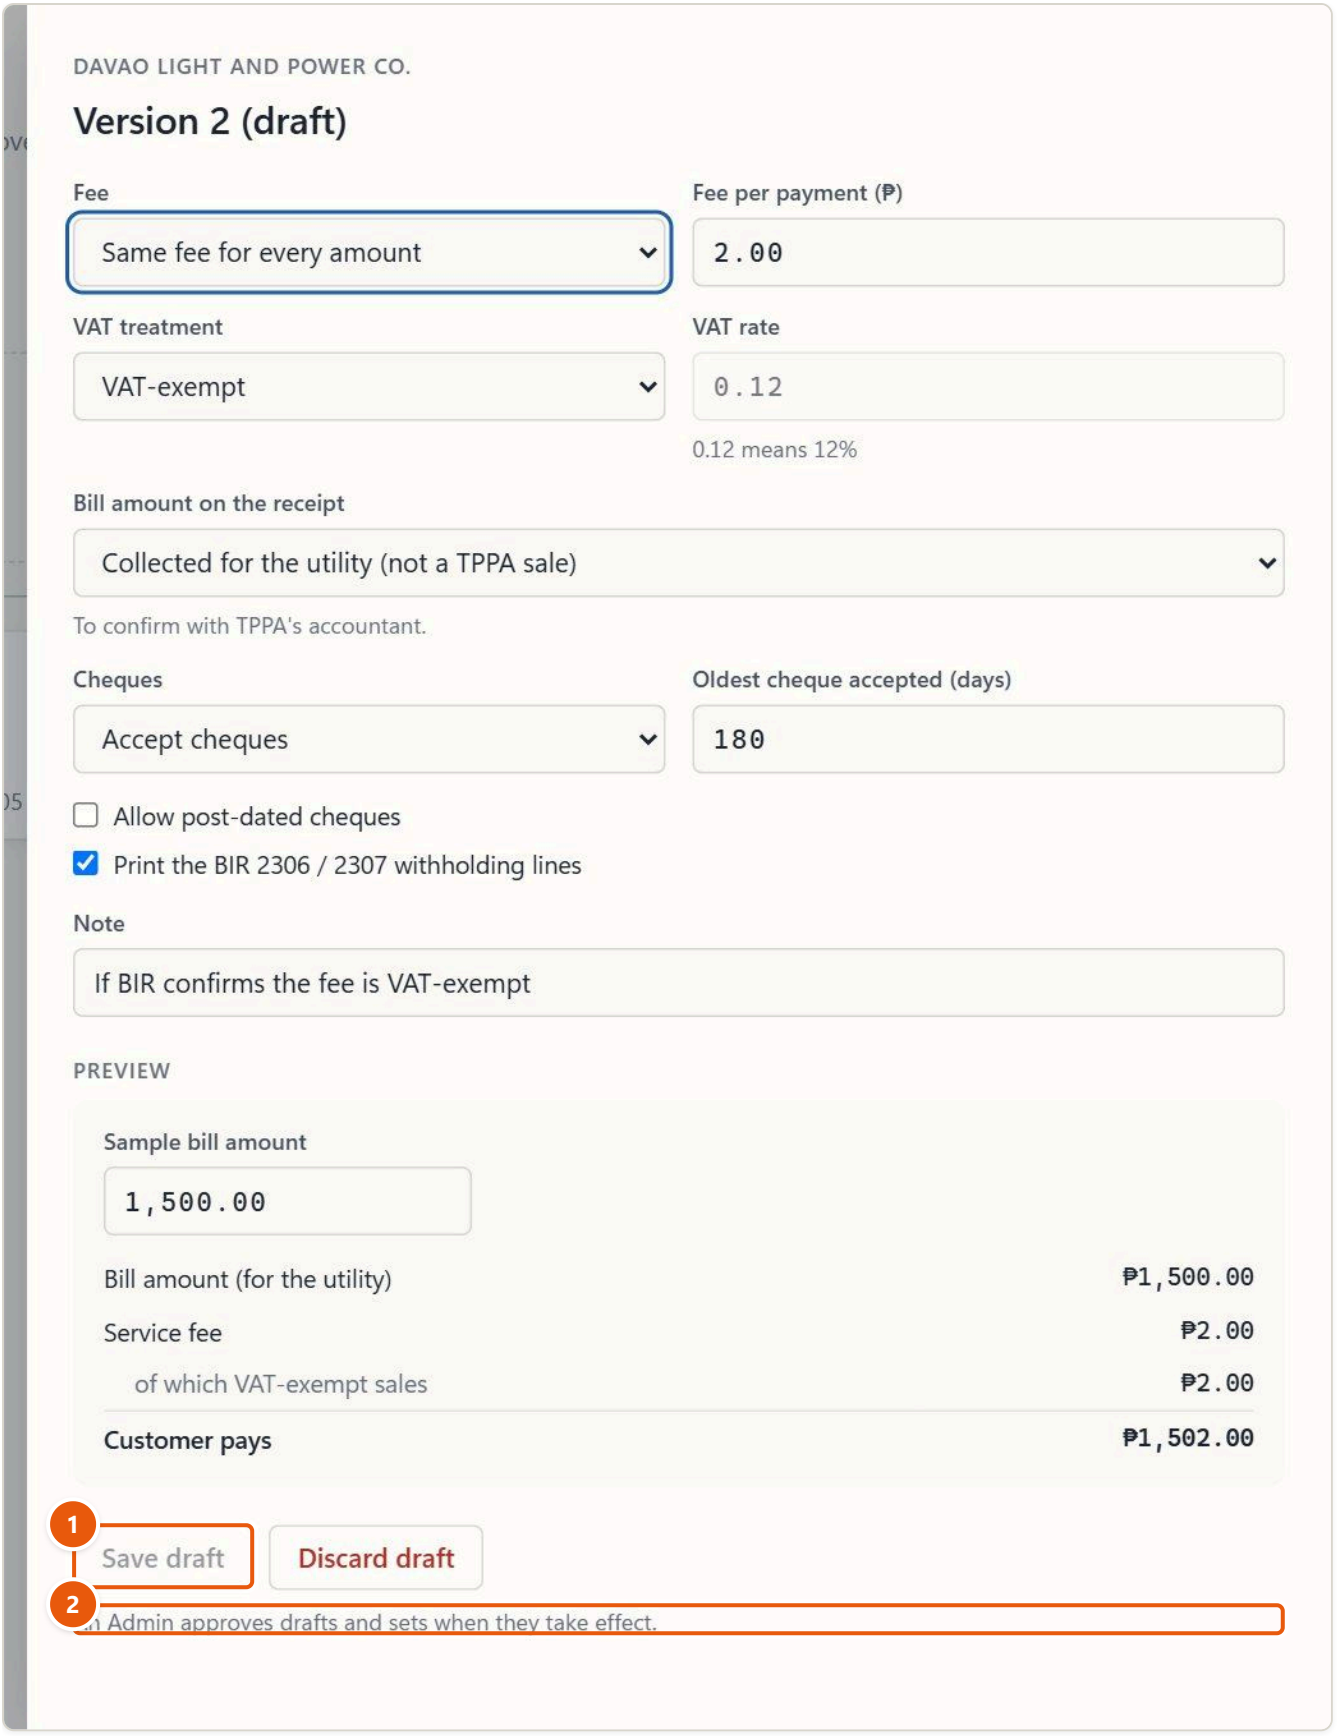


1 Save draft

2 An Admin approves it

Accounting edits drafts; an Admin approves them.


Approve a version

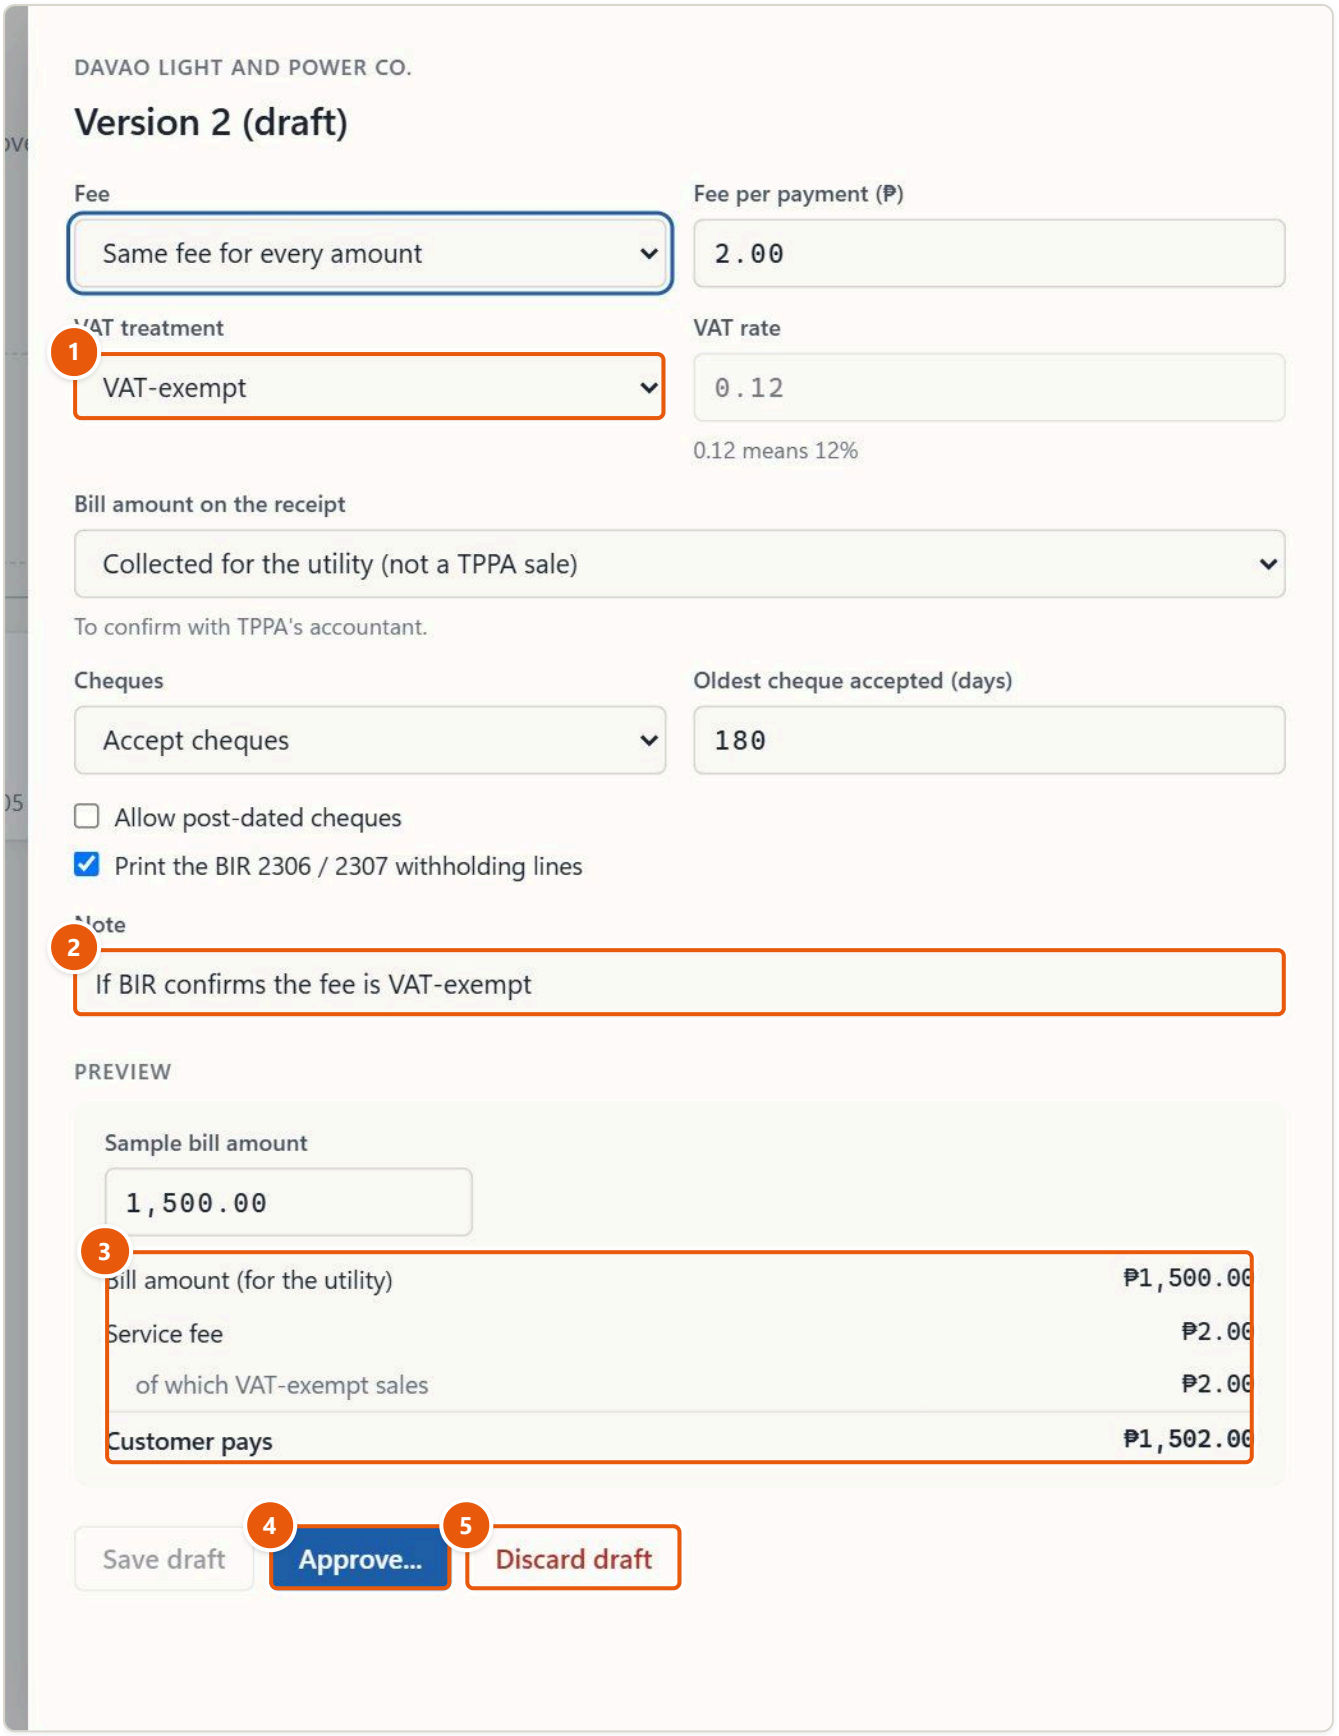

1. This draft: VAT-exempt
2. Why this version
3. Preview
4. Approve...
5. Discard draft

The DLP draft (version 2) waiting for approval.

1. Open the draft. Check the fee, the VAT, the note (2) and the preview (3).
2. Click **Approve…** (4).
3. Choose when it **Takes effect**.
4. Click **Approve**. The console says "Approved. Takes effect" with the date and time.

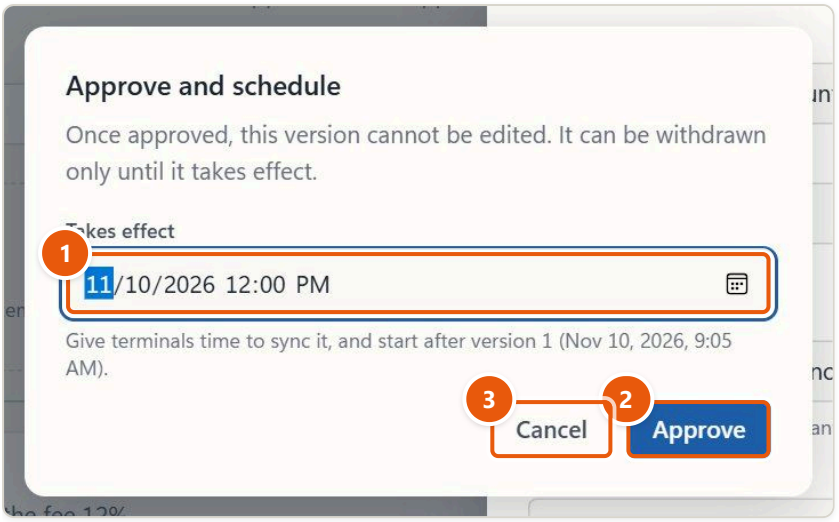

1 When it takes effect
2 Approve
3 Cancel

Approve and schedule (left with Cancel here: the draft keeps waiting).

The dialog says: "Once approved, this version cannot be edited. It can be withdrawn only until it takes effect." The start time must be after the version now in force, and at least 60 minutes ahead so terminals can sync it (the server refuses "Approval needs at least 60 minutes' notice so terminals can sync it"). The very first version of a utility can take effect at once: terminals pick it up at their next sync (every 15 seconds while online).

Withdraw or discard


- **Withdraw (not yet in effect)** on a scheduled version: it will not take effect; the version in force stays. Give a reason. The console says "Withdrawn before it took effect."
- **Discard draft** on a draft: it is kept in the history as retired and can no longer be approved. Give a reason. The console says "Draft discarded."

9. Receipt layout

Rules, Receipt layout holds where each item prints on the receipts, as versions approved like the fees. There are two kinds (1): the **Counter form (teller)** and the **Thermal roll (kiosk)**.

The counter form

The counter prints on a pre-printed 8.5" × 5.5" form with the Epson LX-310.

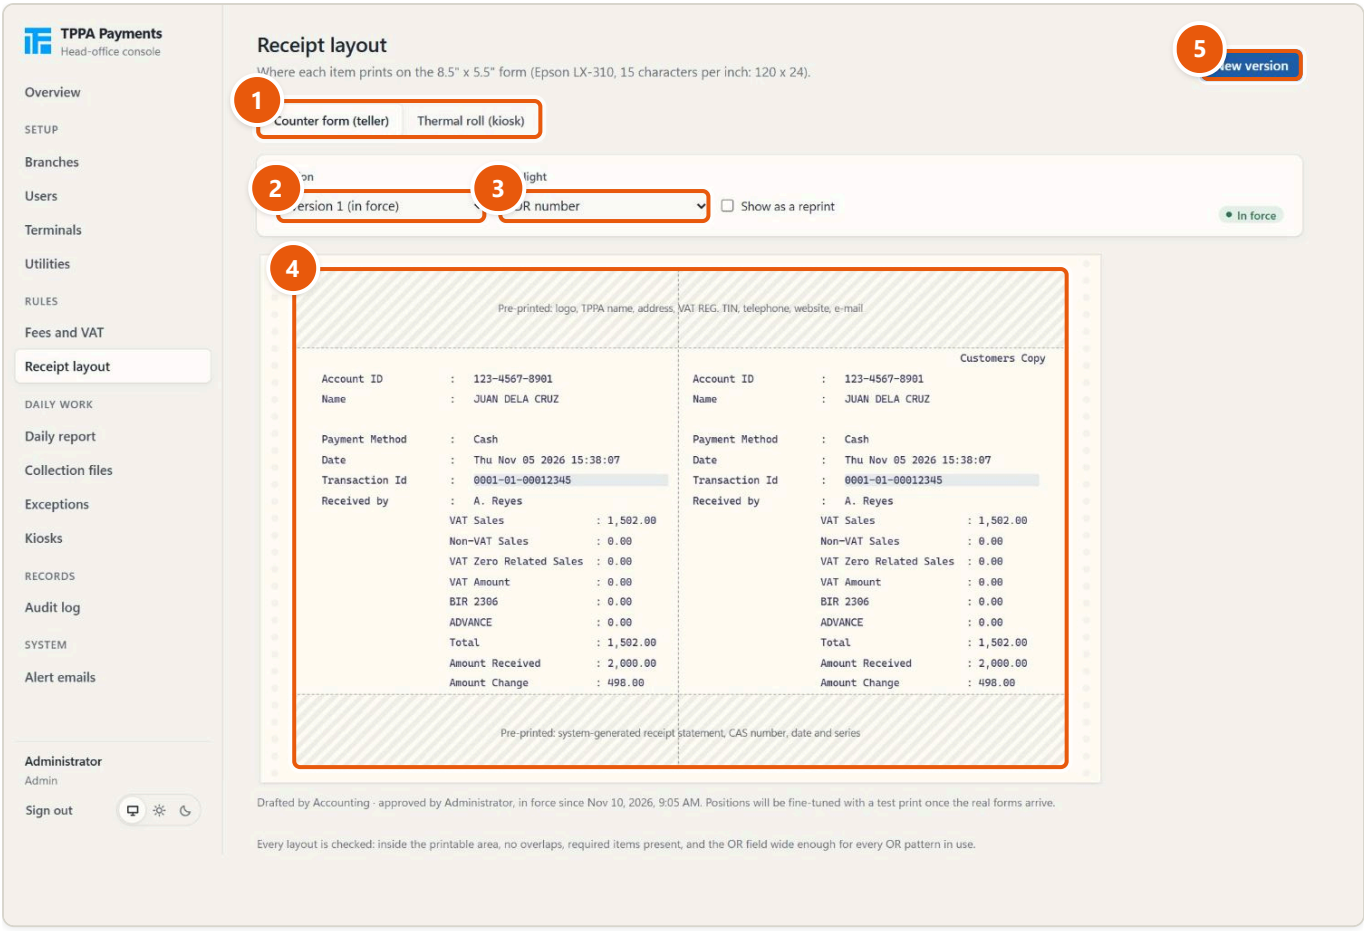

1. Counter form or thermal roll
2. Version
3. Highlight one item
4. Preview on the form
5. New version


The counter's pre-printed form.

- **Version** (2) chooses which version to see; its chip says **In force**, **Draft** and so on.
- **Highlight** (3) shows one item on the form.
- **Show as a reprint** shows the REPRINTED mark.
- The preview (4) shows the office and customer copies.

Every layout is checked: inside the printable area, no overlaps, required items present, and the OR field wide enough for every OR pattern in use. If no layout is in force, the page says "No receipt layout is in force. Tellers cannot print official receipts until one is approved and has started."

To make a new version:

1. Click **New version** (5).
2. Set **The form**: **One copy** or **Two copies** (office and customer's copy side by side), the paper size, characters and lines per inch, where the cut runs and where the customer's copy starts.
3. In **Printed values**, set the row, column, width and alignment of each value; in **Labels**, the fixed texts. Rows and columns are character positions on the form.
4. Watch the **Preview**: "Fits the form" when every check passes.
5. Type a **Note**, then click **Save draft** or **Save and approve…**. **Back without saving** leaves without changes.

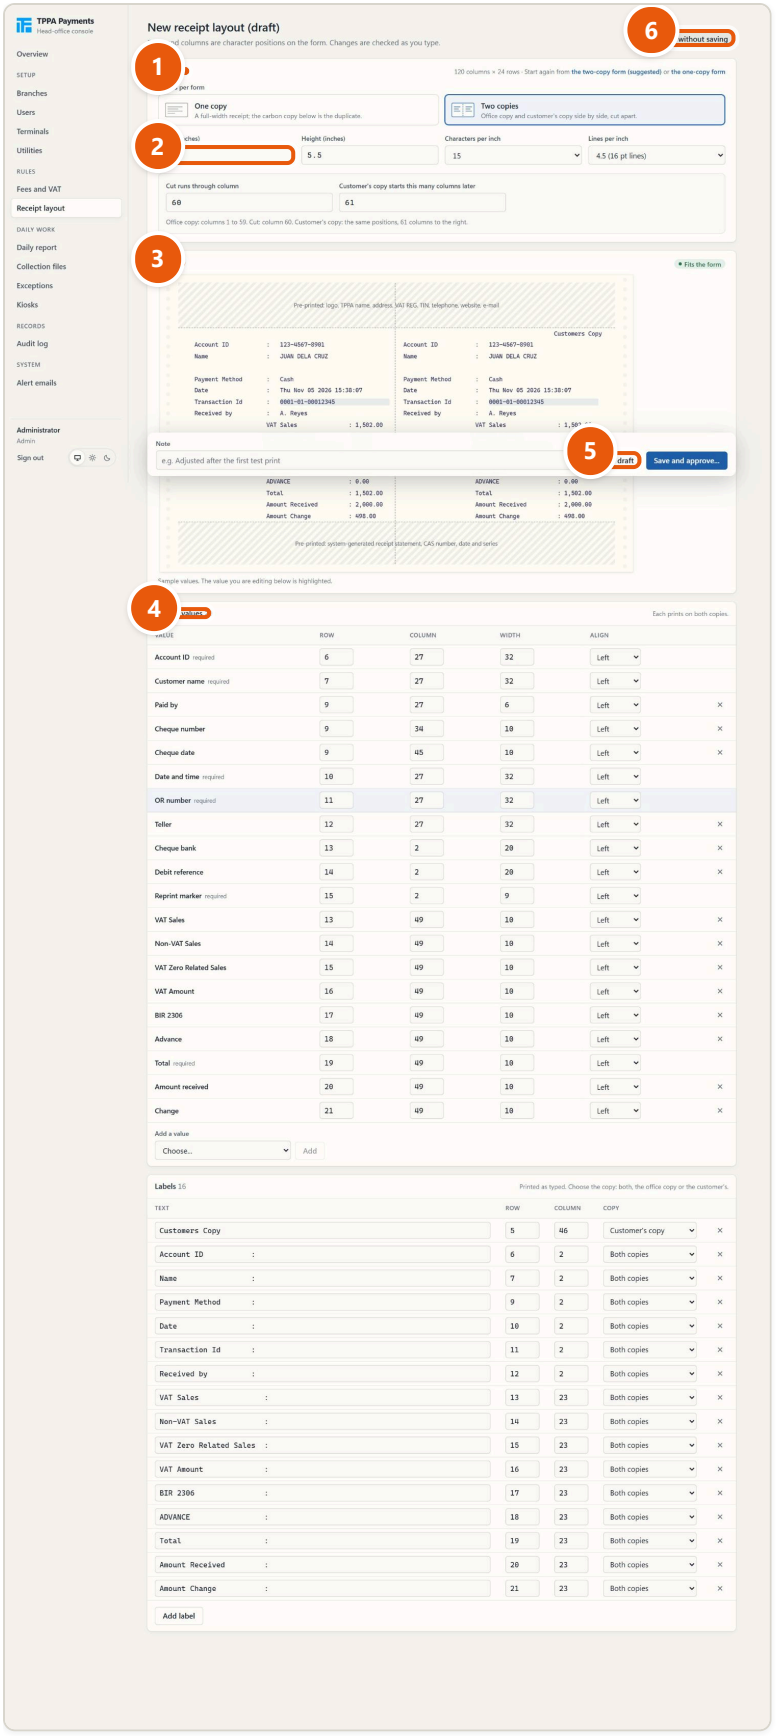

1 The form: size, copies, characters

2 Paper size

3 Preview, checked as you type

4 Where each value prints


5 Save draft

6 Back without saving

Editing a new counter form layout (left without saving).


The thermal roll (kiosks)

The kiosks print on an 80 mm thermal roll. There is no pre-printed form: the kiosk prints the header and footer the BIR requires from this layout. Choose the **Slip** to see each one:

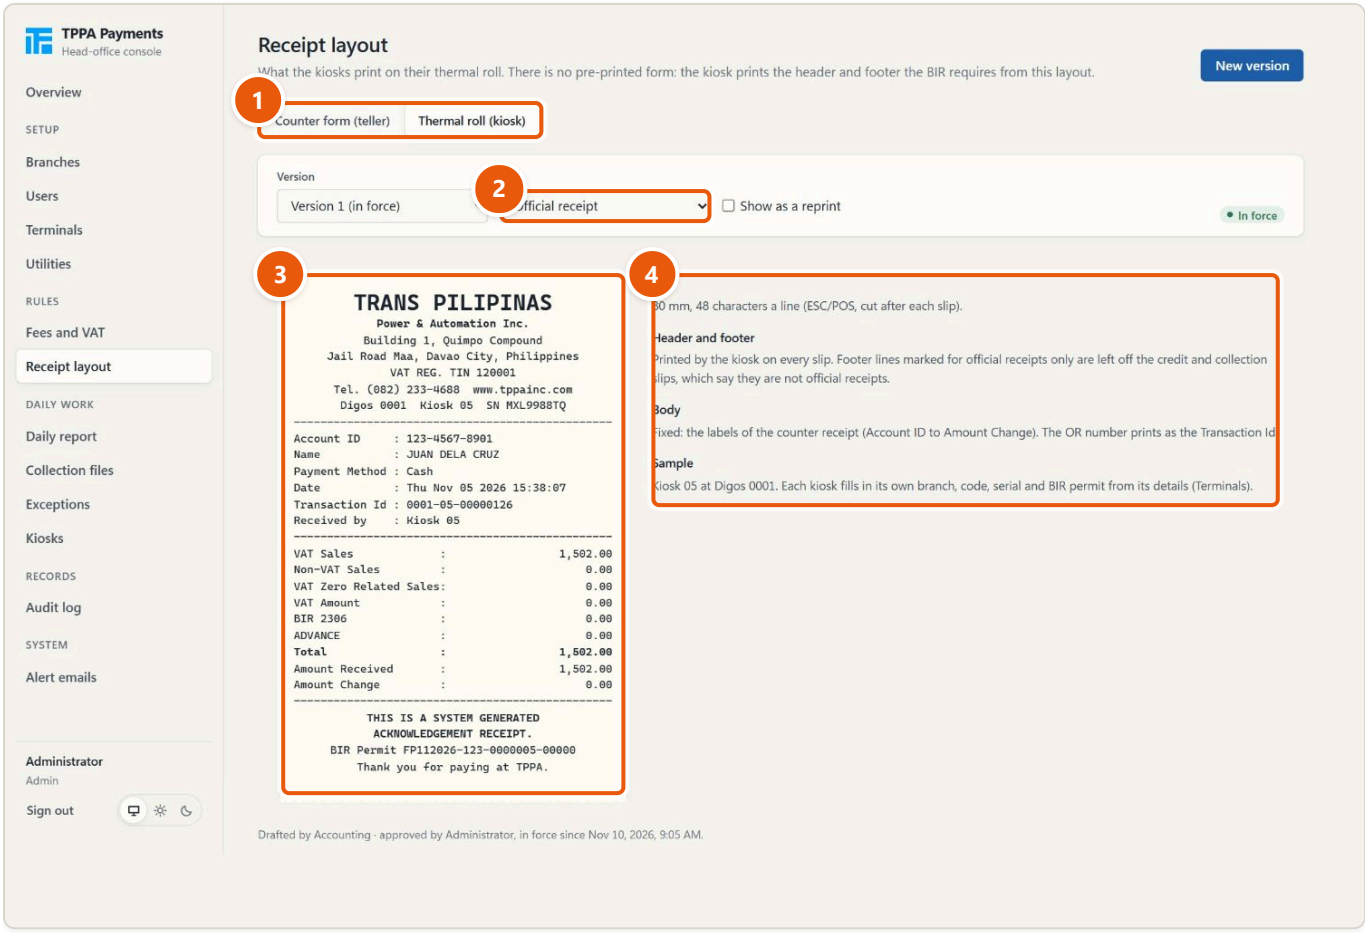


1. Thermal roll (kiosk)
2. Slip: Official receipt
3. The roll as the kiosk prints it
4. What the roll holds

Thermal roll: Official receipt.

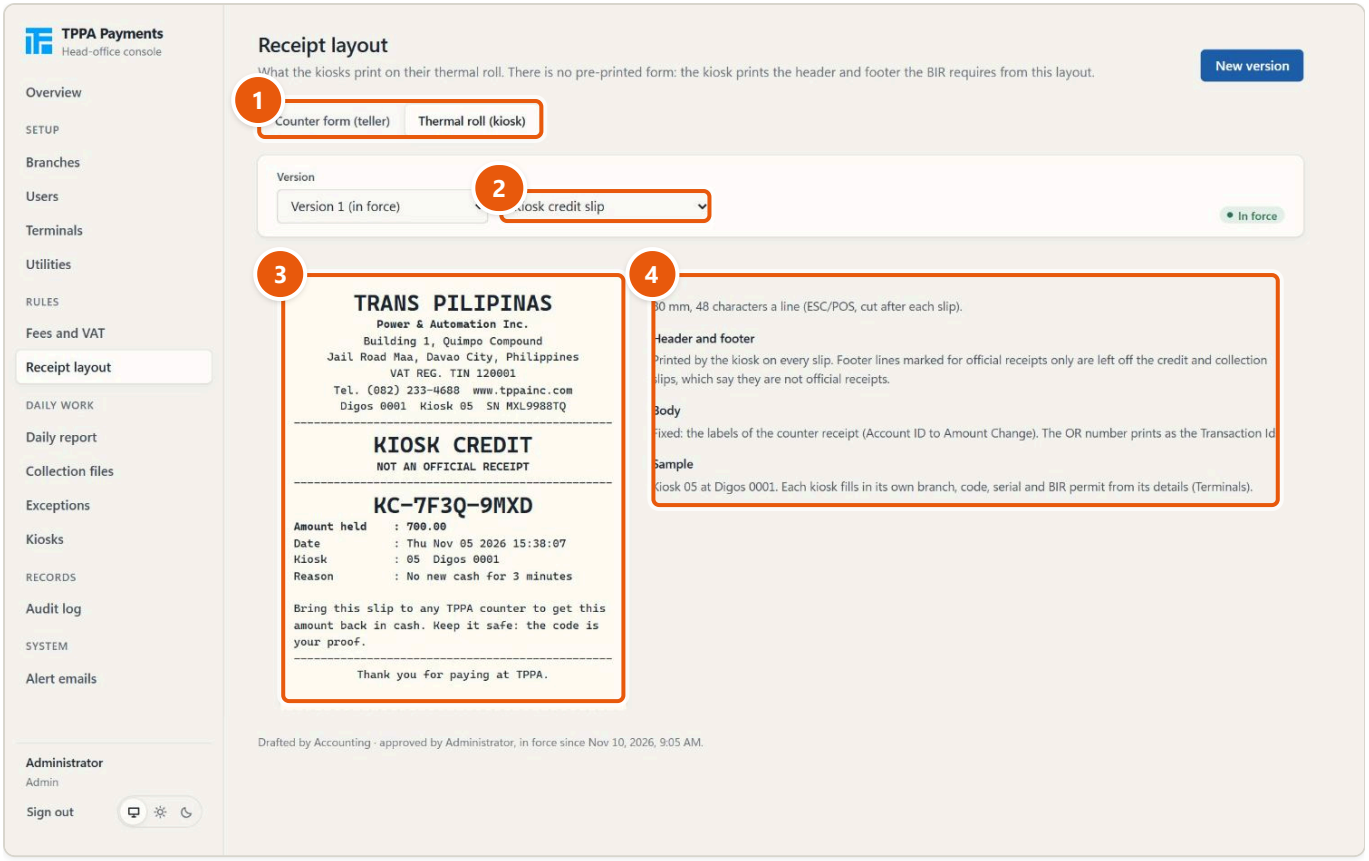

1. Thermal roll (kiosk)
2. Slip: Kiosk credit slip
3. The roll as the kiosk prints it
4. What the roll holds


Thermal roll: Kiosk credit slip.

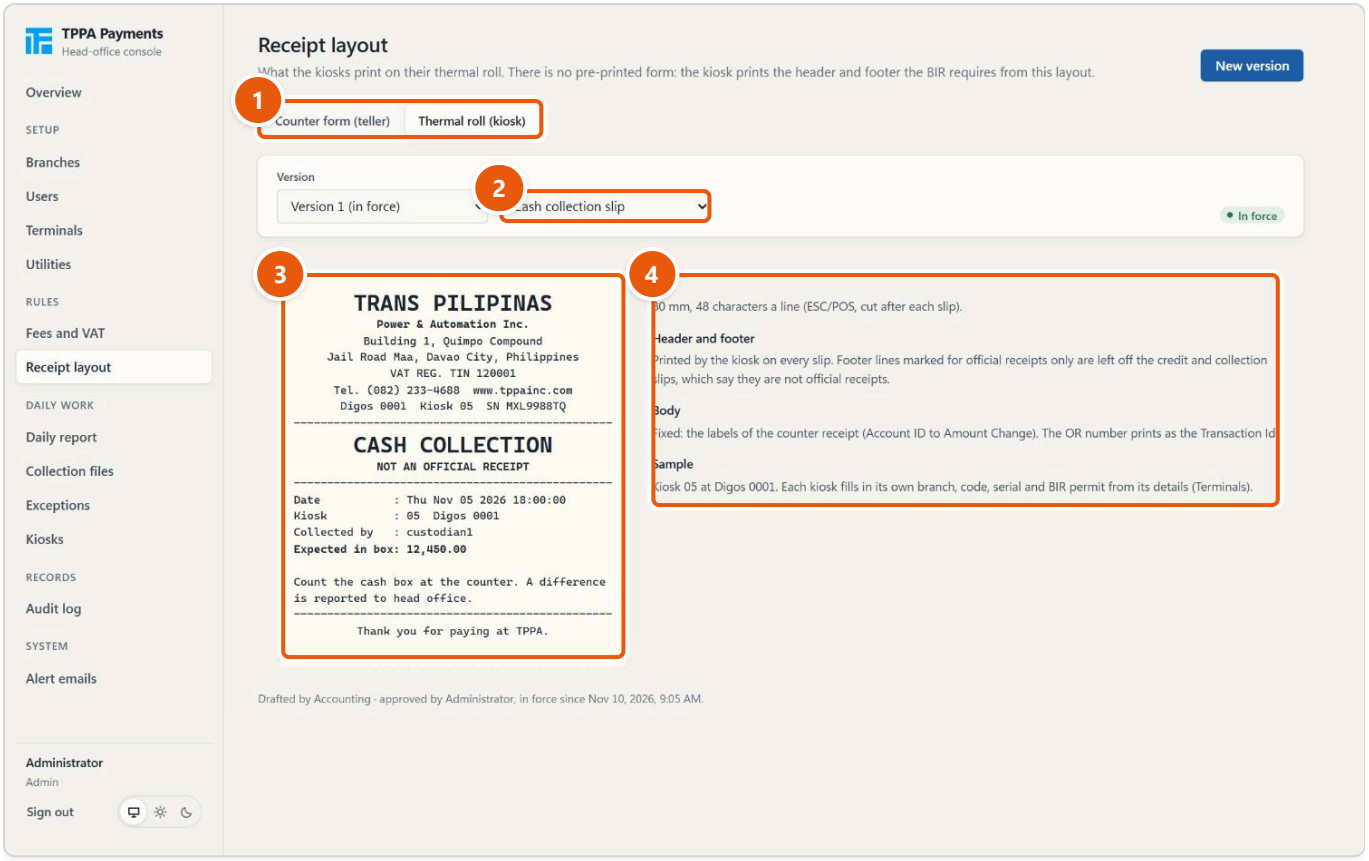

1. Thermal roll (kiosk)
2. Slip: Cash collection slip
3. The roll as the kiosk prints it
4. What the roll holds

Thermal roll: Cash collection slip.

To make a new version, click **New version**:

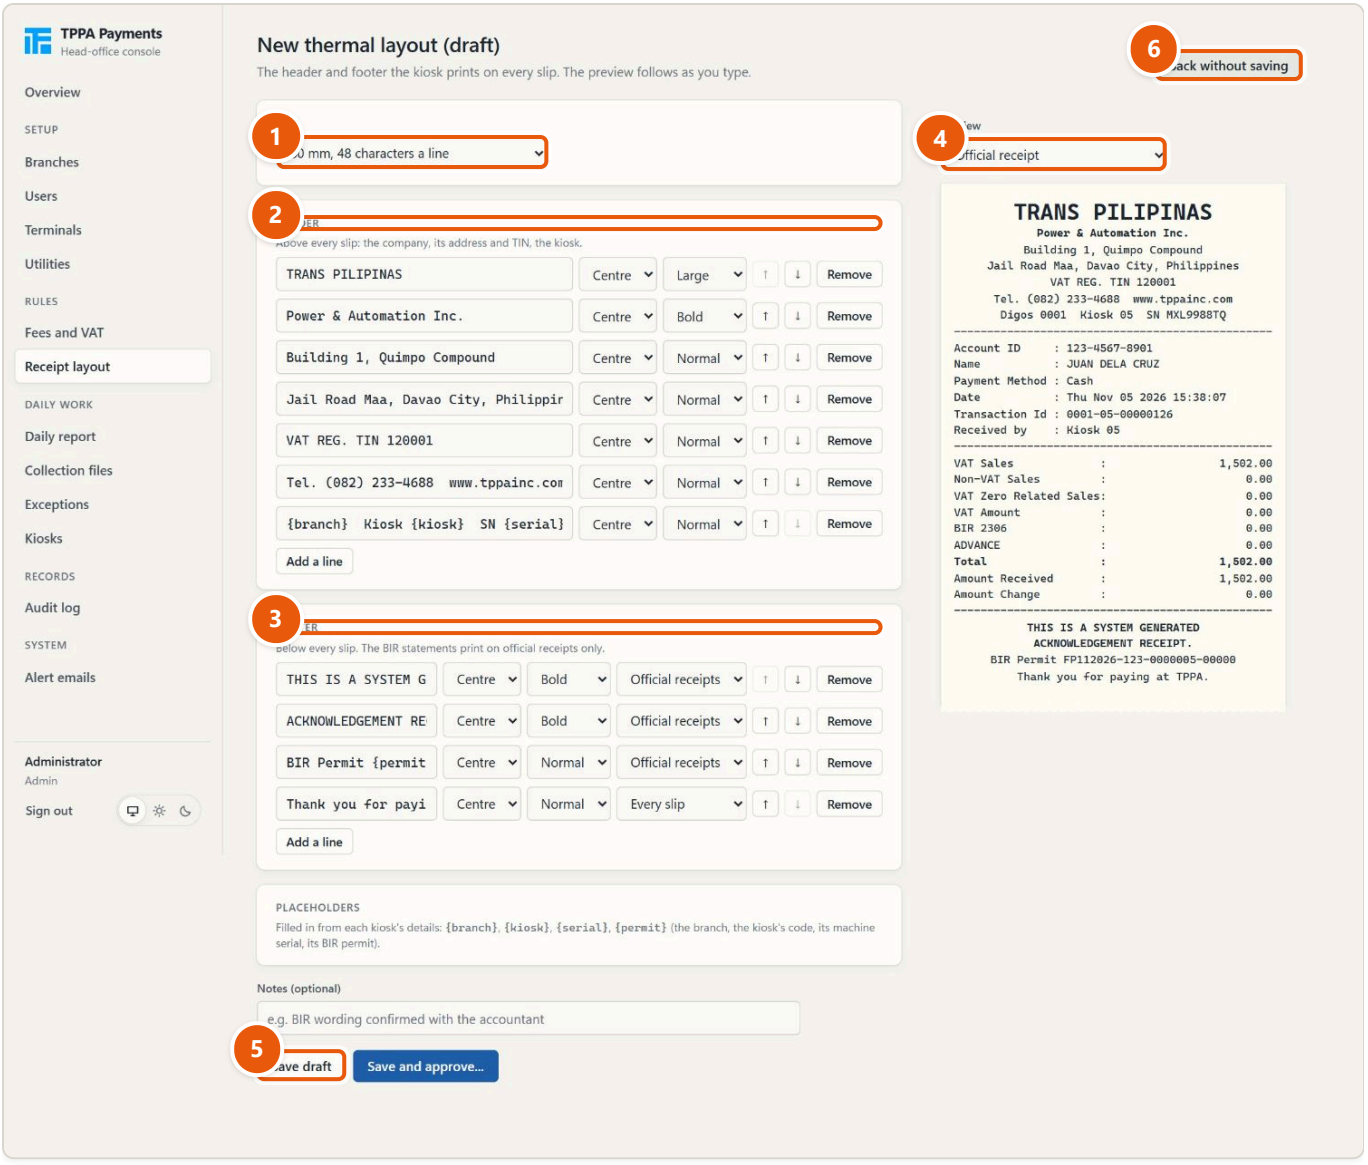

1. Roll width
2. Header lines
3. Footer lines
4. Preview a slip
5. Save draft
6. Back without saving

Editing a new thermal layout (left without saving).


1. Choose the **Roll**: "80 mm, 48 characters a line" or "58 mm, 32 characters a line".
2. Set the **Header** and **Footer** lines: each with its text, Left/Centre/Right and Normal/Bold/Large; footer lines on **Every slip** or **Official receipts** only. Use the arrows to move a line, **Remove** to delete it, **Add a line** to add one.
3. Check each slip in the preview.
4. Click **Save draft** or **Save and approve...**.

Approve, withdraw or discard a layout

On a draft, click **Approve...** and choose when it takes effect, exactly as for a fee version. **Edit draft** changes it, **Discard draft** retires it, and **Withdraw (not yet in effect)** stops a scheduled version. Accounting can draft layouts; only an admin or super admin approves them.

10. Daily report

Daily work, Daily report shows what a branch collected on a business day, terminal by terminal, from what the terminals sent.

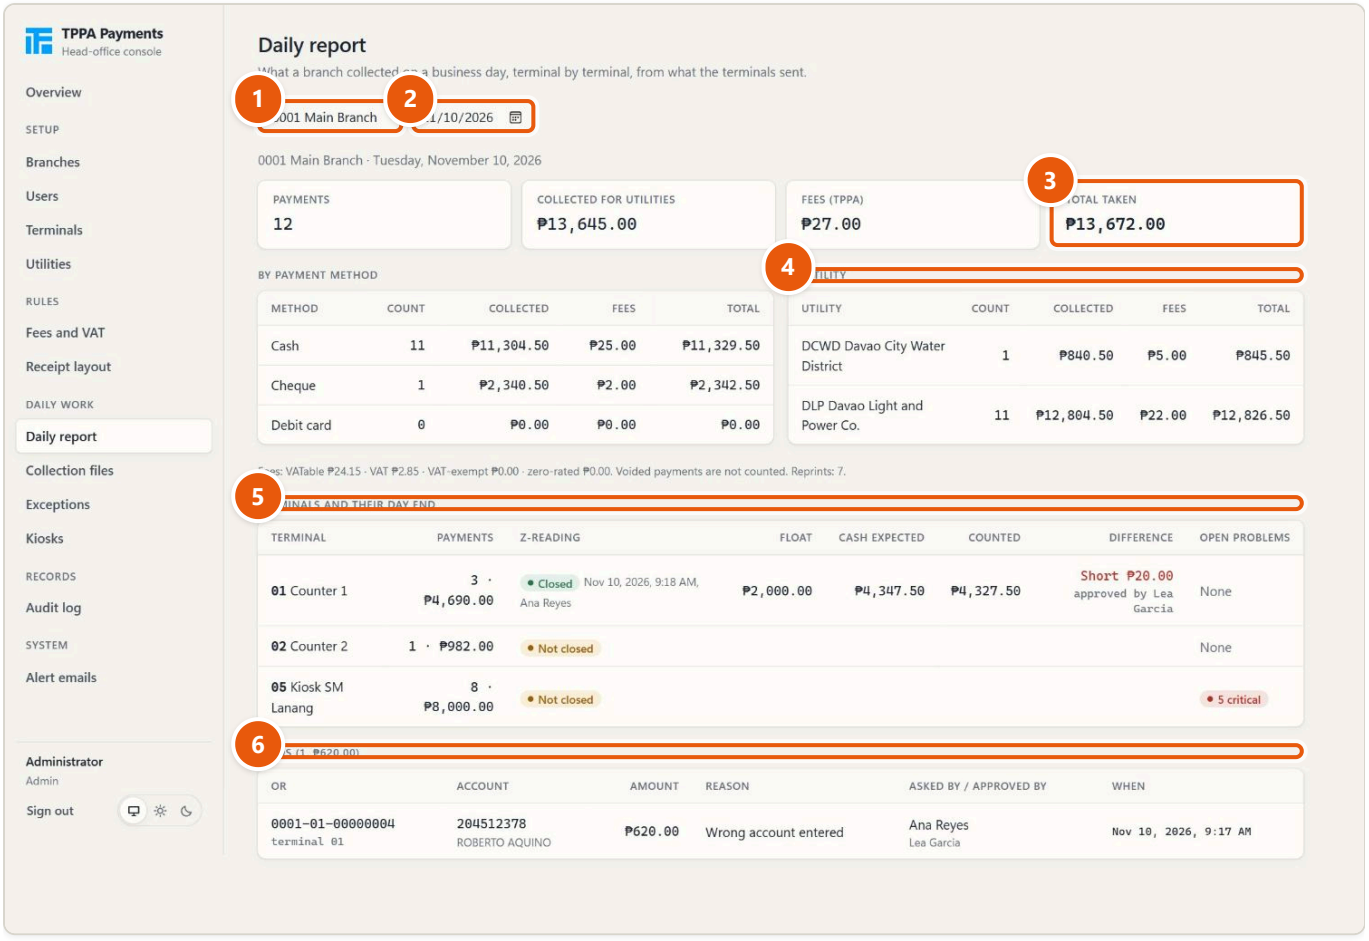

1. Branch
2. Business day
3. The day in totals
4. By payment method and by utility
5. Each terminal: Z-reading, cash, difference
6. Voids: who asked, who approved

The daily report of the Main Branch, today.

1. Choose the **Branch** (1) and the **Business day** (2).
2. Read the totals (3): payments, collected for the utilities, TPPA's fees, total taken.
3. **By payment method** and **By utility** (4) split them. Below: the fees' VATable, VAT, VAT-exempt and zero-rated parts; voided payments are not counted.
4. **Terminals and their day end** (5): each terminal's payments, when and by whom it closed the day, the float, the cash expected and counted, the difference and who approved it, and what is left to check. A terminal not closed shows "Not closed".
5. **Voids** (6): each voided payment, why, who asked and who approved.


11. Collection files

Each utility receives a **collection file** (a `.TXT` file, with a `.RPT` report) for each branch's day. **Daily work, Collection files** makes them.

The rule: every terminal closes the day first

Files are made once **every terminal of the branch has closed the day** (Day end on the terminal). Terminals not registered yet do not count. Then the page says that every terminal of the branch has closed the day and "the files can be made", and anyone with the page can click **Generate files** on each utility's card.

Before that, only a branch manager, an admin or a super admin can make them, with a reason. Accounting sees "Waiting for every terminal to close the day."

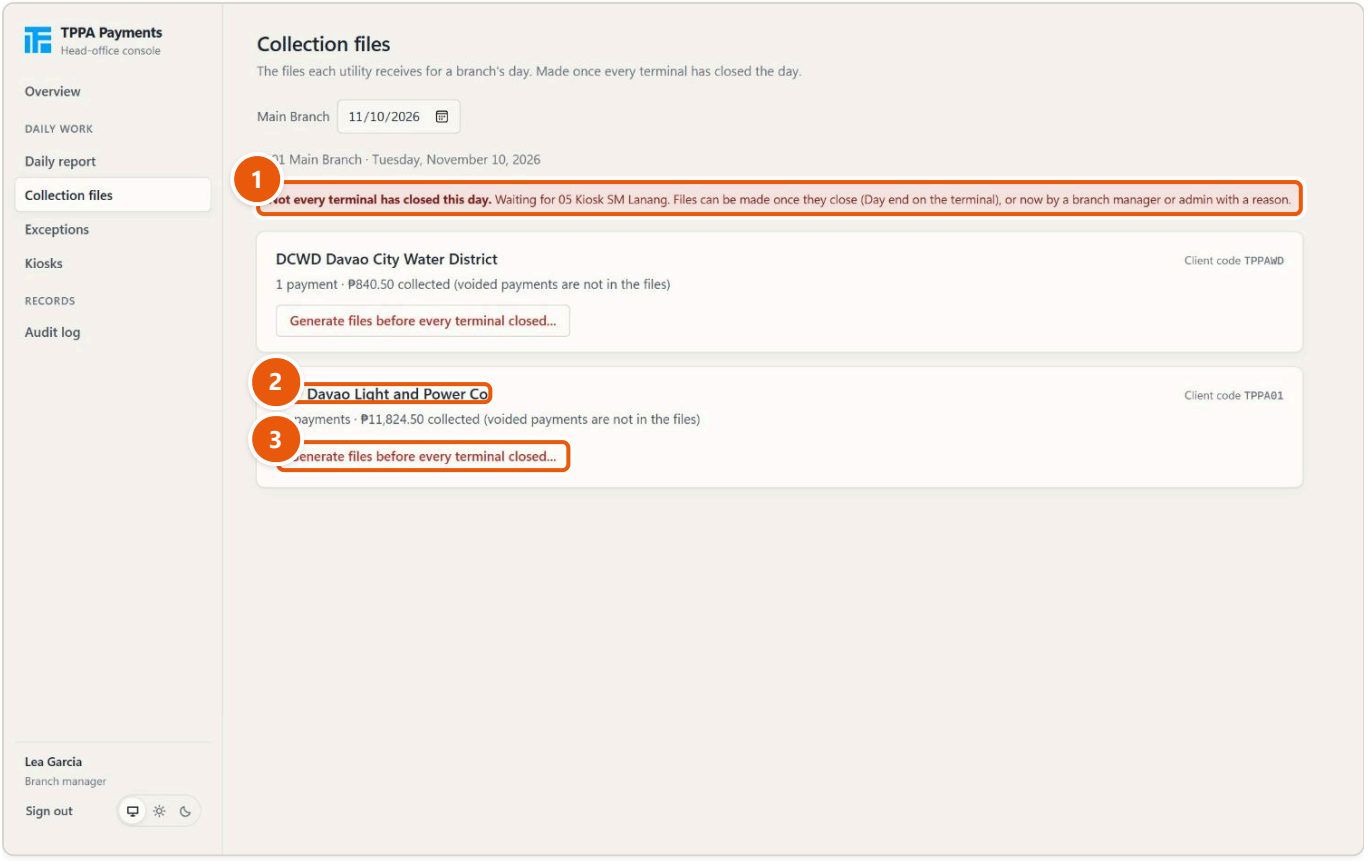


1 Not every terminal has closed: which ones
2 One card per utility
3 Make them now, with a reason

Before every terminal closed (taken as a branch manager; an admin sees the same).

Make the files before every terminal closed

Do this only when a utility needs the file and a terminal cannot close (for example, it is out of order).

1. Choose the branch and the day.
2. Read which terminals are still open (1).
3. On the utility's card, click **Generate files before every terminal closed...** (3).
4. Type the **Reason**: at least 10 characters, naming the terminal still open and why.
5. Click **Make the files**. The console says "Files ready."

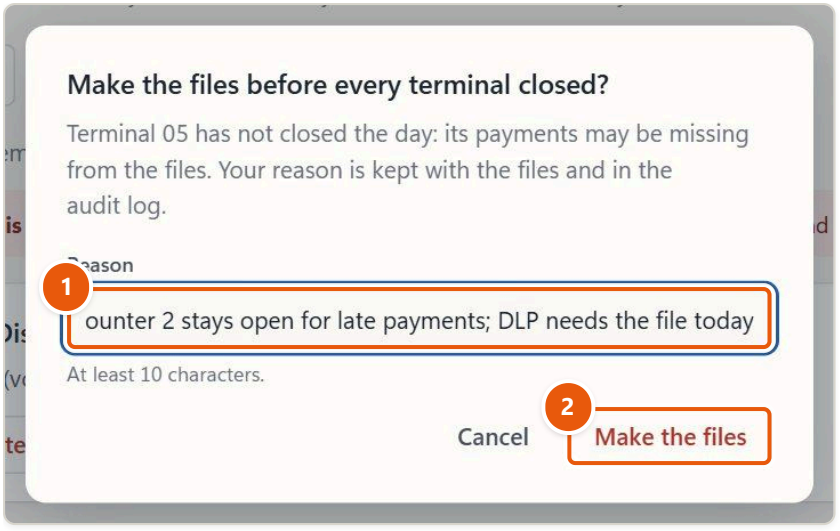


1 Reason: at least 10 characters 2 Make the files

Making the files before every terminal closed.

The dialog warns that the open terminal's payments may be missing from the files. Your reason is kept with the files and in the audit log, the file shows **Made before every terminal closed**, and Exceptions shows a "Files made before every terminal closed" check for that day.

Download the files

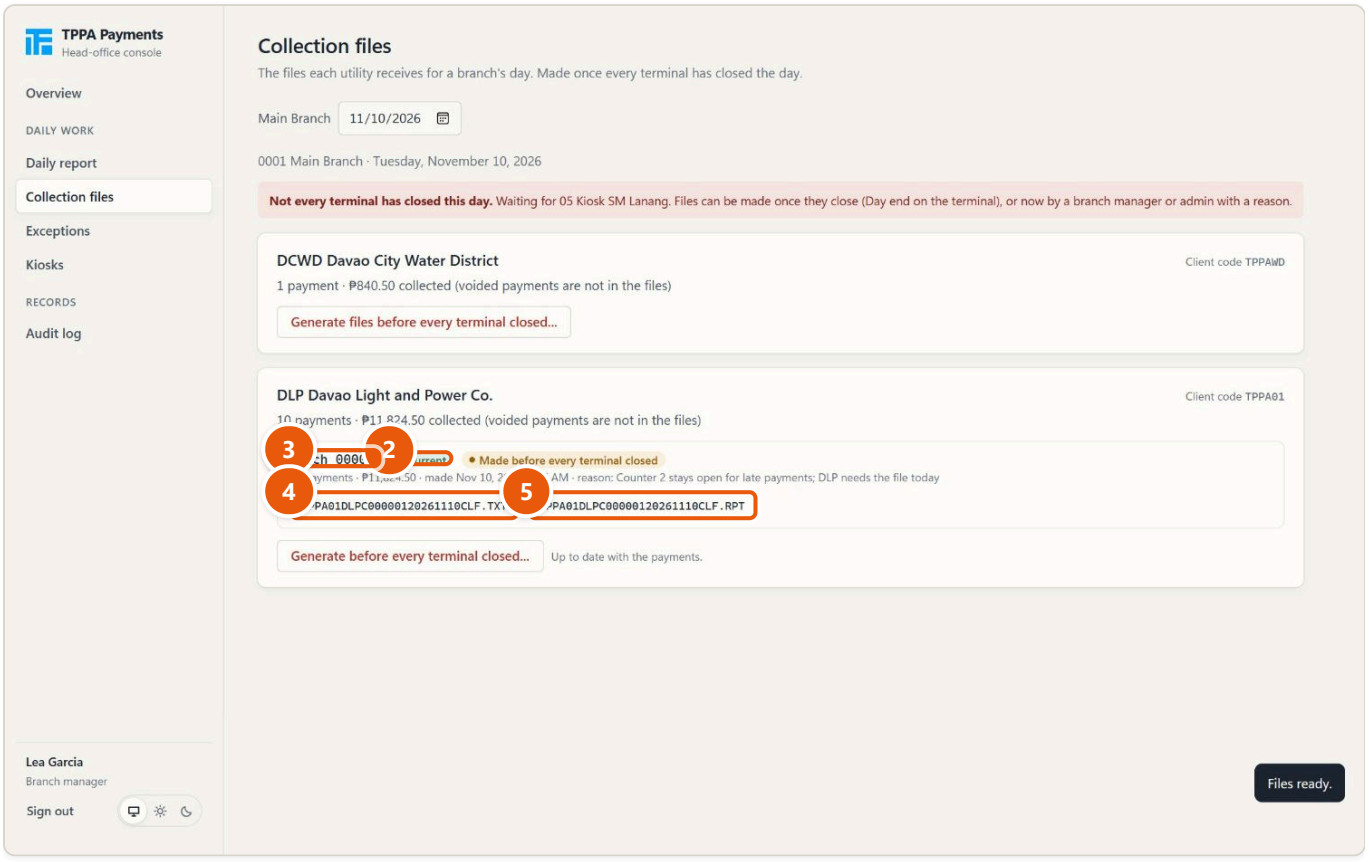


1 The batch number
2 Current
3 Made before every terminal closed, with the reason
4 Download the .TXT
5 Download the .RPT

The DLP files, ready to download.

Each card shows the **Batch** number (1), **Current** (2), how many payments and how much, when it was made, and the reason if it was made early (3). Click the `.TXT` (4) or `.RPT` (5) file name to download it. The batch number is in the file name. Voided payments are not in the files, and fees never are.

Generate again

When payments change after a batch was made (a late payment or a void), the card says "Payments changed since batch 1 (a late payment or a void). Generate the files again: they get a new batch number, and batch 1 is kept as superseded."

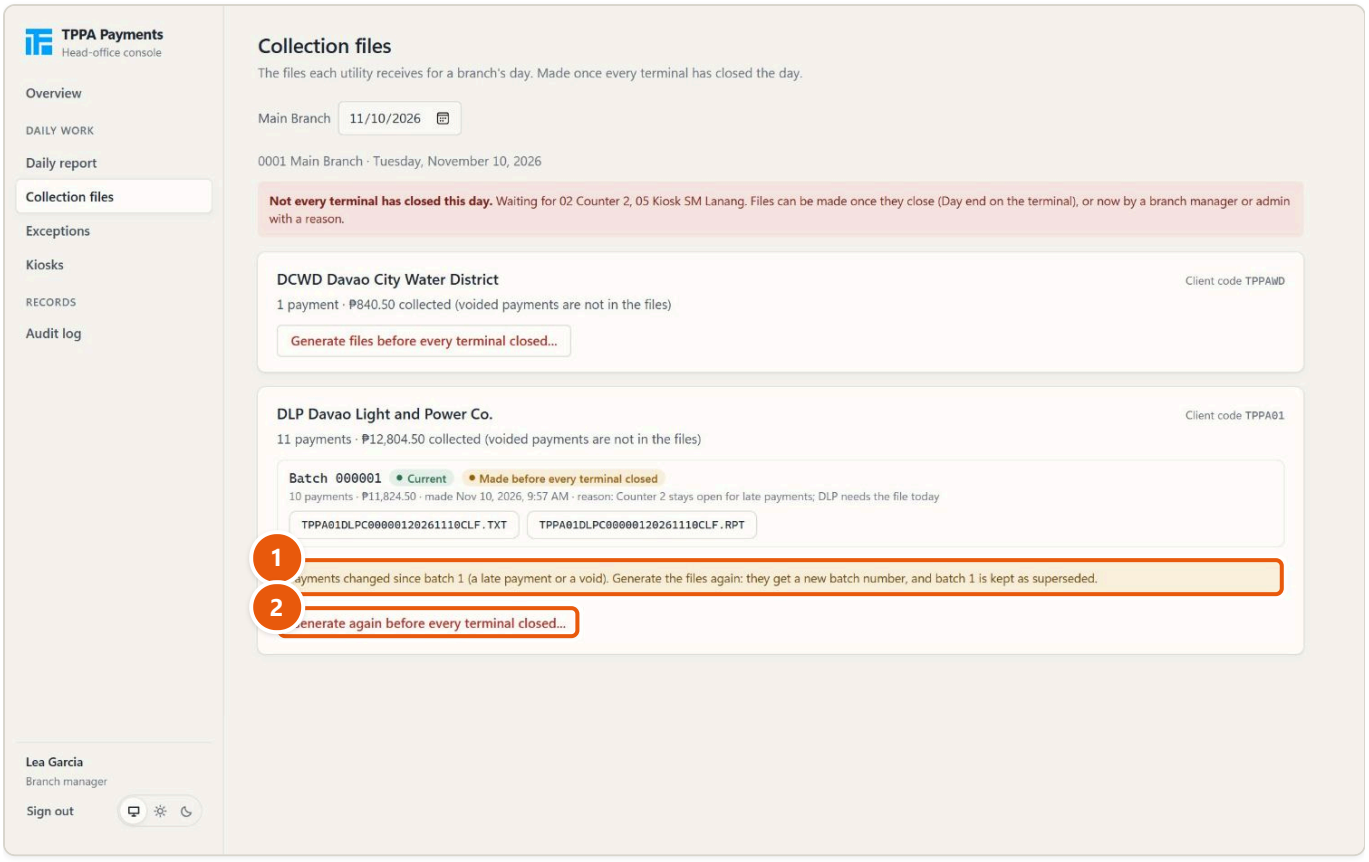


1 Payments changed since the batch

2 Generate again

A late payment: the files must be made again.

1. Click **Generate again** (or **Generate again before every terminal closed...**, with a reason, if a terminal is still open).
2. The new batch becomes **Current**. The earlier one moves to **Earlier batches (superseded, kept)** with its time, and stays downloadable.

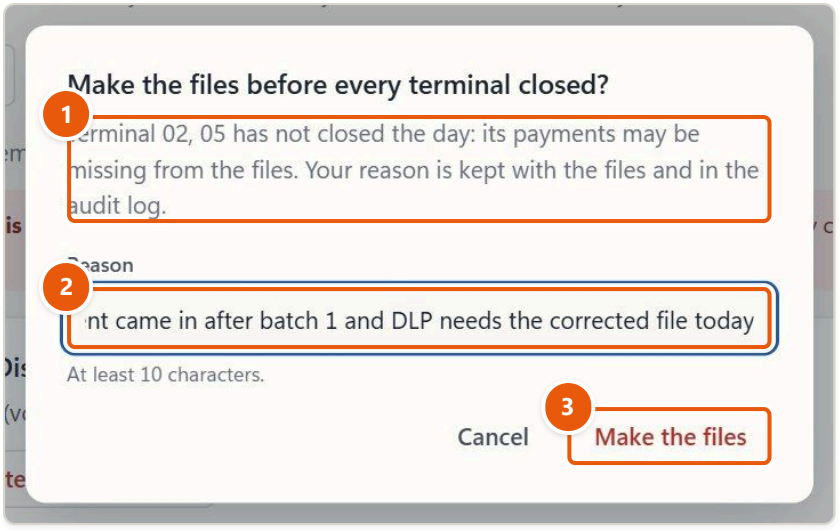


1 The terminals still open

2 Reason: names the terminal still open

3 Make the files

Generating again before every terminal closed: a reason again.

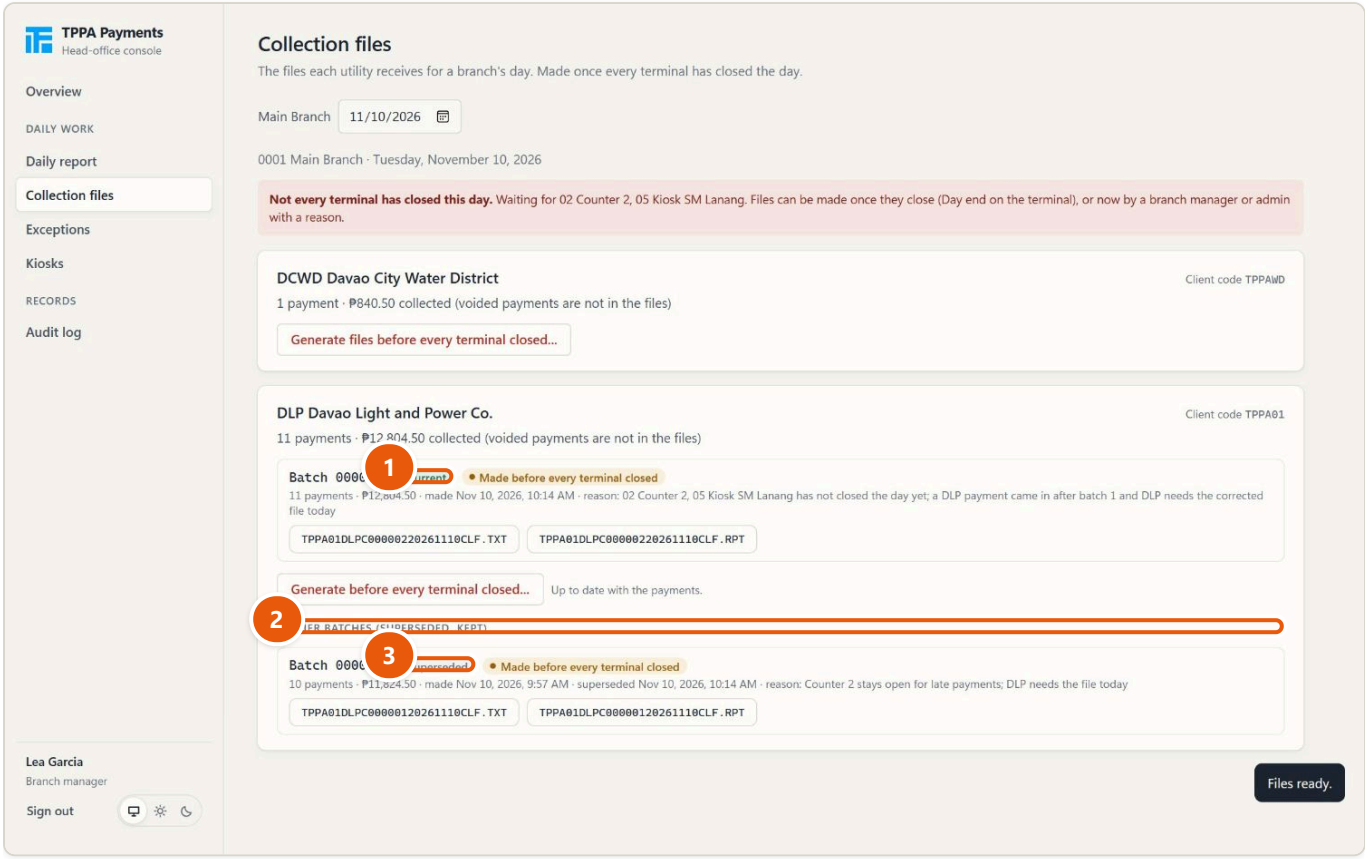

1 The new batch is current

2 Earlier batches, kept as superseded


3 Superseded: when, and still downloadable

Generated again: the earlier batch is kept.

When nothing changed, the button is greyed with "Up to date with the payments." Files can be made only for past days or today.

12. Exceptions

Daily work, Exceptions shows what the terminals sent that does not add up, and the day's checks. Choose the branch and the day at the top.

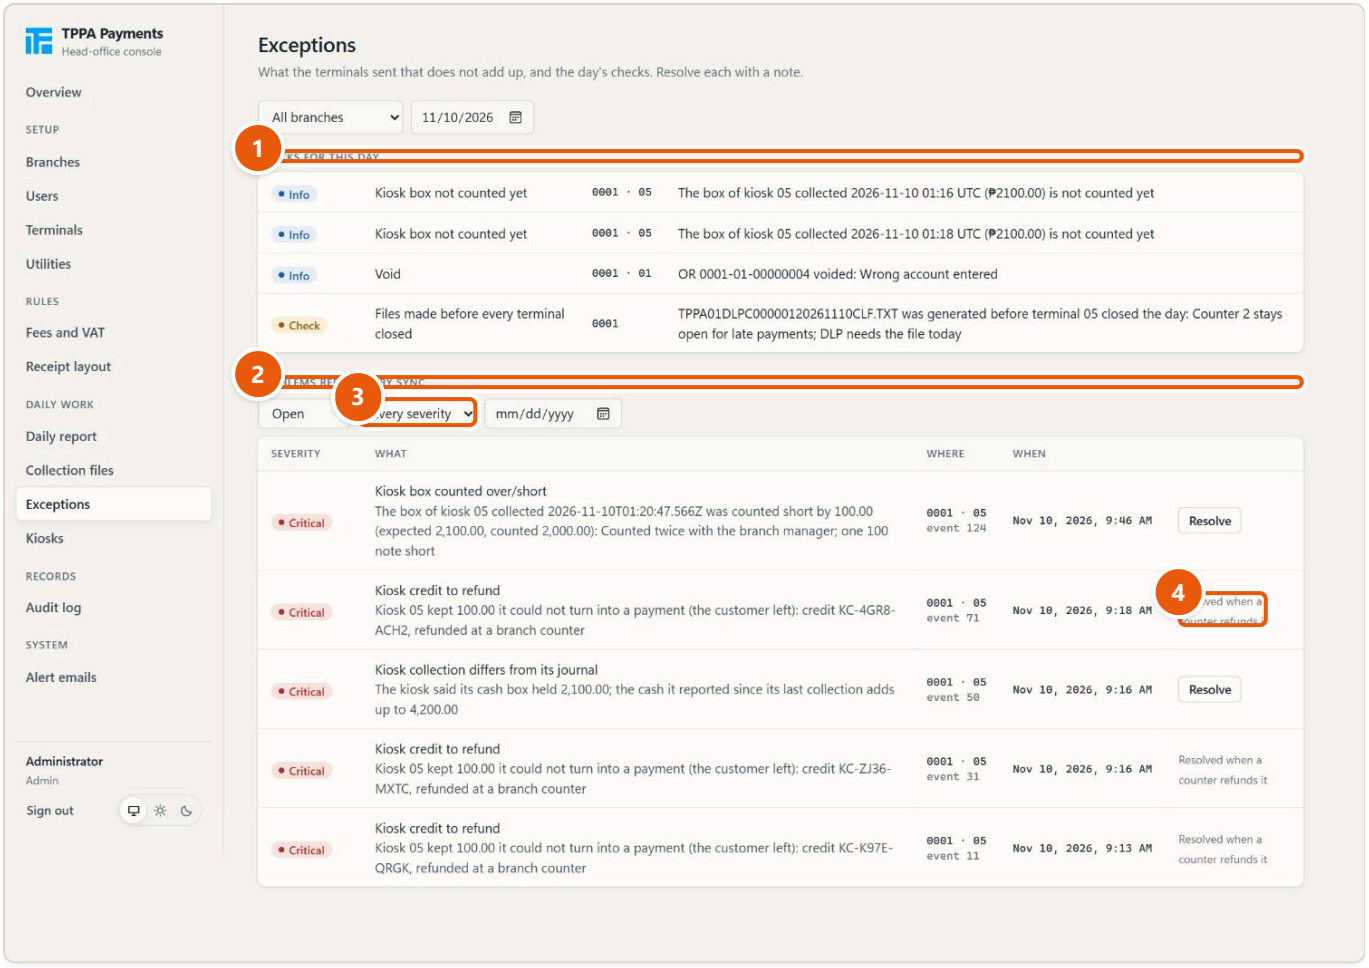

1 Checks for this day: clear by themselves
2 Problems reported by sync
3 Filters: status, severity, day
4 A kiosk credit: resolved by its refund

Exceptions, all branches.

There are two lists:


- **Checks for this day** (1) are worked out live from the day's records, for example "Kiosk out of service", "Kiosk box not counted yet", "Void" or "Files made before every terminal closed". They clear by themselves when the cause goes away; there is nothing to resolve.
- **Problems reported by sync** (2) are what the terminals and kiosks reported: for example a cash difference at day end, a kiosk box counted over or short, a kiosk credit to refund. Each stays until someone resolves it.

Use the filters (3) to show **Open**, **Resolved** or **All**; **Critical** or **Check**; and the day it was raised. Severities are **Critical**, **Check** and **Info**.

Resolve a problem

1. Find out what happened (call the branch, check the daily report).

2. Click **Resolve** on the row.
3. In **What was found or done**, say what you found and did (at least 5 characters).
4. Click **Resolve**. The console says "Resolved."

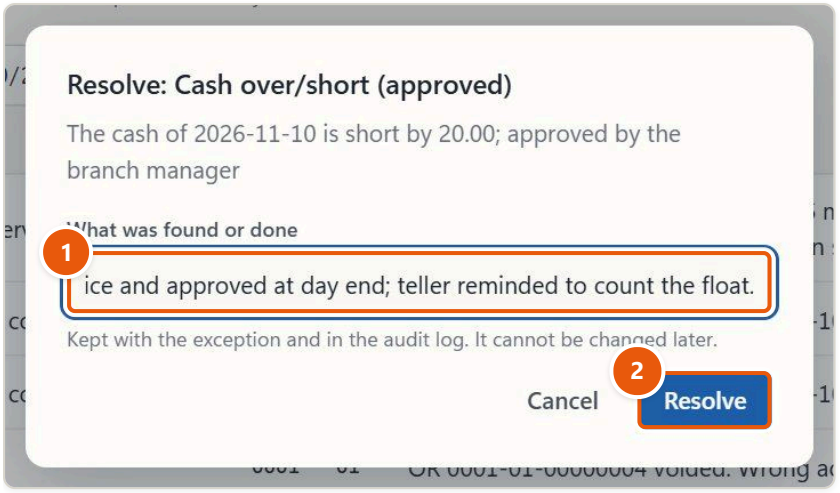


1 What was found or done (kept, cannot change)

2 Resolve

Resolving the ₱20 cash difference of Counter 1.

The note is kept with the exception and in the audit log. It cannot be changed later. Resolved rows show "Resolved by (name), (time): (note)".

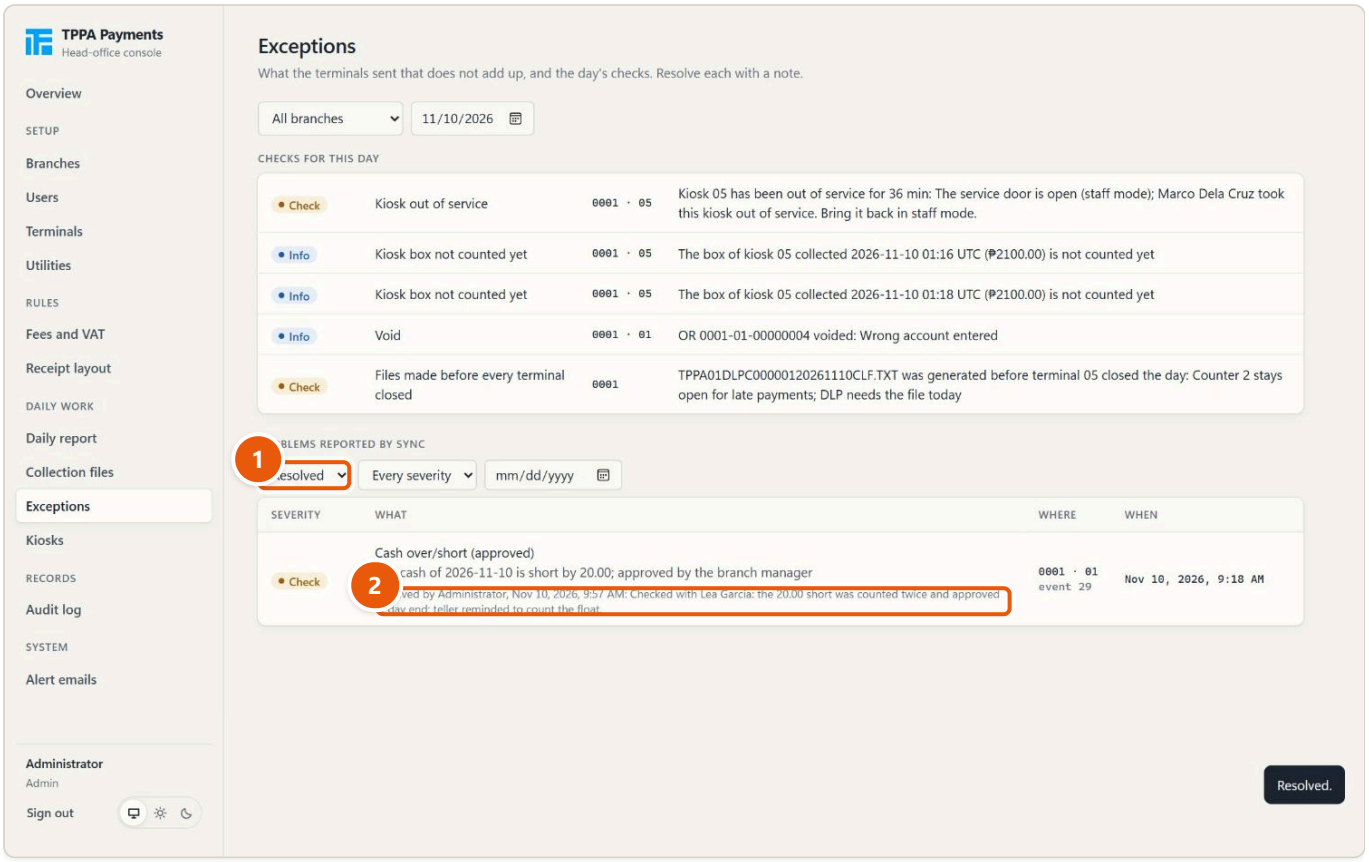


1 Status: Resolved

2 Who resolved it, when, and the note

Resolved exceptions keep their note.

Kiosk credits resolve themselves

When a kiosk keeps cash it could not turn into a payment (the customer left), it issues a kiosk credit slip and reports a "Kiosk credit to refund". It cannot be resolved by hand: the row reads "Resolved when a counter refunds it" (4 in the Exceptions picture). When a branch counter refunds the credit, with a branch manager's approval, it is resolved with where, who and who approved.

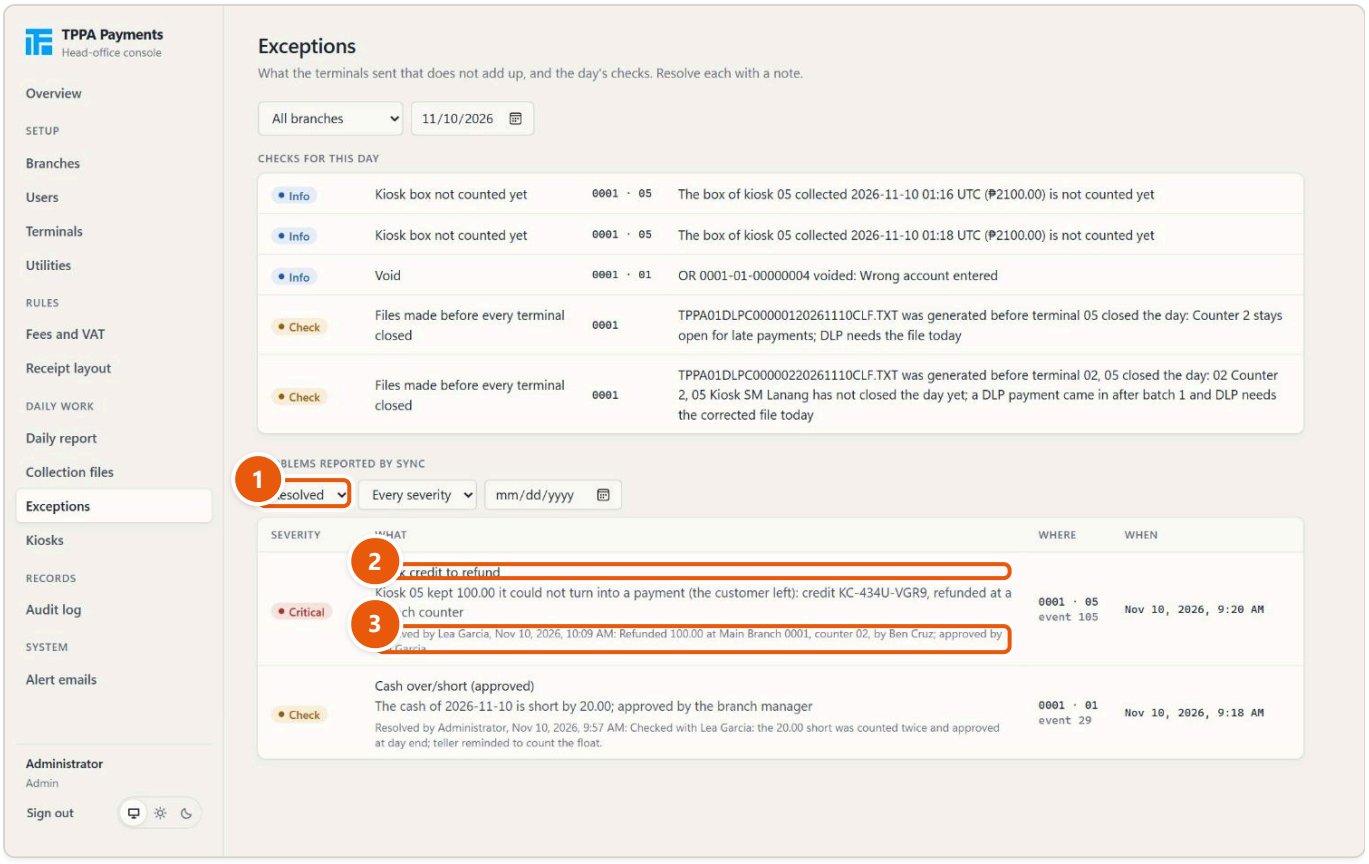

1 Status: Resolved


2 The kiosk credit

3 Resolved by its refund: where, who, approved by

A kiosk credit is resolved by its refund at a counter, not by hand.

13. Kiosks

Daily work, Kiosks shows each kiosk now, and the cash collections waiting to be counted at the office.

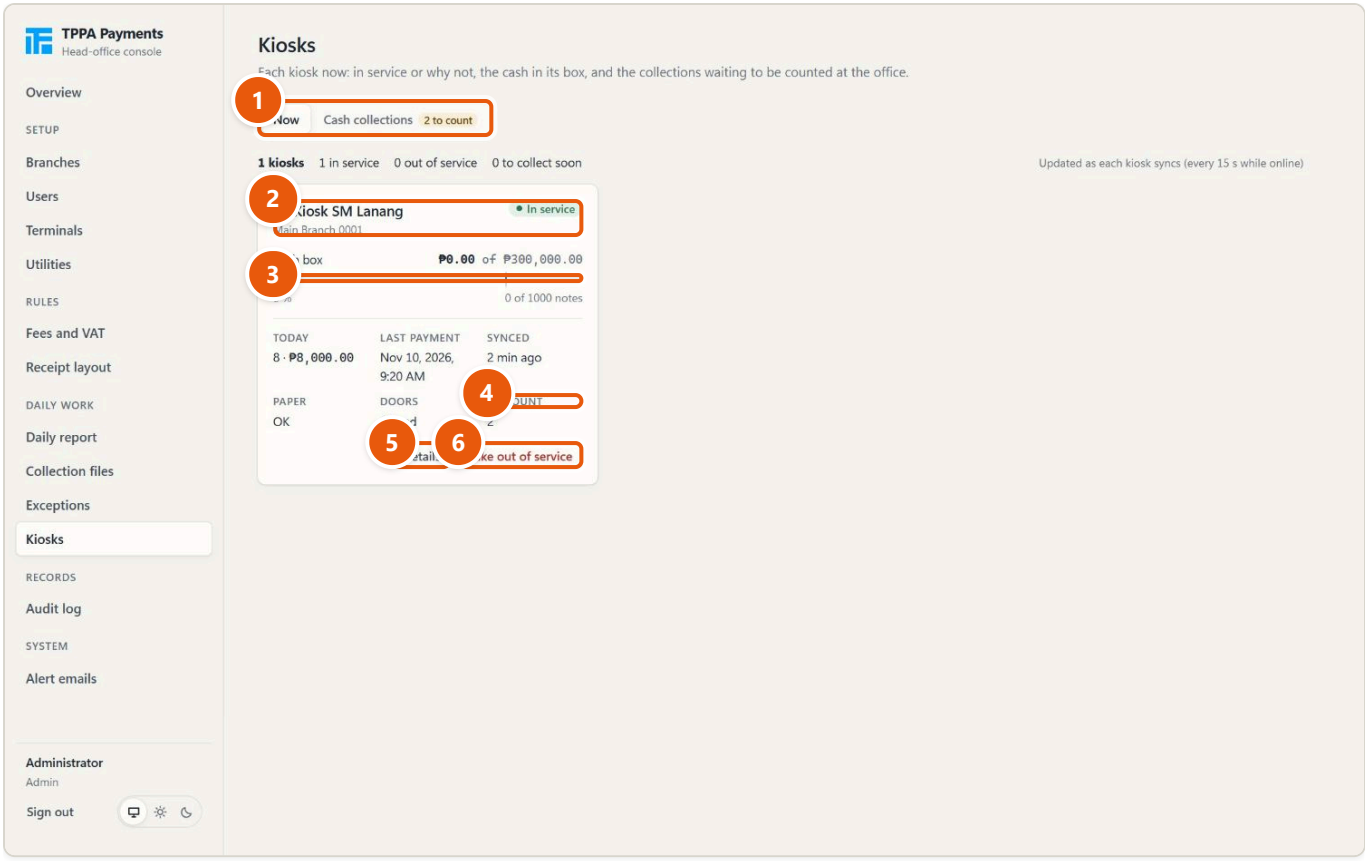


1. Now, or the cash collections
2. The kiosk and its state
3. Cash box against its limit (collect at 75 %)
4. Boxes waiting for the office count
5. Details
6. Take out of service

Kiosks, Now: each kiosk, what needs someone first.

- **Now** or **Cash collections** (1); the badge says how many boxes are left to count.
- Each kiosk (2) shows its state: **In service**, **Out of service**, **Out of service by head office**, **Staff mode**, **Not heard from (time)** or **Not reported yet**, with the reasons.
- The cash box gauge (3) shows the cash against its limit; at 75 % it says "collect soon".
- **Today**, **Last payment**, **Synced**, **Paper**, **Doors** and **To count** (4).
- **Details** (5) opens the kiosk's page; **Take out of service** (6) stops it.

The page updates as each kiosk syncs (every 15 seconds while online).

A kiosk's page

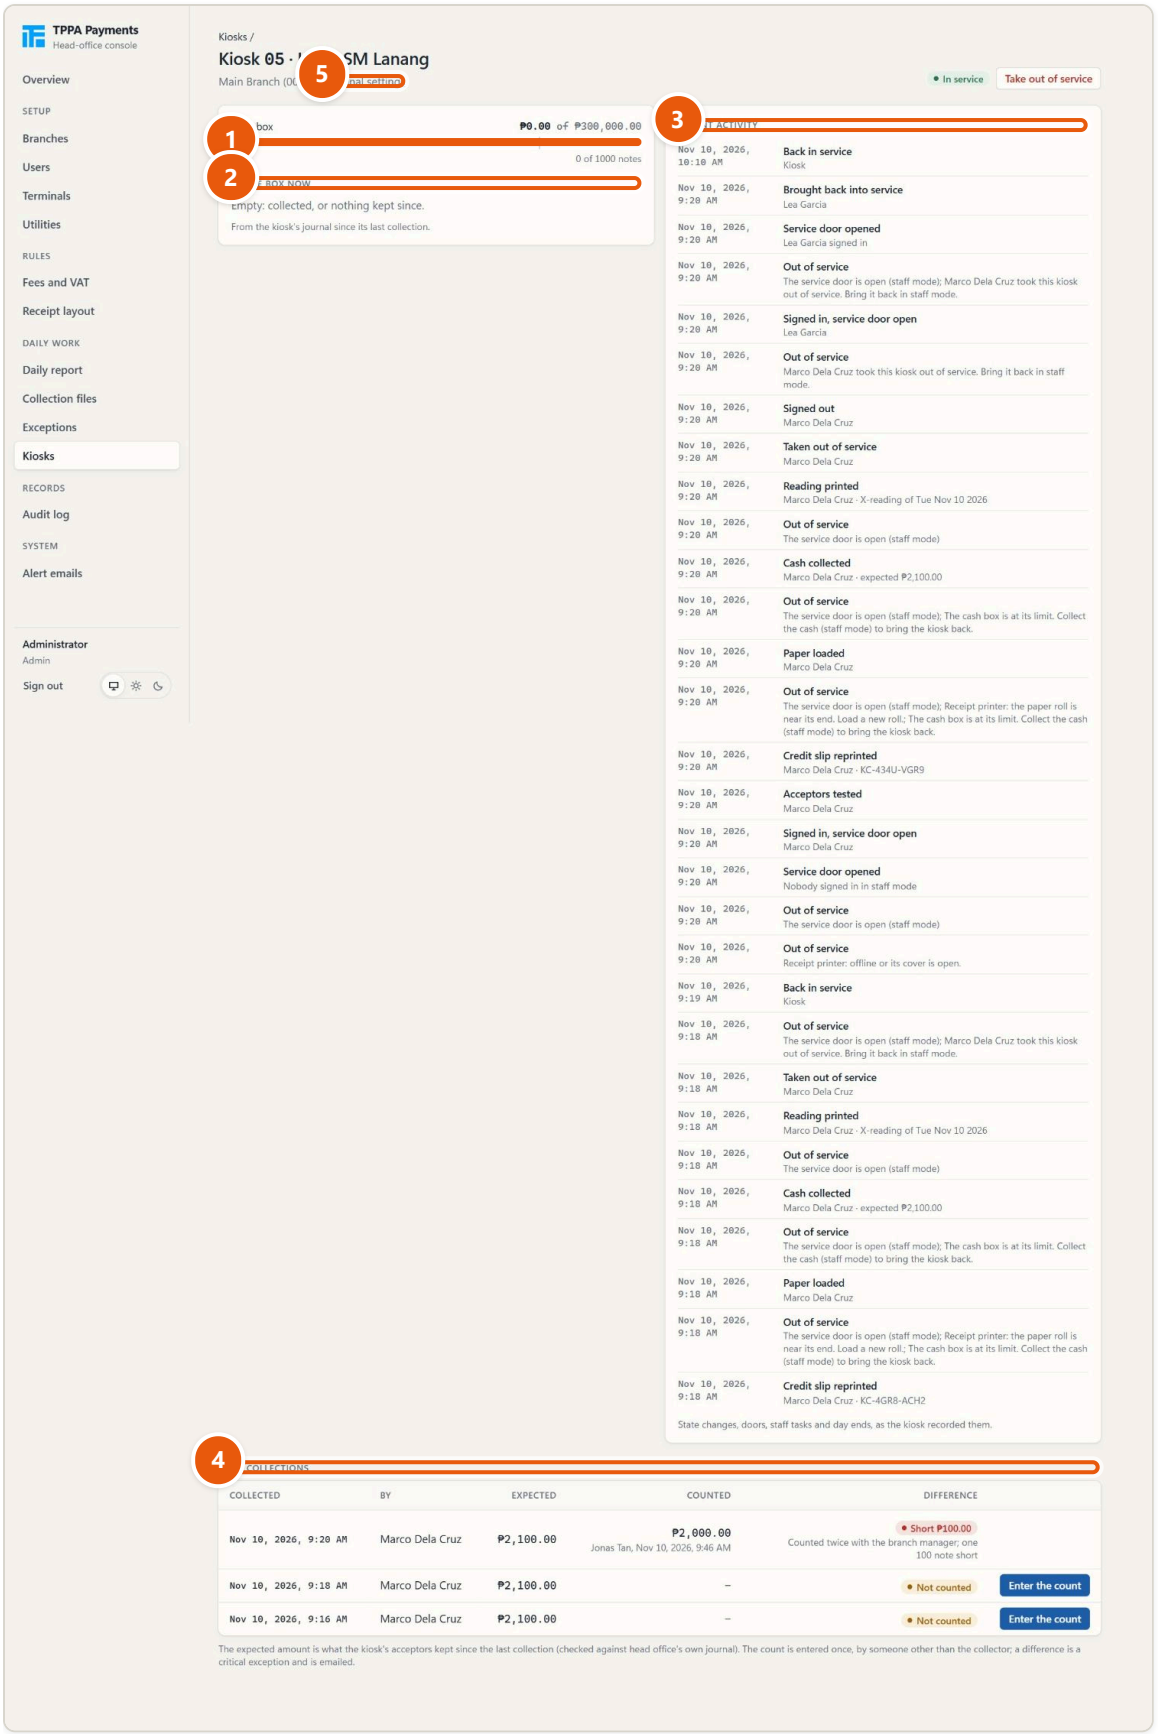

1. Cash box now
2. In the box, by note and coin
3. Recent activity
4. This kiosk's collections
5. Its terminal page


One kiosk in detail.

It shows the cash box (1), what is **In the box now** by note and coin (2), the **Recent activity** the kiosk recorded (3: state changes, doors, staff tasks, day ends), its **Cash collections** (4), and a link to its terminal page (5) for its settings.

Take a kiosk out of service

For example, when the mall closes the floor for repairs.

1. Click **Take out of service**.
2. In **Why**, type the reason (at least 5 characters). It is kept with the kiosk and in the audit log, and shown in staff mode, never to customers.
3. Click **Take out of service**. The console says "Kiosk 05 goes out of service at its next sync."

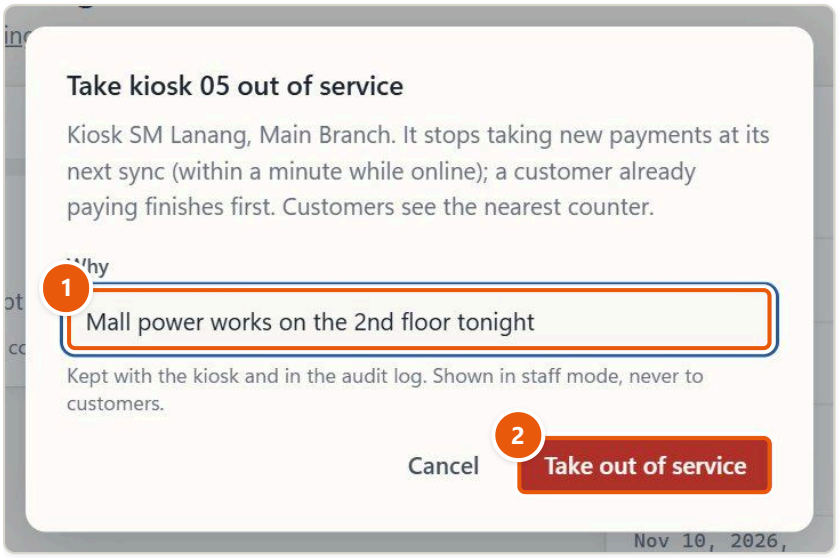


1 Why: kept, shown in staff mode only

2 Take out of service

Head office takes a kiosk out of service.

It stops taking new payments at its next sync (within a minute while online); a customer already paying finishes first. Customers see the nearest counter.

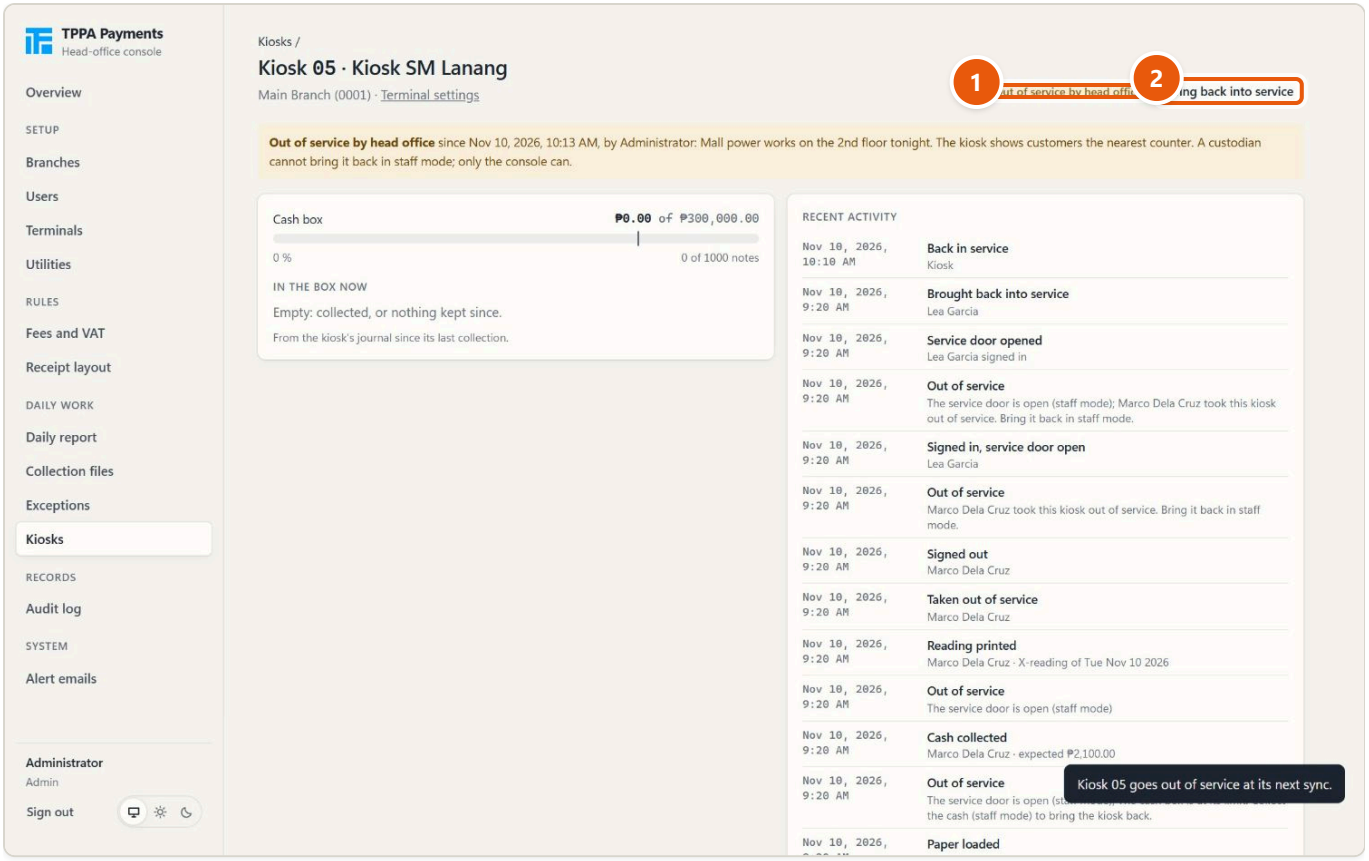

1 Out of service by head office: who, when, why


2 Bring back into service

The kiosk held by head office.

> **Note:** A custodian cannot bring a kiosk that head office took out of service back in staff mode; only the console can.

Bring a kiosk back into service

1. Open the kiosk and click **Bring back into service**.
2. Read who took it out, when and why.
3. Click **Bring back into service**. The console says "Kiosk 05 is back in service at its next sync."

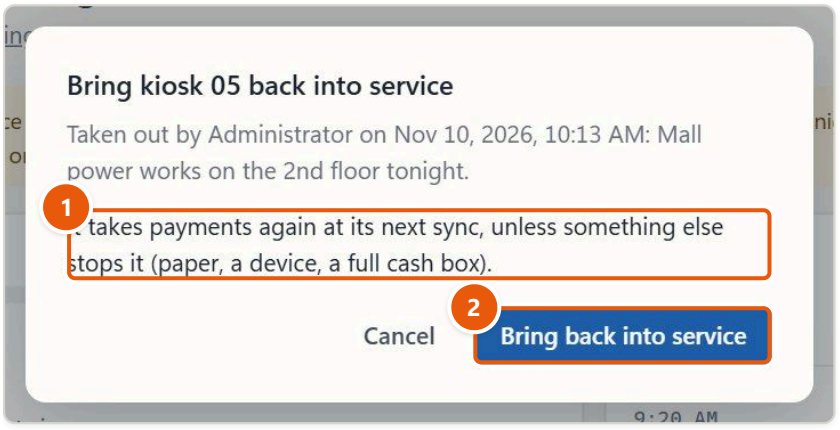

1 Unless something else stops it


2 Bring back into service

Bringing the kiosk back into service.

It takes payments again at its next sync, unless something else stops it (paper, a device, a full cash box).

Cash collections

When a custodian collects a kiosk's cash box, it is listed under **Cash collections**, newest first. Each box is counted at the office, once.

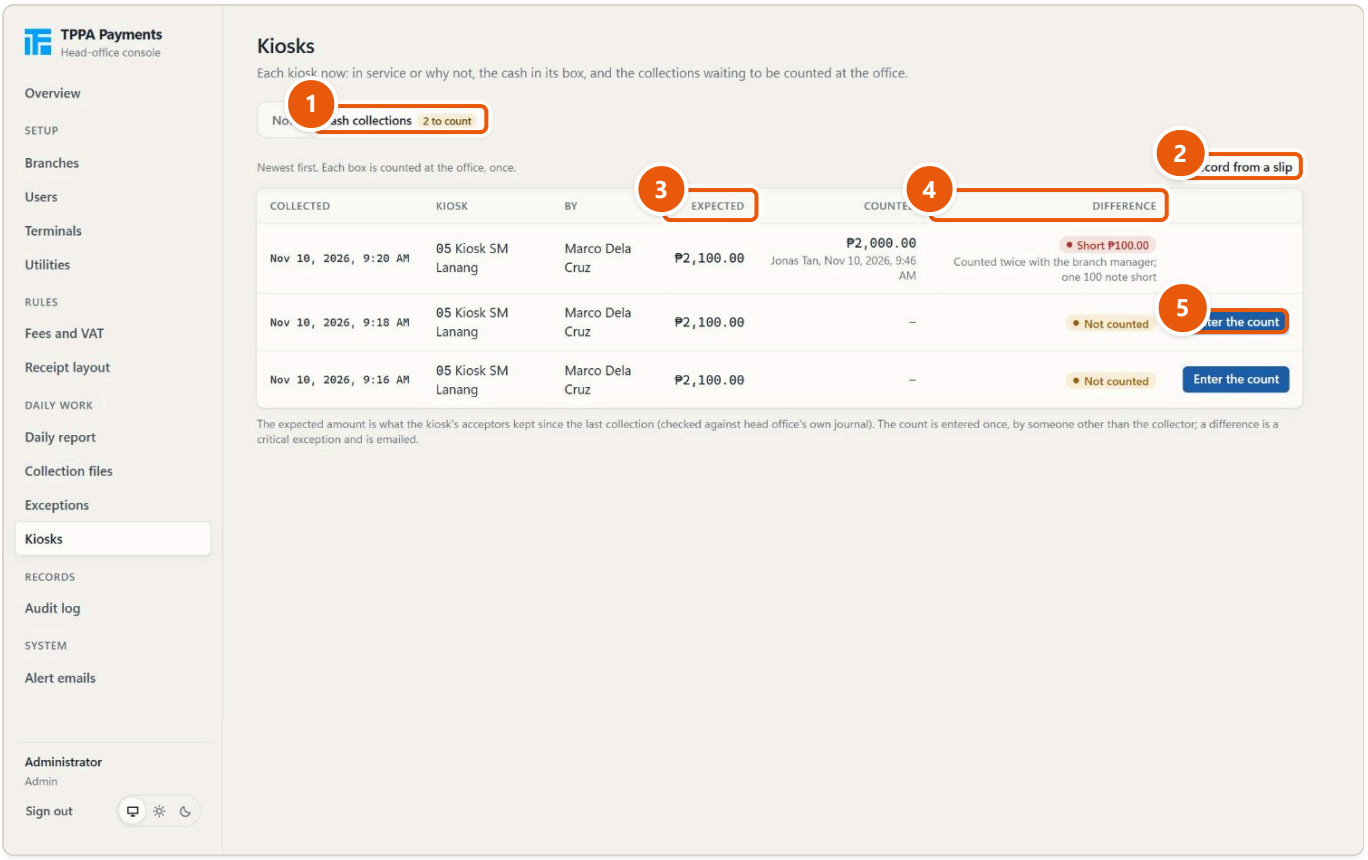

1. Cash collections (to count)
2. Record from a slip
3. What the kiosk kept
4. Matches, short or over
5. Enter the count


Cash collections: each box is counted at the office, once.

Expected (3) is what the kiosk's acceptors kept since the last collection, checked against head office's own journal. **Difference** (4) shows whether the count matches, or is short or over.

Enter the count

Admins, super admins and Accounting count the boxes. You can never count a box you collected yourself: that row reads "You collected it: someone else counts it".


1. Click **Enter the count** (5 above).
2. Count what is in the box, not what the slip says. Type the number of each note and coin under **Counted**.
3. Check **Counted** and **Difference** against what the kiosk kept.
4. If the count differs, say what was found (at least 5 characters). It is required.
5. Click **Save the count**.

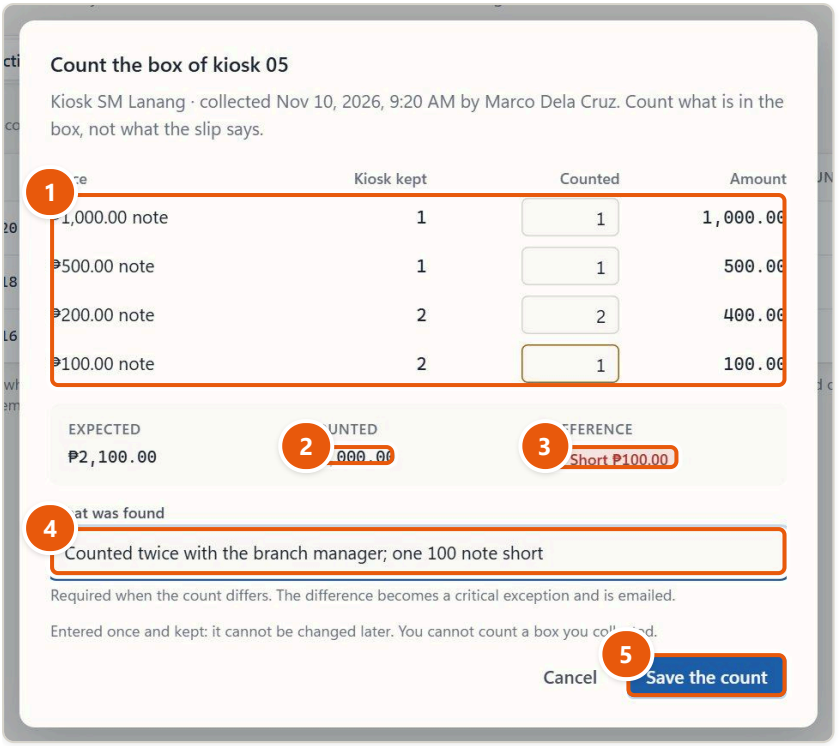

1. Count each note and coin in the box
2. Counted total
3. Difference against what the kiosk kept
4. Required when it differs
5. Save the count

A box counted one ₱100 note short (counted here by Accounting).

The count is entered once and kept: it cannot be changed later. A difference becomes a critical exception "Kiosk box counted over/short" and is emailed; the console says "Count saved. The difference is a critical exception and was emailed."

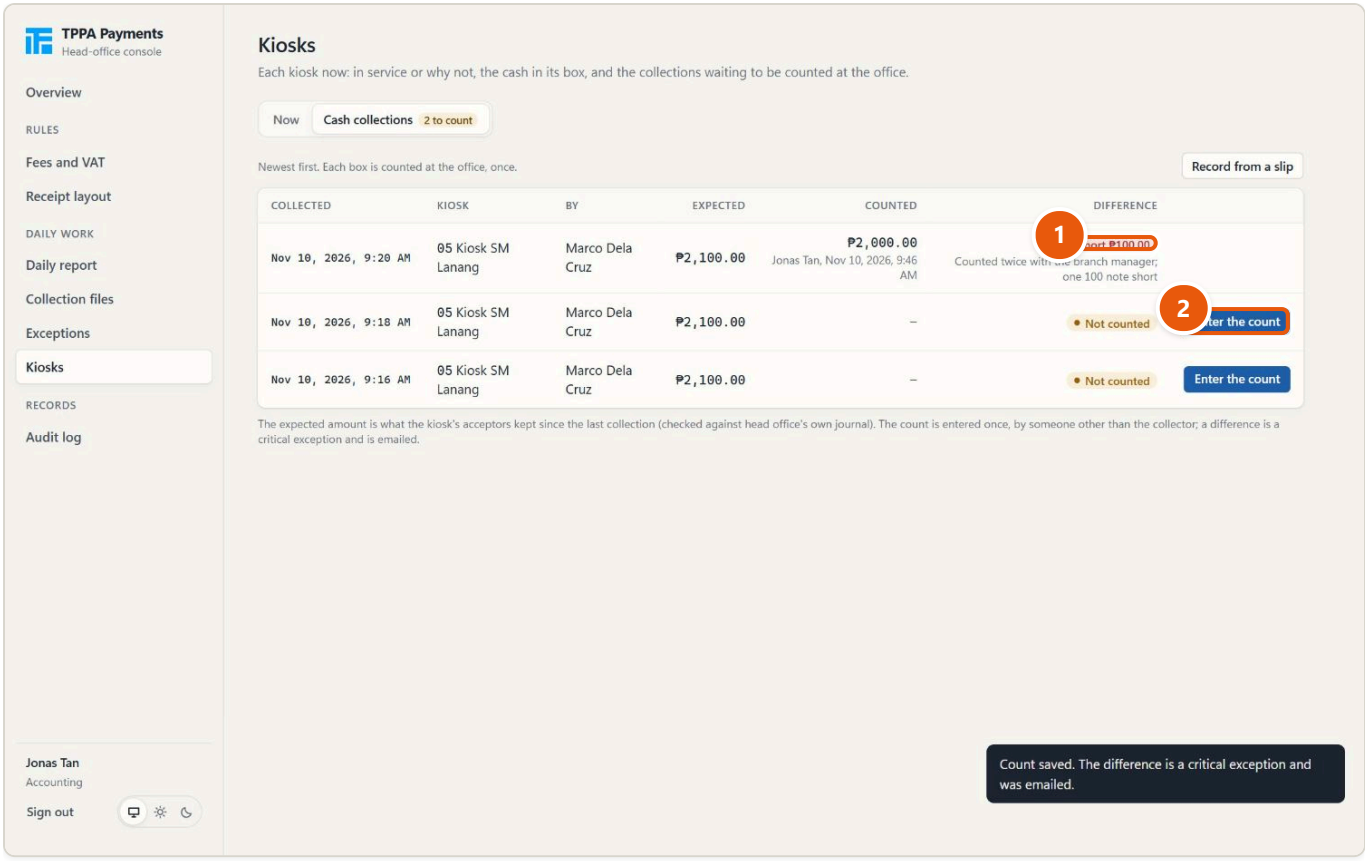

1 Counted short, with the note


2 The other boxes still to count

The count is kept; the difference is a critical exception and is emailed.

Record a collection from its slip

Only for a slip marked **NOT SENT**: the kiosk was reset or not recognised when the box was swapped, so it could not tell head office.

1. On **Cash collections**, click **Record from a slip**.
2. Choose the **Kiosk** and who **Collected by** (people who may service that kiosk).
3. Type **Collected on (Manila time)** and **Expected (on the slip)**, as printed.
4. Click **Record the collection**.

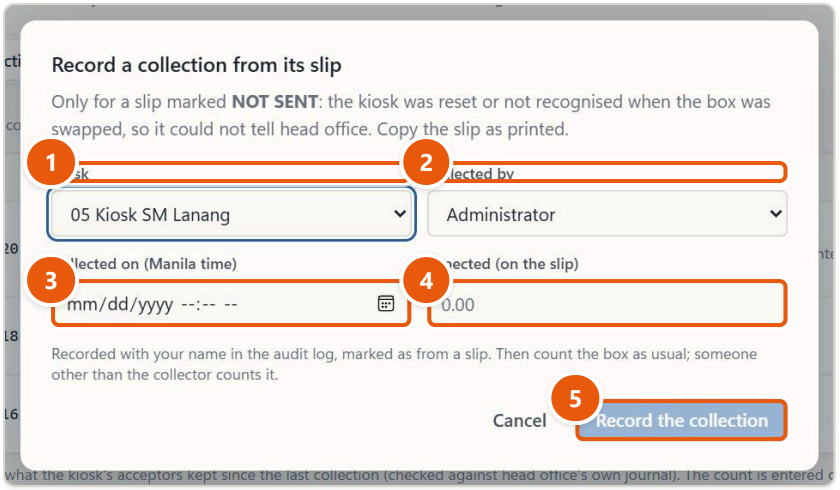


1. Kiosk
2. Who collected it
3. When (Manila time)
4. Expected, as on the slip
5. Record the collection

Only for a slip marked NOT SENT (left with Cancel here).

It is recorded with your name in the audit log and marked **From slip**. Then count the box as usual; someone other than the collector counts it. The collection cannot be in the future.

14. Audit log

Records, Audit log lists every sign-in and change: who made it and from where. Entries can never be edited or deleted.

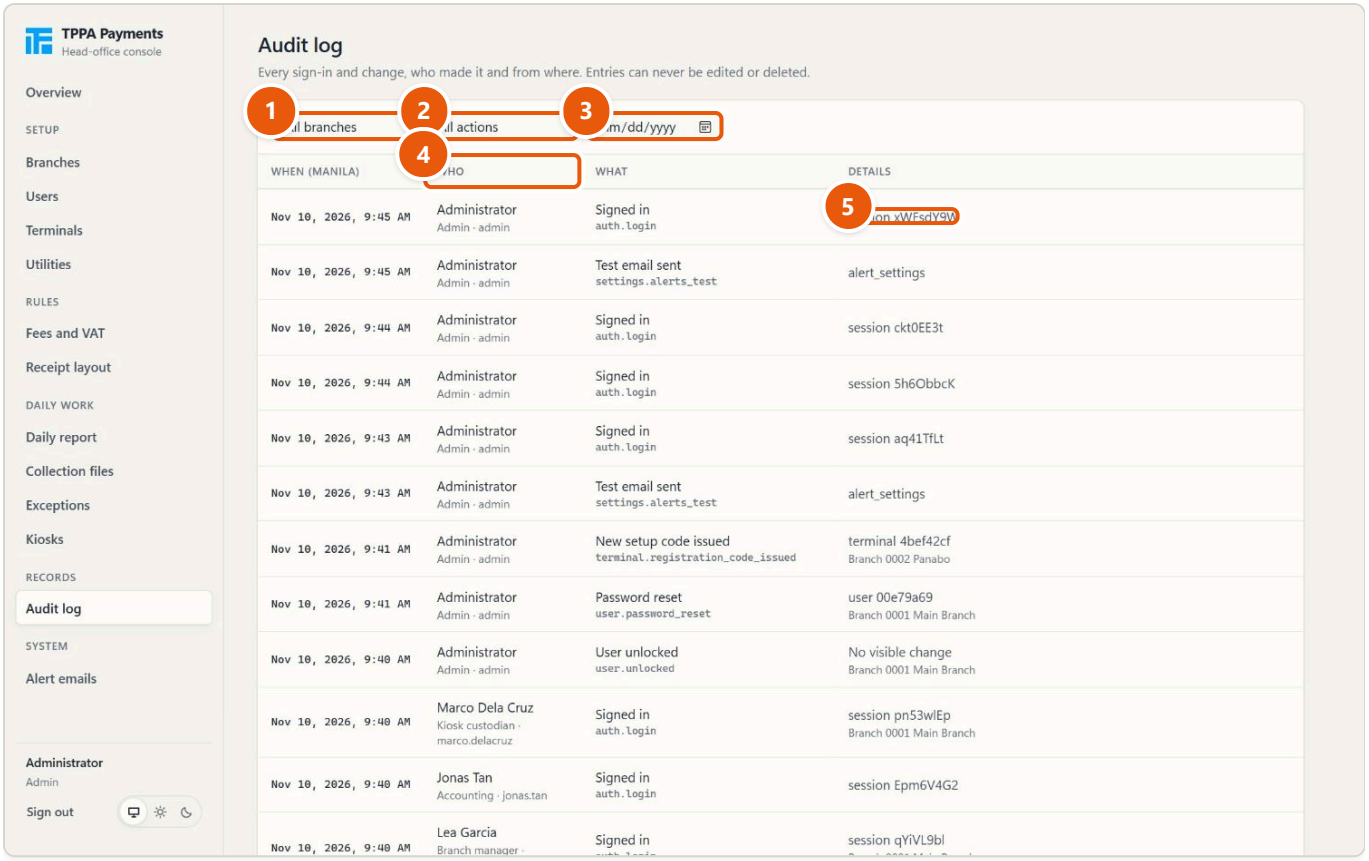


1. Branch
2. Kind of action
3. Day
4. Who, with role and username
5. Click for the details

The audit log, newest first.

1. Filter by **Branch** (1), **Kind of action** (2: Sign-ins, Users, Branches, Utilities, Utilities at branches, Terminals, OR series, Fees and VAT, Receipt layout, Collection files, Exceptions, Kiosk credits, Settings, Alert emails) and **Day** (3).
2. **Who** (4) shows the name, role and username, or "System".
3. Click an entry (5) to see its details.
4. **Show older entries** at the end loads more; **Clear filters** shows everything again.

The details open under the entry: each field before and after, and the computer's address and browser.

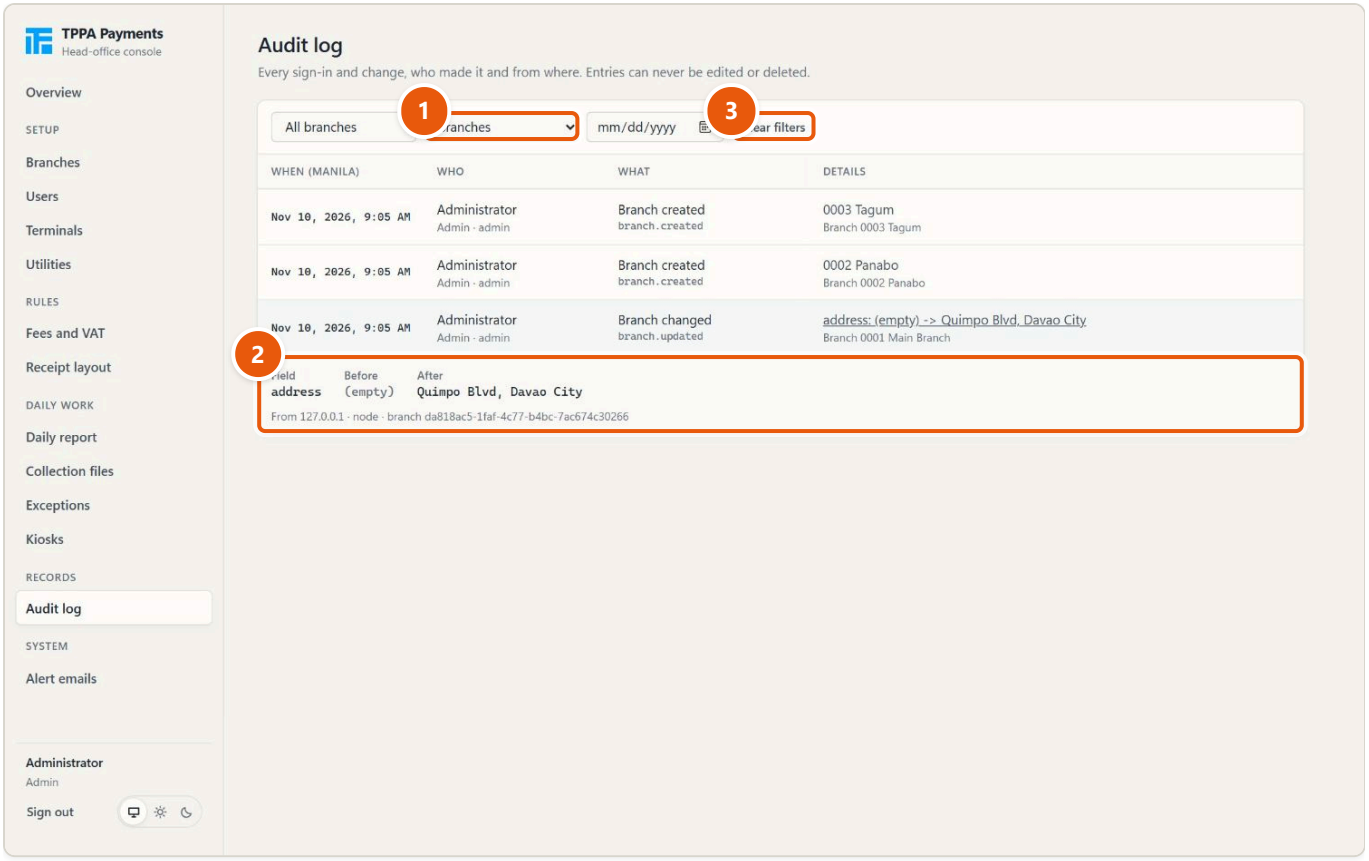

1 Only branch changes


2 Field, before and after; address and browser

3 Clear filters

An entry opened: what changed.

15. Alert emails

System, Alert emails sets who is told by email when something needs attention.

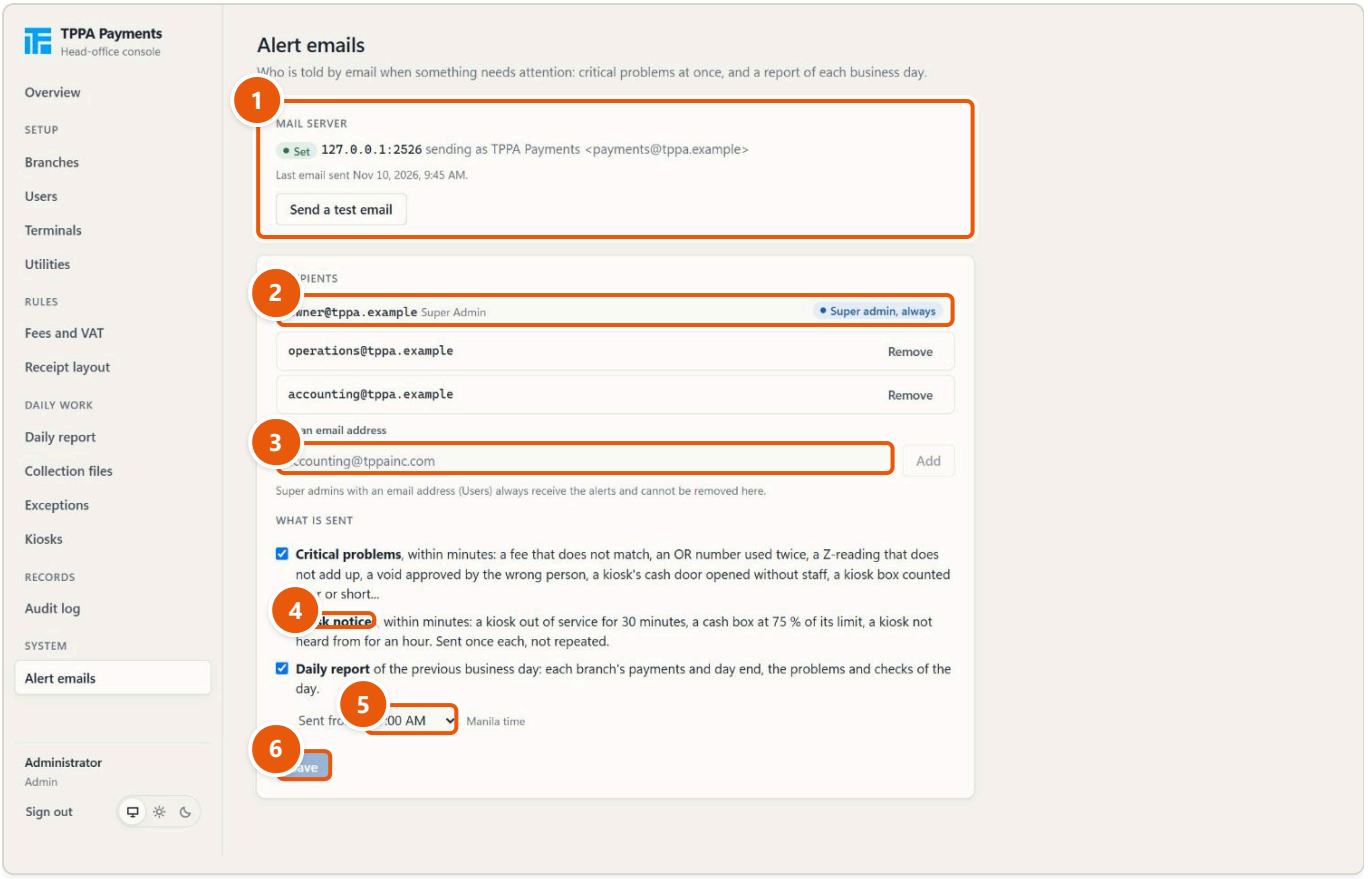

1. Mail server (set by IT)
2. Super admins always receive them
3. Add a recipient
4. What is sent: critical, kiosk notices, daily report
5. When the daily report is sent
6. Save

Alert emails.

- **Mail server** (1) is set by IT on the server; the page only shows it, with the last email sent. If none is set, it says "No mail server is set on this server, so no alert email can be sent." If an email failed, it shows the error; it is tried again automatically.
- **Recipients**: super admins with an email address always receive the alerts (2: "Super admin, always") and cannot be removed here.
- **What is sent** (4), each with its own tick box:
  - **Critical problems**, within minutes: a fee that does not match, an OR number used twice, a Z-reading that does not add up, a void approved by the wrong person, a kiosk's cash door opened without staff, a kiosk box counted over or short...
  - **Kiosk notices**, within minutes: a kiosk out of service for 30 minutes, a cash box at 75 % of its limit, a kiosk not heard from for an hour. Sent once each, not repeated.
  - **Daily report** of the previous business day, **Sent from** the hour you choose (5), Manila time.


To add a recipient:

1. Type the address in **Add an email address** and click **Add** (3).
2. Click **Save** (6). The console says "Alert emails saved."

To take one off, click **Remove** next to it, then **Save**. At most 20 recipients; the console says "Already on the list." or "Enter a valid email address." when needed.

Send a test email

Click **Send a test email**. The console says who it was sent to:

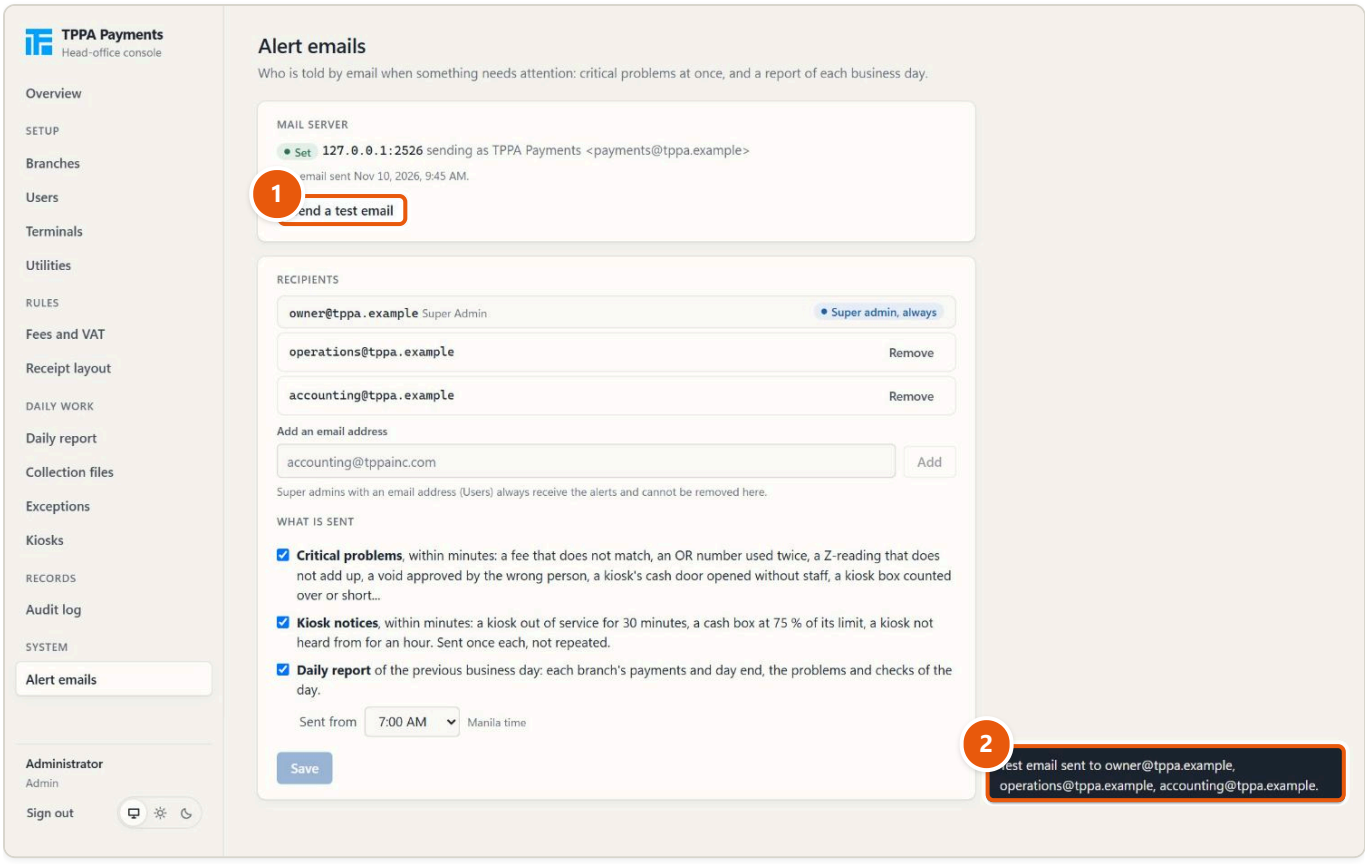

1 Send a test email

2 Sent to every recipient

The test email was sent.

16. When something is not right

Problem	What to do
A teller cannot take payments for a utility	Check the utility is enabled at the branch and has a fee in force (Overview: "No fee")
A teller cannot print official receipts	Check a receipt layout is in force and the terminal has an OR series
A one-time code does not work	It is valid 24 hours, once. **Issue new code** on the terminal's page
A terminal shows "Clock off" or "Clock off: blocked"	Ask IT to set the computer's clock; beyond 30 minutes the terminal blocks
A terminal's computer was reinstalled	**Reset registration** (same computer only)
A terminal was lost, stolen or replaced	**Revoke terminal**, then create a new one
Someone is locked out	Users: **Unlock** or **Reset password**
Collection files cannot be made	A terminal has not closed the day: close it, or make them early with a reason

Problem	What to do
A kiosk box count is short or over	It is a critical exception: find out why, then **Resolve** it with a note
No alert emails arrive	Alert emails: check the mail server, the recipients and the tick boxes; send a test email

For anything else, see the Troubleshooting guide.

17. Quick reference

Task	Where
See what needs attention	Overview, Needs your attention
Create a branch	Setup, Branches, **New branch**
Enable a utility at a branch	Setup, Branches, the branch, Utilities at this branch, **Enable**
Create a user	Setup, Users, **New user**
Unlock, reset a password, reset two-step	Setup, Users, the person
Deactivate a user	Setup, Users, the person, **Deactivate**
Create a terminal and get its code	Setup, Terminals, **New terminal**
A new code for a terminal waiting for setup	Setup, Terminals, the terminal, **Issue new code**
Open, close or re-pattern an OR series	Setup, Terminals, the terminal, Official receipt series
Reset or revoke a terminal	Setup, Terminals, the terminal, **Reset registration** / **Revoke terminal**
Change kiosk settings	Setup, Terminals, the kiosk, **Edit kiosk settings**
Add or change a utility	Setup, Utilities
Approve a fee version	Rules, Fees and VAT, the draft, **Approve…**
Approve a receipt layout	Rules, Receipt layout, the draft, **Approve…**
A branch's day	Daily work, Daily report
Make or download collection files	Daily work, Collection files
Resolve an exception	Daily work, Exceptions, **Resolve**
Take a kiosk out of service, bring it back	Daily work, Kiosks
Count a kiosk box	Daily work, Kiosks, Cash collections, **Enter the count**
Who did what	Records, Audit log
Who gets alert emails	System, Alert emails