TPPA PAYMENTS

Troubleshooting guide

What you see, what to check, how to fix it, and who to call, for the console, the teller app, the kiosk and the server.

For: Everyone who uses TPPA Payments, and IT

Version 1.0 · 2026-11-10

The screenshots come from a demonstration system: every name, account, amount and code in them is made up.

Contents

1 About this guide

2 Who to call, and what to tell them

- The escalation table
- What to tell them

3 Signing in

- Wrong username or password
- The account is locked
- Too many attempts
- "This account cannot sign in. Ask an administrator."
- "...can sign in here" (the wrong place for this account)
- Two-step code rejected
- Phone lost, or no recovery codes left
- The console keeps asking for my password ("Confirm it is you")
- Teller app: offline sign-in refused
- Teller app: the screen is locked

4 The head-office console

- "The server cannot be reached"
- The Overview says something needs attention
- Collection files cannot be made
- "Payments changed since batch 1"
- An exception on the Exceptions page
- A kiosk box count difference
- Alert emails do not arrive

5 The teller app

- The app does not start
- The set-up code is refused
- "Payments cannot be taken right now."

Warnings in the status bar

Printer problems

Offline, and records waiting to sync

"Sync stopped."

"This terminal was reset"

"The server does not recognise this computer"

The day end will not close

A void is refused

A kiosk credit refund fails

A cheque is refused

6 The kiosk

The kiosk is out of service

Staff mode problems

"This kiosk was reset" or "The server does not recognise this kiosk"

A customer's payment could not be finished

A kiosk box count difference

7 The server (IT)

The console does not open, or every terminal is offline

Alert emails are not sent

A terminal's clock is off

A terminal the server does not recognise

8 Quick reference: where to look

1. About this guide

This guide is for everyone: tellers, branch managers, kiosk custodians, head office and IT. It is organised by **where the problem shows**:

- signing in (console, teller app, kiosk staff mode);
- the head-office console;
- the teller app at the counter;
- the kiosk;
- the server (for IT).

Each problem is set out the same way:

- **You see:** the words on the screen, exactly as they appear.
- **Check:** what to look at first.
- **Fix:** what to do.
- **Call:** who to call if the fix does not work.

The screen messages are quoted exactly. Search this guide for a word of the message you see.

Important: Never work around a problem with someone else's account or password, and never pay out cash the system refuses (a kiosk credit slip, for example). Call the next person in the escalation table instead.

2. Who to call, and what to tell them

The escalation table

Start at your own level. If the fix in this guide does not work, call the next level.

Level	Who	Calls about
1	**Teller** or **kiosk custodian**	Reads the message and tries the fix in this guide: the printer's paper, the network cable, the drawer count, the kiosk's paper and cash box.
2	**Branch manager**	Approvals (voids, cash differences, float corrections, kiosk credit refunds), the branch's kiosks (out of service and back), a colleague locked out (passes it to head office), anything a teller cannot fix.
3	**Head office admin**	Accounts (unlock, reset a password, reset two-step sign-in), terminals (a new one-time code, OR series, reset registration), utilities, fees and receipt layouts, collection files, exceptions, kiosks held by head office.
4	**IT**	The PC, Windows and its clock, the printer and its driver, the network, a terminal the server does not recognise, reinstalling a terminal, the server, the mail server. IT calls the development team when this guide says so.

What to tell them


Write it down before you call, or take a photo of the screen:

1. **The terminal code and name**, as in the top bar of the teller app (for example "Counter 1 · Main Branch 0001"), or the kiosk number.
2. **The branch** (name and 4-digit code).
3. **The time** it happened (the clock is at the bottom right of the teller app).
4. **The message text**, word for word, or the photo.
5. **The OR number** of any receipt involved, and the customer's account ID if it is about a payment.
6. **What you did** just before, and what you have tried since.
7. Whether the status bar says **Online** or **Offline**, and how many records are **waiting to sync**.

3. Signing in

Wrong username or password

You see: "Wrong username or password." The password field is emptied.

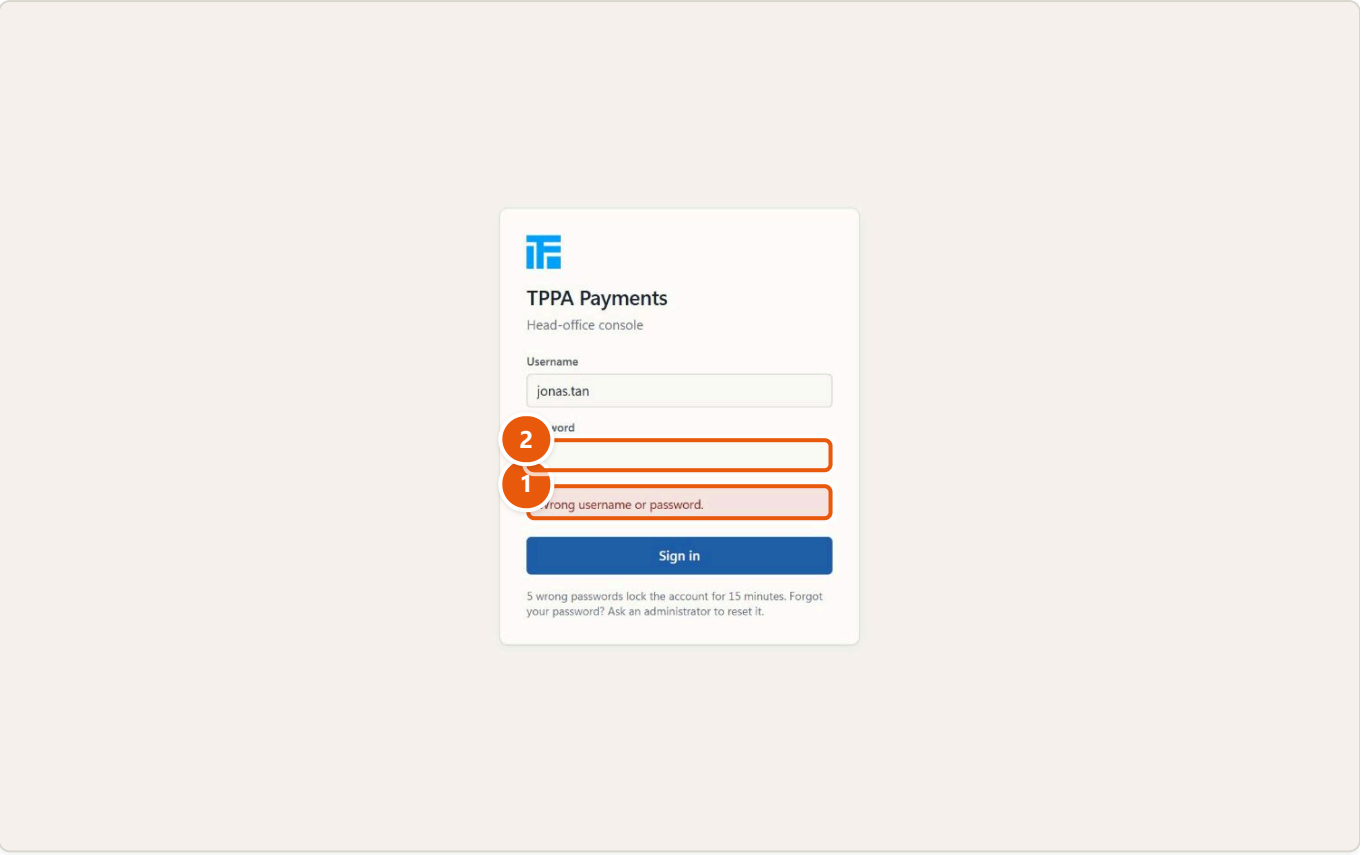

1 What went wrong

2 The password is cleared: type it again

A wrong username or password.

Check: your username is your own (for example ana.reyes), with no space before or after. Is Caps Lock on? Passwords are case sensitive.

Fix: type the password again, slowly. If you forgot it, do not keep trying: after five wrong passwords the account locks.

Call: an administrator (head office) to reset your password. Nobody can reset their own password. The new temporary password is given to you directly.


The account is locked

You see:

- console: "This account is locked after too many failed attempts. Try again in 15 minutes or ask an administrator to unlock it."
- teller app: "This account is locked after too many wrong passwords. Wait 15 minutes, or ask an administrator to unlock it."

Check: five wrong passwords in a row lock the account for 15 minutes. It is the same account in the console, at the counter and at the kiosk.

Fix: wait 15 minutes, then sign in with the right password. Or ask an administrator to unlock it now: in the console, **Users**, the person, **Unlock** (or **Reset password**, which also lifts the lockout and signs the person out everywhere).

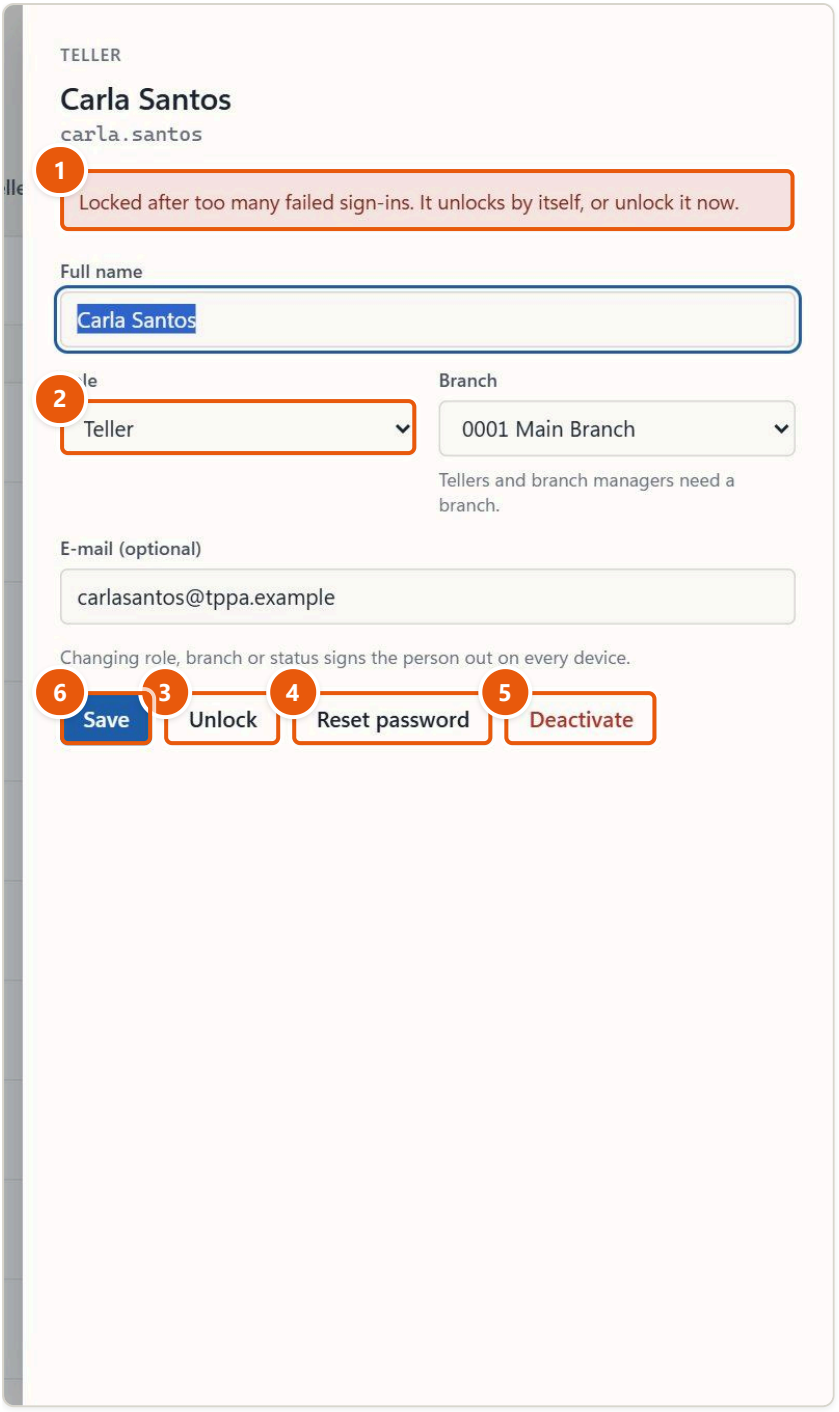

1. Locked: it unlocks by itself, or now
2. Role and branch
3. Unlock
4. Reset password
5. Deactivate
6. Save changes

What the administrator sees: the user is locked, with Unlock and Reset password.

Call: your branch manager, who asks head office. If an account locks again and again without anyone typing wrong passwords, tell head office: someone else may be trying it.

Too many attempts

You see: "Too many attempts from this computer. Wait a minute and try again." (console) or "Too many attempts. Wait a minute, then try again." (teller app).

Check: the server allows a limited number of sign-ins per minute from one network address. A whole branch often shares one address, for example at a shift change.

Fix: wait a minute, then sign in again.

Call: IT if it happens every day at the same time.

"This account cannot sign in. Ask an administrator."

Check: usually the account was deactivated.

Fix and call: ask head office (Users, the person). Changing a role, branch or status also signs the person out on every device.

"...can sign in here" (the wrong place for this account)


You see at a counter "Only tellers and the branch manager of this branch can sign in here.", at a kiosk "Only kiosk custodians, the branch manager of this branch and admins can sign in here.", or at either "This account is not active."

Check: each place has its own people. A teller app takes the tellers and the branch manager of its own branch; a kiosk's staff mode takes kiosk custodians and the branch manager of that branch, and admins. A kiosk custodian never signs in at a counter, and head-office staff never sign in at a counter.

Call: head office, if your role or branch is wrong in **Users**, or the account was deactivated.

Two-step code rejected

You see: "That code is not right. Check the time on your phone and use the newest code."

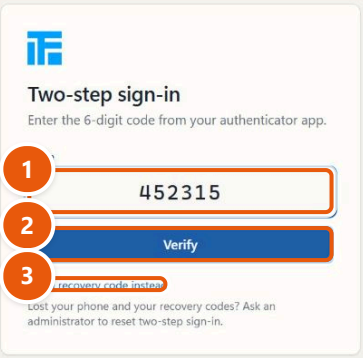

1 The code from the authenticator app
2 Verify
3 No phone? A recovery code

Later sign-ins: after the password, the code from the app.

Check:

- Each code works only for a short time. Use the newest one, not one that is about to change.
- The time on your phone must be right. Set it to automatic (network) time.
- You are using the entry for TPPA Payments in your authenticator app.

Fix: wait for a new code and type it straight away. Without your phone, choose **Use a recovery code instead** and type one of the recovery codes you saved. Each recovery code works once.

Call: see the next problem if the phone is lost.

Phone lost, or no recovery codes left


You see: "Lost your phone and your recovery codes? Ask an administrator to reset two-step sign-in."

Fix: another administrator resets your two-step sign-in in **Users** (**Reset two-step**). You set it up again at your next sign-in, with your phone. Nobody resets their own: the console says "Ask another administrator to reset your two-step sign-in". The two-step sign-in of an admin or a super admin is reset only by a super admin.

Call: a super admin. This is why every server should have two super admins.

The console keeps asking for my password ("Confirm it is you")

You see: a small dialog "Confirm it is you": "Re-enter your password to make changes. You will not be asked again for 10 minutes on this device."

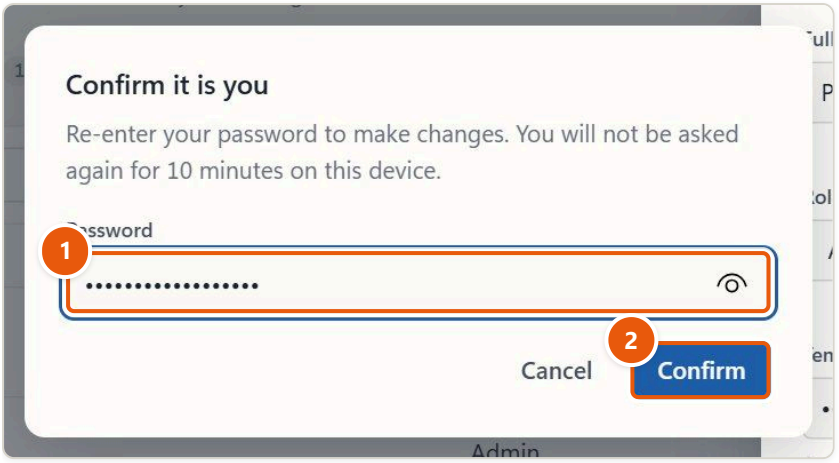

1 Your own password again 2 Confirm

Sensitive changes ask for the password again.


Check: this is the **step-up**, on purpose. Sensitive changes ask for it (users, branches, utilities, fees, receipt layouts, terminals and OR series, kiosk holds and counts, alert settings). It asks again after 10 minutes, and on another device or browser.

Fix: type your own password and **Confirm**; the change you asked for then runs by itself. "Incorrect password. Too many wrong attempts lock the account." means the password was wrong; it counts towards the lockout.

Call: nobody; this is normal. If it asks on every single click, tell IT.

Teller app: offline sign-in refused

When the server cannot be reached, the teller app checks the password on the PC itself. The sign-in screen then says "Offline" and "Offline sign-in works for people who signed in online on this terminal in the last 36 hours."

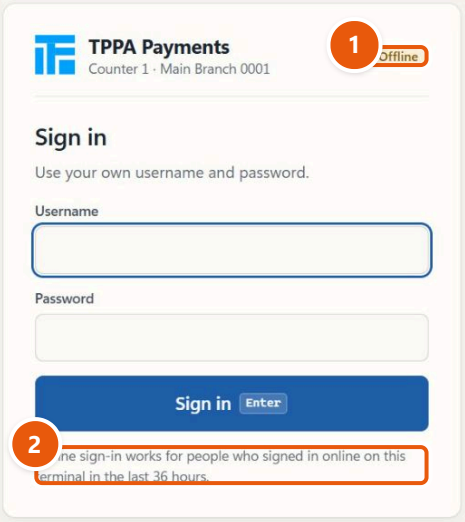

1 Offline

2 Who can sign in offline

You see | What it means | Fix |

| ---------- | ---------- | ---------- | | "The server cannot be reached, and you have not signed in online on this terminal before. Connect to the network and sign in once, or ask a colleague who has." | You never signed in online at this PC. | Fix the network (cable, Wi-Fi) or let a colleague who has signed in here before work until it is back. | | "Your last online sign-in on this terminal was more than 36 hours ago. Connect to the network and sign in online once." | The 36-hour offline window has passed. | Restore the network, then sign in once online. | | "Your password was changed. Connect to the network and sign in online once." | Your password was reset since your last online sign-in. | Sign in online with the new password. | | "Your account is no longer allowed on this terminal. Ask the branch manager." | Your account was removed from this branch or deactivated. | Ask the branch manager and head office. | | "Too many wrong passwords while offline. Connect to the network and sign in online." | Five wrong passwords offline. | Sign in online. |

Call: IT for the network; head office for your account.

Teller app: the screen is locked

You see: "Locked", your name and "shift open since ...", and "Nothing was lost."

Fix: type your own password and press `Enter`. The app locks after 10 minutes without use, or at once with `F12`.

"Wrong password." means try again. After five wrong passwords the app signs you out: "Too many wrong passwords: signed out. Sign in again." Your work is kept; sign in again.

4. The head-office console

"The server cannot be reached"

Check: your own internet connection (does another website open?). Then whether colleagues have the same problem.

Fix: reload the page after a minute; the server may be restarting after an update.

Call: IT, with the time it started. Counters and kiosks keep working offline in the meantime and sync afterwards.


The Overview says something needs attention

The **Needs your attention** list on the Overview names each problem, with **Open** to go to the page that fixes it. The usual ones:

The Overview says	Fix
No fee: a utility has no fee in force	Fees and VAT: approve a fee version (an admin). Counters cannot take payments for it until then.
No layout: no receipt layout in force	Receipt layout: approve one (an admin).
No OR series on a registered terminal	Terminals, the terminal: open an OR series (the range on its BIR permit).
Running low: OR numbers	Terminals, the terminal: prepare the next series.
Not set up: a terminal has not registered, or "its setup code has expired: issue a new one"	Terminals, the terminal, **Issue new code**, and give the code to IT at that PC.
Locked: a user is locked out	Users, the person, **Unlock**.
Offline: a kiosk has not synced for over 10 minutes	Check the kiosk's network and power (branch, IT).
Kiosk down: out of service	Kiosks, the kiosk: read why; the custodian fixes it in staff mode.
Collect: a kiosk cash box at 75 % of its limit	The custodian collects the cash.
To count: kiosk boxes waiting for the office count	Kiosks, Cash collections, **Enter the count** (Accounting or an admin).
Draft: a fee or layout waiting for approval	An admin reviews and approves it, or it is discarded.

Collection files cannot be made

You see: "Not every terminal has closed this day. Waiting for 05 Kiosk SM Lanang. Files can be made once they close (Day end on the terminal), or now by a branch manager or admin with a reason." Accounting sees only "Waiting for every terminal to close the day."

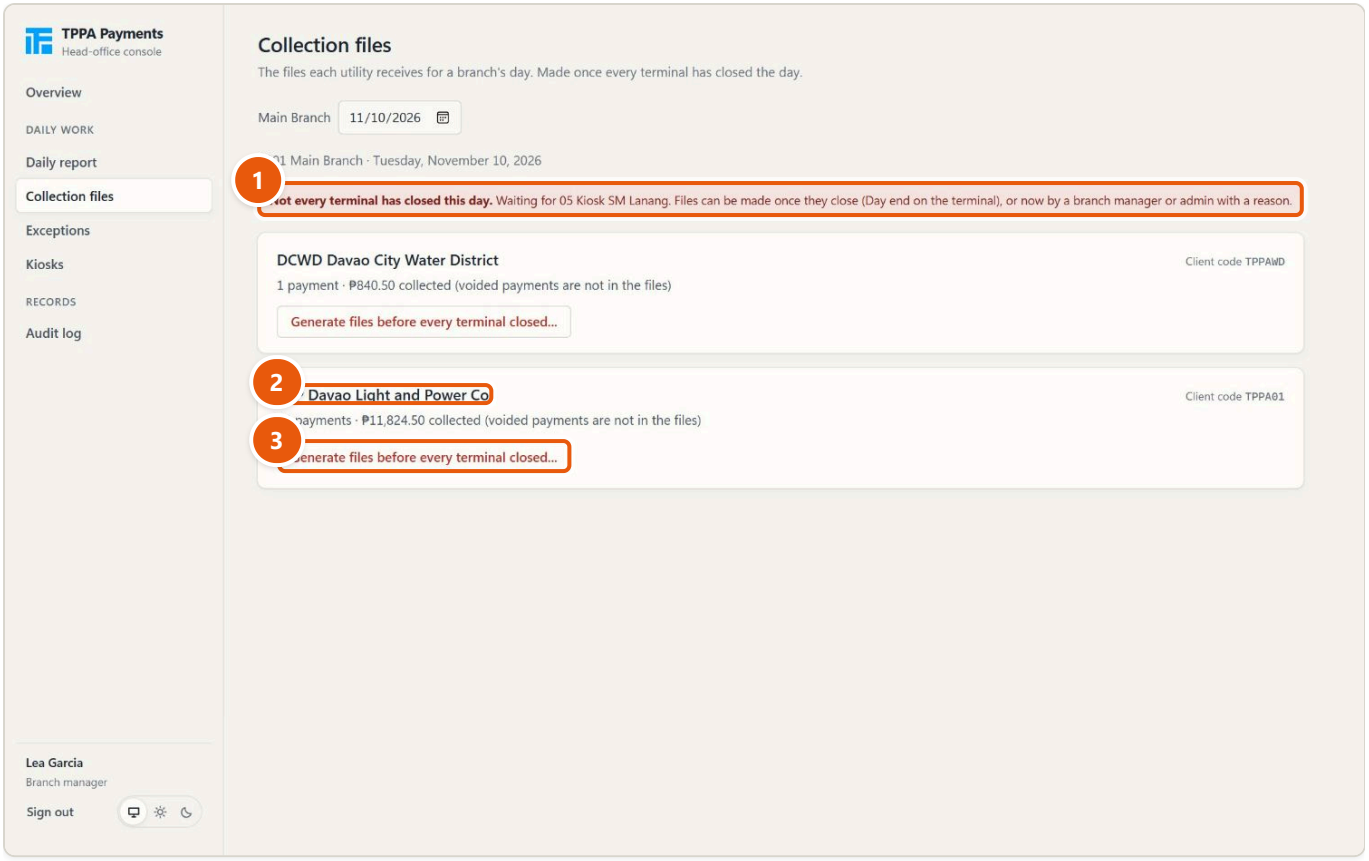

1 Not every terminal has closed: which ones
2 One card per utility
3 Make them now, with a reason


Collection files as a branch manager: a terminal (05 Kiosk SM Lanang) has not closed the day.

Check: this is the **D18 rule**: the files are made once every terminal of the branch has closed the day. The message names the terminals still open.

- A **counter** is closed when its teller closes the day (Day end, `F10`) and the terminal has synced. A day closed while offline reaches head office only when the network is back.
- A **kiosk** closes its day by itself after midnight (Manila time), or when it next starts.
- A terminal still **waiting for setup** does not count.

Fix:

1. Ask the branch to close the day on each terminal named, and to check its status bar says **Online** and **All synced**.
2. If the files are needed now (for example a terminal is out of order), a branch manager or an admin uses **Generate files before every terminal closed...** and gives a reason of at least 10 characters that names the terminal still open. The files are then marked "Made before every terminal closed", and the Exceptions page lists the check "Files made before every terminal closed".

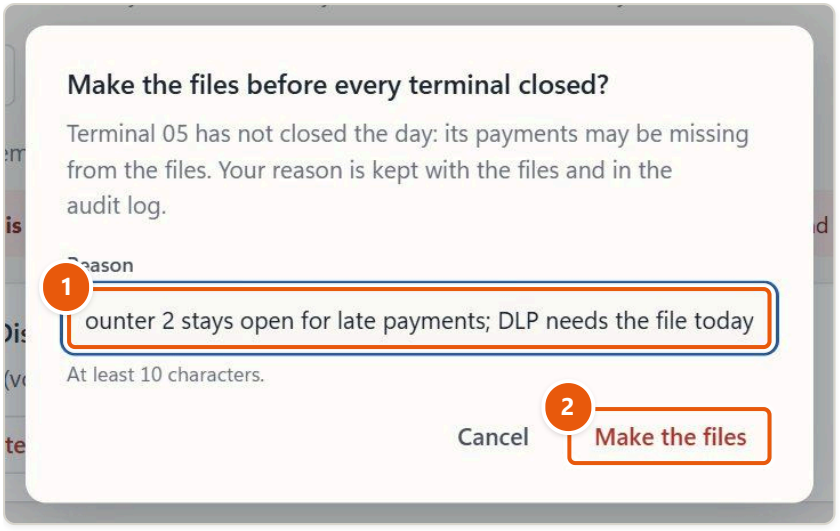

1 Reason: at least 10 characters 2 Make the files

Making the files before every terminal closed.

Call: the branch manager of the branch; head office if the terminal cannot sync.

"Payments changed since batch 1"


You see: "Payments changed since batch 1 (a late payment or a void). Generate the files again: they get a new batch number, and batch 1 is kept as superseded."

Fix: use **Generate again** (or **Generate again before every terminal closed...**, with a reason). Send the new batch to the utility. The earlier batch stays downloadable under "Earlier batches (superseded, kept)". When nothing changed, the page says "Up to date with the payments."

An exception on the Exceptions page

The Exceptions page has two parts:

- **Checks for this day** are worked out live. They clear by themselves when the cause is gone (the box is counted, the kiosk is back in service). There is nothing to resolve.
- **Problems reported by sync** stay open until someone resolves them: **Resolve**, then "What was found or done" (at least 5 characters). The note is kept with the exception and in the audit log; it cannot be changed later.

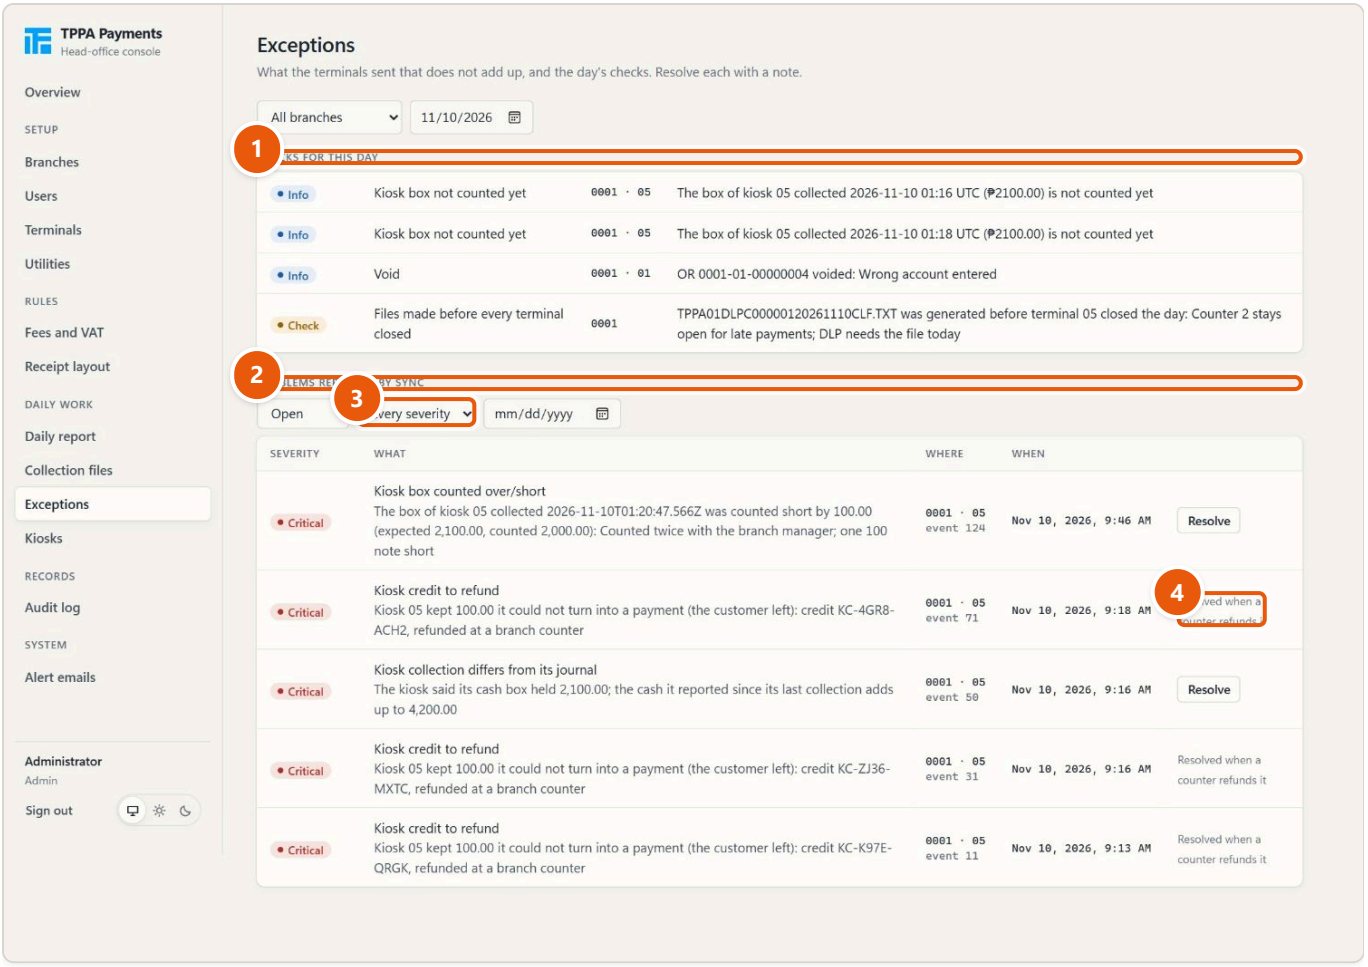

1 Checks for this day: clear by themselves
2 Problems reported by sync
3 Filters: status, severity, day
4 A kiosk credit: resolved by its refund

Exceptions, all branches.

Before you resolve: find out what happened (ask the branch, look at the Daily report and the terminal's page), fix what needs fixing, then write what you found. A kiosk credit to refund cannot be resolved by hand: it is resolved when a counter refunds it.


The common kinds, as the **What** column names them:

What it says	What it means	What to do
Cash over/short (approved)	A teller's count differed from the cash expected; the branch manager approved it at the day end.	Ask the branch why; resolve with what was found.
Cash over/short, not approved	A difference with no manager's approval.	Ask the branch manager; this is not normal.
Day closed without a cash count	The day was closed with no count.	Ask the branch for the count; remind them the drawer is counted every day.
Z-reading does not match	The terminal's Z-reading differs from the payments head office holds.	Compare the Daily report with the printed Z-reading; ask the branch whether a terminal was offline or reset. Call IT if records are missing.

What it says	What it means	What to do
Fee does not match	A payment's fee differs from the fee version in force.	Check the terminal's settings (Terminals, the terminal, Sync); the terminal may have old settings.
Old fee used while offline	The terminal used a fee version that had just been replaced, because it was offline.	Usually explained by the offline time; check and resolve.
Records out of order	The terminal's chain of records has a gap or a break.	Call IT, who may call the development team.
Terminal clock off	The terminal's clock differs from the server's.	IT fixes the PC's clock.
Approved by the person who asked, **Approved by someone who may not**	A void or difference was approved against the four-eyes rule or by someone who is not a branch manager of that branch.	Treat as serious: ask the branch manager and check the audit log.
Void after the day closed, **Payment after the day closed**	A record dated on a day the terminal had already closed.	Ask the branch; check the terminal's clock.
Kiosk credit to refund	A kiosk kept cash it could not turn into a payment.	Nothing by hand: it is resolved when a counter refunds the slip.
Kiosk box counted over/short	The office count of a kiosk box differs from what the kiosk kept.	See "A kiosk box count difference" below.
Kiosk collection differs from its journal	What the kiosk said its box held differs from the cash it reported since the last collection.	Compare with the box count; call IT if it repeats.
Kiosk cash door opened without staff	The cash door opened with nobody who may service the kiosk signed in.	Check the kiosk and the cash at once; call the branch manager.
Kiosk receipt not printed, **Kiosk credit slip not printed**	The kiosk took the money but could not print the slip.	The custodian reprints today's slips in staff mode (Reprint); fix the printer.
Kiosk refund not recorded by the counter, **Kiosk refund nobody approved**	A kiosk credit refund at a counter does not match what head office approved.	Ask the branch which counter paid it, and check its day end.
Machine serial changed	The computer now reports another serial number. Its BIR permit follows its machine.	Check whether the terminal moved to other hardware (IT).

A kiosk box count difference

You see, after **Save the count**: "Count saved. The difference is a critical exception and was emailed." The collection shows "Short ₱100.00" (or over) with your note.

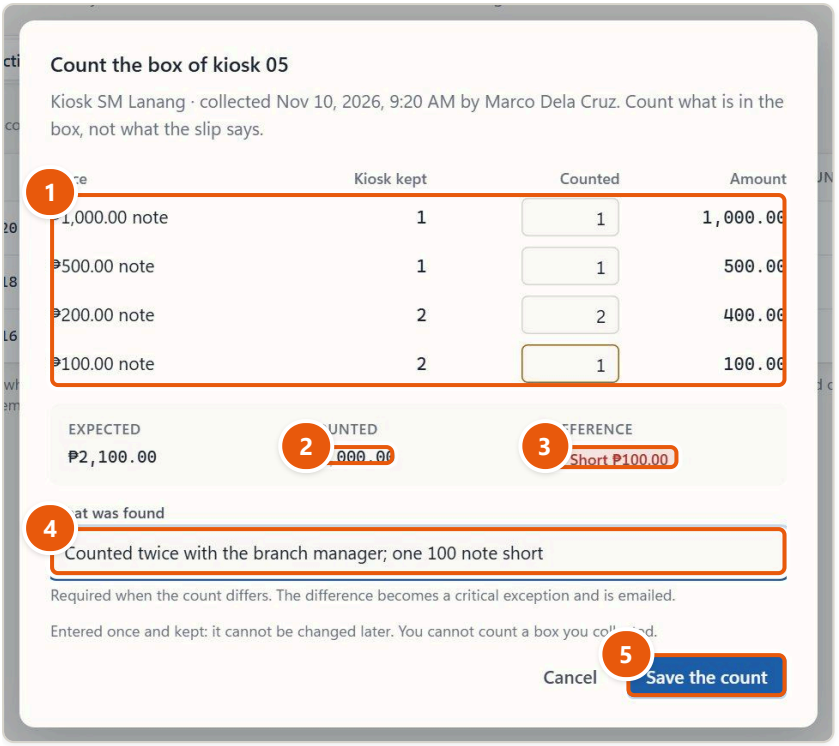

1. Count each note and coin in the box
2. Counted total
3. Difference against what the kiosk kept
4. Required when it differs
5. Save the count

Accounting counts a collected box: one ₱100 note short.

Check before you save: count the box again, with a colleague, piece by piece. Count what is in the box, not what the slip says. A count is entered once and cannot be changed later, and it needs a note when it differs.

Other messages: "You collected this box: someone else counts it" (the collector never counts their own box); "This box is already counted".

Fix after it is saved: look at the kiosk's page (Kiosks, **Details**): "In the box now", "Recent activity" (who opened the doors, who collected) and the collection slip in the box's bag. Look on Exceptions for "Kiosk collection differs from its journal" for the same kiosk. Then resolve the "Kiosk box counted over/short" exception with what you found.


Call: the branch manager of the kiosk's branch and Accounting.

Alert emails do not arrive

Check in **System, Alert emails**:

1. **Mail server**: it should say **Set**, with the server name. If it says "No mail server is set on this server, so no alert email can be sent. IT sets it in the server settings (SMTP_HOST, SMTP_USER, SMTP_PASSWORD).", IT must set it.
2. "The last email could not be sent (...): ... It is tried again automatically." gives the mail server's answer. Pass it to IT.
3. **Recipients**: is the address on the list, spelled right? Super admins with an email address always receive the alerts.

4. **Send a test email**. "Test email sent to ..." means the server handed it to the mail server: look in the spam folder.

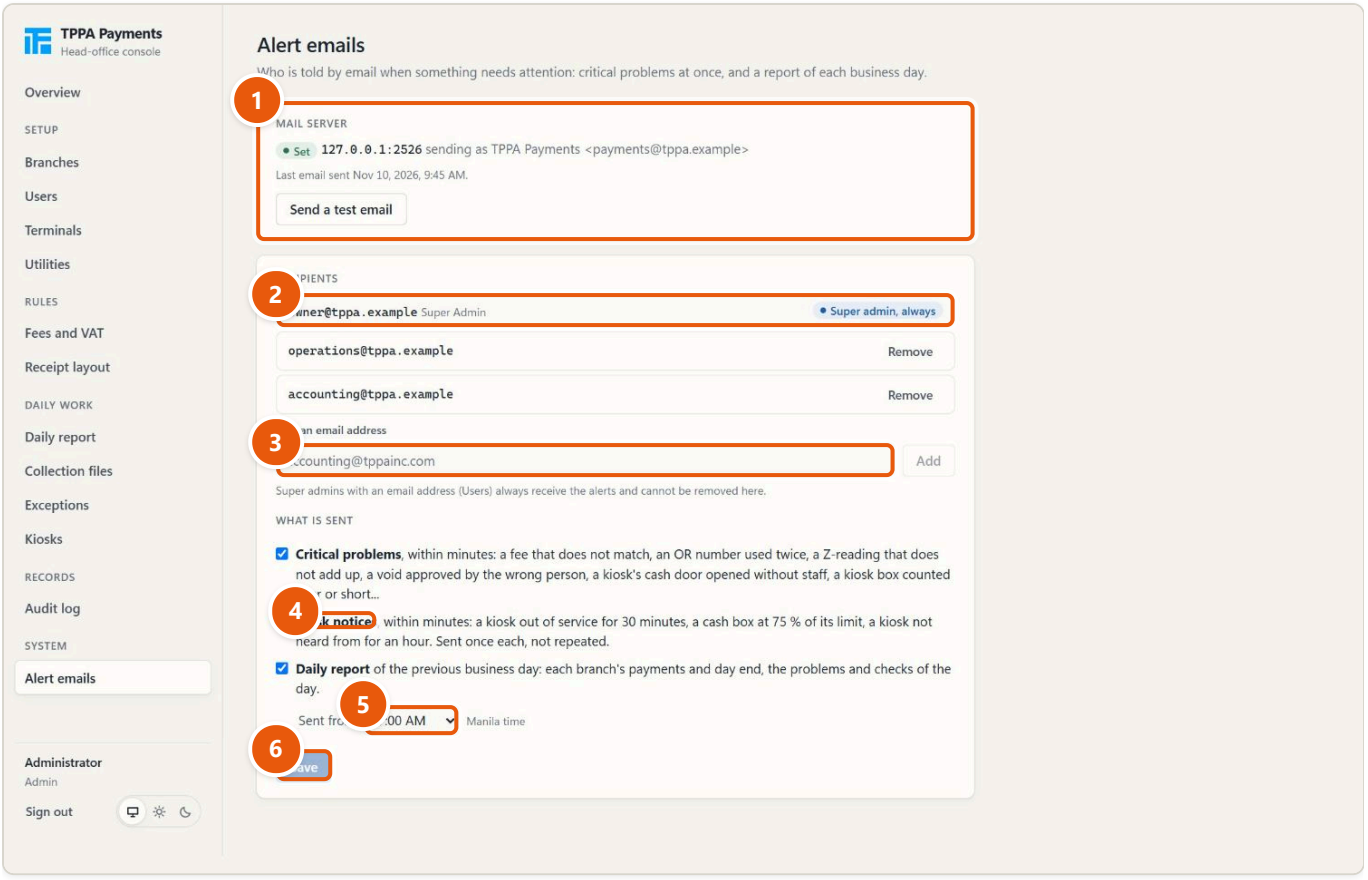

1. Mail server (set by IT)
2. Super admins always receive them
3. Add a recipient
4. What is sent: critical, kiosk notices, daily report
5. When the daily report is sent
6. Save

Alert emails.

Remember what is sent: critical problems within minutes; kiosk notices (out of service for 30 minutes, cash box at 75 %, not heard from for an hour) once each, not repeated; the daily report of the previous business day from 7:00 AM Manila time.

Call: IT for the mail server (see the server section below). A failed send is also in the audit log (Kind of action: Alert emails).

5. The teller app


The app does not start

You see	Fix	Call
"The app could not start" / "Restart the computer. If it happens again, call IT."	Restart the PC.	IT if it happens again.

You see	Fix	Call
"This computer cannot run the teller app" / "Windows cannot protect the app's keys on this computer. Call IT."	Nothing at the counter.	IT: the app keeps its keys in Windows' own protected store, which is not available for this Windows account.

The set-up code is refused

You see on "Set up this computer": "This code is not valid or has expired. Ask the administrator for a new one."

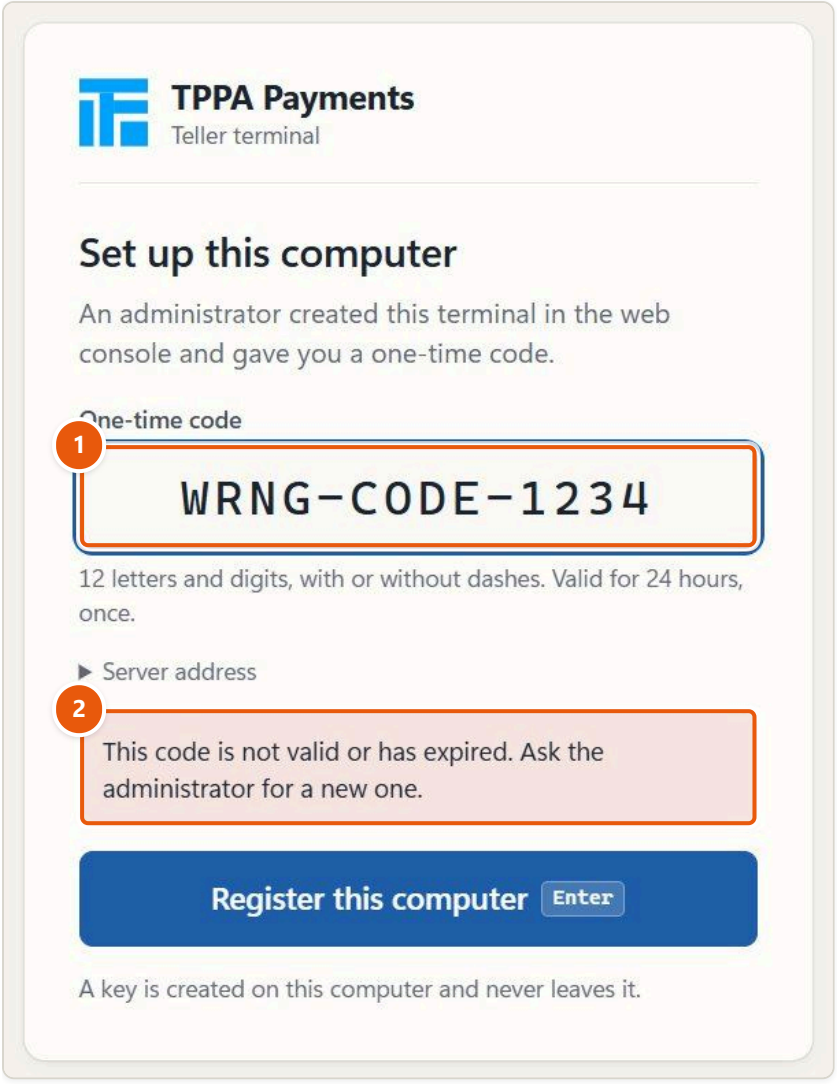

1 The code as typed

2 Why it was refused

Check: the code is 12 letters and digits (dashes optional), valid for 24 hours and once, on one computer. A new code makes the old one stop working.

Other messages on the same screen:

- "This code is for a kiosk, not a teller counter. Enter it in the TPPA kiosk app, or ask the administrator for a counter code."
- "The server address must start with https://" or "Enter only the server address, without a path": the **Server address** is wrong (IT).


- "Cannot reach the server at … Check the network cable or Wi-Fi."

Fix: head office issues a new code (Terminals, the terminal, **Issue new code**) and gives it to the person at the PC.

Call: head office for the code; IT for the server address and the network.

"Payments cannot be taken right now."

You see a red box on the Payment screen with one or more reasons, and **Check for new settings**.

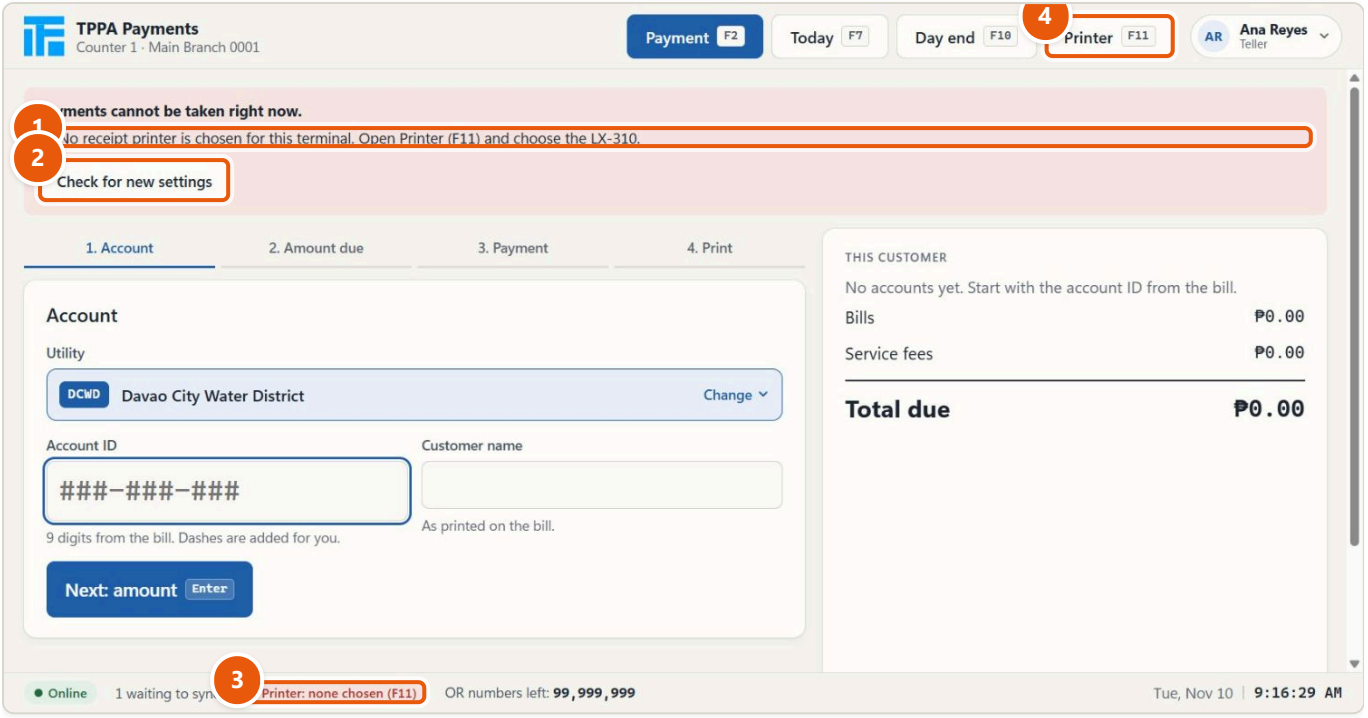


1. Why payments cannot be taken
2. Check for new settings
3. Printer state (F11 to choose one)
4. Printer screen (F11)

Fix first: after head office fixes something, press **Check for new settings** instead of waiting (the app also checks every 15 seconds). If the server cannot be reached it says "The server cannot be reached. Settings will update when it can."

Each reason, exactly as the app shows it:

You see	What it means	Fix	Call
"No receipt printer is chosen for this terminal. Open Printer (F11) and choose the LX-310."	No printer chosen on this PC.	F11, choose the Epson LX-310.	IT if it is not in the list.
"No fee is in force for any utility yet. Head office must approve one."	No approved fee version yet.	Wait for head office.	Head office (admin).
"No utility is enabled for this branch. Head office enables it in the console: Branches, choose this branch, then Utilities at this branch."	The branch collects for no utility yet.	Wait for head office.	Head office (admin).
"No receipt layout is in force yet. Head office must approve one."	No receipt layout approved.	Wait for head office.	Head office (admin).

You see	What it means	Fix	Call
"This terminal has no official receipt numbers. Head office must open an OR series for it."	No OR series.	Wait for head office.	Head office (admin).
"All official receipt numbers of this terminal are used. Head office must open the next OR series."	The series is used up.	Wait for head office.	Head office (admin).
"The OR number cannot be printed with the current pattern. Call head office."	The print pattern of the OR number does not work.	Nothing at the counter.	Head office (admin).
"Sync required. This terminal has not received settings for more than 36 hours, so it cannot know the current fees. Connect to the network; payments resume as soon as settings arrive."	Offline too long.	Restore the network; payments resume by themselves.	IT for the network.
"This terminal has no settings yet. Connect to the network and download them."	A new set-up that never downloaded its settings.	Connect the network.	IT.
"The computer clock is ... minutes off. Receipts carry the date and time, so fix the clock before taking payments."	The PC's clock is more than 30 minutes off the server's.	Nothing at the counter.	IT fixes the Windows clock.
"The day is closed on this terminal (Z-reading done). Payments resume tomorrow; reprints still work."	The day end was done.	Take payments at another counter, or tomorrow.	Branch manager if the day was closed by mistake.
"Head office reset the registration of this terminal. Set this computer up again with the new code."	Head office reset this terminal.	See "This terminal was reset" below.	Head office and IT.
"The server does not recognise this computer, so payments could not reach head office. Ask IT."	See "The server does not recognise this computer" below.		IT.

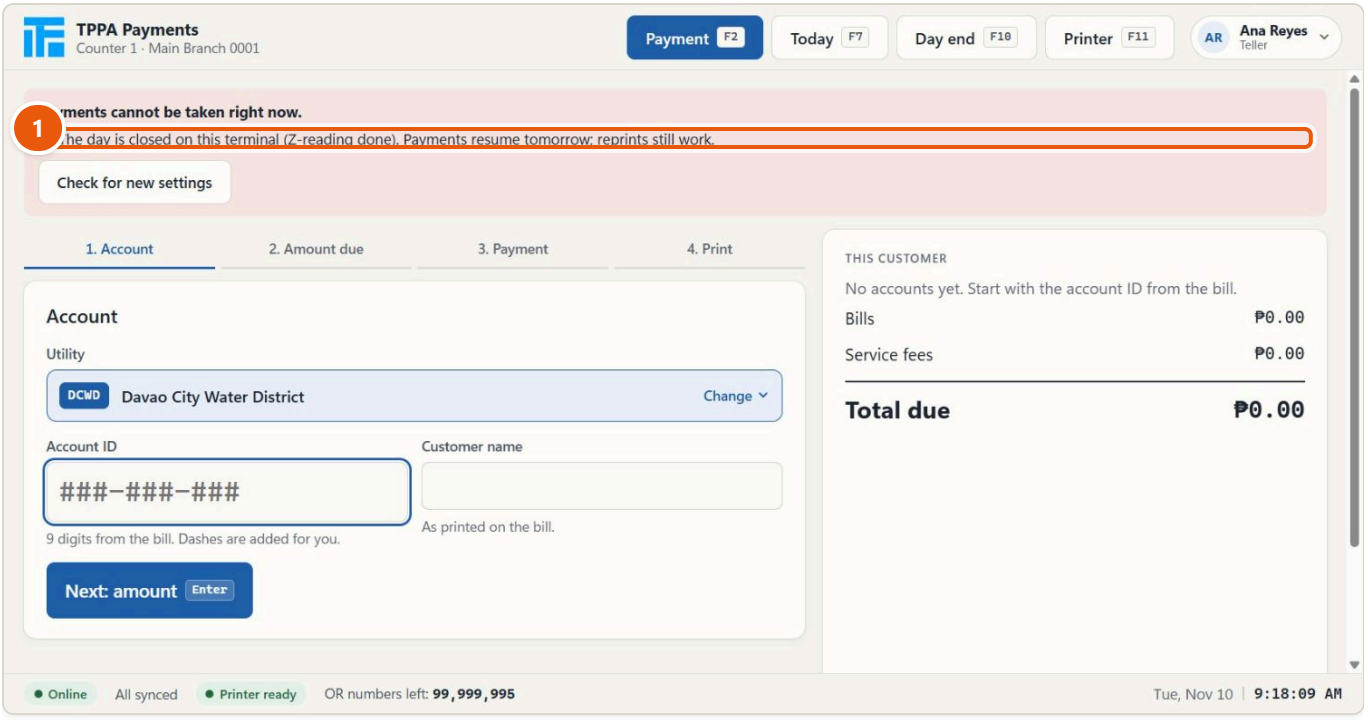

1 No more payments today

After the day end: no more payments today; reprints still work.

Warnings in the status bar

The status bar at the bottom is always visible.

You see	What it means	What to do
"Offline: work is saved and sent later"	The server cannot be reached. Payments go on.	Keep working; check the network cable or Wi-Fi; tell IT if it lasts.
"3 waiting to sync"	Records not yet sent to head office.	Nothing; they are sent when the network is back.
"Clock 7 min off: ask IT to fix the time"	The PC's clock is more than 5 minutes off.	Tell IT the same day. Payments go on until 30 minutes.
"Clock 35 min off: fix the time before taking payments"	More than 30 minutes off: payments stop.	IT fixes the clock.
"OR numbers left: 4,000: tell head office"	Fewer than 5 % of the series is left.	Tell head office, so it prepares the next series.
"Printer: ..." in red	The printer is not ready.	See "Printer problems" below.

Printer problems

The printer chip in the status bar says what is wrong. The receipts print on the Epson LX-310 on the pre-printed 8.5" × 5.5" forms.

The status bar says	Fix
"Printer: out of paper"	Load forms.

The status bar says	Fix
"Printer: paper jam"	Clear the paper path and reload the forms.
"Printer: offline"	Check that the printer is switched on, online (press its Online button) and connected.
"Printer: paused"	Printing is paused in Windows. Resume the printer in Printers & scanners (IT if you cannot).
"Printer: error"	Check the printer and its cover.
"Printer: not found"	The receipt printer is not installed on this computer any more. Call IT.
"Printer: none chosen (F11)"	`F11`, choose the LX-310.

If the printer fails before a payment is saved, the app says what is wrong and ends "...then press Enter to print. Nothing is recorded yet." Fix the printer, then press `Enter`.


If the payment is saved but the receipt did not print, the message ends "...then press F9 to print OR ...". The payment and its OR number are kept. Fix the printer, then press `F9`. The same goes for a failed reprint ("...then press F9 to reprint OR ...").

"The chosen printer cannot print receipts (it is not the LX-310, or has the wrong driver)." The receipts are sent to the printer as raw ESC/P, which only the LX-310 with Epson's driver accepts. Choose the LX-310 in Printer (`F11`). IT installs Epson's LX-310 driver if it is missing.

The printer is out of paper but the status bar still says ready. The driver does not report the printer's state (for example a "Generic / Text Only" driver). IT installs Epson's LX-310 driver with its status monitor.

The print does not land in the boxes of the form. Calibrate:

1. Press `F11` (Printer).
2. Load a blank or spoiled form.
3. Press **Print test page**.
4. Move the print onto the boxes with **Move**, or with the arrow keys (Shift + arrow moves more). Print the test page again to check.
5. Press **Save offsets** (`Enter`).

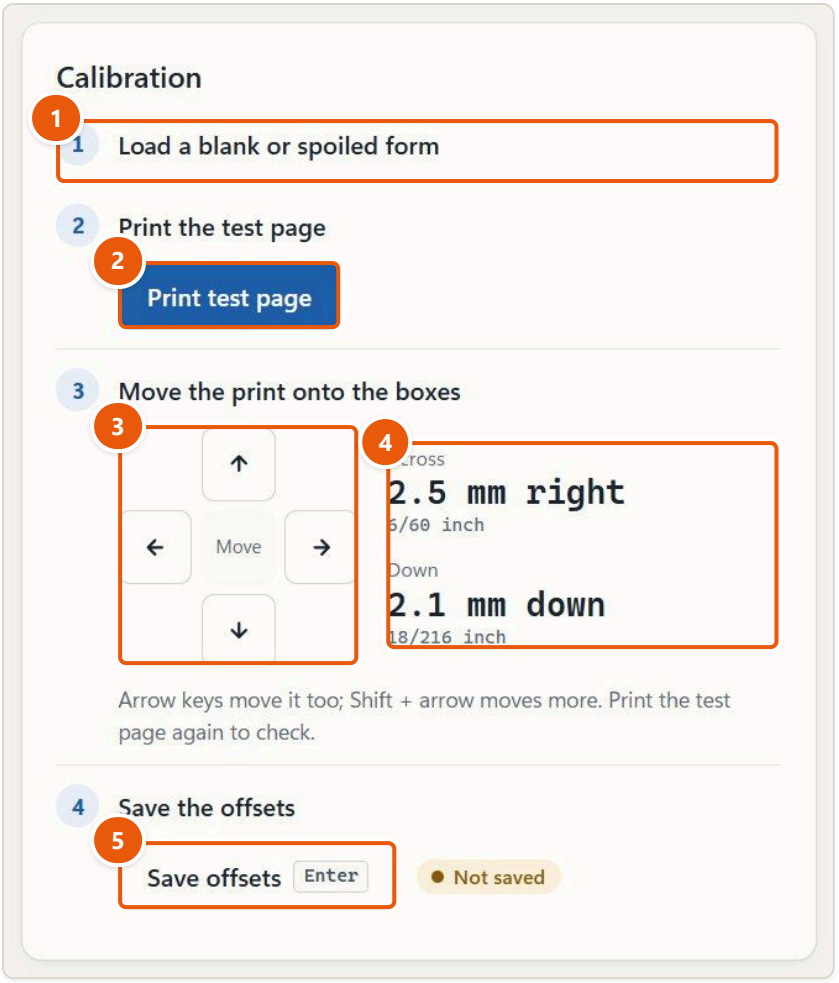


1. Load a blank or spoiled form
2. Print the test page
3. Move the print (or arrow keys)
4. How far it moved
5. Save the offsets (Enter)

Call: IT for drivers, a printer not found, or a printer that does not respond.

Offline, and records waiting to sync

You see: "Offline: work is saved and sent later" in the status bar, and "N waiting to sync".

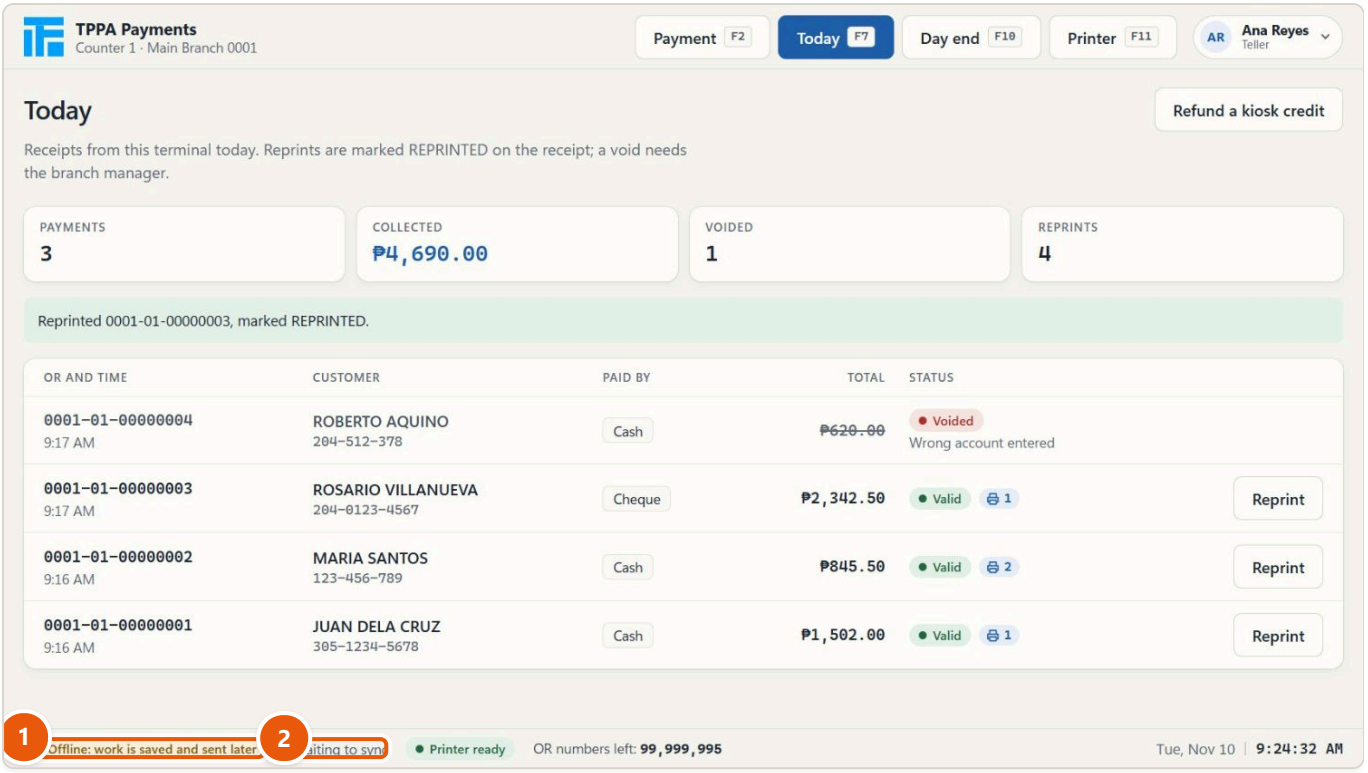

1 Offline: work is saved and sent later

2 Records waiting to sync

Check: the network cable, the Wi-Fi, the branch's internet. Can another PC at the branch open the console?

Fix: keep working: payments, receipts, voids, reprints and the day end all work offline. Everything is sent by itself when the network is back; the count goes down to "All synced".

What does **not** work offline:

- refunding a kiosk credit slip (it is checked with head office so it is paid only once);
- signing in for someone who has not signed in online at this PC in the last 36 hours;
- after 36 hours without settings, payments stop ("Sync required").

Call: IT if the PC stays offline while other PCs are online, or for more than a few hours.

"Sync stopped."

You see a red box starting "Sync stopped." with one of these messages:

Message	What to do
"The server holds different records for this terminal. Nothing was deleted here. Call IT now."	Stop and call IT at once. IT calls the development team.
"The server refused event ...: .... Nothing was deleted here. Call IT."	Call IT with the full message.
"This terminal has been revoked by head office. It can no longer be used."	Call head office: a revoked terminal is not used again.
"The server sent settings this version of the app does not understand. Update the app."	Call IT: the app is older than the server.

"This terminal was reset"

You see a full screen: "This terminal was reset". "Head office reset the registration of Counter 1 on ... Everyone has been signed out and this computer cannot take payments."

Check: head office did this on purpose (Terminals, **Reset registration**), usually because Windows was reinstalled. The screen then says one of two things:

- "Everything that matters was sent to head office before the reset. Nothing was lost."
- "N records on this computer were never sent to head office, including N payments (OR ... to ...). They are kept in a separate file on this computer. Keep the paper receipts and call head office before you set it up again."

Fix:

1. If records were not sent: keep the paper receipts, call head office, then tick "I have told head office about the N records".
2. Press **Set up this computer again**. The app restarts on "Set up this computer".
3. Type the **new one-time code** from head office and press **Register this computer**. This terminal keeps its number, BIR permit and OR series, and continues from head office's numbers.

If the old set-up had printed receipts that never reached head office, the next screen warns that those OR numbers may be printed again on new receipts. Tell head office, keep the paper copies, and tick "I have told head office about OR ...".

Call: head office for the new code; IT if the PC must be set up by IT. Nothing on the PC is deleted: the old files are set aside.

"The server does not recognise this computer"

You see a full screen with that title, then one of:

- "The server at ... has no terminal 01. It may be the wrong server, or its database was replaced."
- "The server knows terminal 01, but not the key of this computer. The terminal may have been set up on another computer."

and "Payments are stopped here: they could not reach head office." Nobody can sign in: "The server does not recognise this computer. Nobody can sign in until IT sets it up again."

Check: this shows only after the server has refused the PC for several minutes. The screen lists what IT needs: Server, Terminal, Terminal ID, Device key, Last synced, Not sent.

Fix: at the counter, press **Try again now** once; the app also keeps trying by itself and comes back when the server knows the PC again. Otherwise this is a job for IT, who follows **For IT: what to check** on the same screen (and the IT and set-up guide):

1. Is the server address right (not a test server)?
2. In the console, Terminals: find the terminal and compare its device key with the one on the screen.
3. Get a new one-time code: **Reset registration** on the terminal, **Issue new code** if it waits for setup, or a new terminal if it is not there.


4. If records were not sent, keep the paper receipts, tell head office and tick the box.
5. Type the code under "New one-time code" and press **Set up with this code**. A wrong code changes nothing on the PC.

Call: IT, with a photo of the screen. If it is the right server and the terminal is there with this very key, IT calls the development team.

The day end will not close

You see on the Day end screen (`F10`):

You see	What it means	Fix
"Enter the count to close the day."	Nothing counted yet.	Count the drawer: the number of each bill and coin.
"The count is short by ₱20.00" (or over), "Count the drawer again, or a branch manager approves the difference here with their own username and password."	The count differs from the cash expected.	Count again. If it still differs, the branch manager types their username and password and presses **Approve and close day**.
"Enter the branch manager's username and password."	A difference needs the manager.	The branch manager signs in the two fields.
"A different person must approve the cash difference: the branch manager signs with their own password."	The teller typed their own name.	The branch manager approves (four-eyes rule).
"... is not a branch manager. Only a branch manager can approve the cash difference."	The person who signed is not a branch manager.	The branch manager approves.
"Close ... first: days are closed in order."	An earlier day is still open on this PC.	Close that day first.
"This day is already closed."	It was closed.	Nothing; print the Z-reading if needed.

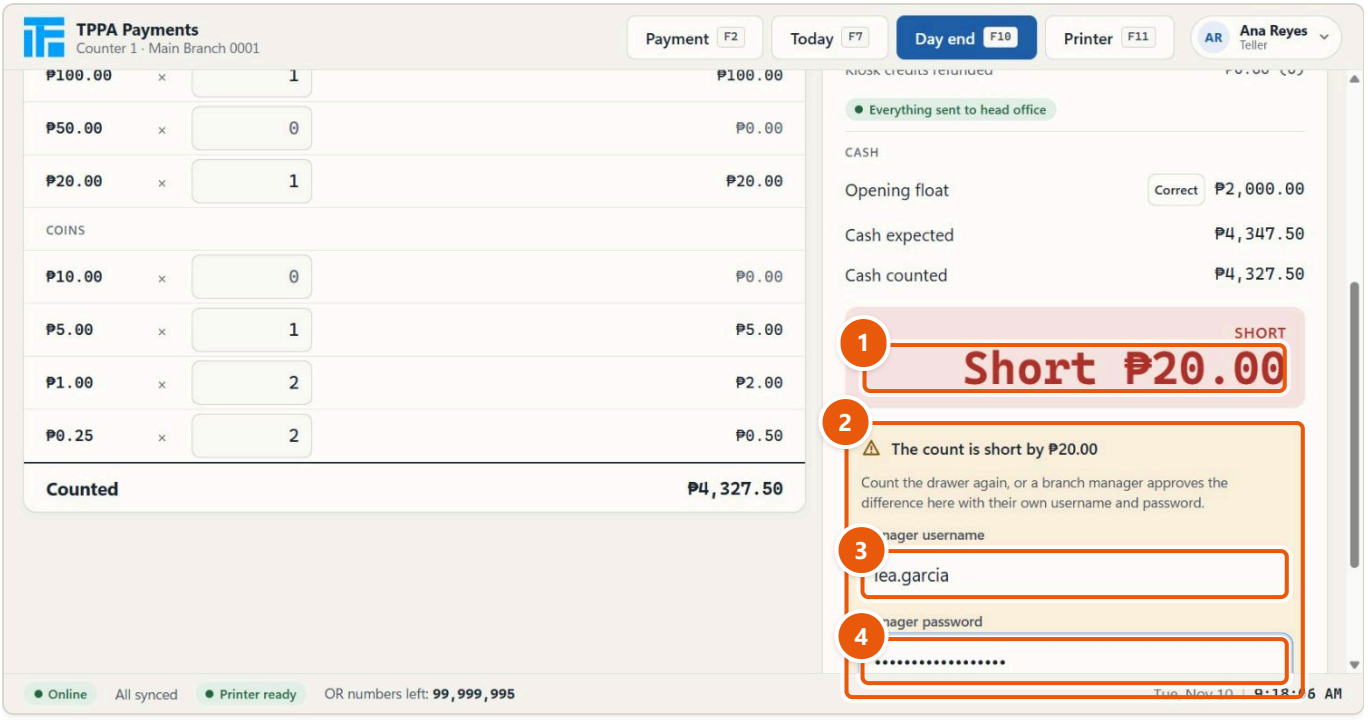

1. Short: the difference
2. Count again, or the manager approves
3. Branch manager: username
4. Branch manager: password

Check the cash expected: opening float + cash payments − kiosk credits refunded. A wrong opening float makes it wrong: correct it with **Correct** next to the opening float (the branch manager approves the correction).

Records waiting to sync ("N waiting to sync: sent when the network is back") do **not** stop the day end. The Z-reading reaches head office when the network is back; until then head office sees the terminal as not closed.

Call: the branch manager.


A void is refused

You see	Fix
"A different person must approve a void: the branch manager signs with their own password."	The branch manager approves, not the teller.
"... is not a branch manager. Only a branch manager can approve a void."	The branch manager approves.
"Enter the reason for the void, e.g. "Wrong account entered"."	Type the reason (at least 3 characters).
"OR ... is already voided."	Nothing to do.
"The day of OR ... is closed, so it can no longer be voided here. Call head office."	Call head office.


A kiosk credit refund fails

The customer brings a kiosk credit slip (code KC-XXXX-XXXX) to the counter. On **Today** (F7), **Refund a kiosk credit**. These are the refusals:

You see	What it means	What to do
"Head office has no kiosk credit with this code. Check the code on the slip. If it is right, call head office: do not pay it out."	The code is wrong or unknown.	Check every character. Do not pay. Call head office.
"Already refunded ... at ..., counter ..., by ... (approved by ...). Do not pay it out again; keep the slip and call head office."	It was paid once already.	Do not pay. Keep the slip; call head office.
"The day is closed on this terminal: the drawer is counted. Refund it at another counter, or tomorrow."	This counter's day is closed.	Use another counter, or tomorrow.
"No network. A kiosk credit is checked with head office so it is paid only once. Connect to the network, or ask the customer to come back."	The PC is offline.	Fix the network, or ask the customer to come back.
"Enter the whole code, as on the slip: KC, then two groups of four letters and numbers."	The code is incomplete.	Type the whole code.
"A different person must approve a refund: the branch manager signs with their own password."	The teller typed their own name as the approver.	The branch manager approves.
"... is not a branch manager of this branch. Only a branch manager can approve a refund."	The approver is not this branch's manager.	This branch's manager approves.

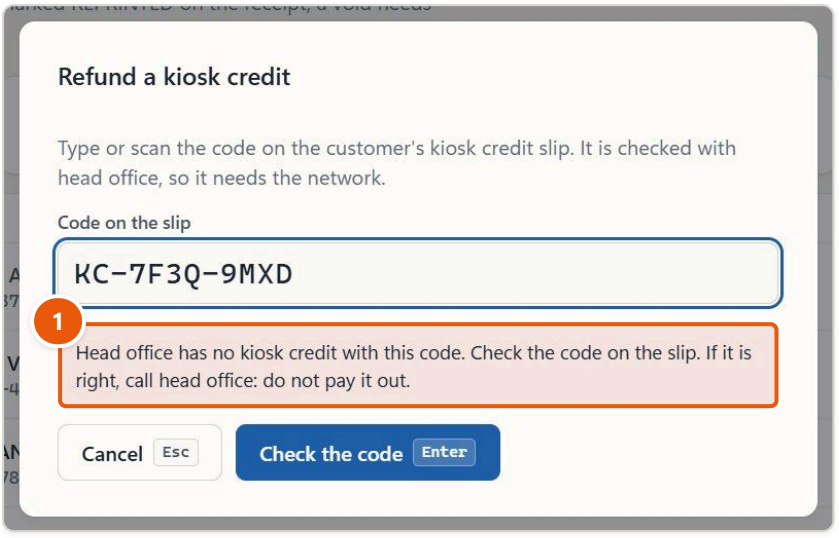


1 Head office has no such credit

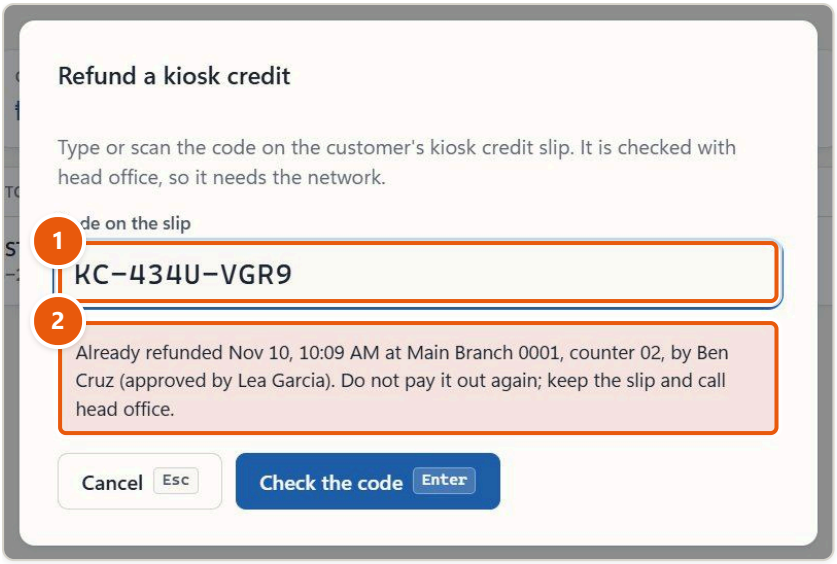

1 The same code again

2 Refused: already refunded, when, where, by whom

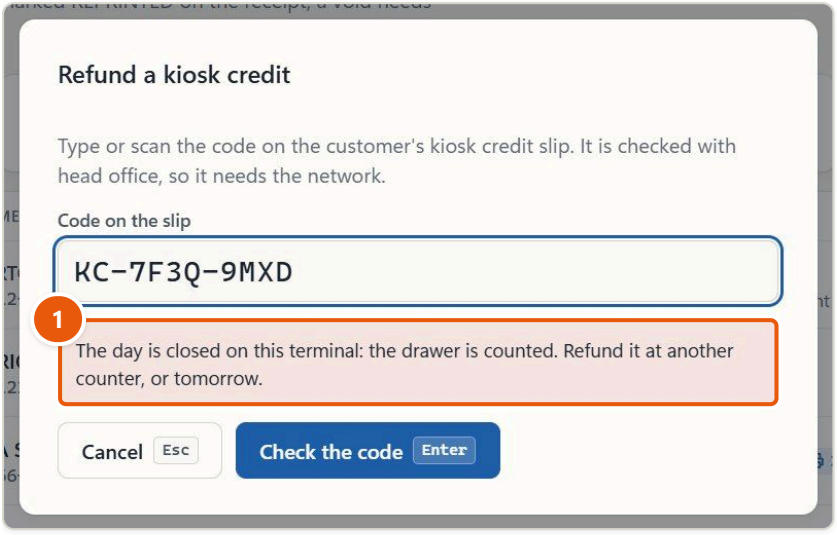

1 Refused: the day is closed here

Call: head office for an unknown or already-refunded slip. Never pay out a slip the system refuses.


A cheque is refused

"The cheque is older than 180 days (stale): not accepted." or "The cheque must be for exactly ₱.... No change is given on cheques." The cheque rules come from the fee version in force (head office). Ask for another way to pay; call the branch manager if in doubt.

6. The kiosk


The kiosk is out of service

Customers see: "Out of service", "This machine cannot take payments right now. Pay at a TPPA counter.", and the nearest counter. A customer already paying finishes first when head office takes the kiosk out of service.

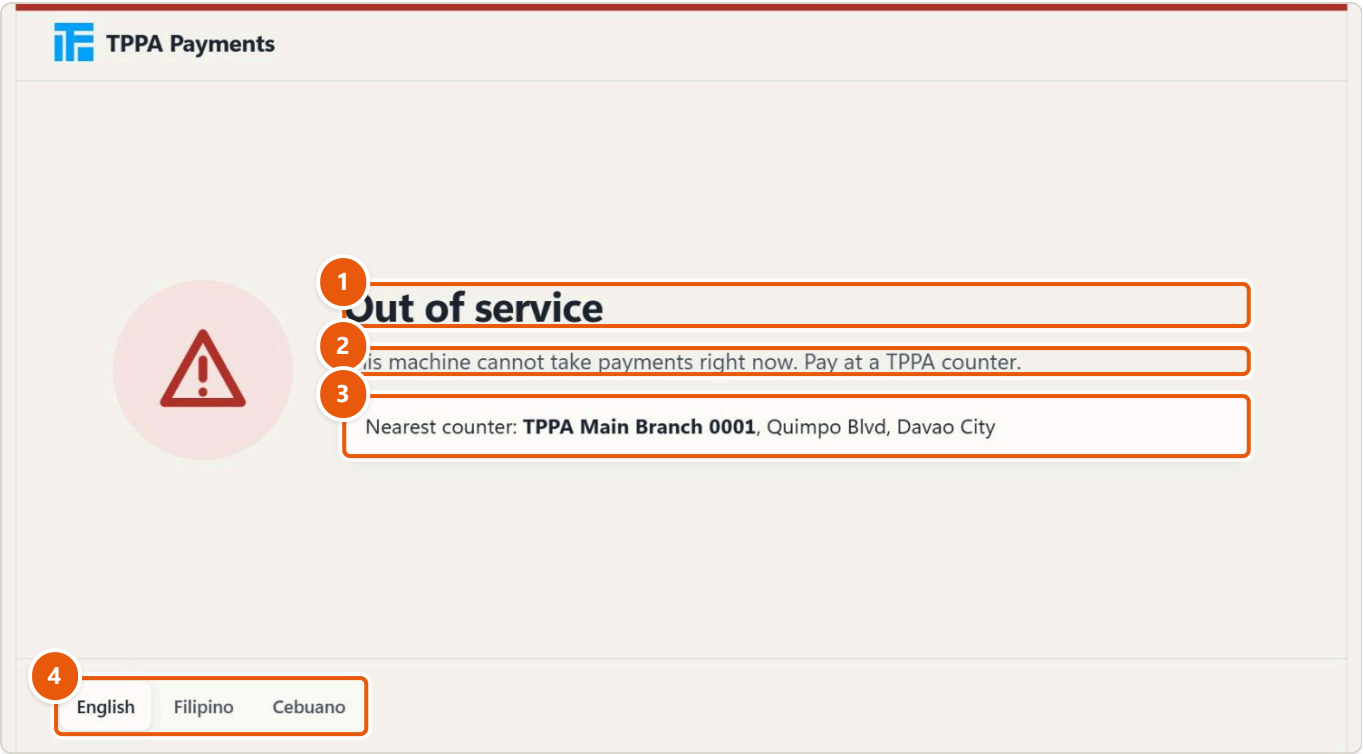

1. Out of service
2. Pay at a TPPA counter
3. The nearest counter
4. Read it in another language

Check: open the service door: staff mode lists **What needs fixing**, each fault with its fix. Head office sees the same reasons on the **Kiosks** page (Kiosks, the kiosk, **Details**).

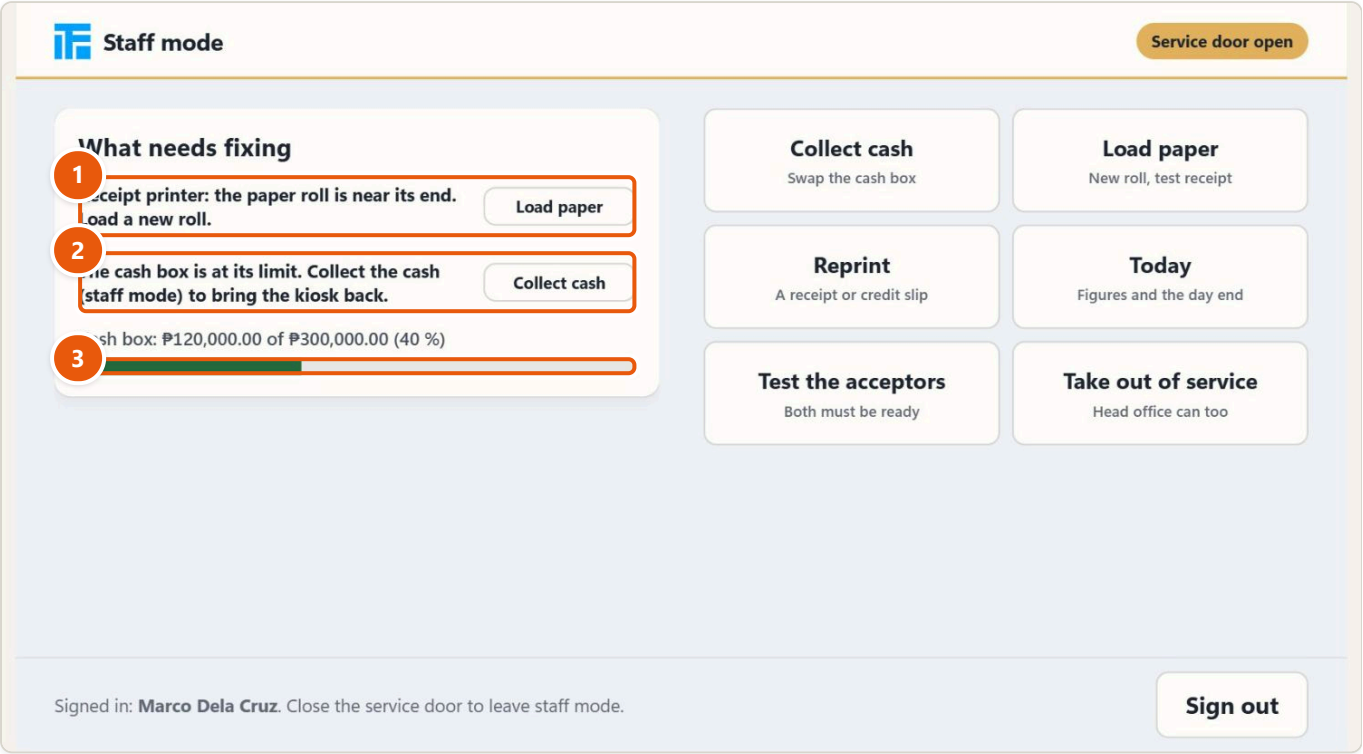

1. A fault and its fix
2. Another fault and its fix
3. Cash box meter

The faults, as staff mode shows them:

You see	Fix	Call
"Receipt printer: the paper roll is near its end. Load a new roll."	**Load paper**: a new 80 mm roll, then print a test.	
"Receipt printer: out of paper. Load a new roll."	**Load paper**.	
"Receipt printer: offline or its cover is open."	Close the cover, check the power and cable.	IT
"Receipt printer: the paper is jammed."	Clear the jam, then **Load paper**.	
"Receipt printer: paused in Windows." / "it reports an error." / "Windows does not have the printer named in the console."		IT
"Receipt printer: choose it in the console."	The hardware profile has no printer name.	Head office (admin)
"Note acceptor: a note is jammed or the acceptor reports a fault."	Clear the note path; **Test the acceptors**.	IT
"Coin acceptor: it reports a fault or a coin jam."	Clear the coin path; **Test the acceptors**.	IT
"...: the "..." driver is not in this version of the kiosk app yet. Choose the simulator in the console, or update the kiosk app."	A device is set to a real driver this version does not have yet.	Head office and IT
"The cash box is at its limit. Collect the cash (staff mode) to bring the kiosk back."	**Collect cash**.	
"The cash door is open."	Close and lock the cash door.	Branch manager if nobody from TPPA opened it
"... took this kiosk out of service. Bring it back in staff mode."	Staff took it out.	Staff with the right to bring it back (staff mode, **Bring back into service**)
"Head office (...) took this kiosk out of service: .... Only the console brings it back."	Held by head office.	Head office (Kiosks, **Bring back into service**)
"This computer is registered as a teller counter. In the console, create a kiosk (Kind: Kiosk) and register this computer with its code."	Set up with a counter's code.	Head office and IT
A reason such as "No fee is in force...", "This terminal has no official receipt numbers...", "Sync required..." or "The computer clock is ... minutes off..."	The same rules as a counter (see "Payments cannot be taken right now." above).	Head office or IT

The kiosk comes back into service by itself once every reason is fixed and the service door is closed (unless head office holds it).

Staff mode problems

- **The teller is refused:** "Only kiosk custodians, the branch manager of this branch and admins can sign in here."
- **Wrong password, account locked:** as for the console (see "Signing in"). Offline, staff mode accepts people who signed in there online before; never admins.
- **Leaving staff mode:** close the service door. It signs the person out.

"This kiosk was reset" or "The server does not recognise this kiosk"


Customers see "Out of service". In staff mode (service door open) nobody can sign in: "It cannot reach head office as it is, so nobody can sign in: collect the cash here, then set it up again."

1. **Collect the cash first.** The kiosk refuses to be set up again while its cash box holds cash ("Collect the cash first"). Swap the box and press **Box swapped: print the slip**: the slip says NOT SENT because the kiosk cannot tell head office. Sign it and give it with the box to the office; head office records it with **Record from a slip** and counts the box as usual.
2. If records were not sent, call head office and tick "I have told head office".
3. **Reset:** press **Set up again**, then enter the new one-time code. **Not recognised:** IT compares the facts on the screen with the console, gets a new code and enters it under "Set up with a new code".

Call: head office and IT.

A customer's payment could not be finished

The customer sees: "Your payment could not be finished" and "Your ₱100.00 is safe. Take the slip from below the screen to any TPPA counter to get it back."

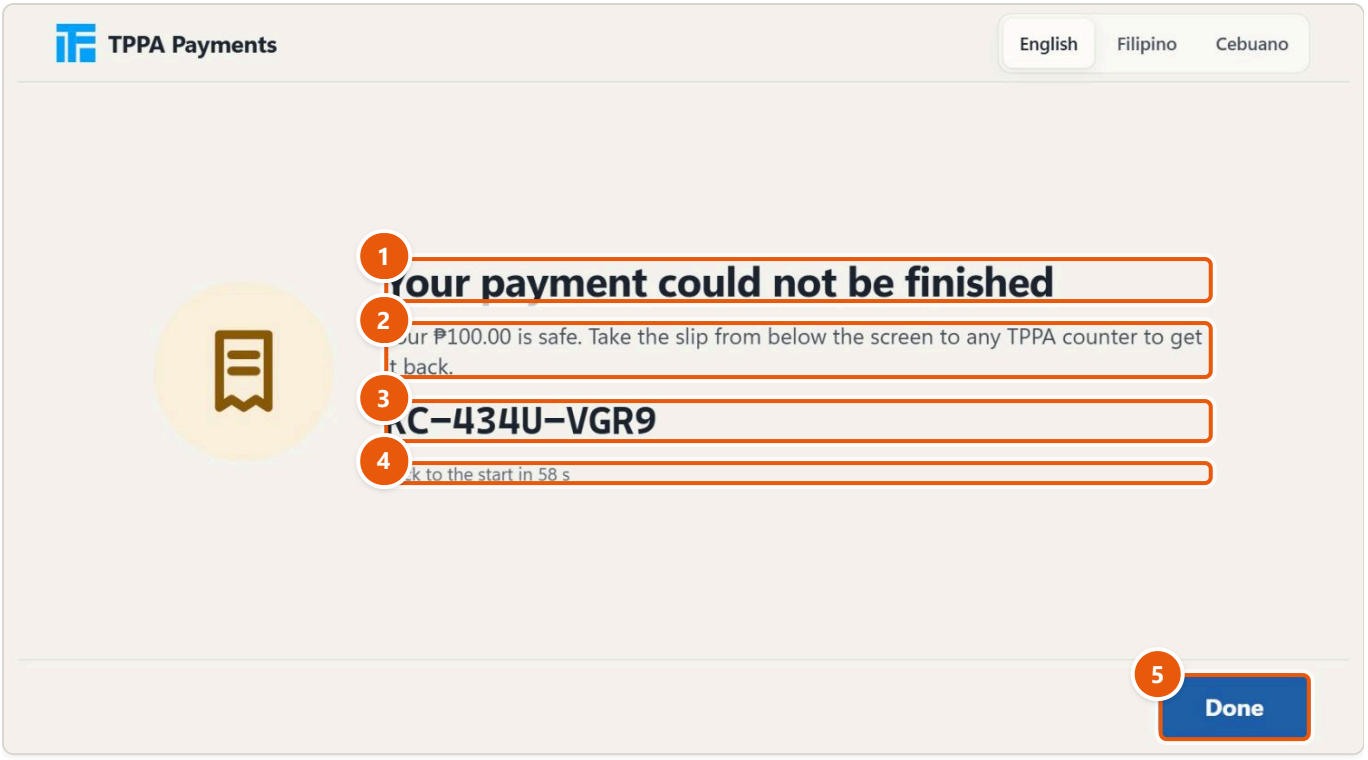

1. Your payment could not be finished
2. Your cash is safe: take the slip
3. The credit code
4. Back to the start after a minute
5. Done

Fix: the customer takes the kiosk credit slip to a counter, where it is refunded with the branch manager's approval (see "A kiosk credit refund fails" above). If the slip did not print, the custodian reprints it in staff mode (**Reprint**, today's receipts and credit slips).

A kiosk box count difference

See the console section, "A kiosk box count difference".

7. The server (IT)

These checks are for IT, on the server. The commands are run from `/opt/tppa-pos/app/deploy` (see the IT and set-up guide, and `docs/guides/running.md` part 2).

The console does not open, or every terminal is offline

1. `docker compose ps`: every service should be "healthy"; `migrate` "Exited (0)".
2. `curl -s https://<console address>/api/health` should answer `{"status":"ok","database":"ok"}`.
3. Read the logs: `docker compose logs -f api` (or `web`, `nginx`, `postgres`). "Invalid environment configuration: ..." names a missing or wrong setting in `deploy/.env`.
4. After a failed update: `docker compose logs api migrate`.
5. The certificate: `docker compose logs certbot`. The console works only over HTTPS through nginx; plain HTTP redirects to HTTPS.

Terminals keep working offline during an outage and sync afterwards. Tell the branches.

Alert emails are not sent

- The mail server is set in `deploy/.env`: `SMTP_HOST`, `SMTP_PORT`, `SMTP_USER`, `SMTP_PASSWORD`, `SMTP_FROM`. Put the password in single quotes; otherwise Docker Compose reads a `$` in it as a variable and changes it.
- `ALERTS_INTERVAL_SECONDS=0` turns sending off.
- After a change, restart the stack's API (`docker compose up -d`), then **Send a test email** in the console. The console shows the last error.

A terminal's clock is off

The teller app warns beyond 5 minutes and stops payments beyond 30 minutes; head office gets a "Terminal clock off" exception. Set the PC's date and time to be set automatically in Windows, and check that the PC can reach a time server.

A terminal the server does not recognise

Follow the procedure in the IT and set-up guide ("A terminal the server does not recognise"). Never delete a terminal's data folder: unsent payments are real cash.

8. Quick reference: where to look

The message starts with	Section
"Wrong username or password."	Signing in
"This account is locked..."	Signing in
"That code is not right..."	Signing in, two-step code rejected
"Confirm it is you"	Signing in, the console keeps asking
"Offline sign-in works..." / "Your last online sign-in..."	Signing in, offline sign-in refused
"Payments cannot be taken right now."	The teller app
"Printer: ..." / "The chosen printer cannot print receipts..."	The teller app, printer problems
"Offline: work is saved and sent later"	The teller app, offline
"Sync stopped."	The teller app
"This terminal was reset"	The teller app
"The server does not recognise this computer"	The teller app
"The count is short by..."	The teller app, day end
"Head office has no kiosk credit..." / "Already refunded..."	The teller app, kiosk credit refunds
"Not every terminal has closed this day."	The console, collection files

The message starts with	Section
"Out of service"	The kiosk
"No mail server is set on this server..."	The console, alert emails